Name: Kashish Paryani Batch: T21 Roll No: 83

EXPERIMENT 3

Aim: To Perform various GIT operations on local and Remote repositories using GIT Cheat-Sheet

Pull and Push Processes

The pull command used to fetch the repository from github to local while push is used to commit files from local repository to Github.

Push (): Push changes to Web repository

Pull (): Pull changes to Local repository

The following commands are used for pull and push repositories

A) Push command

```
C:\Users\kashishparyani\git-dvcs\git-demo-project>git remote add origin https://github.com/kashishparyani/SEPM-PRAC.git

C:\Users\kashishparyani\git-dvcs\git-demo-project>git remote show origin
* remote origin
  Fetch URL: https://github.com/kashishparyani/SEPM-PRAC.git
  Push  URL: https://github.com/kashishparyani/SEPM-PRAC.git
  HEAD branch: (unknown)

C:\Users\kashishparyani\git-dvcs\git-demo-project>git commit -m "Initial Commit"
On branch master
Untracked files:
  (use "git add <file>..." to include in what will be committed)
        EduBot/

nothing added to commit but untracked files present (use "git add" to track)
```

If you add remote again then will show you fatal error.

$ git remote add origin https://github.com/bhushanjadhav1/Myrepository.git

fatal: remote origin already exists.

So, to delete origin rm origin command is used

$ git remote rm origin

Now, to push the local repository to remote github following command is used

$ git push-u origin master

```
C:\Users\kashishparyani\git-dvcs\git-demo-project>git branch -m Main

C:\Users\kashishparyani\git-dvcs\git-demo-project>git push -u origin main
info: please complete authentication in your browser...
```

```
C:\Users\kashishparyani\git-dvcs\git-demo-project>git push -u origin Main
Enumerating objects: 3, done.
Counting objects: 100% (3/3), done.
Writing objects: 100% (3/3), 221 bytes | 221.00 KiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
remote:
remote: Create a pull request for 'Main' on GitHub by visiting:
remote:      https://github.com/kashishparyani/SEPM-PRAC/pull/new/Main
remote:
To https://github.com/kashishparyani/SEPM-PRAC.git
 * [new branch]      Main -> Main
branch 'Main' set up to track 'origin/Main'.

C:\Users\kashishparyani\git-dvcs\git-demo-project>
```

Now you can check the github for updated contents.

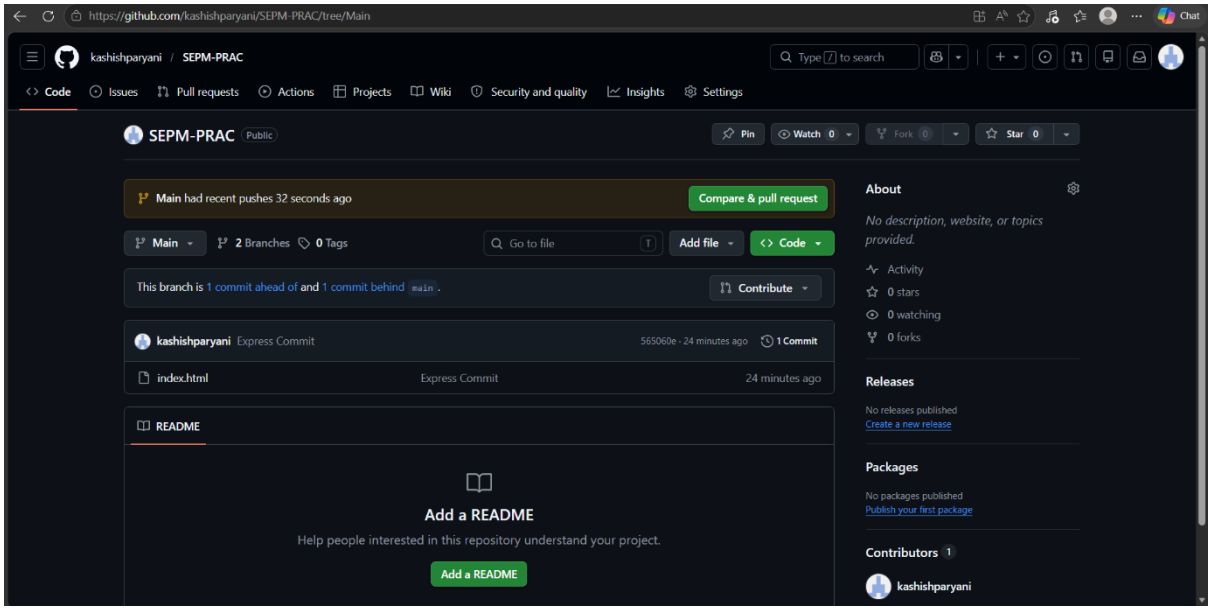

B) Pull Changes

Pull command is used to download the remote updated repository into local one. The command for download is

$ git pull

```
C:\Users\kashishparyani\git-dvcs\git-demo-project>git pull
remote: Enumerating objects: 3, done.
remote: Counting objects: 100% (3/3), done.
remote: Total 3 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
Unpacking objects: 100% (3/3), 852 bytes | 106.00 KiB/s, done.
From https://github.com/kashishparyani/SEPM-PRAC
 * [new branch]      main       -> origin/main
Already up to date.

C:\Users\kashishparyani\git-dvcs\git-demo-project>
```

C) Fetch

Suppose you have a file in github and you have changed it.

From:

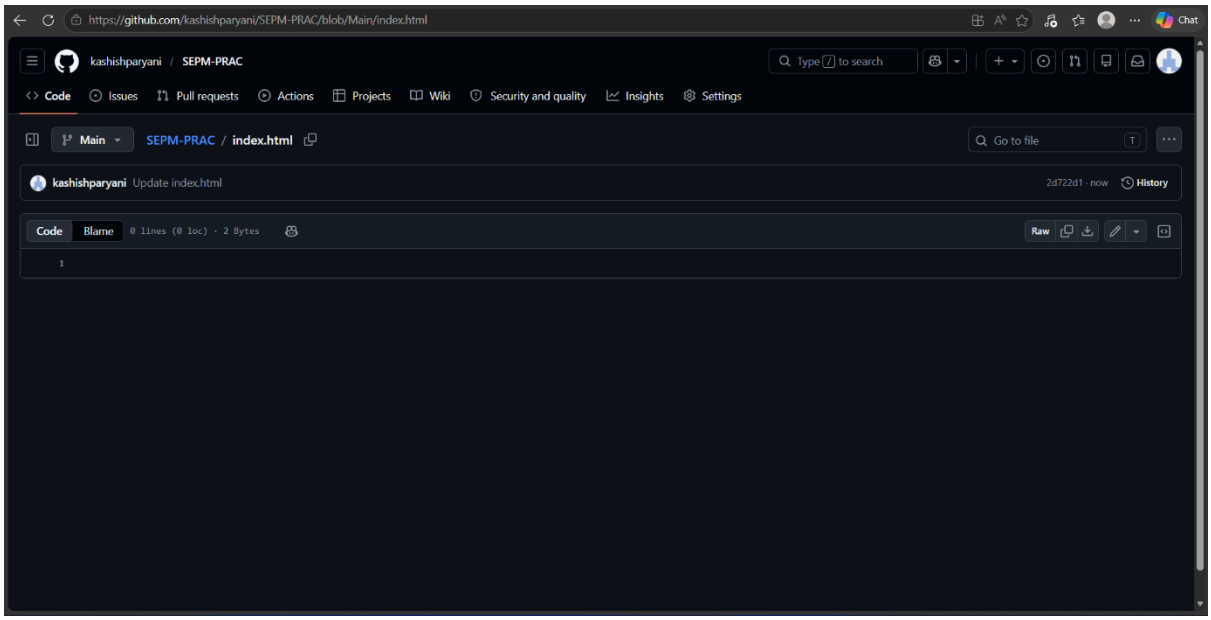

To:

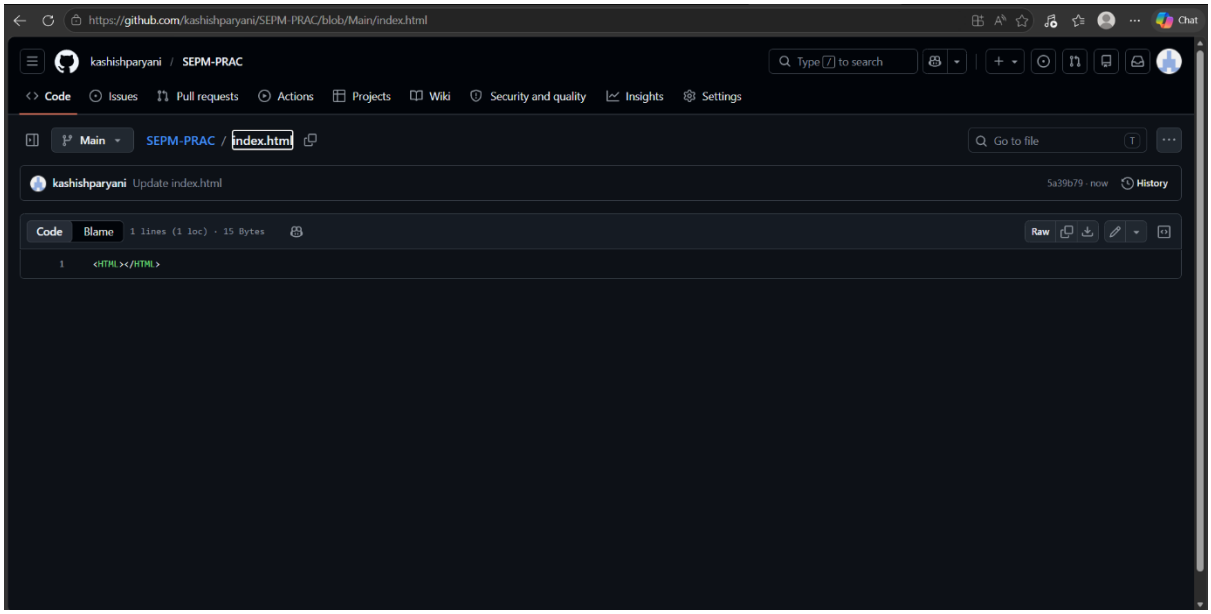

Now we use fetch command to fetch the changes, which will show you both the files like original and changed in local repository.

$ git fetch

```
C:\Users\kashishparyani\git-dvcs\git-demo-project>git fetch
remote: Enumerating objects: 5, done.
remote: Counting objects: 100% (5/5), done.
remote: Total 3 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
Unpacking objects: 100% (3/3), 903 bytes | 112.00 KiB/s, done.
From https://github.com/kashishparyani/SEPM-PRAC
 * [new branch]      Main       -> origin/Main

C:\Users\kashishparyani\git-dvcs\git-demo-project>
```

Here fetch will not show you like updated changes file as like push. So, use merge command to merge the changes so use following command for merge.

$ git merge origin/master

```
C:\Users\kashishparyani\git-dvcs\git-demo-project>git merge origin/Main
Updating 565060e..5a39b79
Fast-forward
 index.html | 1 +
 1 file changed, 1 insertion(+)

C:\Users\kashishparyani\git-dvcs\git-demo-project>
```

Online Resource: https://dzone.com/articles/top-20-git-commands-with-examples