GuardianOps - Screenshots and Demonstration

Kasmya Bhatia | FAST LEARNERS | MLOps

Demonstration walkthrough (about 3-4 minutes):

1. Start the stack and wait about 45s for the 200-sample baseline capture.
2. Click TERMINATE PROCESS - Guardian detects the crash and auto-recovers.
3. Click CORRUPT OUTPUT - a silent drift incident opens and waits for human approval (policy P-002).
4. Click AUTHORIZE ROLLBACK - the incident resolves.
5. Click REPLAY LABELLED DATASET - confusion matrix and metrics.
6. Review the auto-generated incident report.

Source and run instructions: https://github.com/kasmya/GUARDIAN-OPPS



Fig 1. Dashboard at steady state: zero incidents, confidence 100/100, live score trace tracking the baseline.



Fig 2. After a chaos-injected process crash: service DOWN, Guardian responding, crash counted.

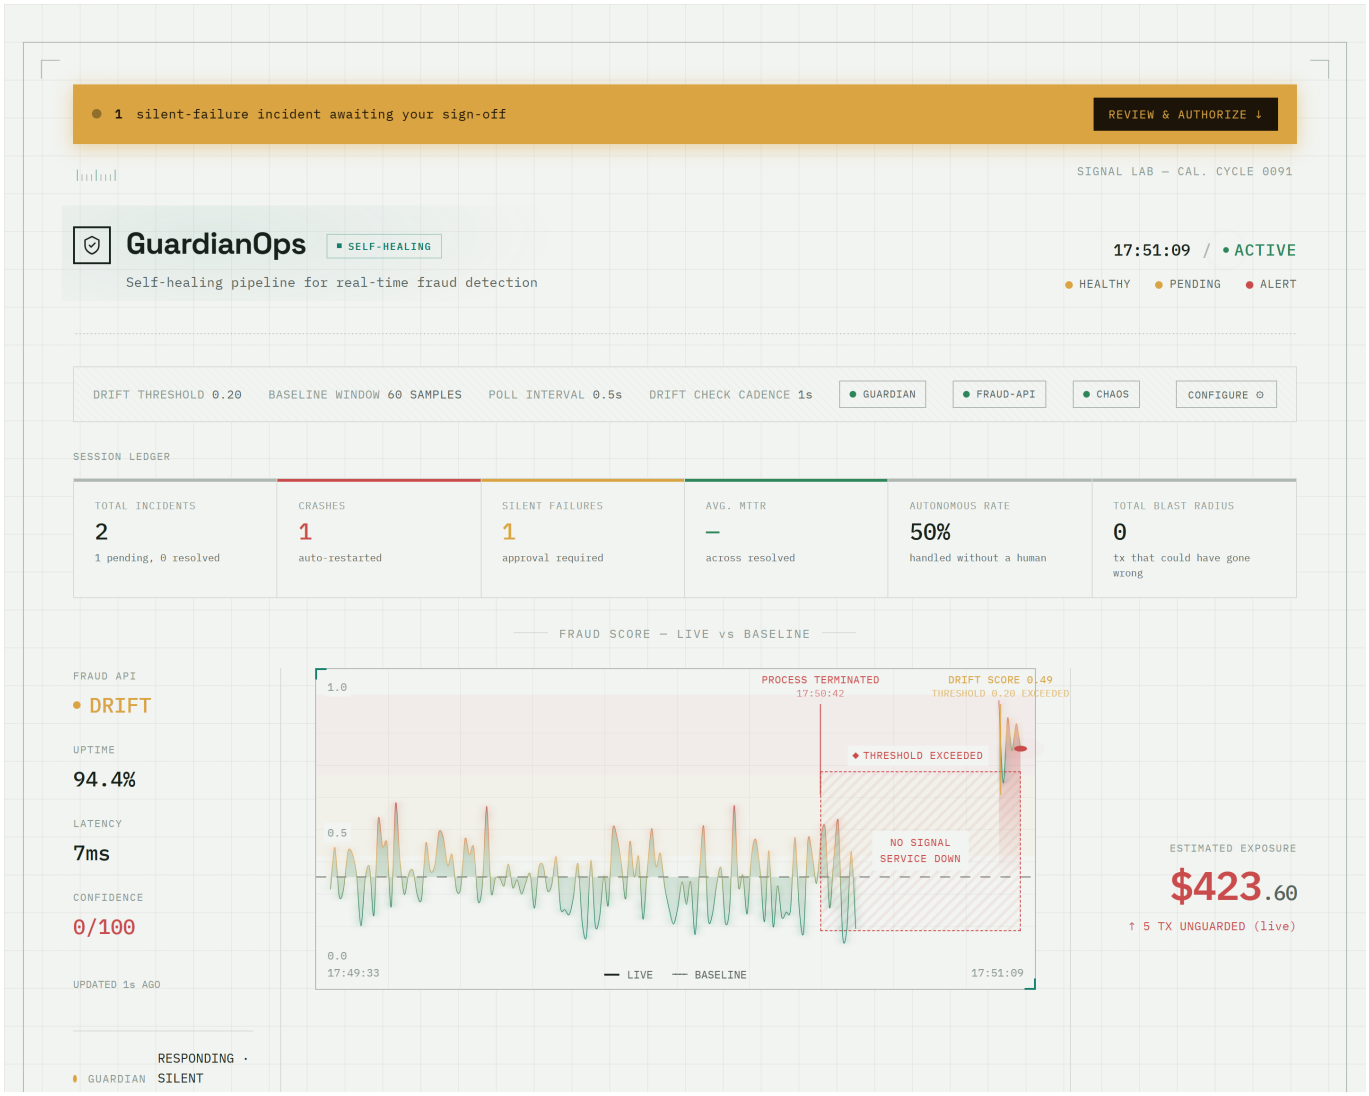


Fig 3. Silent-failure (output drift) incident awaiting human sign-off; no automatic action taken.

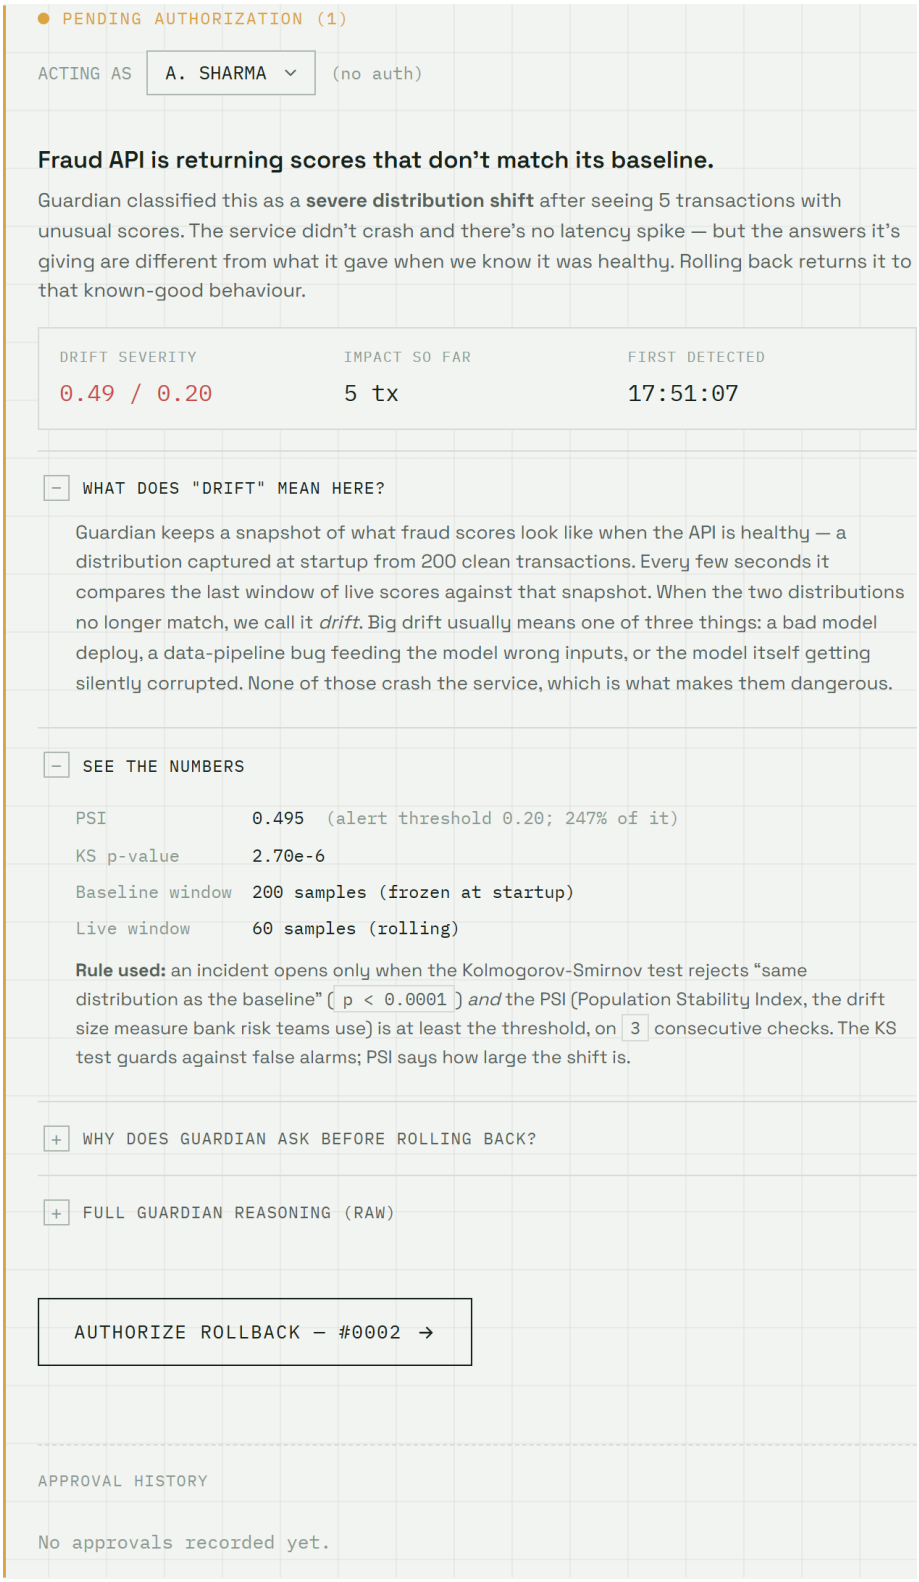


Fig 4. Pending Authorization card for the drift incident (policy P-002).

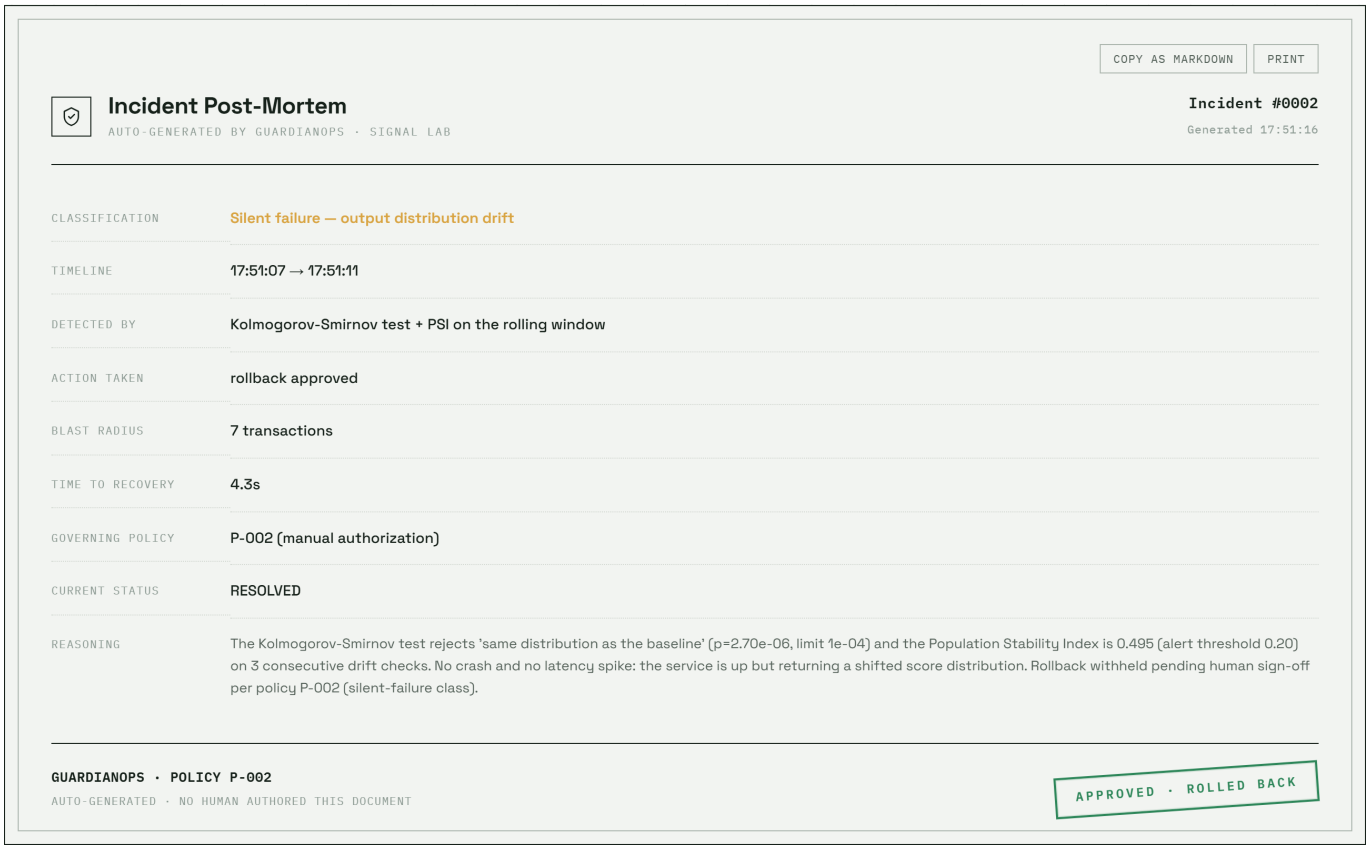


Fig 5. Auto-generated incident report: classification, timeline, MTTR, policy and reasoning.

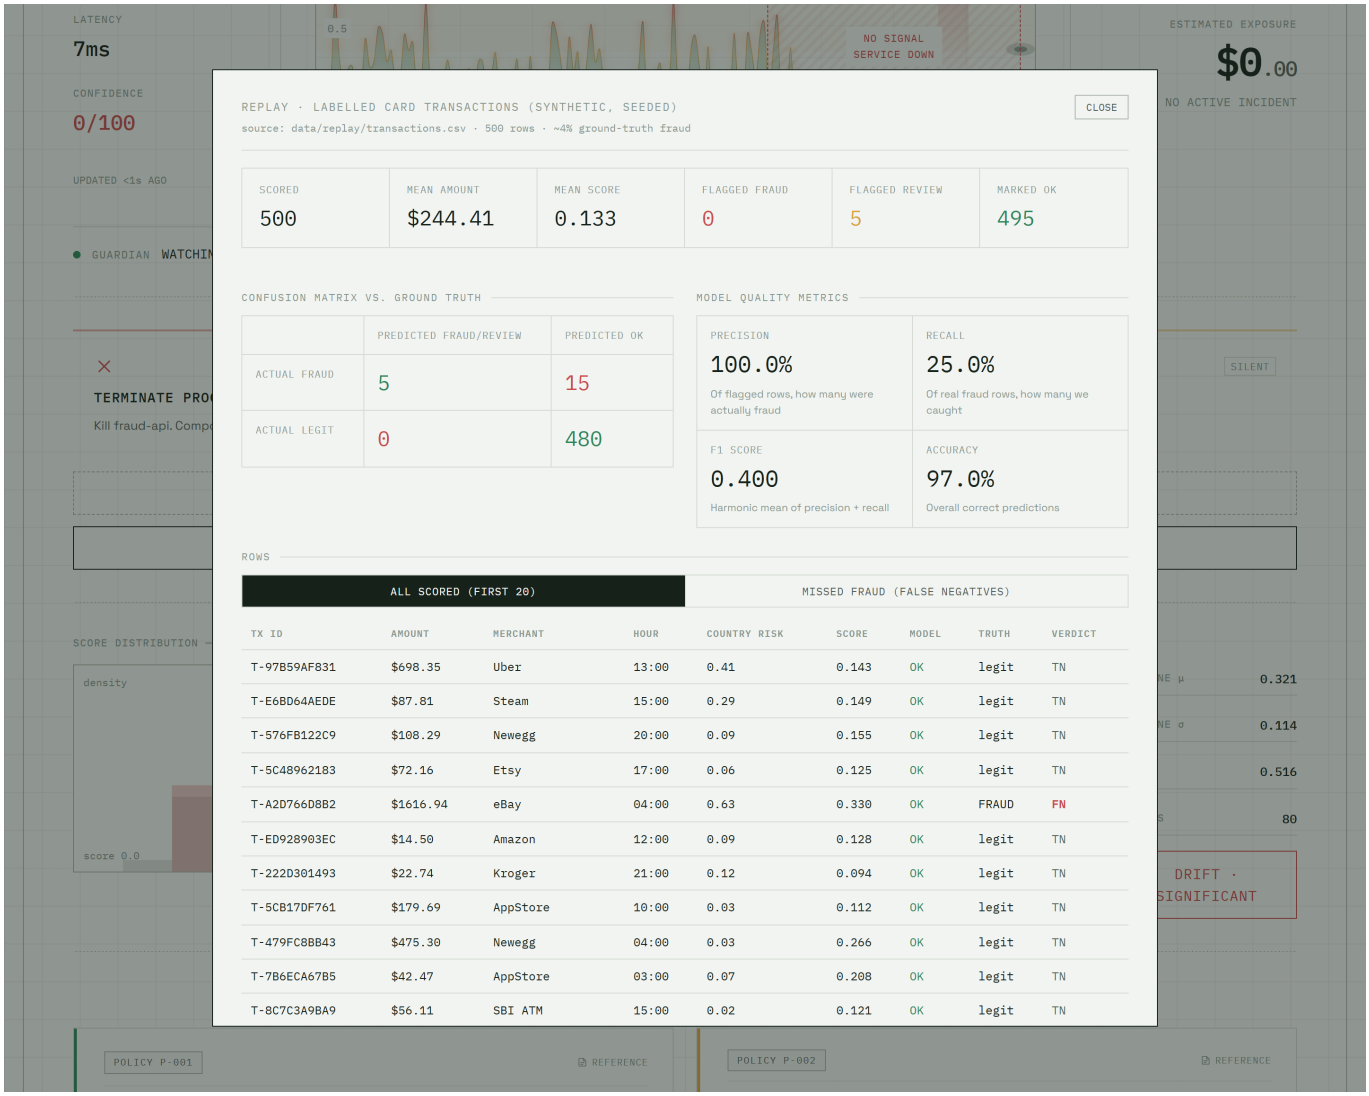


Fig 6. Replay of the labelled dataset: confusion matrix with precision, recall, F1 and accuracy.