


Pipeline Playbook

Docs 1–5 explained how the pipeline works. This one is just for using it — the commands, and what to check when something doesn't look right.

practical guide 2026-08-16

01 The whole lifecycle, at a glance



Two commands, both already-familiar git commands. Everything between them — building, tagging images, pulling, restarting — is automatic.

02 Making a release

```
git push origin main                # builds automatically, nothing deploys yet
git tag v1.4.0
git push origin v1.4.0              # this is the deploy gate
```

Watch it happen in GitHub's Actions tab — the `build` run fires on the push, the `deploy` run fires on the tag. Both run on the same self-hosted runner, so both show up in the same repo's Actions history.

03 Rolling back


```
git tag v1.4.1-rollback <older-commit-sha>
git push origin v1.4.1-rollback
```

Same deploy workflow, same six steps as doc 4 — it pulls the older SHA's image, which is already in the registry. No rebuild, no waiting on a fresh build to finish.

04 Checking what's actually deployed

QUESTION	WHERE TO LOOK
Did the last build succeed?	GitHub → Actions → <code>build</code> workflow runs
Did the last deploy succeed?	GitHub → Actions → <code>deploy</code> workflow runs
What SHA is actually running right now?	<code>docker compose -f docker-compose.deploy.yml images</code> on clubuntu — the tag on each running image
Are the containers healthy?	<code>docker compose ps</code> on clubuntu

05 Something went wrong

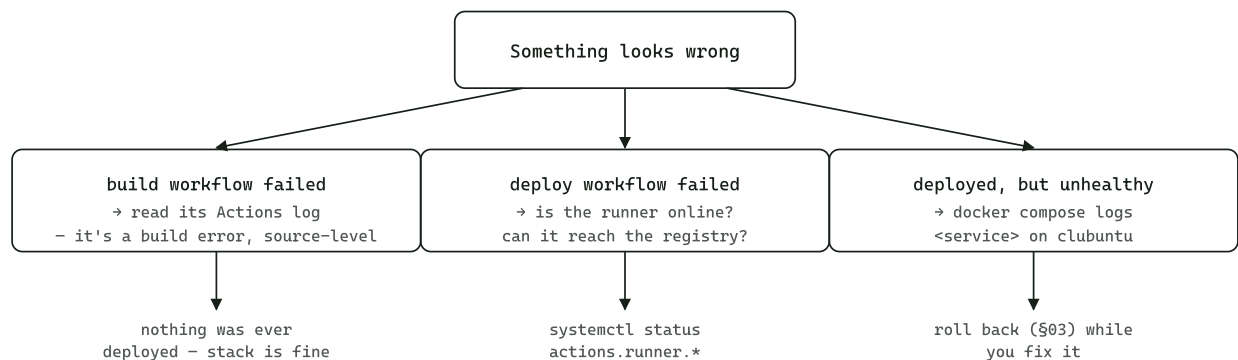

Three failure modes, three different places to look — and a failed build or a failed deploy both leave whatever was already running untouched.