

How Deployment Works


The complete pipeline as it actually runs today — every action, in sequence, tagged to the one component that performs it.

laptop → GitHub (kat-e8/manpage) → clubuntu 2026-08-16

00 The three components


COMPONENT	ROLE
LAPTOP	Where code is written and every <code>git</code> command is typed. Nothing else.
GITHUB	Hosts the repo, matches events to workflows, resolves jobs, queues them. Never touches clubuntu directly — it dispatches by queue, not by connection.
CLUBUNTU	Runs the self-hosted runner, the private registry, and the deployed stack itself. Always reaches out to GitHub — GitHub never reaches in.

01 Shipping a code change

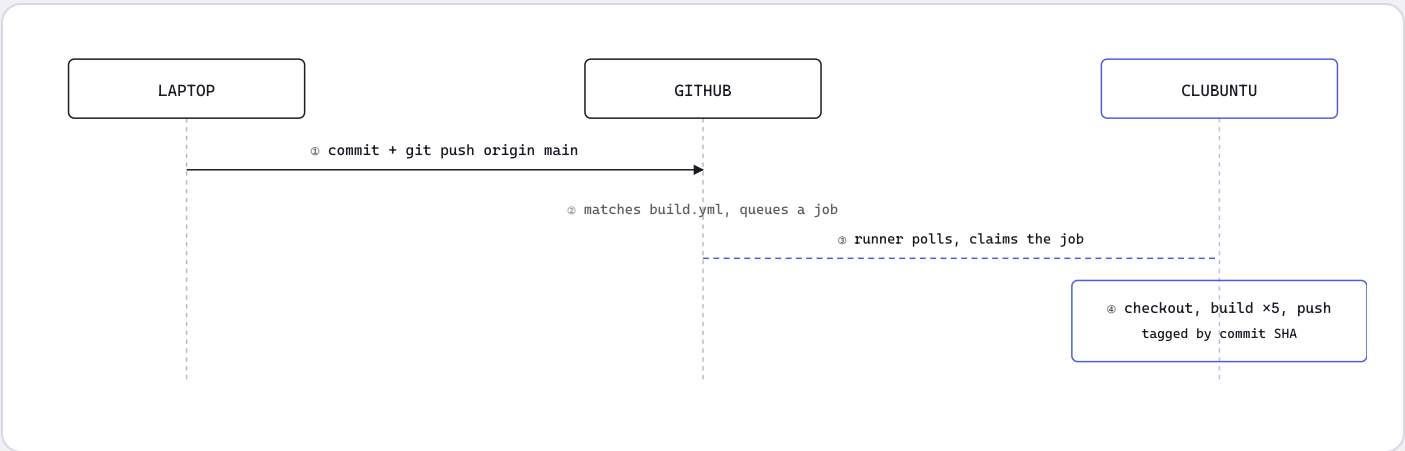

End state: five new images in the registry. Nothing running on clubuntu has changed yet.

02 Making a release

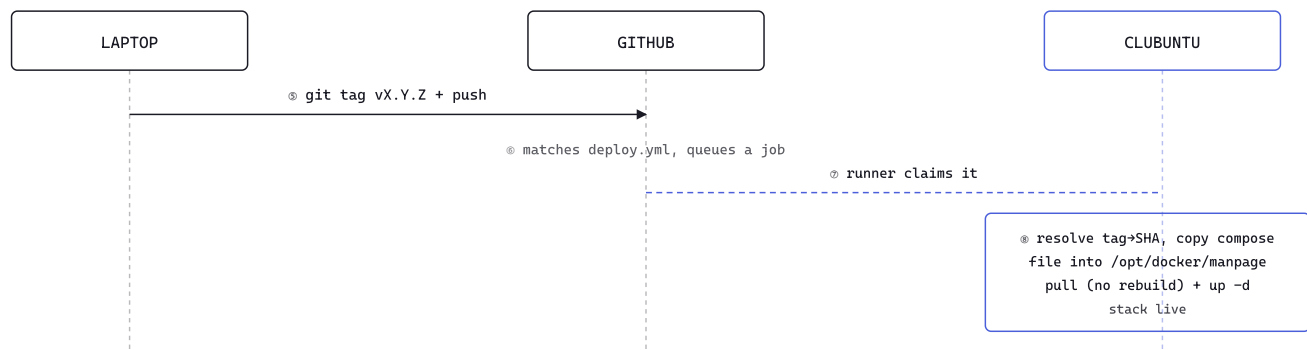

End state: the stack on clubuntu is running that exact commit, reachable at

`clubuntu.dala-cirius.ts.net:8100`.

03 Rolling back

Identical to steps ⑤–⑧, with one substitution: step ⑤ becomes `git tag vX.Y.Z-rollback <older-commit-sha>` instead of the newest commit. Every step after that is the same code path, unaware it's "a rollback" — it costs one pull, never a rebuild, because that older SHA's images are still sitting in the registry from whenever they were originally built.

One exception learned the hard way: re-pushing an *already-existing, unchanged* tag triggers nothing — no ref change, no push event. Redeploying the same version again means deleting and recreating that tag first.

04 What never crosses which boundary

- ▶ The laptop's source tree never reaches clubuntu — only images, and only `docker-compose.deploy.yml`, freshly copied out of each disposable checkout.
- ▶ `.env`, `db/schema.sql`, `coder_commands.xlsx` live only on clubuntu, permanently — never in git, never rebuilt, never touched by either workflow.
- ▶ clubuntu never receives an inbound connection from GitHub — the runner always polls outward, never the other way around.

05 Command reference, by component

WHERE	COMMAND	EFFECT
LAPTOP	<code>git push origin main</code>	Triggers a build — registry only, nothing deployed
LAPTOP	<code>git tag vX.Y.Z && git push origin vX.Y.Z</code>	Triggers a deploy — the stack actually updates
LAPTOP	<code>git tag vX.Y.Z-rollback <sha> && git push origin vX.Y.Z-rollback</code>	Same deploy path, pointed backward
CLUBUNTU	<code>docker compose -f docker-compose.deploy.yml ps</code>	What's actually running right now, and at which tag
CLUBUNTU	<code>curl localhost:8100/healthz</code>	Confirms the gateway is live
GITHUB	Actions tab	Every build/deploy run, logs for each step, pass or fail

git-docs — 12 · final summary · laptop → github (kat-e8/manpage) → clubuntu