

Class014

Kate Ruiz (PID: A17671200)

Background

The data for today's mini project comes from a knock-down study of an important HOX gene.

Data Import

```
library(DESeq2)
```

```
Loading required package: S4Vectors
```

```
Loading required package: stats4
```

```
Loading required package: BiocGenerics
```

```
Loading required package: generics
```

```
Attaching package: 'generics'
```

```
The following objects are masked from 'package:base':
```

```
as.difftime, as.factor, as.ordered, intersect, is.element, setdiff,  
setequal, union
```

```
Attaching package: 'BiocGenerics'
```

The following objects are masked from 'package:stats':

IQR, mad, sd, var, xtabs

The following objects are masked from 'package:base':

anyDuplicated, aperm, append, as.data.frame, basename, cbind,
colnames, dirname, do.call, duplicated, eval, evalq, Filter, Find,
get, grep, grepl, is.unsorted, lapply, Map, mapply, match, mget,
order, paste, pmax, pmax.int, pmin, pmin.int, Position, rank,
rbind, Reduce, rownames, sapply, saveRDS, table, tapply, unique,
unsplit, which.max, which.min

Attaching package: 'S4Vectors'

The following object is masked from 'package:utils':

findMatches

The following objects are masked from 'package:base':

expand.grid, I, unname

Loading required package: IRanges

Loading required package: GenomicRanges

Loading required package: Seqinfo

Loading required package: SummarizedExperiment

Loading required package: MatrixGenerics

Loading required package: matrixStats

Attaching package: 'MatrixGenerics'

The following objects are masked from 'package:matrixStats':

```
colAlls, colAnyNAs, colAnys, colAvgsPerRowSet, colCollapse,
colCounts, colCummaxs, colCummins, colCumprods, colCumsums,
colDiffs, colIQRDiffs, colIQRs, colLogSumExps, colMadDiffs,
colMads, colMaxs, colMeans2, colMedians, colMins, colOrderStats,
colProds, colQuantiles, colRanges, colRanks, colSdDiffs, colSds,
colSums2, colTabulates, colVarDiffs, colVars, colWeightedMads,
colWeightedMeans, colWeightedMedians, colWeightedSds,
colWeightedVars, rowAlls, rowAnyNAs, rowAnys, rowAvgsPerColSet,
rowCollapse, rowCounts, rowCummaxs, rowCummins, rowCumprods,
rowCumsums, rowDiffs, rowIQRDiffs, rowIQRs, rowLogSumExps,
rowMadDiffs, rowMads, rowMaxs, rowMeans2, rowMedians, rowMins,
rowOrderStats, rowProds, rowQuantiles, rowRanges, rowRanks,
rowSdDiffs, rowSds, rowSums2, rowTabulates, rowVarDiffs, rowVars,
rowWeightedMads, rowWeightedMeans, rowWeightedMedians,
rowWeightedSds, rowWeightedVars
```

Loading required package: Biobase

Welcome to Bioconductor

```
Vignettes contain introductory material; view with
'browseVignettes()'. To cite Bioconductor, see
'citation("Biobase")', and for packages 'citation("pkgname")'.
```

Attaching package: 'Biobase'

The following object is masked from 'package:MatrixGenerics':

```
rowMedians
```

The following objects are masked from 'package:matrixStats':

```
anyMissing, rowMedians
```

```
countData <- read.csv("GSE37704_featurecounts.csv", row.names=1)
colData <- read.csv("GSE37704_metadata.csv", row.names=1)
```

```
head(colData)
```

```
          condition
SRR493366 control_sirna
SRR493367 control_sirna
SRR493368 control_sirna
SRR493369      hoxa1_kd
SRR493370      hoxa1_kd
SRR493371      hoxa1_kd
```

```
head(countData)
```

```
          length SRR493366 SRR493367 SRR493368 SRR493369 SRR493370
ENSG00000186092    918         0         0         0         0         0
ENSG00000279928    718         0         0         0         0         0
ENSG00000279457   1982        23        28        29        29        28
ENSG00000278566    939         0         0         0         0         0
ENSG00000273547    939         0         0         0         0         0
ENSG00000187634   3214       124       123       205       207       212
          SRR493371
ENSG00000186092         0
ENSG00000279928         0
ENSG00000279457        46
ENSG00000278566         0
ENSG00000273547         0
ENSG00000187634       258
```

Have a wee peek at these:

Clean Up (data tidyig)

We need to remove the funny “length” column from out `countData` to make the columns match the rows in `colData`.

```
countData <- countData[,-1]
```

Check macth of `colData` and `countData`

```
rownames(colData) == colnames(countData)
```

```
[1] TRUE TRUE TRUE TRUE TRUE TRUE
```

DESeq Analysis

```
library(DESeq2)
```

```
head(countData)
```

	SRR493366	SRR493367	SRR493368	SRR493369	SRR493370	SRR493371
ENSG00000186092	0	0	0	0	0	0
ENSG00000279928	0	0	0	0	0	0
ENSG00000279457	23	28	29	29	28	46
ENSG00000278566	0	0	0	0	0	0
ENSG00000273547	0	0	0	0	0	0
ENSG00000187634	124	123	205	207	212	258

Remove zero count genes

```
to.keep <- rowSums(countData) > 0  
countData <- countData[to.keep,]
```

```
library(DESeq2)
```

```
dds<- DESeqDataSetFromMatrix(countData=countData,  
                             colData=colData,  
                             design=~condition)
```

Warning in DESeqDataSet(se, design = design, ignoreRank): some variables in design formula are characters, converting to factors

```
dds = DESeq(dds)
```

estimating size factors

estimating dispersions

gene-wise dispersion estimates

mean-dispersion relationship

final dispersion estimates

fitting model and testing

```
dds
```

```
class: DESeqDataSet
dim: 15975 6
metadata(1): version
assays(4): counts mu H cooks
rownames(15975): ENSG00000279457 ENSG00000187634 ... ENSG00000276345
               ENSG00000271254
rowData names(22): baseMean baseVar ... deviance maxCooks
colnames(6): SRR493366 SRR493367 ... SRR493370 SRR493371
colData names(2): condition sizeFactor
```

```
res = results(dds)
```

```
summary(res)
```

```
out of 15975 with nonzero total read count
adjusted p-value < 0.1
LFC > 0 (up)      : 4349, 27%
LFC < 0 (down)    : 4396, 28%
outliers [1]      : 0, 0%
low counts [2]     : 1237, 7.7%
(mean count < 0)
[1] see 'cooksCutoff' argument of ?results
[2] see 'independentFiltering' argument of ?results
```

Setting up input object

Running DESeq

Getting results


Volcano plot

A plot of log2 fold change vs -log of Adjusted P value

```
library(ggplot2)

ggplot(res)+
  aes(log2FoldChange,
      -log(padj))+
  geom_point()
```


Warning: Removed 1237 rows containing missing values or values outside the scale range (`geom\_point()`).

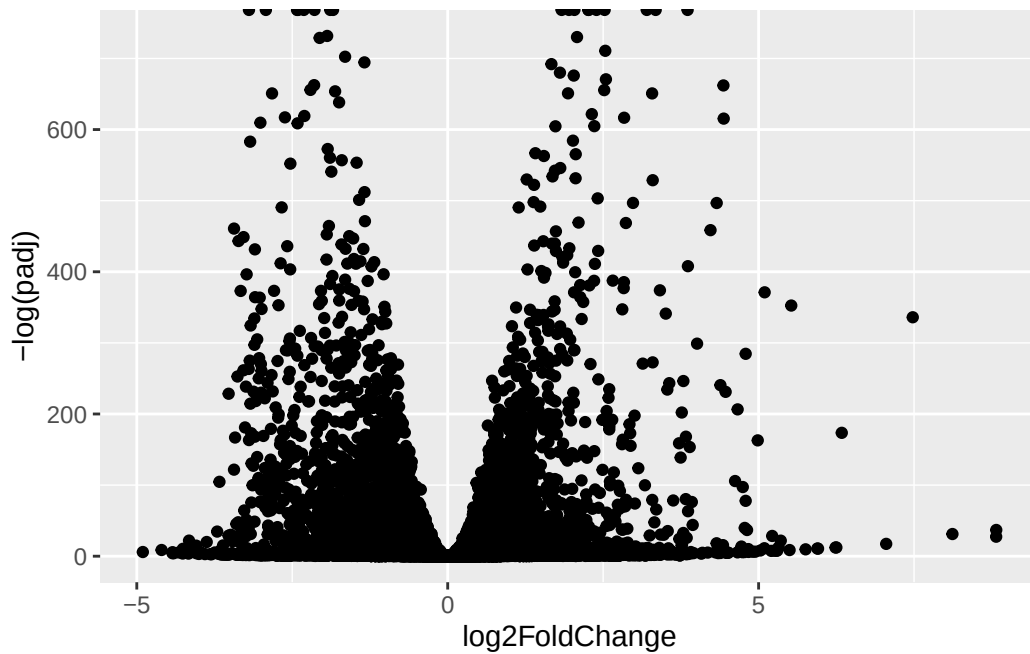

Add annotation


```
ggplot(res)+  
  aes(log2FoldChange,  
      -log(padj))+  
  geom_point()+  
  geom_hline(yintercept=-log(0.01), col="red")
```

Warning: Removed 1237 rows containing missing values or values outside the scale range (`geom\_point()`).

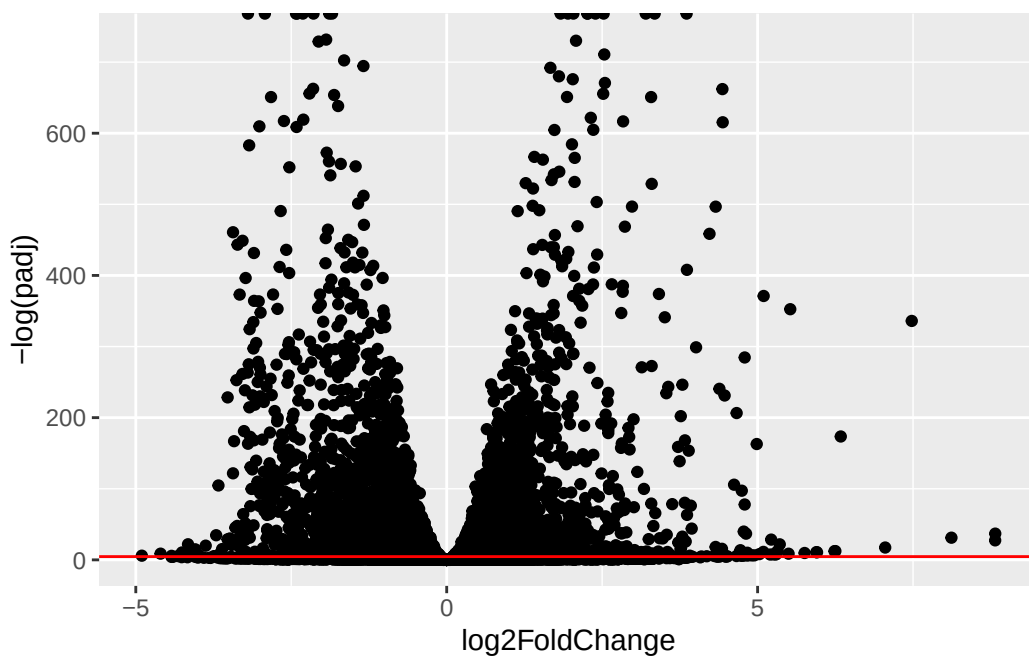

```
mycols <- rep("gray", nrow(res))  
mycols[abs(res$log2FoldChange)>2] <- "darkgreen"  
mycols[res$padj >= 0.01] <- "gray"  
  
ggplot(res)+  
  aes(log2FoldChange,  
      -log(padj))+  
  geom_point(col=mycols)+  
  geom_hline(yintercept=-log(0.01), col="red")
```


Warning: Removed 1237 rows containing missing values or values outside the scale range (``geom_point()``).

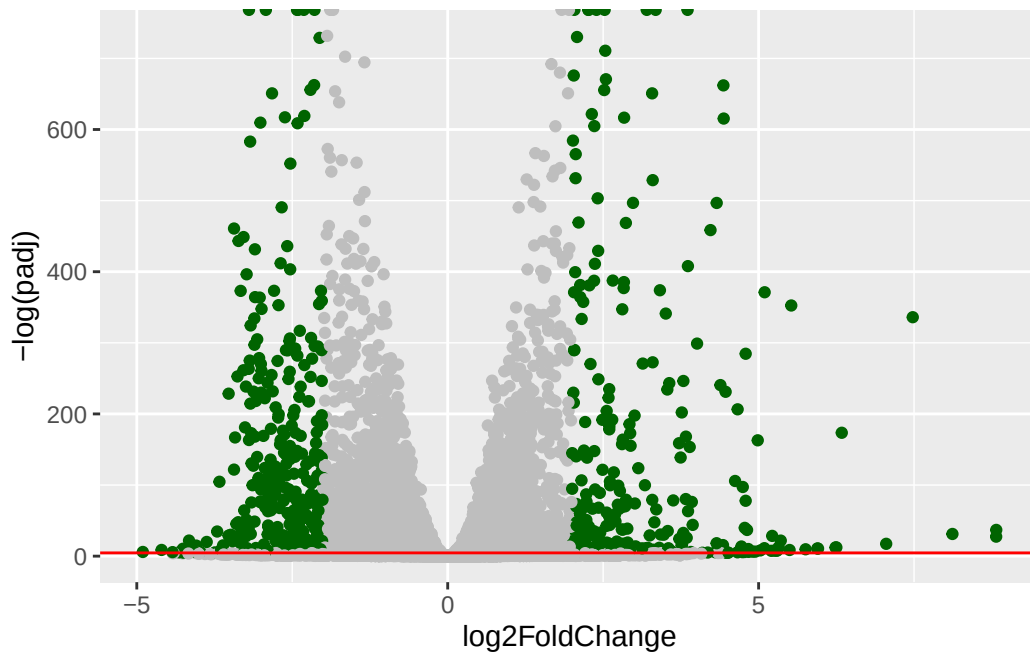

```
library("AnnotationDbi")
library("org.Hs.eg.db")
```

```
columns(org.Hs.eg.db)
```

```
[1] "ACCNUM"      "ALIAS"       "ENSEMBL"     "ENSEMBLPROT" "ENSEMBLTRANS"
[6] "ENTREZID"    "ENZYME"      "EVIDENCE"     "EVIDENCEALL"  "GENENAME"
[11] "GENETYPE"    "GO"          "GOALL"        "IPI"          "MAP"
[16] "OMIM"        "ONTOLOGY"    "ONTOLOGYALL"  "PATH"         "PFAM"
[21] "PMID"        "PROSITE"     "REFSEQ"       "SYMBOL"       "UCSCKG"
[26] "UNIPROT"
```

```
res$symbol = mapIds(org.Hs.eg.db,
  keys=rownames(res),
  keytype="ENSEMBL",
  column="SYMBOL")
```

'select()' returned 1:many mapping between keys and columns

```
res$entrez = mapIds(org.Hs.eg.db,  
  keys=rownames(res),  
  keytype="ENSEMBL",  
  column="ENTREZID")
```

'select()' returned 1:many mapping between keys and columns

```
head(res)
```

log2 fold change (MLE): condition hoxa1 kd vs control sirna

Wald test p-value: condition hoxa1 kd vs control sirna

DataFrame with 6 rows and 8 columns

	baseMean	log2FoldChange	lfcSE	stat	pvalue
	<numeric>	<numeric>	<numeric>	<numeric>	<numeric>
ENSG00000279457	29.9136	0.1792571	0.3248216	0.551863	5.81042e-01
ENSG00000187634	183.2296	0.4264571	0.1402658	3.040350	2.36304e-03
ENSG00000188976	1651.1881	-0.6927205	0.0548465	-12.630158	1.43990e-36
ENSG00000187961	209.6379	0.7297556	0.1318599	5.534326	3.12428e-08
ENSG00000187583	47.2551	0.0405765	0.2718928	0.149237	8.81366e-01
ENSG00000187642	11.9798	0.5428105	0.5215598	1.040744	2.97994e-01
	padj	symbol	entrez		
	<numeric>	<character>	<character>		
ENSG00000279457	6.86555e-01	NA	NA		
ENSG00000187634	5.15718e-03	SAMD11	148398		
ENSG00000188976	1.76549e-35	NOC2L	26155		
ENSG00000187961	1.13413e-07	KLHL17	339451		
ENSG00000187583	9.19031e-01	PLEKHN1	84069		
ENSG00000187642	4.03379e-01	PERM1	84808		

```
library(gage)
```

```
library(gageData)
```

```
library(pathview)
```

```
#####
Pathview is an open source software package distributed under GNU General
Public License version 3 (GPLv3). Details of GPLv3 is available at
http://www.gnu.org/licenses/gpl-3.0.html. Particullary, users are required to
formally cite the original Pathview paper (not just mention it) in publications
or products. For details, do citation("pathview") within R.
```

The pathview downloads and uses KEGG data. Non-academic uses may require a KEGG license agreement (details at <http://www.kegg.jp/kegg/legal.html>).

```
#####
```

We need a foldchanges vector for gage()

```
foldchanges <- res$log2FoldChange
names(foldchanges)<-res$entrez
```

Pathway Analysis

KEGG

```
library(pathview)
library(gage)
library(gageData)

data(kegg.sets.hs)
data(sigmet.idx.hs)

# Focus on signaling and metabolic pathways only
kegg.sets.hs = kegg.sets.hs[sigmet.idx.hs]

# Examine the first 3 pathways
head(kegg.sets.hs, 3)
```

```
$`hsa00232 Caffeine metabolism`
```

```
[1] "10" "1544" "1548" "1549" "1553" "7498" "9"
```

```
$`hsa00983 Drug metabolism - other enzymes`
```

```
[1] "10" "1066" "10720" "10941" "151531" "1548" "1549" "1551"
[9] "1553" "1576" "1577" "1806" "1807" "1890" "221223" "2990"
[17] "3251" "3614" "3615" "3704" "51733" "54490" "54575" "54576"
```

```
[25] "54577" "54578" "54579" "54600" "54657" "54658" "54659" "54963"
[33] "574537" "64816" "7083" "7084" "7172" "7363" "7364" "7365"
[41] "7366" "7367" "7371" "7372" "7378" "7498" "79799" "83549"
[49] "8824" "8833" "9" "978"
```

```
$`hsa00230 Purine metabolism`
```

```
[1] "100" "10201" "10606" "10621" "10622" "10623" "107" "10714"
[9] "108" "10846" "109" "111" "11128" "11164" "112" "113"
[17] "114" "115" "122481" "122622" "124583" "132" "158" "159"
[25] "1633" "171568" "1716" "196883" "203" "204" "205" "221823"
[33] "2272" "22978" "23649" "246721" "25885" "2618" "26289" "270"
[41] "271" "27115" "272" "2766" "2977" "2982" "2983" "2984"
[49] "2986" "2987" "29922" "3000" "30833" "30834" "318" "3251"
[57] "353" "3614" "3615" "3704" "377841" "471" "4830" "4831"
[65] "4832" "4833" "4860" "4881" "4882" "4907" "50484" "50940"
[73] "51082" "51251" "51292" "5136" "5137" "5138" "5139" "5140"
[81] "5141" "5142" "5143" "5144" "5145" "5146" "5147" "5148"
[89] "5149" "5150" "5151" "5152" "5153" "5158" "5167" "5169"
[97] "51728" "5198" "5236" "5313" "5315" "53343" "54107" "5422"
[105] "5424" "5425" "5426" "5427" "5430" "5431" "5432" "5433"
[113] "5434" "5435" "5436" "5437" "5438" "5439" "5440" "5441"
[121] "5471" "548644" "55276" "5557" "5558" "55703" "55811" "55821"
[129] "5631" "5634" "56655" "56953" "56985" "57804" "58497" "6240"
[137] "6241" "64425" "646625" "654364" "661" "7498" "8382" "84172"
[145] "84265" "84284" "84618" "8622" "8654" "87178" "8833" "9060"
[153] "9061" "93034" "953" "9533" "954" "955" "956" "957"
[161] "9583" "9615"
```

```
foldchanges = res$log2FoldChange
names(foldchanges) = res$entrez
head(foldchanges)
```

```
<NA>      148398      26155      339451      84069      84808
0.17925708 0.42645712 -0.69272046 0.72975561 0.04057653 0.54281049
```

```
# Get the results
keggres = gage(foldchanges, gsets=kegg.sets.hs)
```

```
attributes(keggres)
```

```
$names
[1] "greater" "less" "stats"
```

```
# Look at the first few down (less) pathways
head(keggres$less)
```

	p.geomean	stat.mean	p.val
hsa04110 Cell cycle	8.995727e-06	-4.378644	8.995727e-06
hsa03030 DNA replication	9.424076e-05	-3.951803	9.424076e-05
hsa03013 RNA transport	1.246882e-03	-3.059466	1.246882e-03
hsa03440 Homologous recombination	3.066756e-03	-2.852899	3.066756e-03
hsa04114 Oocyte meiosis	3.784520e-03	-2.698128	3.784520e-03
hsa00010 Glycolysis / Gluconeogenesis	8.961413e-03	-2.405398	8.961413e-03

	q.val	set.size	exp1
hsa04110 Cell cycle	0.001448312	121	8.995727e-06
hsa03030 DNA replication	0.007586381	36	9.424076e-05
hsa03013 RNA transport	0.066915974	144	1.246882e-03
hsa03440 Homologous recombination	0.121861535	28	3.066756e-03
hsa04114 Oocyte meiosis	0.121861535	102	3.784520e-03
hsa00010 Glycolysis / Gluconeogenesis	0.212222694	53	8.961413e-03

```
pathview(gene.data=foldchanges, pathway.id="hsa04110")
```

'select()' returned 1:1 mapping between keys and columns

Info: Working in directory /Users/kateruiz/Desktop/BIMM 143/Class014

Info: Writing image file hsa04110.pathview.png

```
# A different PDF based output of the same data
pathview(gene.data=foldchanges, pathway.id="hsa04110", kegg.native=FALSE)
```

'select()' returned 1:1 mapping between keys and columns

Warning: reconcile groups sharing member nodes!

```
      [,1] [,2]
[1,] "9"  "300"
[2,] "9"  "306"
```

Info: Working in directory /Users/kateruiz/Desktop/BIMM 143/Class014

Info: Writing image file hsa04110.pathview.pdf

```
## Focus on top 5 upregulated pathways here for demo purposes only
keggrespathways <- rownames(keggres$greater)[1:5]

# Extract the 8 character long IDs part of each string
keggresids = substr(keggrespathways, start=1, stop=8)
keggresids
```

```
[1] "hsa04640" "hsa04630" "hsa00140" "hsa04142" "hsa04330"
```

```
pathview(gene.data=foldchanges, pathway.id=keggresids, species="hsa")
```

'select()' returned 1:1 mapping between keys and columns

Info: Working in directory /Users/kateruiz/Desktop/BIMM 143/Class014

Info: Writing image file hsa04640.pathview.png

'select()' returned 1:1 mapping between keys and columns

Info: Working in directory /Users/kateruiz/Desktop/BIMM 143/Class014

Info: Writing image file hsa04630.pathview.png

'select()' returned 1:1 mapping between keys and columns

Info: Working in directory /Users/kateruiz/Desktop/BIMM 143/Class014

Info: Writing image file hsa00140.pathview.png

'select()' returned 1:1 mapping between keys and columns

Info: Working in directory /Users/kateruiz/Desktop/BIMM 143/Class014

Info: Writing image file hsa04142.pathview.png

'select()' returned 1:1 mapping between keys and columns

Info: Working in directory /Users/kateruiz/Desktop/BIMM 143/Class014

Info: Writing image file hsa04330.pathview.png

GO

```
data(go.sets.hs)
data(go.subs.hs)

# Focus on Biological Process subset of GO
gobpsets = go.sets.hs[go.subs.hs$BP]

gobpres = gage(foldchanges, gsets=gobpsets)

lapply(gobpres, head)
```

\$greater

	p.geomean	stat.mean	p.val
G0:0007156 homophilic cell adhesion	8.519724e-05	3.824205	8.519724e-05
G0:0002009 morphogenesis of an epithelium	1.396681e-04	3.653886	1.396681e-04
G0:0048729 tissue morphogenesis	1.432451e-04	3.643242	1.432451e-04
G0:0007610 behavior	1.925222e-04	3.565432	1.925222e-04
G0:0060562 epithelial tube morphogenesis	5.932837e-04	3.261376	5.932837e-04
G0:0035295 tube development	5.953254e-04	3.253665	5.953254e-04
	q.val	set.size	expl
G0:0007156 homophilic cell adhesion	0.1951953	113	8.519724e-05
G0:0002009 morphogenesis of an epithelium	0.1951953	339	1.396681e-04
G0:0048729 tissue morphogenesis	0.1951953	424	1.432451e-04
G0:0007610 behavior	0.1967577	426	1.925222e-04
G0:0060562 epithelial tube morphogenesis	0.3565320	257	5.932837e-04
G0:0035295 tube development	0.3565320	391	5.953254e-04

\$less

	p.geomean	stat.mean	p.val
G0:0048285 organelle fission	1.536227e-15	-8.063910	1.536227e-15
G0:0000280 nuclear division	4.286961e-15	-7.939217	4.286961e-15
G0:0007067 mitosis	4.286961e-15	-7.939217	4.286961e-15
G0:0000087 M phase of mitotic cell cycle	1.169934e-14	-7.797496	1.169934e-14
G0:0007059 chromosome segregation	2.028624e-11	-6.878340	2.028624e-11
G0:0000236 mitotic prometaphase	1.729553e-10	-6.695966	1.729553e-10
	q.val	set.size	expl
G0:0048285 organelle fission	5.841698e-12	376	1.536227e-15
G0:0000280 nuclear division	5.841698e-12	352	4.286961e-15
G0:0007067 mitosis	5.841698e-12	352	4.286961e-15
G0:0000087 M phase of mitotic cell cycle	1.195672e-11	362	1.169934e-14

G0:0007059	chromosome segregation	1.658603e-08	142	2.028624e-11
G0:0000236	mitotic prometaphase	1.178402e-07	84	1.729553e-10

\$stats

		stat.mean	exp1
G0:0007156	homophilic cell adhesion	3.824205	3.824205
G0:0002009	morphogenesis of an epithelium	3.653886	3.653886
G0:0048729	tissue morphogenesis	3.643242	3.643242
G0:0007610	behavior	3.565432	3.565432
G0:0060562	epithelial tube morphogenesis	3.261376	3.261376
G0:0035295	tube development	3.253665	3.253665

Reactome

```
sig_genes <- res[res$padj <= 0.05 & !is.na(res$padj), "symbol"]
print(paste("Total number of significant genes:", length(sig_genes)))
```

```
[1] "Total number of significant genes: 8147"
```

```
write.table(sig_genes, file="significant_genes.txt", row.names=FALSE, col.names=FALSE, quote=
```