


SCHEDULE OF BEAMS

BEAM NOS	BEAM SIZE	BOTTOM BARS		TOP BARS	STIRRUPS	REMARKS
		Straight	Curtailed (0.7L span)			
B1, B2, B4, B7	600 x 600	6-16 *	6-12 *	6-12 *	8 * ϕ 100 (12) 200 c/c	8 LEGGED STIRRUPS
B3, B13, B19, B46, B48	600 x 600	6-16 *	-----	6-16 *	8 * ϕ 100 (12) 200 c/c	8 LEGGED STIRRUPS
B6, B9	400 x 600	4-20 *	4-20 *	4-16 *	8 * ϕ 100 (12) 200 c/c	4 LEGGED STIRRUPS
B8, B9	600 x 600	6-16 *	4-16 *	6-12 *	8 * ϕ 100 (12) 200 c/c	8 LEGGED STIRRUPS
B10, B11, B20	600 x 600	6-16 *	6-16 *	6-12 *	8 * ϕ 100 (12) 200 c/c	8 LEGGED STIRRUPS
B12	600 x 600	6-20 *	6-16 *	6-16 *	10 * ϕ 100 (12) 200 c/c	8 LEGGED STIRRUPS
B14, B17	600 x 600	6-20 *	6-20 *	6-16 *	8 * ϕ 100 (12) 200 c/c	8 LEGGED STIRRUPS
B15, B16	450 x 600	4-16 *	4-16 *	4-16 *	8 * ϕ 100 (12) 200 c/c	4 LEGGED STIRRUPS
B18	600 x 600	6-25 *	6-20 *	6-16 *	8 * ϕ 100 (12) 150 (10) 200 c/c	8 LEGGED STIRRUPS
B27, B28	300 x 600	3-16 *	-----	3-16 *	8 * ϕ 100 (12) 200 c/c	8 LEGGED STIRRUPS
B29, B30	300 x 600	3-16 *	3-16 *	3-16 *	8 * ϕ 100 (12) 200 c/c	8 LEGGED STIRRUPS
B31, B44, B47, B49, B137	300 x 600	3-20 *	-----	3-20 *	8 * ϕ 100 c/c	8 LEGGED STIRRUPS
B32	600 x 600	3-16 *	-----	3-16 *	8 * ϕ 100 c/c	8 LEGGED STIRRUPS
B34, B35, B43	400 x 600	4-20 *	-----	4-16 *	10 * ϕ 100 (12) 200 c/c	4 LEGGED STIRRUPS
B36, B37, B40, B45, B54	500 x 600	5-20 *	-----	5-20 *	8 * ϕ 100 (12) 200 c/c	8 LEGGED STIRRUPS
B38, B39, B46, B47	200 x 600	2-20 *	-----	2-16 *	8 * ϕ 100 c/c	8 LEGGED STIRRUPS
B41	200 x 600	2-25 *	2-25 *	2-20 *	8 * ϕ 100 (12) 150 (10) 200 c/c	8 LEGGED STIRRUPS
B42	400 x 600	4-20 *	-----	4-16 *	8 * ϕ 100 (12) 200 c/c	4 LEGGED STIRRUPS
B48	200 x 600	2-20 *	-----	2-16 *	8 * ϕ 100 (12) 200 c/c	8 LEGGED STIRRUPS
B49	200 x 600	3-20 *	-----	3-20 *	10 * ϕ 100 (12) 200 c/c	8 LEGGED STIRRUPS
B49, B50	300 x 600	3-20 *	-----	3-16 *	8 * ϕ 100 (12) 200 c/c	8 LEGGED STIRRUPS
B51C	300 x 600	3-20 *	-----	3-20 *	10 * ϕ 100 c/c	CANTILEVER
B52, B53, B77, B150	300 x 600	3-16 *	3-16 *	3-16 *	8 * ϕ 100 (12) 200 c/c	8 LEGGED STIRRUPS
B54C	350 x 600	3-20 *	-----	3-16 *	8 * ϕ 75 c/c	CANTILEVER
B55	300 x 600	3-20 *	3-16 *	3-16 *	8 * ϕ 100 (12) 200 c/c	8 LEGGED STIRRUPS
B57, B58, B59, B67	300 x 600	3-20 *	3-16 *	3-16 *	8 * ϕ 100 (12) 200 c/c	8 LEGGED STIRRUPS
B60	600 x 600	6-20 *	6-20 *	6-20 *	10 * ϕ 100 (12) 150 (10) 200 c/c	8 LEGGED STIRRUPS
B62, B65	600 x 600	6-16 *	-----	6-12 *	8 * ϕ 100 c/c	8 LEGGED STIRRUPS
B63, B130, B132, B146, B147	300 x 600	3-16 *	3-12 *	3-12 *	8 * ϕ 100 (12) 200 c/c	8 LEGGED STIRRUPS
B64, B148	300 x 600	3-20 *	3-16 *	3-16 *	8 * ϕ 100 (12) 200 c/c	8 LEGGED STIRRUPS
B67, B68, B79	600 x 600	6-16 *	6-16 *	6-12 *	8 * ϕ 100 (12) 200 c/c	8 LEGGED STIRRUPS
B70, B73, B74	600 x 600	6-16 *	-----	6-16 *	8 * ϕ 100 (12) 200 c/c	8 LEGGED STIRRUPS
B71	600 x 600	6-16 *	-----	6-16 *	8 * ϕ 100 (12) 200 c/c	8 LEGGED STIRRUPS
B72	600 x 600	6-16 *	4-16 *	6-12 *	8 * ϕ 100 (12) 200 c/c	8 LEGGED STIRRUPS
B76, B79, B90, B127	300 x 600	3-16 *	-----	3-12 *	8 * ϕ 100 (12) 200 c/c	8 LEGGED STIRRUPS
B78	300 x 600	3-20 *	3-20 *	3-16 *	8 * ϕ 100 (12) 200 c/c	8 LEGGED STIRRUPS
B79C, B148C	300 x 600	3-16 *	-----	3-12 *	8 * ϕ 100 c/c	CANTILEVER
B81, B82, B83	400 x 600	4-16 *	4-12 *	4-12 *	8 * ϕ 100 (12) 200 c/c	4 LEGGED STIRRUPS
B84	600 x 600	6-25 *	6-25 *	6-20 *	10 * ϕ 100 (12) 150 (10) 200 c/c	8 LEGGED STIRRUPS
B85	400 x 600	4-20 *	4-20 *	4-16 *	8 * ϕ 100 (12) 200 c/c	4 LEGGED STIRRUPS
B86, B88, B89	300 x 600	3-25 *	3-20 *	3-20 *	8 * ϕ 100 (12) 200 c/c	8 LEGGED STIRRUPS
B92, B100, B108, B115	200 x 600	3-20 *	3-20 *	3-16 *	10 * ϕ 100 (12) 200 c/c	8 LEGGED STIRRUPS
B93, B121	200 x 600	2-20 *	2-16 *	2-16 *	8 * ϕ 100 (12) 200 c/c	8 LEGGED STIRRUPS
B94, B95, B120, B191	300 x 600	2-16 *	2-12 *	2-16 *	8 * ϕ 100 (12) 200 c/c	8 LEGGED STIRRUPS
B98	450 x 600	4-20 *	-----	4-16 *	8 * ϕ 100 (12) 200 c/c	4 LEGGED STIRRUPS
B99, B100, B112, B131, B119	200 x 600	2-16 *	-----	2-12 *	8 * ϕ 100 (12) 200 c/c	8 LEGGED STIRRUPS
B101, B108, B114, B135, B143	300 x 600	3-20 *	-----	3-20 *	8 * ϕ 100 c/c	8 LEGGED STIRRUPS
B102C, B119C	300 x 600	3-20 *	-----	3-16 *	8 * ϕ 100 c/c	CANTILEVER
B103, B111, B154	200 x 600	2-16 *	-----	2-12 *	8 * ϕ 150 c/c	8 LEGGED STIRRUPS
B104, B110, B116, B122	450 x 600	4-16 *	4-16 *	4-16 *	8 * ϕ 100 (12) 200 c/c	4 LEGGED STIRRUPS
B108	300 x 600	3-16 *	-----	3-16 *	8 * ϕ 100 c/c	8 LEGGED STIRRUPS
B107	300 x 600	2-20 *	-----	2-16 *	8 * ϕ 100 c/c	8 LEGGED STIRRUPS
B117, B118, B123, B140	200 x 600	2-20 *	-----	2-16 *	8 * ϕ 100 c/c	8 LEGGED STIRRUPS
B124	350 x 600	3-20 *	-----	3-16 *	8 * ϕ 100 (12) 200 c/c	CANTILEVER

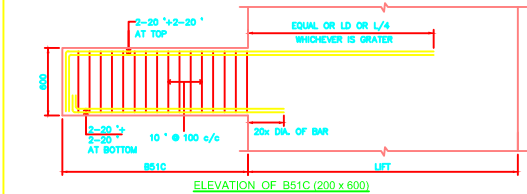




SCHEDULE OF BEAMS

BEAM NOS	BEAM SIZE	BOTTOM BARS		TOP BARS	STIRRUPS	REMARKS
		Straight	Curtailed (0.7L span)			
B135, B136	300 x 600	3-20 *	-----	3-20 *	10 * ϕ 100 (12) 200 c/c	8 LEGGED STIRRUPS
B138	450 x 600	4-20 *	-----	4-16 *	8 * ϕ 100 (12) 200 c/c	4 LEGGED STIRRUPS
B139	300 x 600	3-20 *	-----	3-16 *	8 * ϕ 100 (12) 200 c/c	4 LEGGED STIRRUPS
B133	400 x 600	4-20 *	-----	4-16 *	8 * ϕ 100 (12) 200 c/c	4 LEGGED STIRRUPS
B134	400 x 600	4-25 *	-----	4-16 *	8 * ϕ 100 (12) 200 c/c	4 LEGGED STIRRUPS
B135C	300 x 600	3-20 *	-----	3-20 *	8 * ϕ 75 c/c	CANTILEVER
B136	300 x 600	3-20 *	-----	3-16 *	8 * ϕ 100 (12) 200 c/c	8 LEGGED STIRRUPS
B139	300 x 600	3-25 *	-----	3-16 *	8 * ϕ 100 (12) 150 (10) 200 c/c	8 LEGGED STIRRUPS
B141, B142	300 x 600	3-16 *	-----	3-12 *	8 * ϕ 100 (12) 200 c/c	8 LEGGED STIRRUPS
B149	600 x 600	6-16 *	6-12 *	6-12 *	8 * ϕ 100 (12) 200 c/c	8 LEGGED STIRRUPS
B152, B153	300 x 600	3-16 *	3-12 *	3-12 *	8 * ϕ 100 (12) 200 c/c	8 LEGGED STIRRUPS
B16	300 x 600	3-16 *	-----	3-16 *	8 * ϕ 75 c/c	CANTILEVER
B161	1800 x 600	-----	-----	-----	8 * ϕ 75 c/c	CANTILEVER
M8	150 x D	2-20 *	-----	2-16 *	8 * ϕ 100 (12) 200 c/c	4 LEGGED STIRRUPS
M9C	150 x D	2-20 *	-----	2-20 *	8 * ϕ 100 c/c	CANTILEVER

D = 175 +3 RISERS.

ALL BAR BENT UP AT 45 AND EXTENDED BY 40 IN UNIFORM SPAN.

SLAB NOS.	THICKNESS	SHORT BARS	LONG BARS	REMARKS
S1	175	10 * ϕ 100 c/c	10 * ϕ 100 c/c	TWO WAY
S2	185	10 * ϕ 100 c/c	10 * ϕ 100 c/c	TWO WAY
S3	185	10 * ϕ 100 c/c	10 * ϕ 100 c/c	TWO WAY
S4	230	12 * ϕ 125 c/c	10 * ϕ 100 c/c	TWO WAY
S5	175	10 * ϕ 125 c/c	10 * ϕ 100 c/c	TWO WAY
S6	175	10 * ϕ 150 c/c	10 * ϕ 150 c/c	TWO WAY
S7	180	10 * ϕ 100 c/c	8 * ϕ 200 c/c	ONE WAY
S8	150	8 * ϕ 100 c/c	8 * ϕ 200 c/c	ONE WAY
S9	200	10 * ϕ 100 c/c	10 * ϕ 150 c/c	TWO WAY
S13	150	8 * ϕ 100 c/c	8 * ϕ 200 c/c	ONE WAY 8-150 SUNK
S14	185	10 * ϕ 150 c/c	8 * ϕ 175 c/c	ONE WAY 8-200 SUNK
S15	200	10 * ϕ 150 c/c	10 * ϕ 150 c/c	TWO WAY 8-200 SUNK
S1C	175	10 * ϕ 150 c/c (TOP)	8 * ϕ 100 c/c	CANTILEVER SLAB
S1, S72	175	8 * ϕ 200 c/c	12 * ϕ 100 c/c	STAIRCASE SLAB

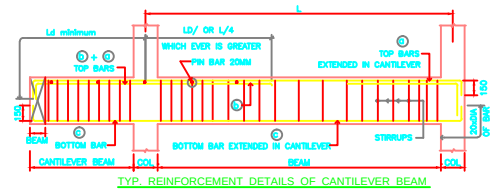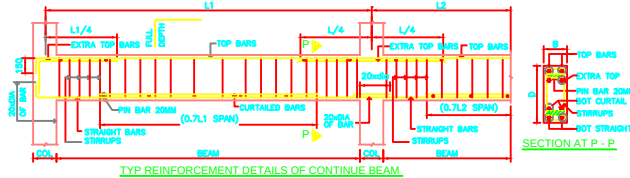

- *CONCRETE GRADE *
- 1) FOOTING & RAFT - M35
- 2) COLUMN & LIFT PARDI - M40
- 3) SLAB & BEAM - M35 INCLUDING COLUMN CAP
- 4) PLINTH & TIE BEAM - M35
- 5) RETAINING WALL - M35

REV.	DESCRIPTION	DATE
RO	ORIGINAL DRAWING	31.01.2025

- REFERENCE IS CODES
- IS 456-2000 - PLAIN AND REINFORCED CONCRETE.
 - IS 800 - STEEL STRUCTURE.
 - IS 3370 - LIQUID RETAINING STRUCTURE.
 - IS 2911 - PILE FOUNDATION.
 - IS 1893-2016- EARTHQUAKE RESISTANT DESIGN OF STRUCTURE.

- NOTES :
- DO NOT SCALE THE DRAWING, REFER FIGURED DIMENSIONS
 - ANY DISCREPANCIES OR OMISSION OR CHANGES SHALL BE BROUGHT TO NOTICE PRIOR TO EXECUTION
 - DO NOT CAST ANY R.C.C WORK UNLESS IT IS CHECKED AND CONFIRMED BY SITE ENGINEER.
 - ALL STEEL IS TOR STEEL OF GRADE Fe 500 N/mm²sq.
 - S.B.C. OF SOIL ASSUMED IS 100 T/Sq.M.
 - COLUMNS AND FOOTINGS ARE DESIGNED FOR B. P. + L. P. + U. G. + 22 FLOORS.
 - DESIGN OF CENTRING, SHUTTERING, AND CONCRETE MIX IS CONTRACTOR / CLIENTS / SITE RESPONSIBILITY.
 - LAPPING OR ANCHORAGE LENGTH
 - a) BEAM AND SLAB = 60 x DIA OF BAR
 - b) COLUMN = 50 x DIA OF BAR
 - CLEAR COVER TO REINFORCEMENT
 - a) FOOTING
 - i) TOP & BOTTOM = 50mm.
 - ii) SIDE = 40mm.
 - b) COLUMN = 40mm.
 - c) SHEAR WALL LESS THAN 200 = 25mm.
 - d) SHEAR WALL/COLUMN FOR 200 = 25mm.
 - e) SHEAR WALL GREATER THAN 200 = 40mm.
 - f) SLAB = 20mm.
 - g) BEAM = 25mm.
 - h) RETAINING WALLS = 25mm.
 - i) WATER TANK WALLS = 25mm.
 - j) LIFT PARDI = 25mm.

10) WE WILL NOT BE RESPONSIBLE FOR ANY LEGAL OR APPROVAL REGRADING THE APPROVED ARCHITECTURAL PLAN.

PROJECT PROPOSED RESIDENTIAL/COMMERCIAL BUILDING AT, 400/401, NANA PETH, PUNE. FOR: AJAY BHOSALE.

ARCHITECT V.K. ARCH. PUNE.

TITLE DETAILS OF SECOND SLAB & BEAM

JOB NO.	DRG. NO.	DATE OF ISSUE	DRN.	DESIGN
4998/19	DRG. NO. 2	31.01.2025	GAJWANI	ANIL

Sunil Muralik & Associates

STRUCTURAL CONSULTANTS

1348/1350 SHIVAJI NAGAR PETH, PUNE. HOTEL, SHIVAJI NAGAR, PUNE. BUILDING ROAD, PUNE.

PHONE: 9420000000, 9420000000. EMAIL: sunil.muralik@gmail.com

THIS DRAWING IS THE PROPERTY OF SUNIL MURALIK & ASSOCIATES. IT IS TO BE USED ONLY FOR THE PROJECT FOR WHICH IT WAS PREPARED. IT IS NOT TO BE REPRODUCED OR USED FOR ANY OTHER PROJECT WITHOUT OUR PERMISSION.