


MAIN RESULT – LFR

Lancichinetti–Fortunato–Radicchi benchmark (2008)


Top 5 bộ test có Q cải thiện mạnh nhất khi dùng mixed matrix W_λ
(filter: $Q(A) \geq 0.1$, score = $\max Q(\lambda > 0) - Q(A)$)

1. LFR-100-mu035	$Q(A)=0.1124$	$\rightarrow$	$Q(\lambda=5.0)=0.4785$	$\Delta Q=+0.3661$
2. LFR-100-mu0.2	$Q(A)=0.4747$	$\rightarrow$	$Q(\lambda=2.0)=0.6280$	$\Delta Q=+0.1534$
3. LFR-500-mu0.4	$Q(A)=0.1670$	$\rightarrow$	$Q(\lambda=0.5)=0.2979$	$\Delta Q=+0.1308$
4. LFR-2000-mu050	$Q(A)=0.1112$	$\rightarrow$	$Q(\lambda=1.0)=0.2409$	$\Delta Q=+0.1297$
5. LFR-500-mu035	$Q(A)=0.2181$	$\rightarrow$	$Q(\lambda=0.5)=0.3380$	$\Delta Q=+0.1198$


[LFR] quality · modularity

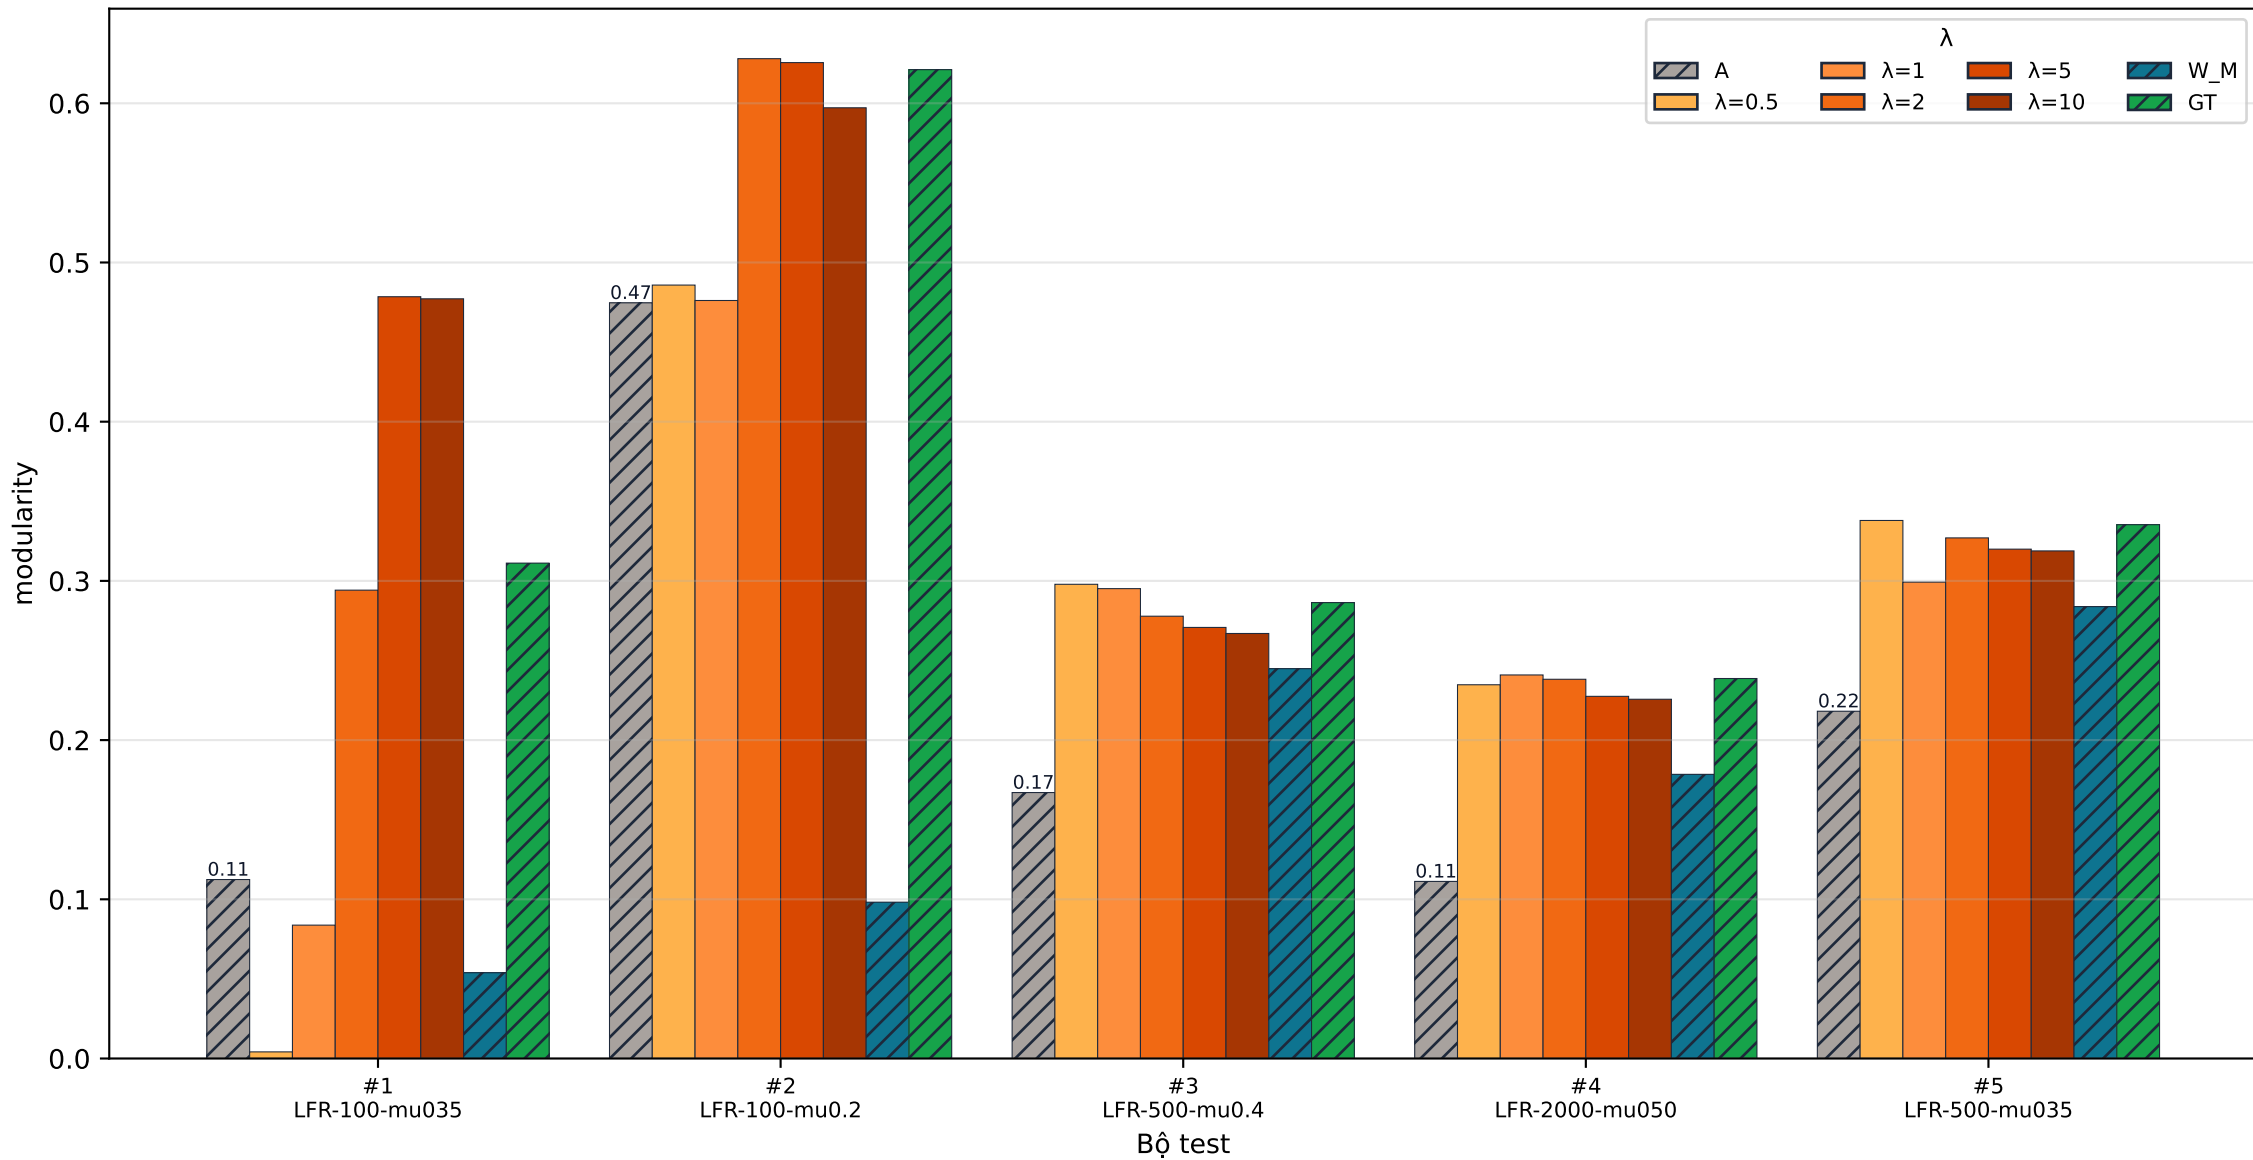


[LFR] quality · cc_avg

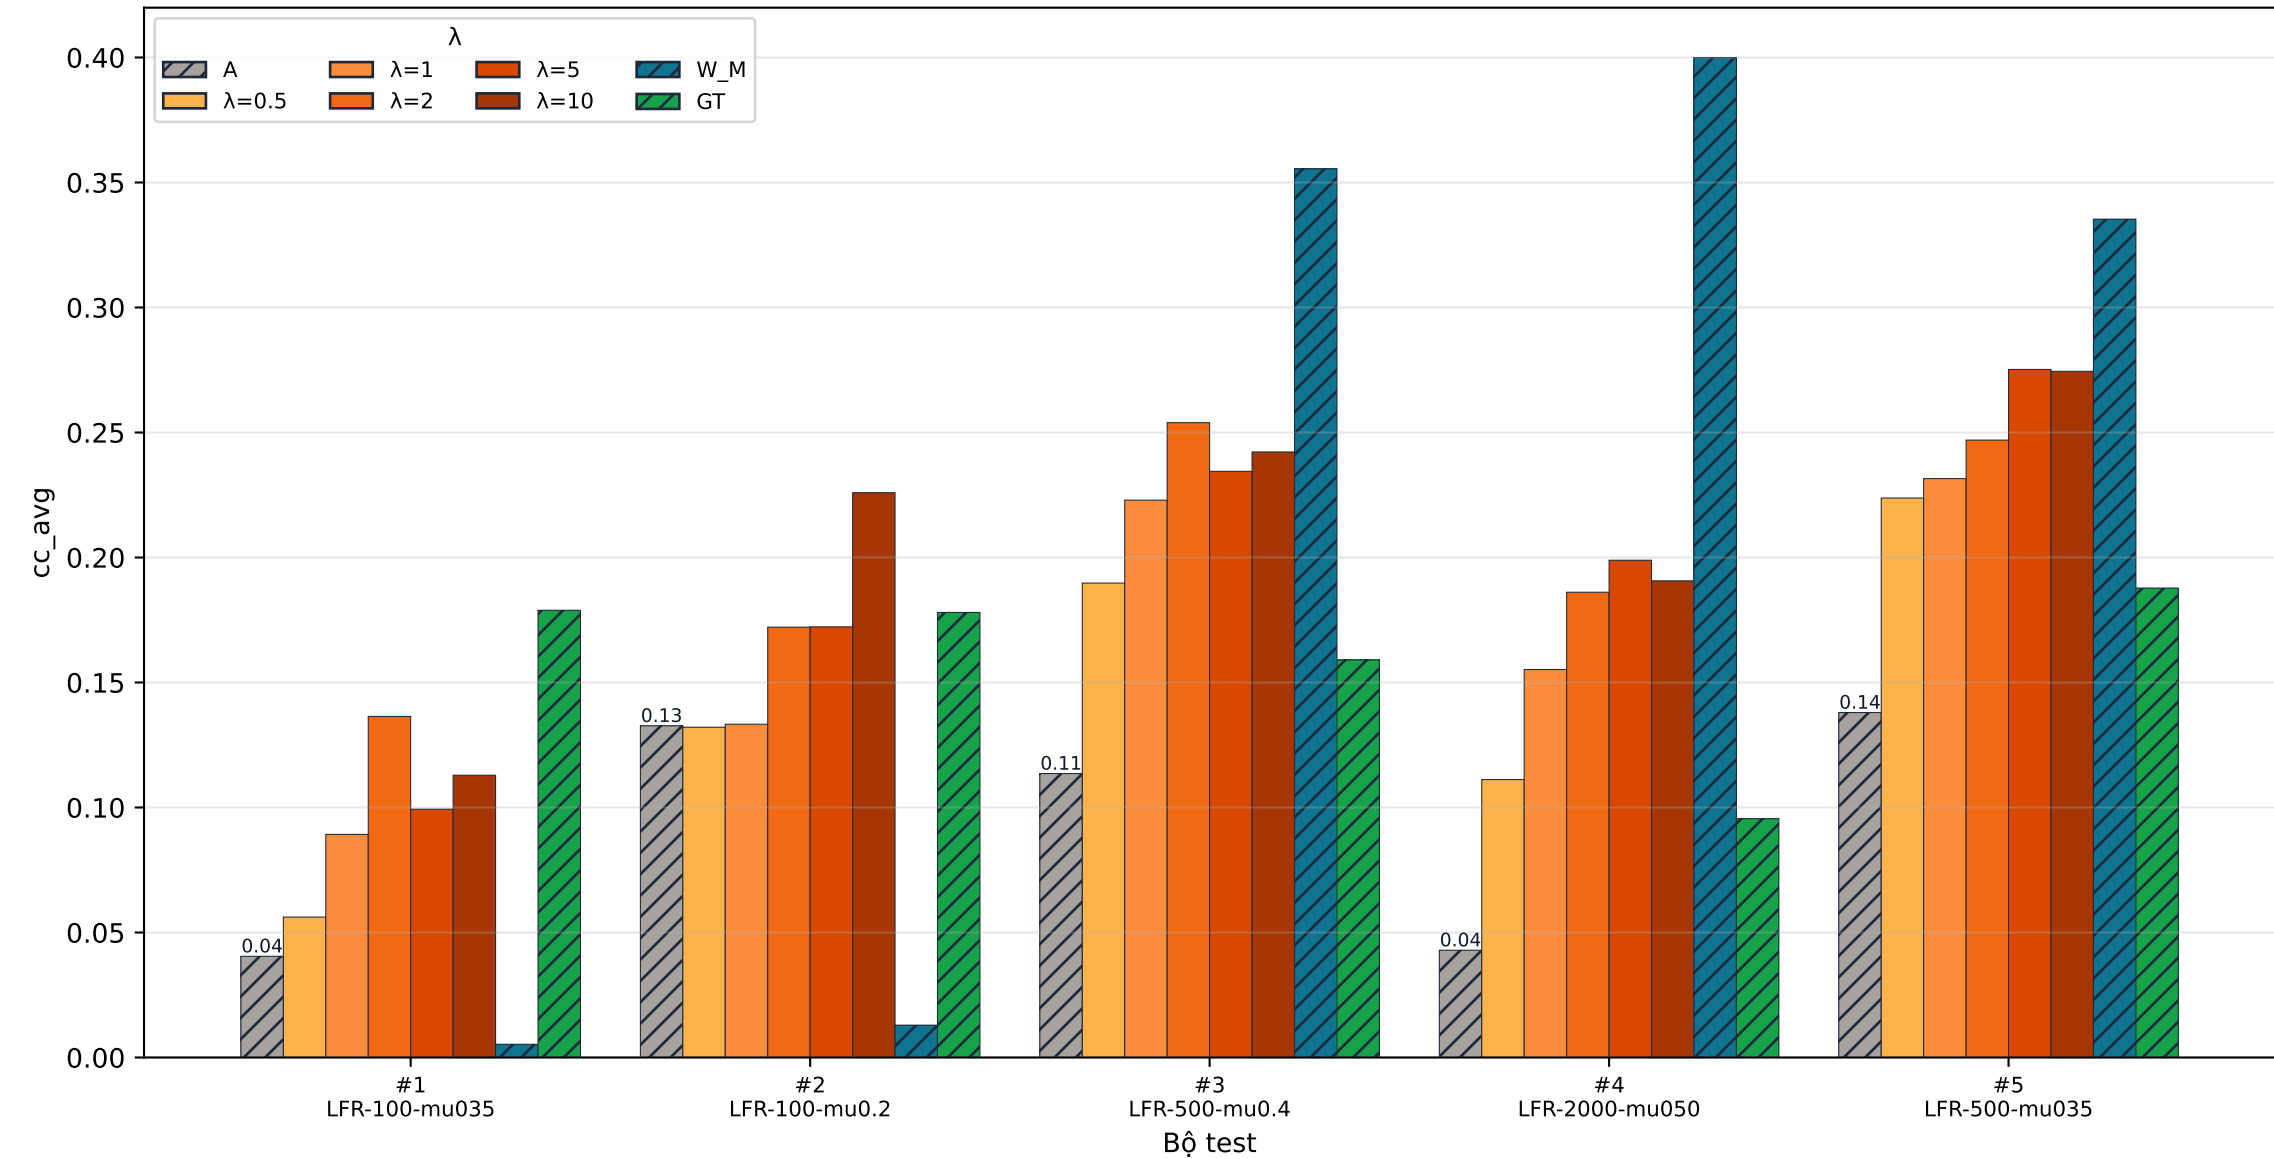


[LFR] quality · cc_weighted

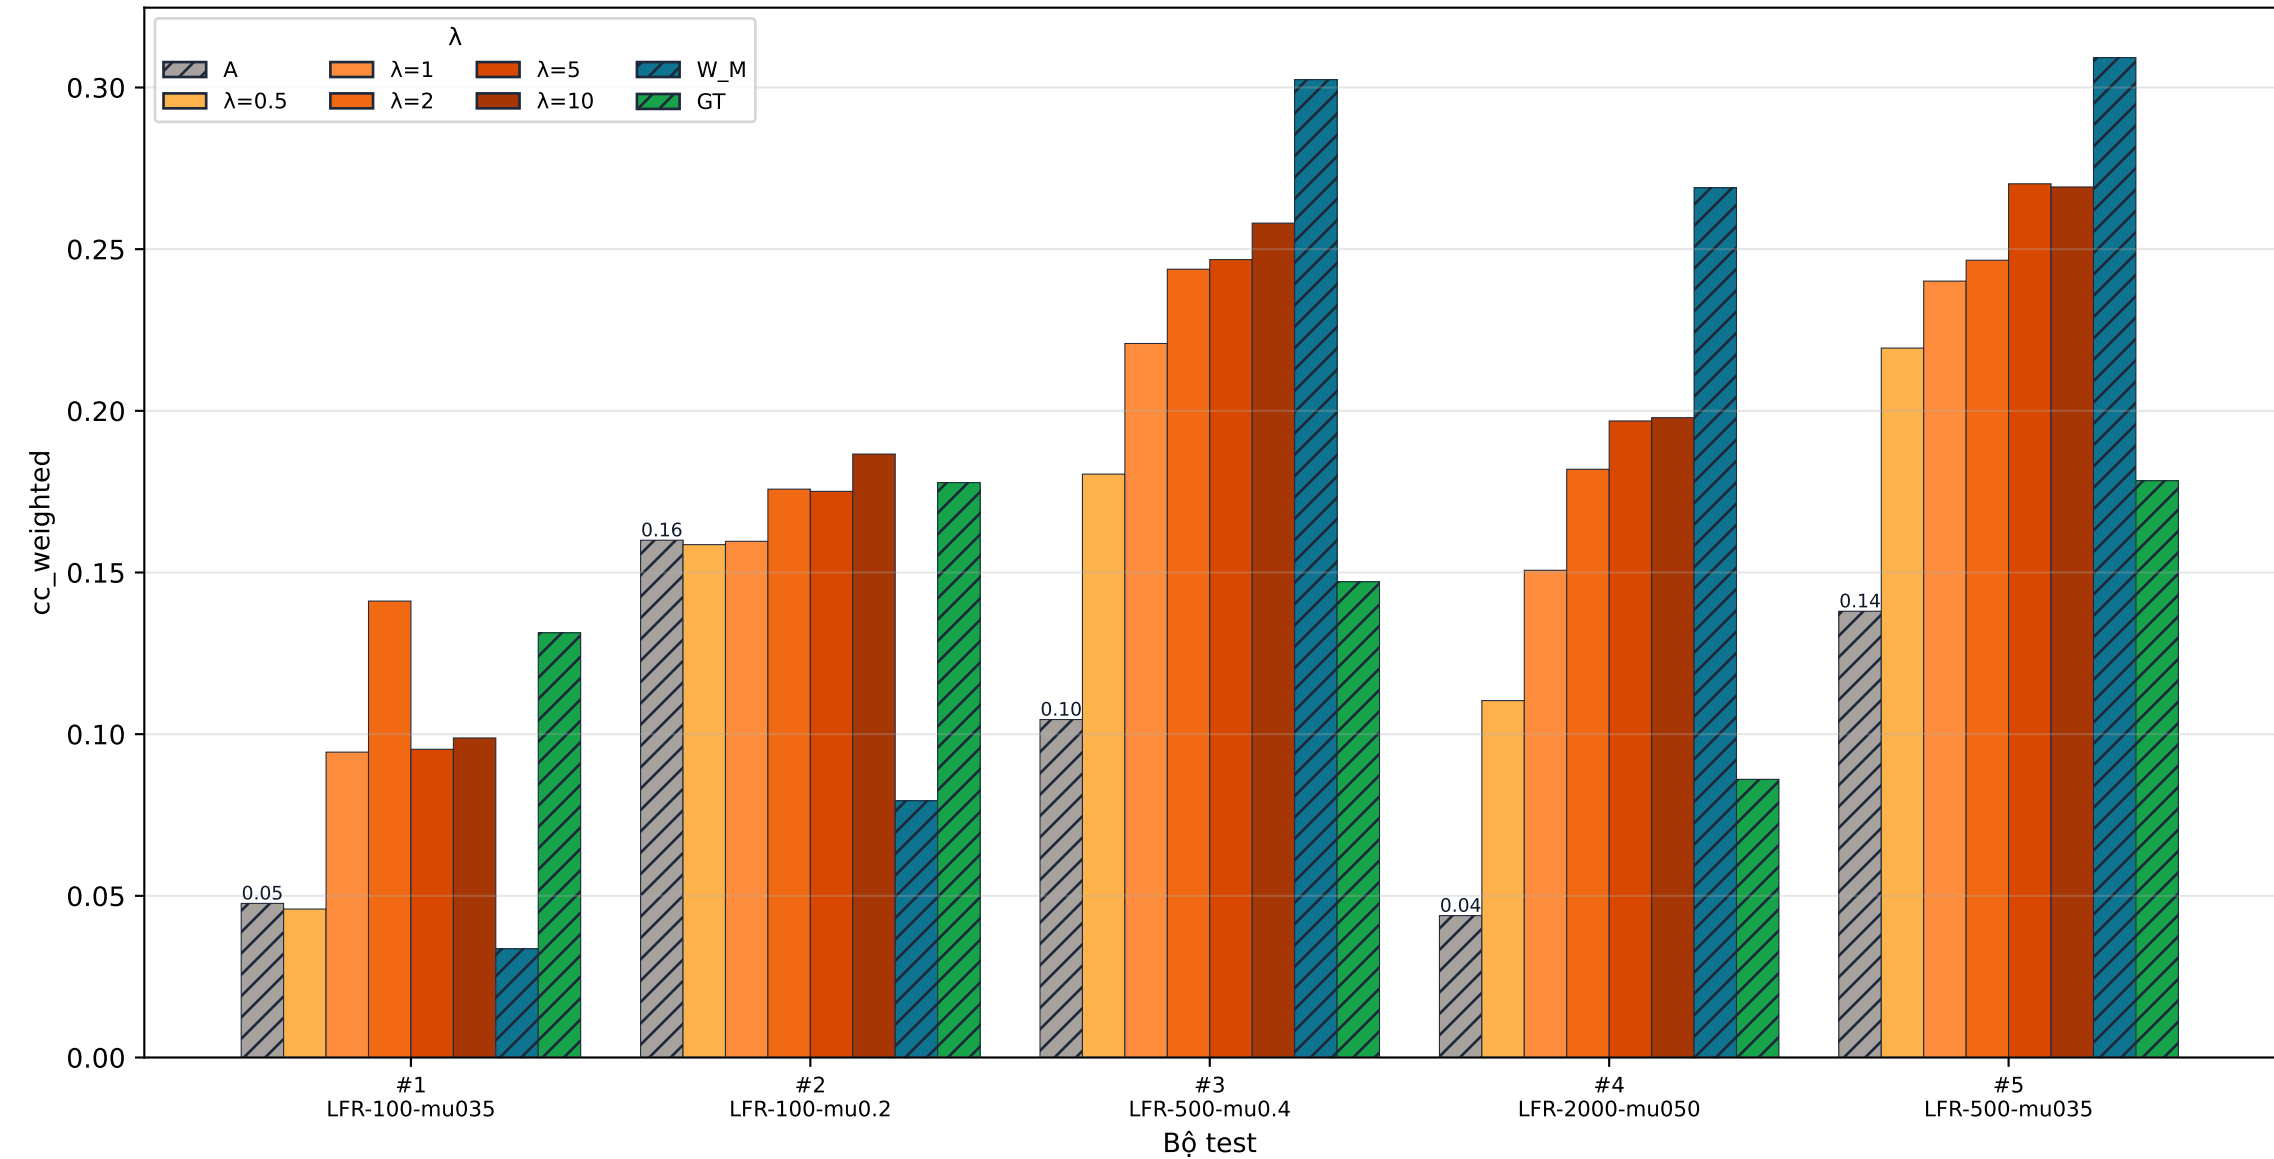


[LFR] cut · edges_cut

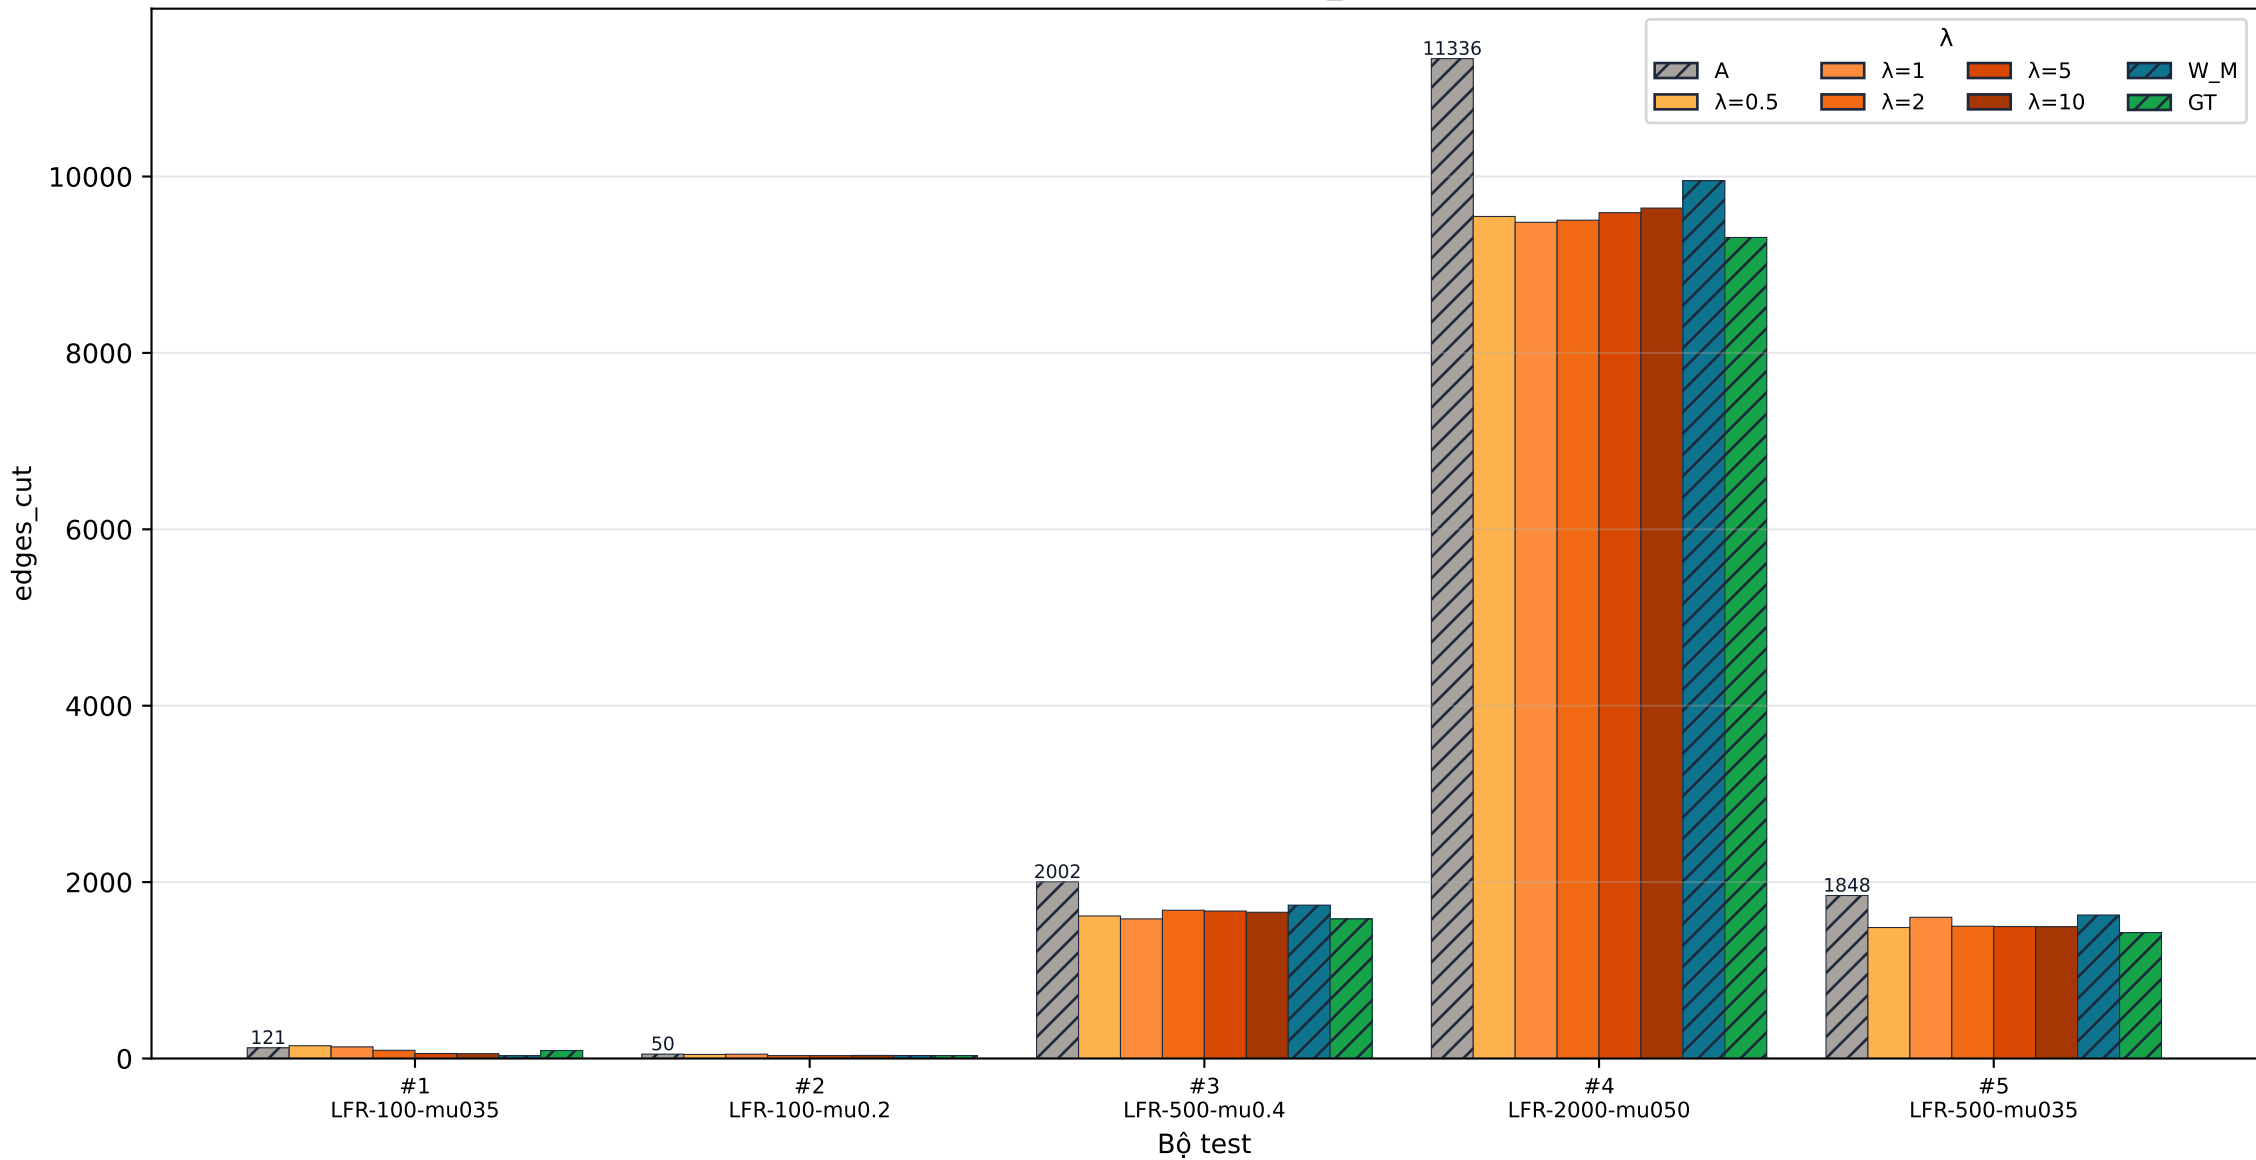


[LFR] cut · motifs_cut

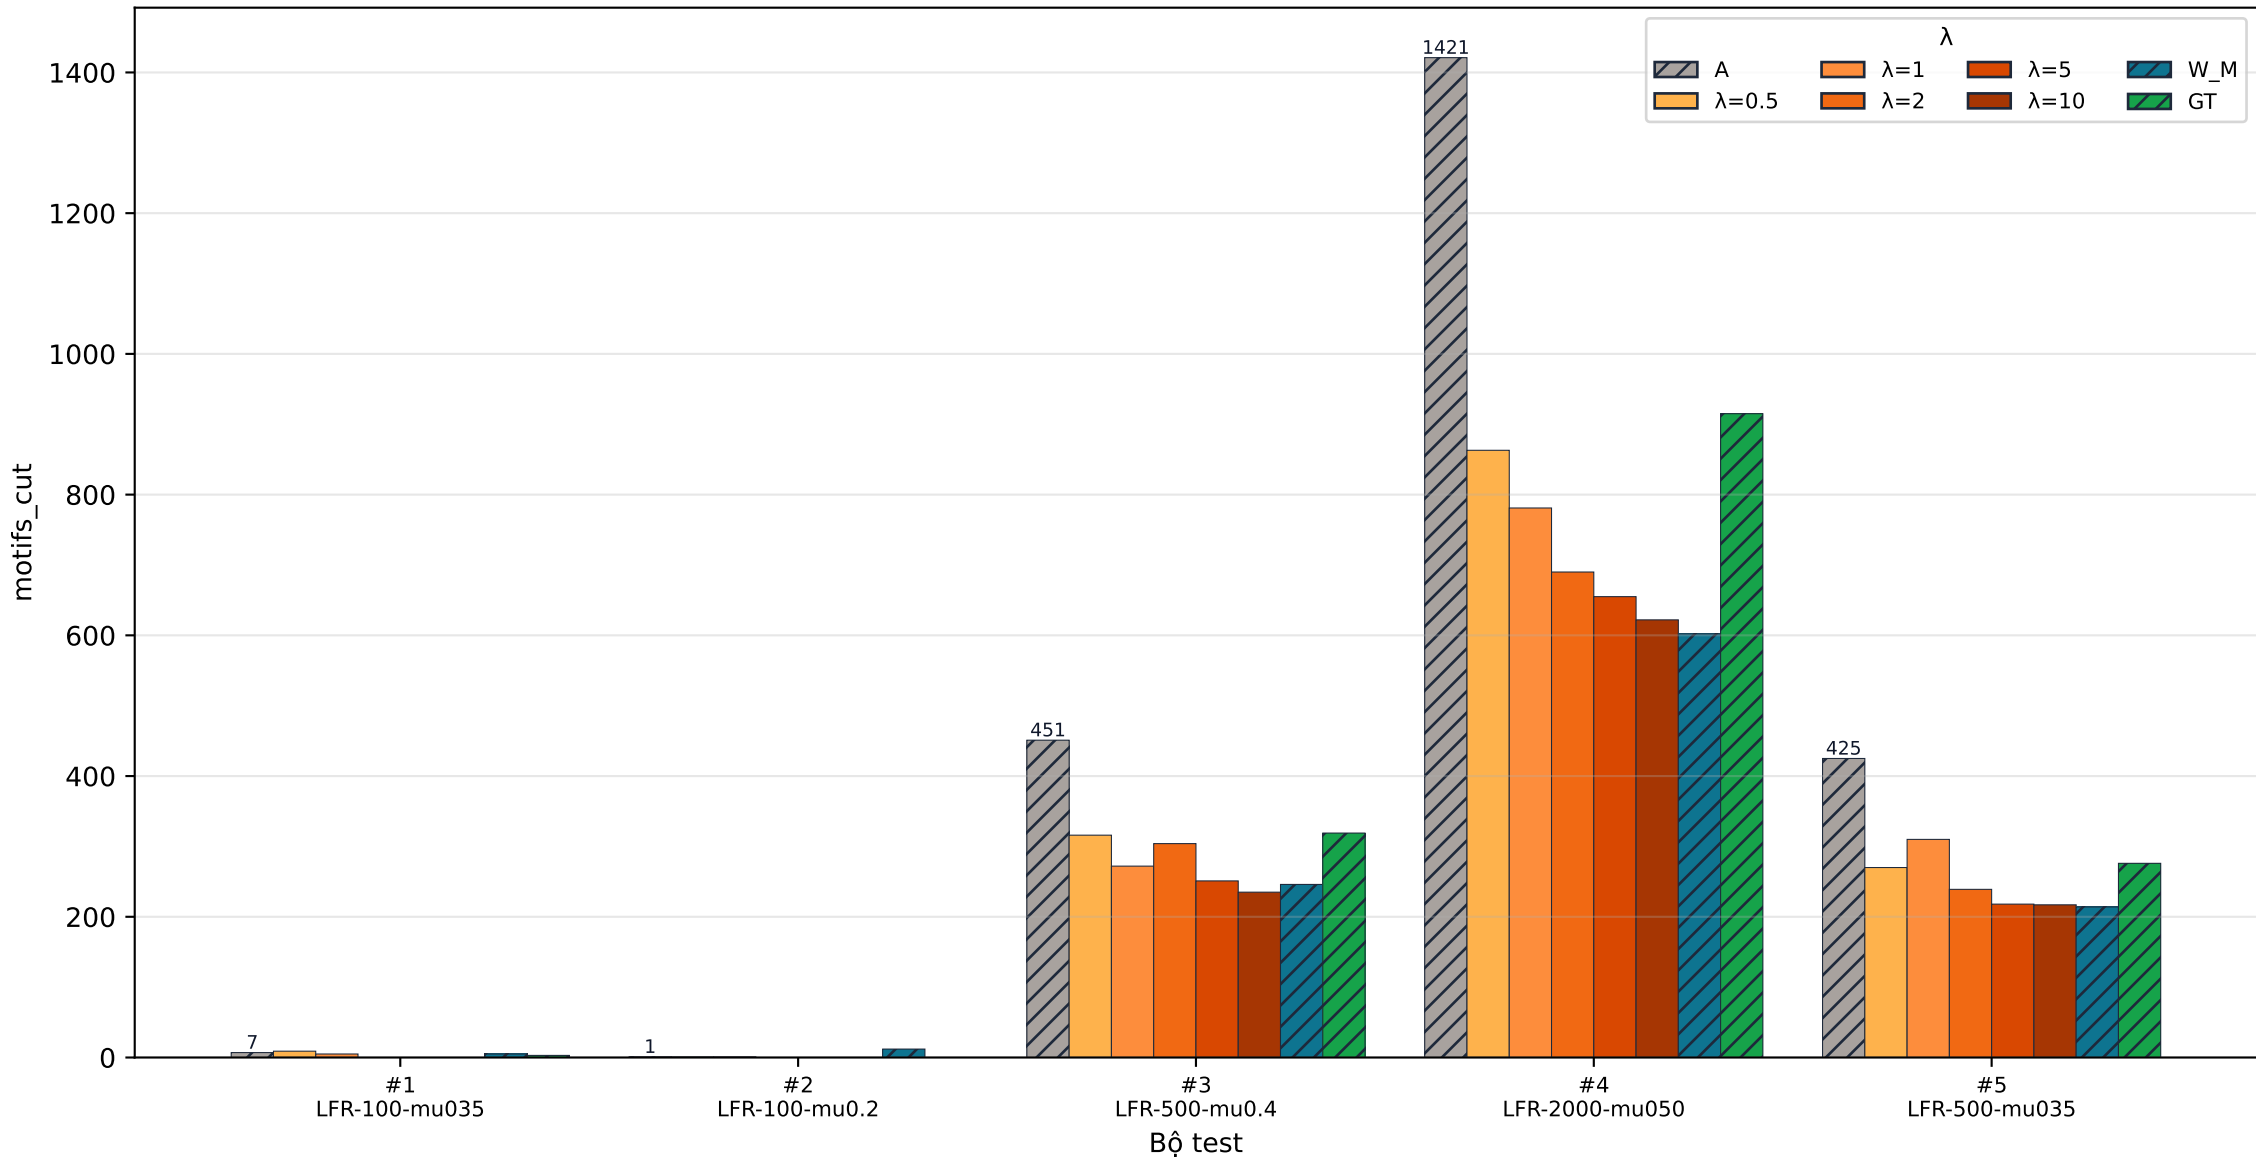


[LFR] cut · motifs_internal

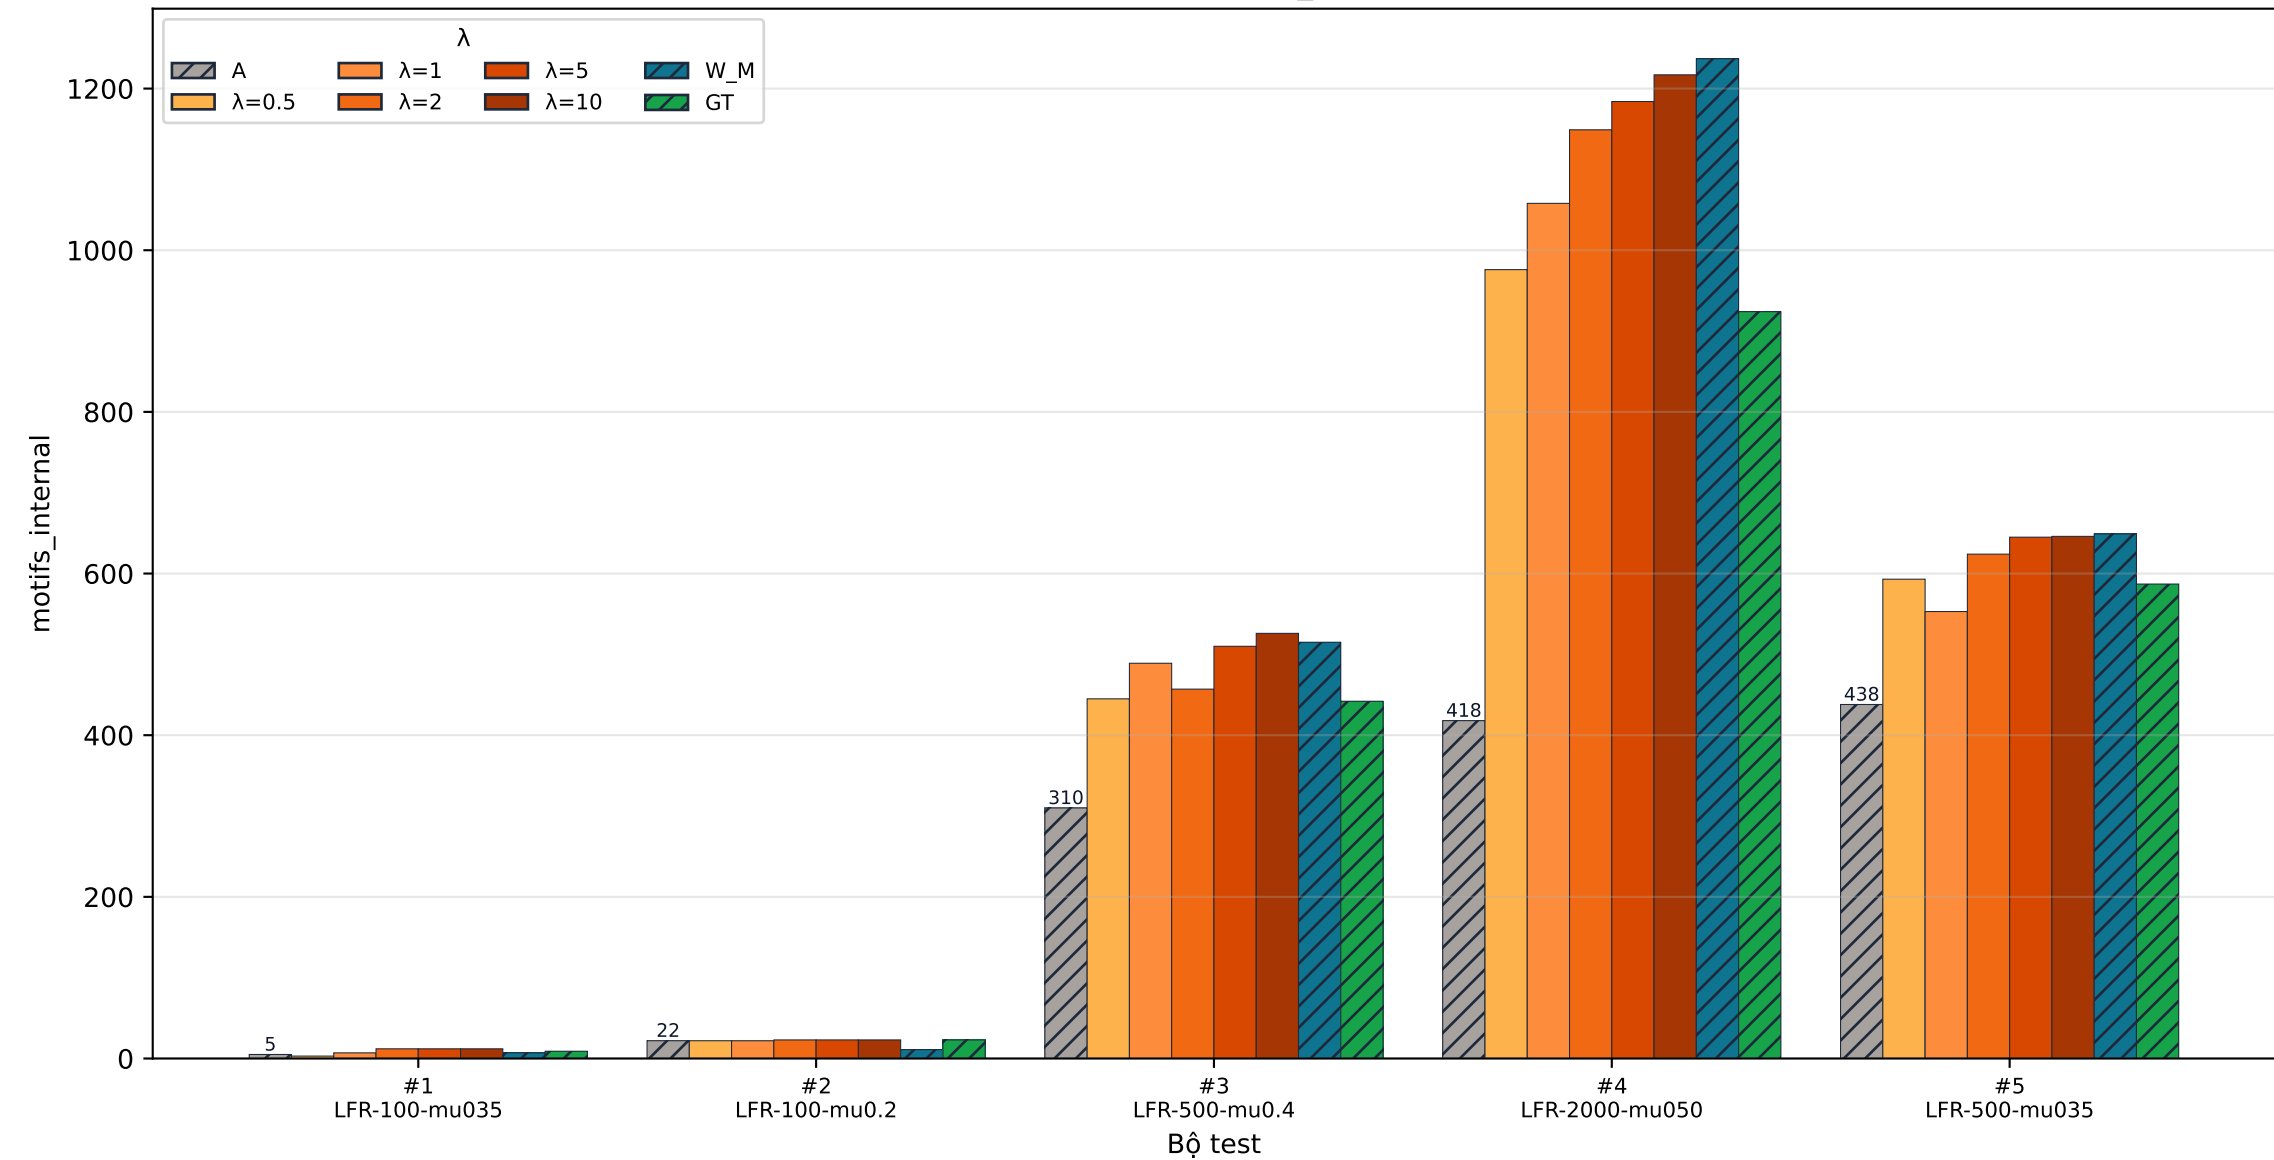

[LFR] stability · jaccard_vs_base

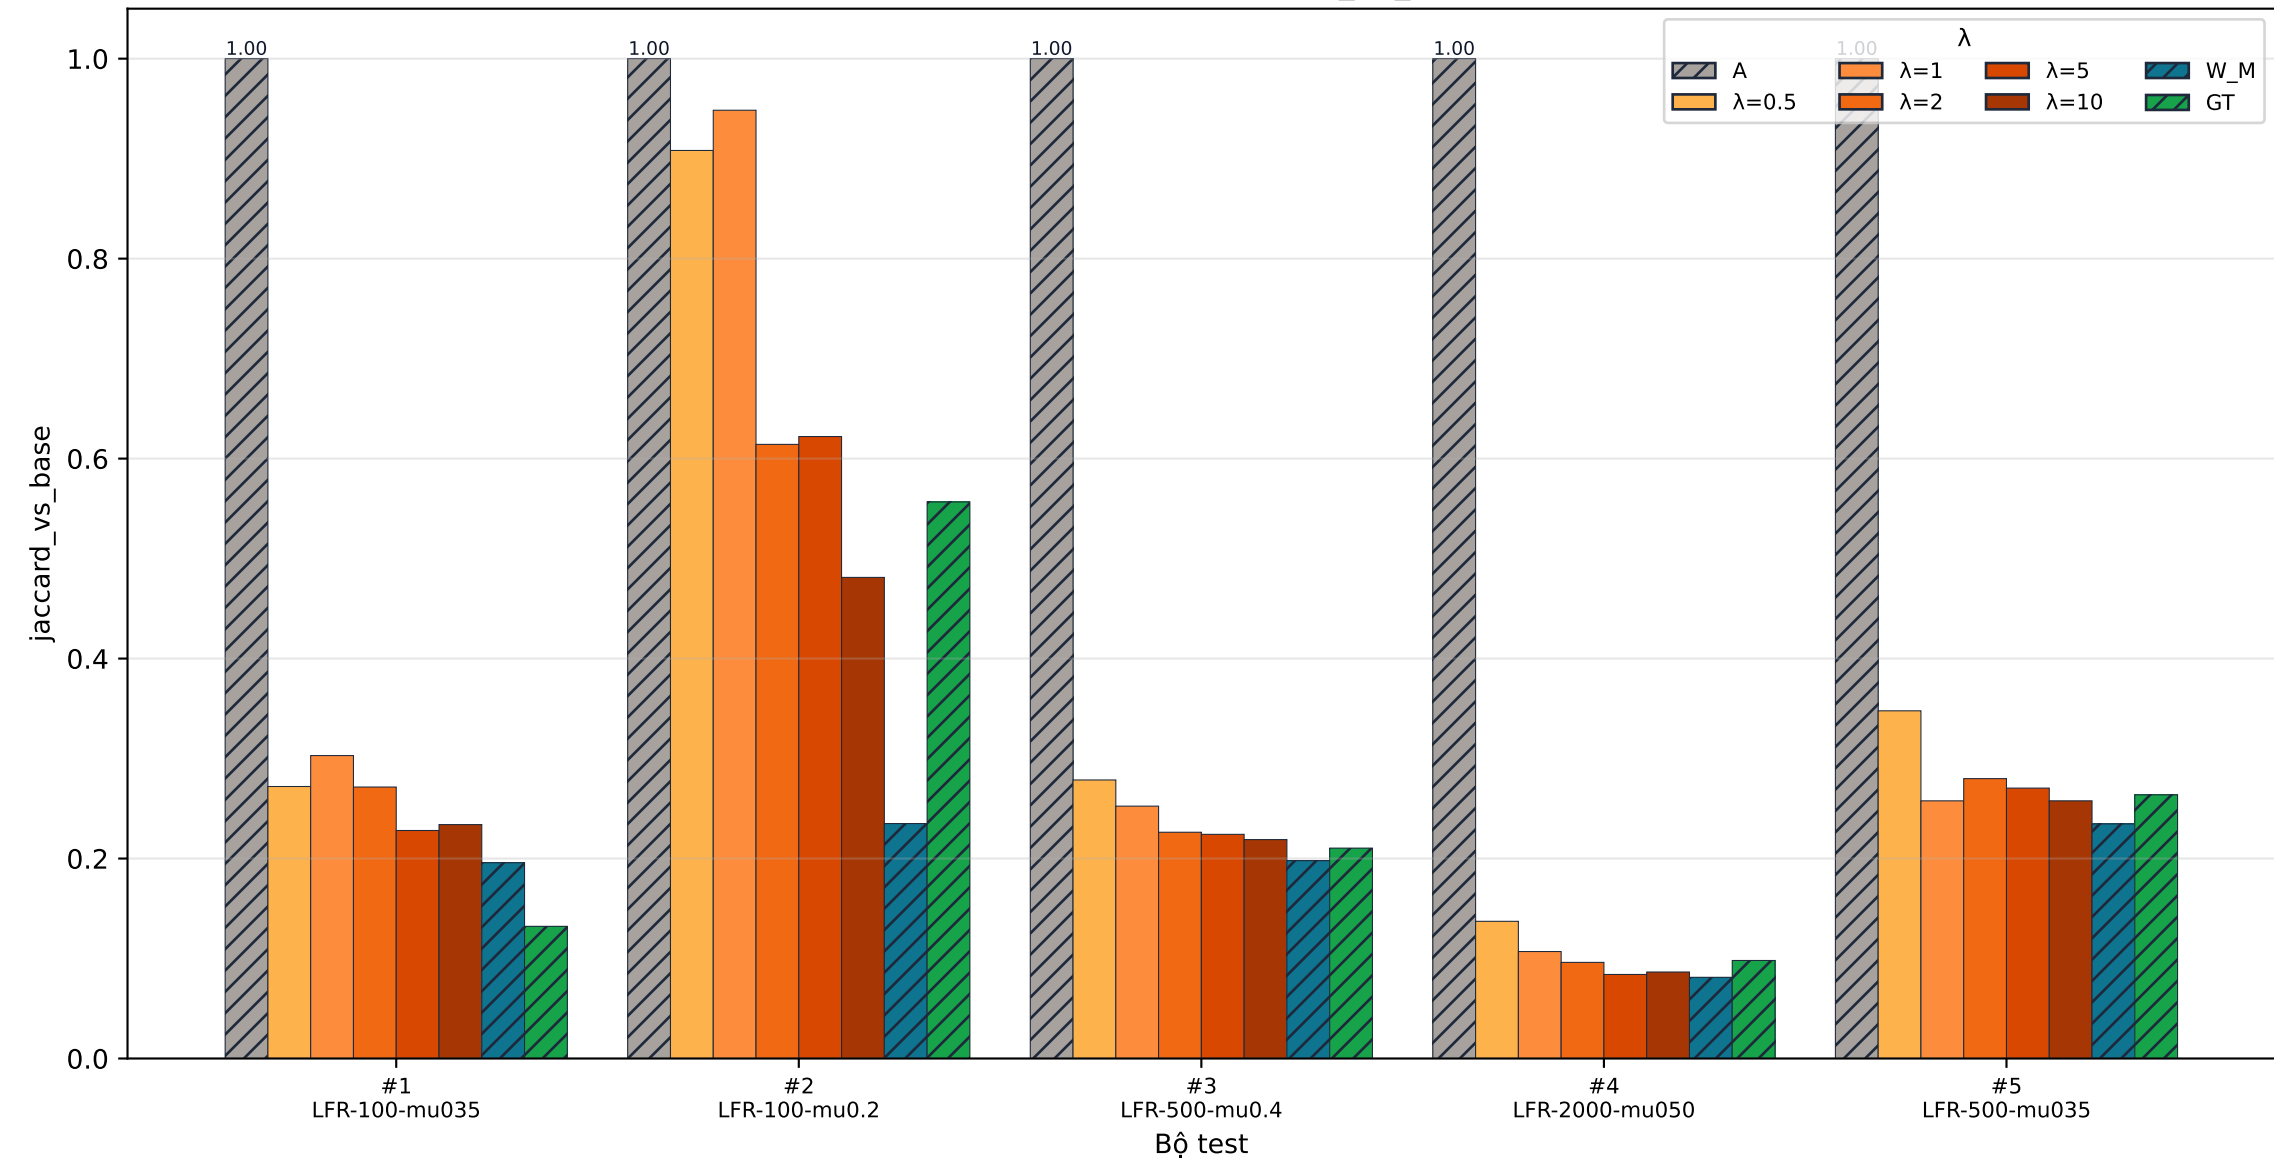

[LFR] compare_to_GT · nmi

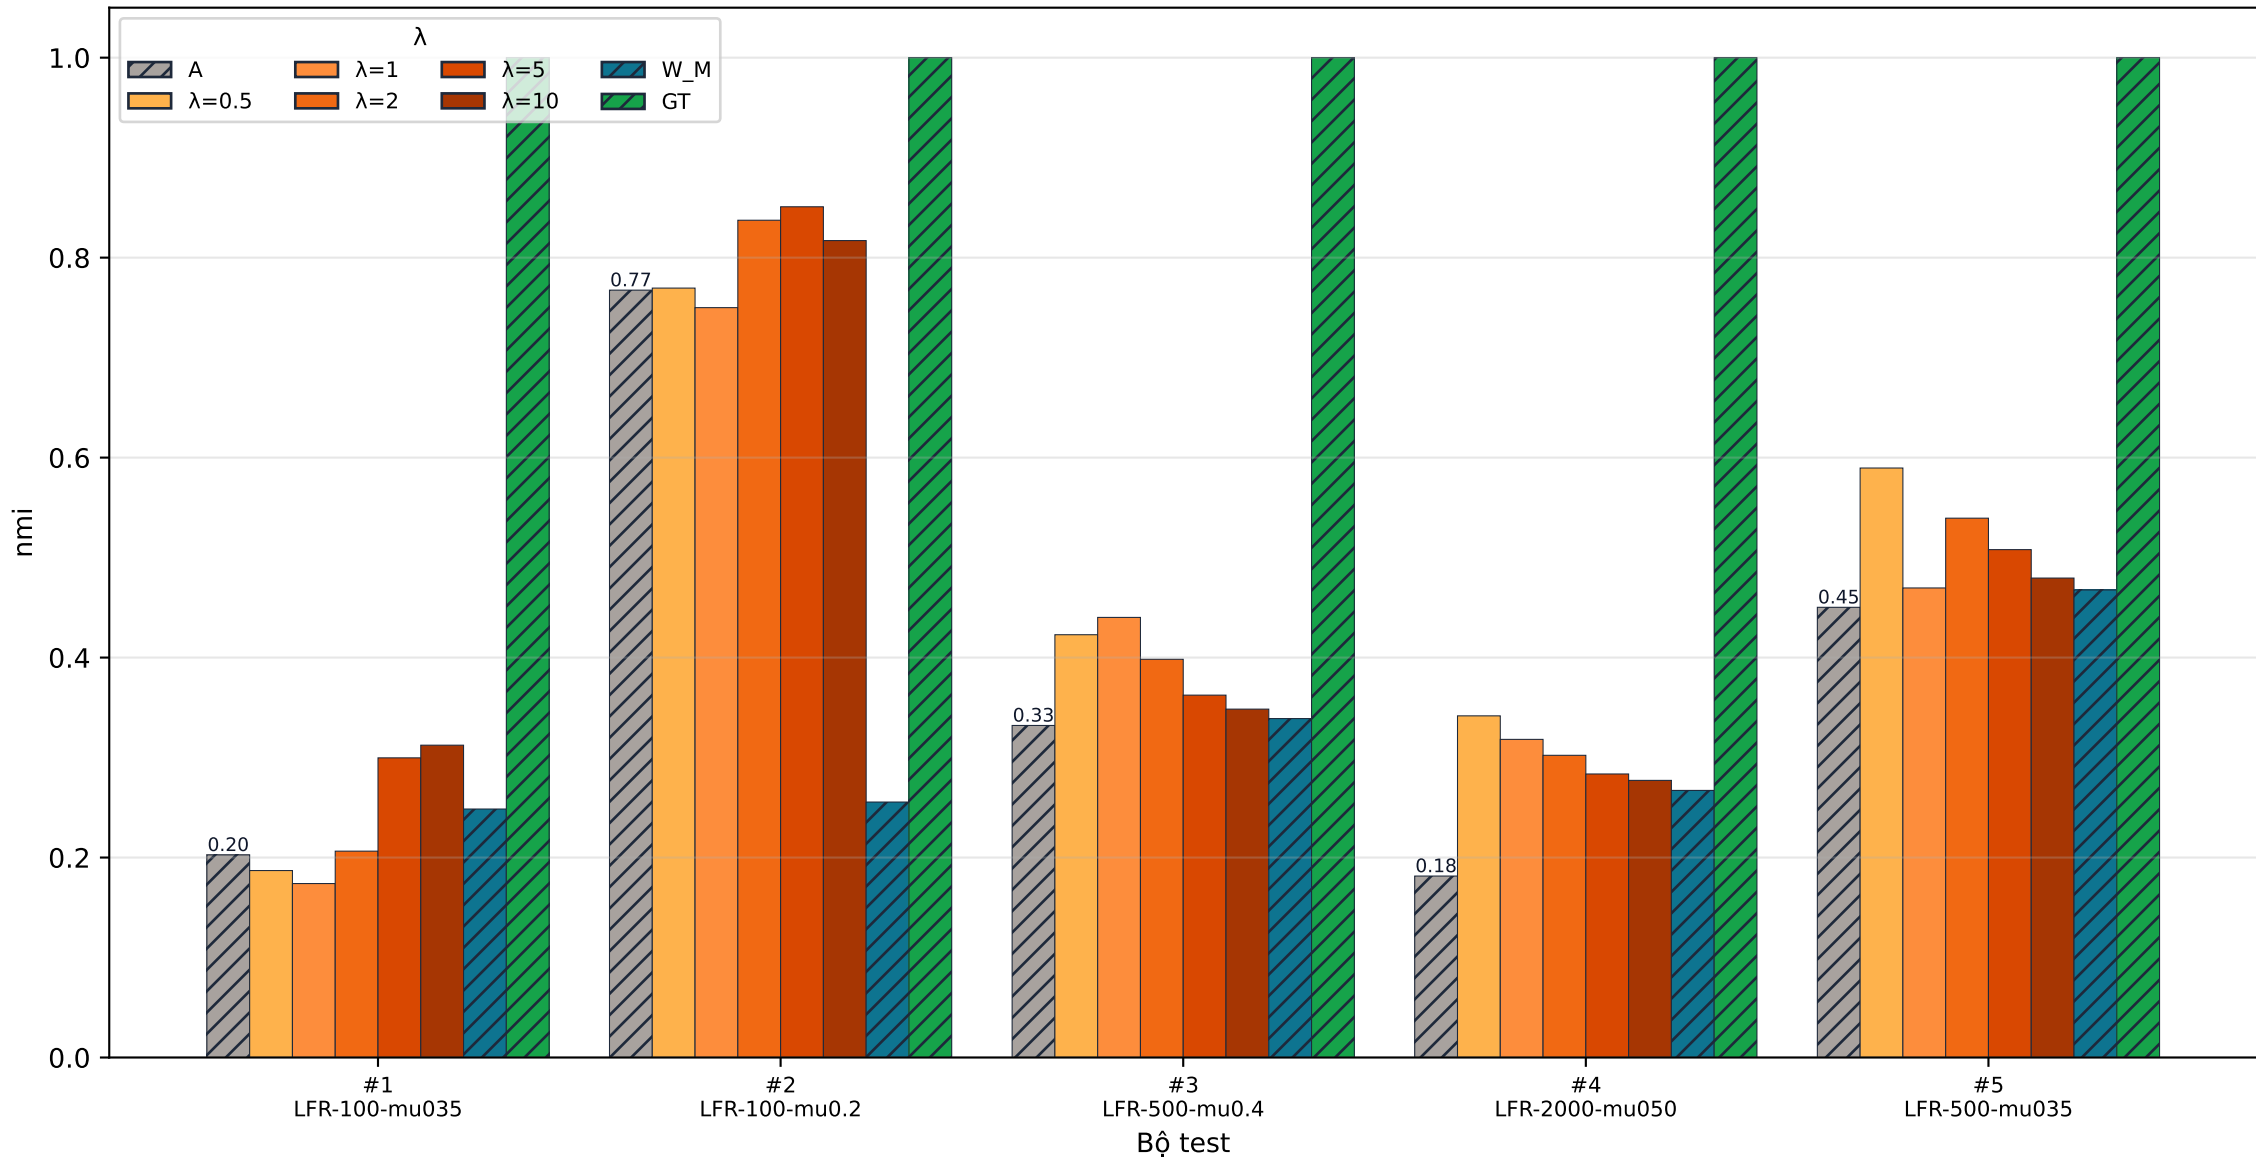

[LFR] compare_to_GT · jaccard

