


MAIN RESULT – REAL

Real-world dataset (SNAP / MUSAE)


Top 6 bộ test có Q cải thiện mạnh nhất khi dùng mixed matrix W_λ
(filter: $Q(A) \geq 0.1$, score = $\max Q(\lambda > 0) - Q(A)$)

1. cit-HepTh_adj-ncut-k50	$Q(A)=0.5962$	$\rightarrow$	$Q(\lambda=1.0)=0.6227$	$\Delta Q=+0.0265$
2. cit-HepTh_adj-ncut-k100	$Q(A)=0.5731$	$\rightarrow$	$Q(\lambda=1.0)=0.6021$	$\Delta Q=+0.0290$
3. cit-HepTh_adj-ncut-k200	$Q(A)=0.5257$	$\rightarrow$	$Q(\lambda=10.0)=0.5709$	$\Delta Q=+0.0452$
4. cit-HepTh_adj-ncut-k300	$Q(A)=0.4916$	$\rightarrow$	$Q(\lambda=5.0)=0.5302$	$\Delta Q=+0.0386$
5. cit-HepTh_adj-ncut-k400	$Q(A)=0.4695$	$\rightarrow$	$Q(\lambda=5.0)=0.5044$	$\Delta Q=+0.0349$
6. cit-HepTh_adj-ncut-k500	$Q(A)=0.4508$	$\rightarrow$	$Q(\lambda=1.0)=0.4839$	$\Delta Q=+0.0330$


cit-HepTh_adj quality · modularity

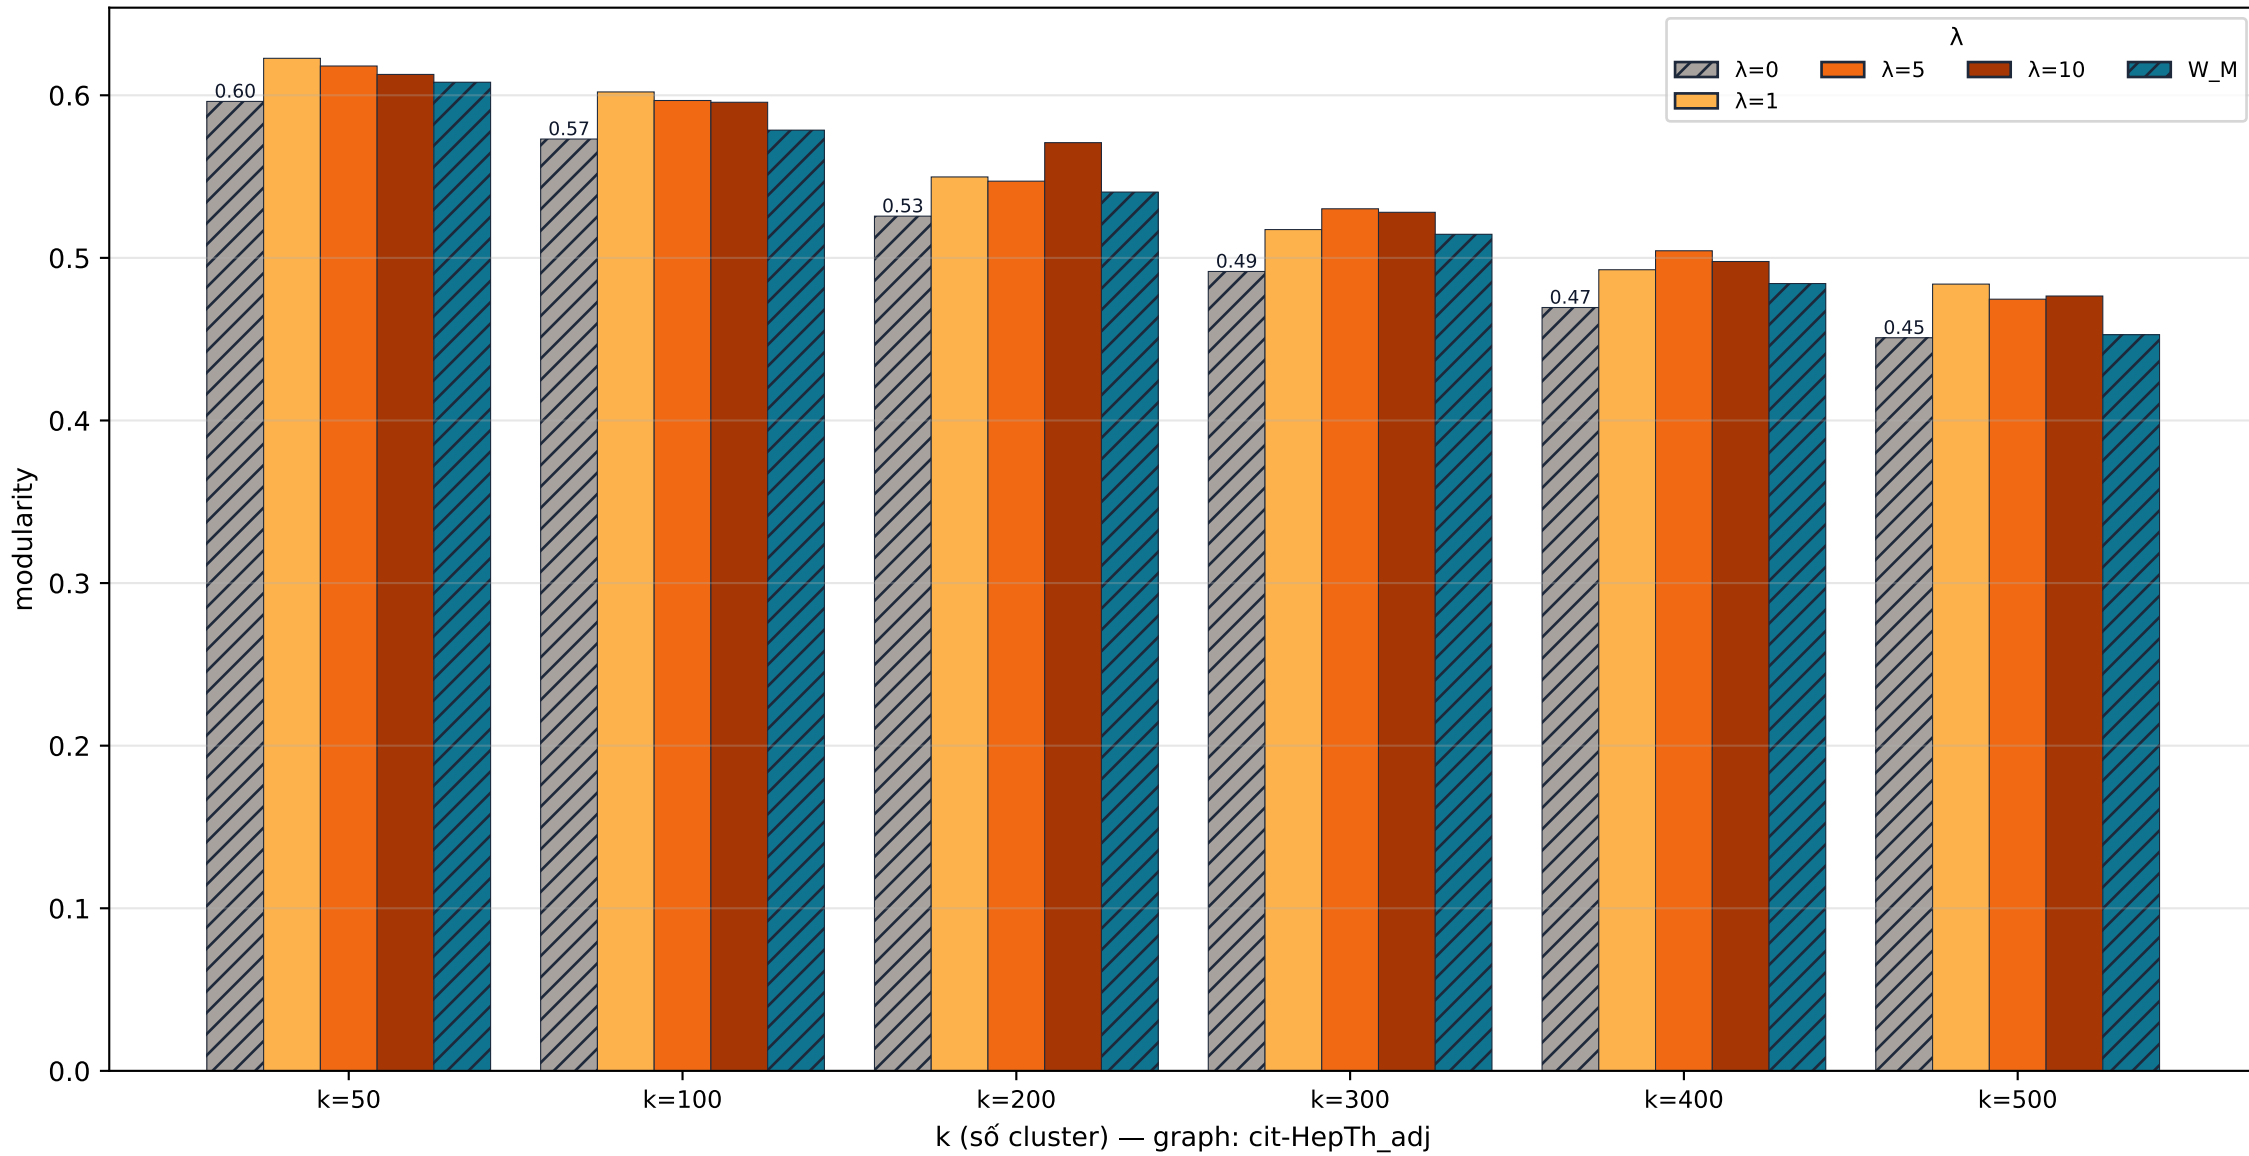


cit-HepTh_adj quality · cc_avg

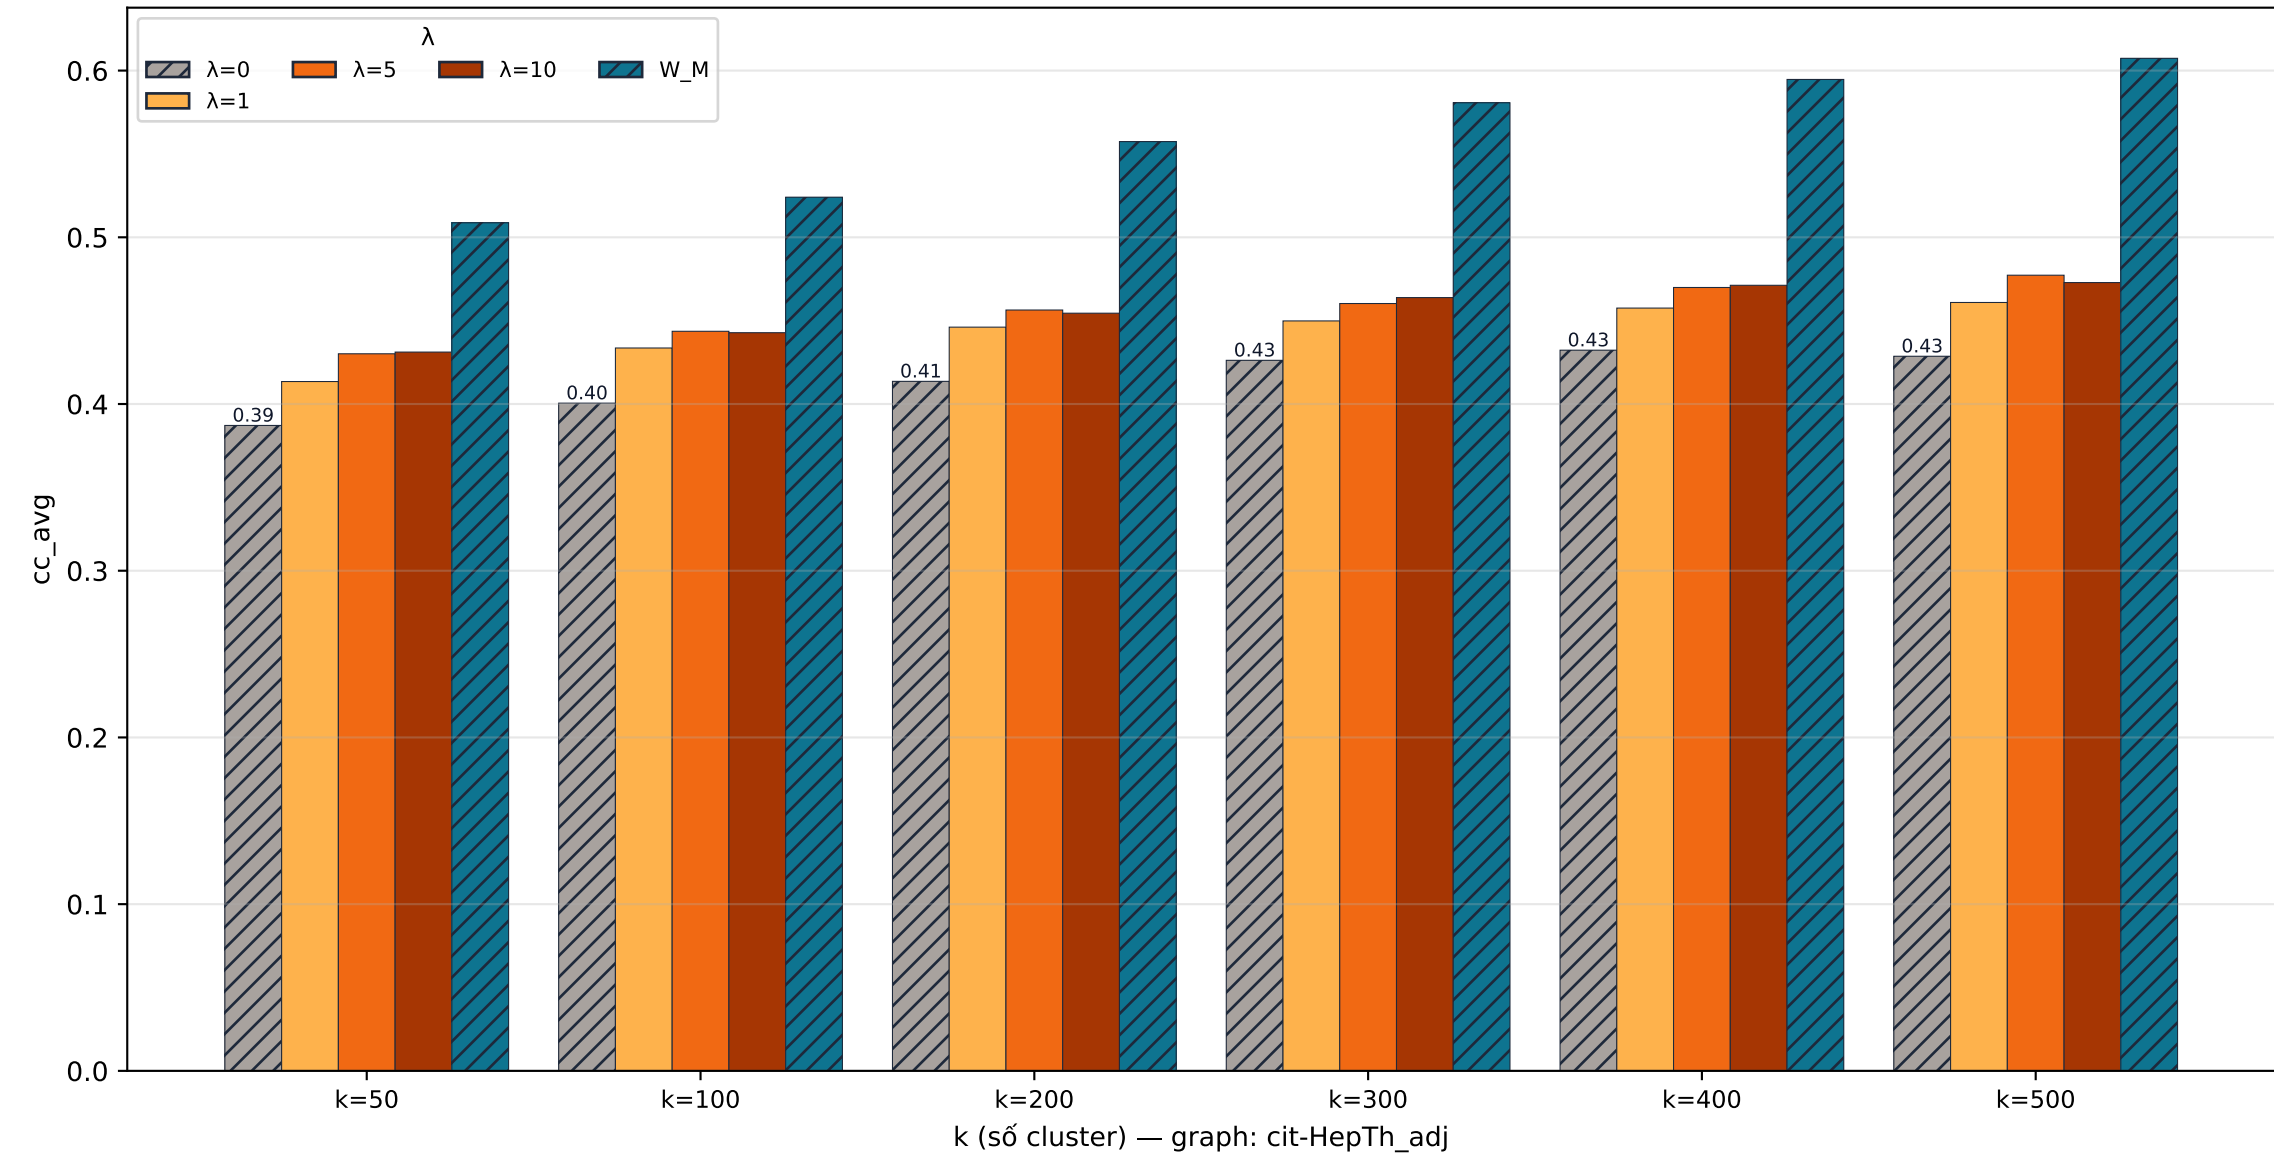


cit-HepTh_adj quality · cc_weighted

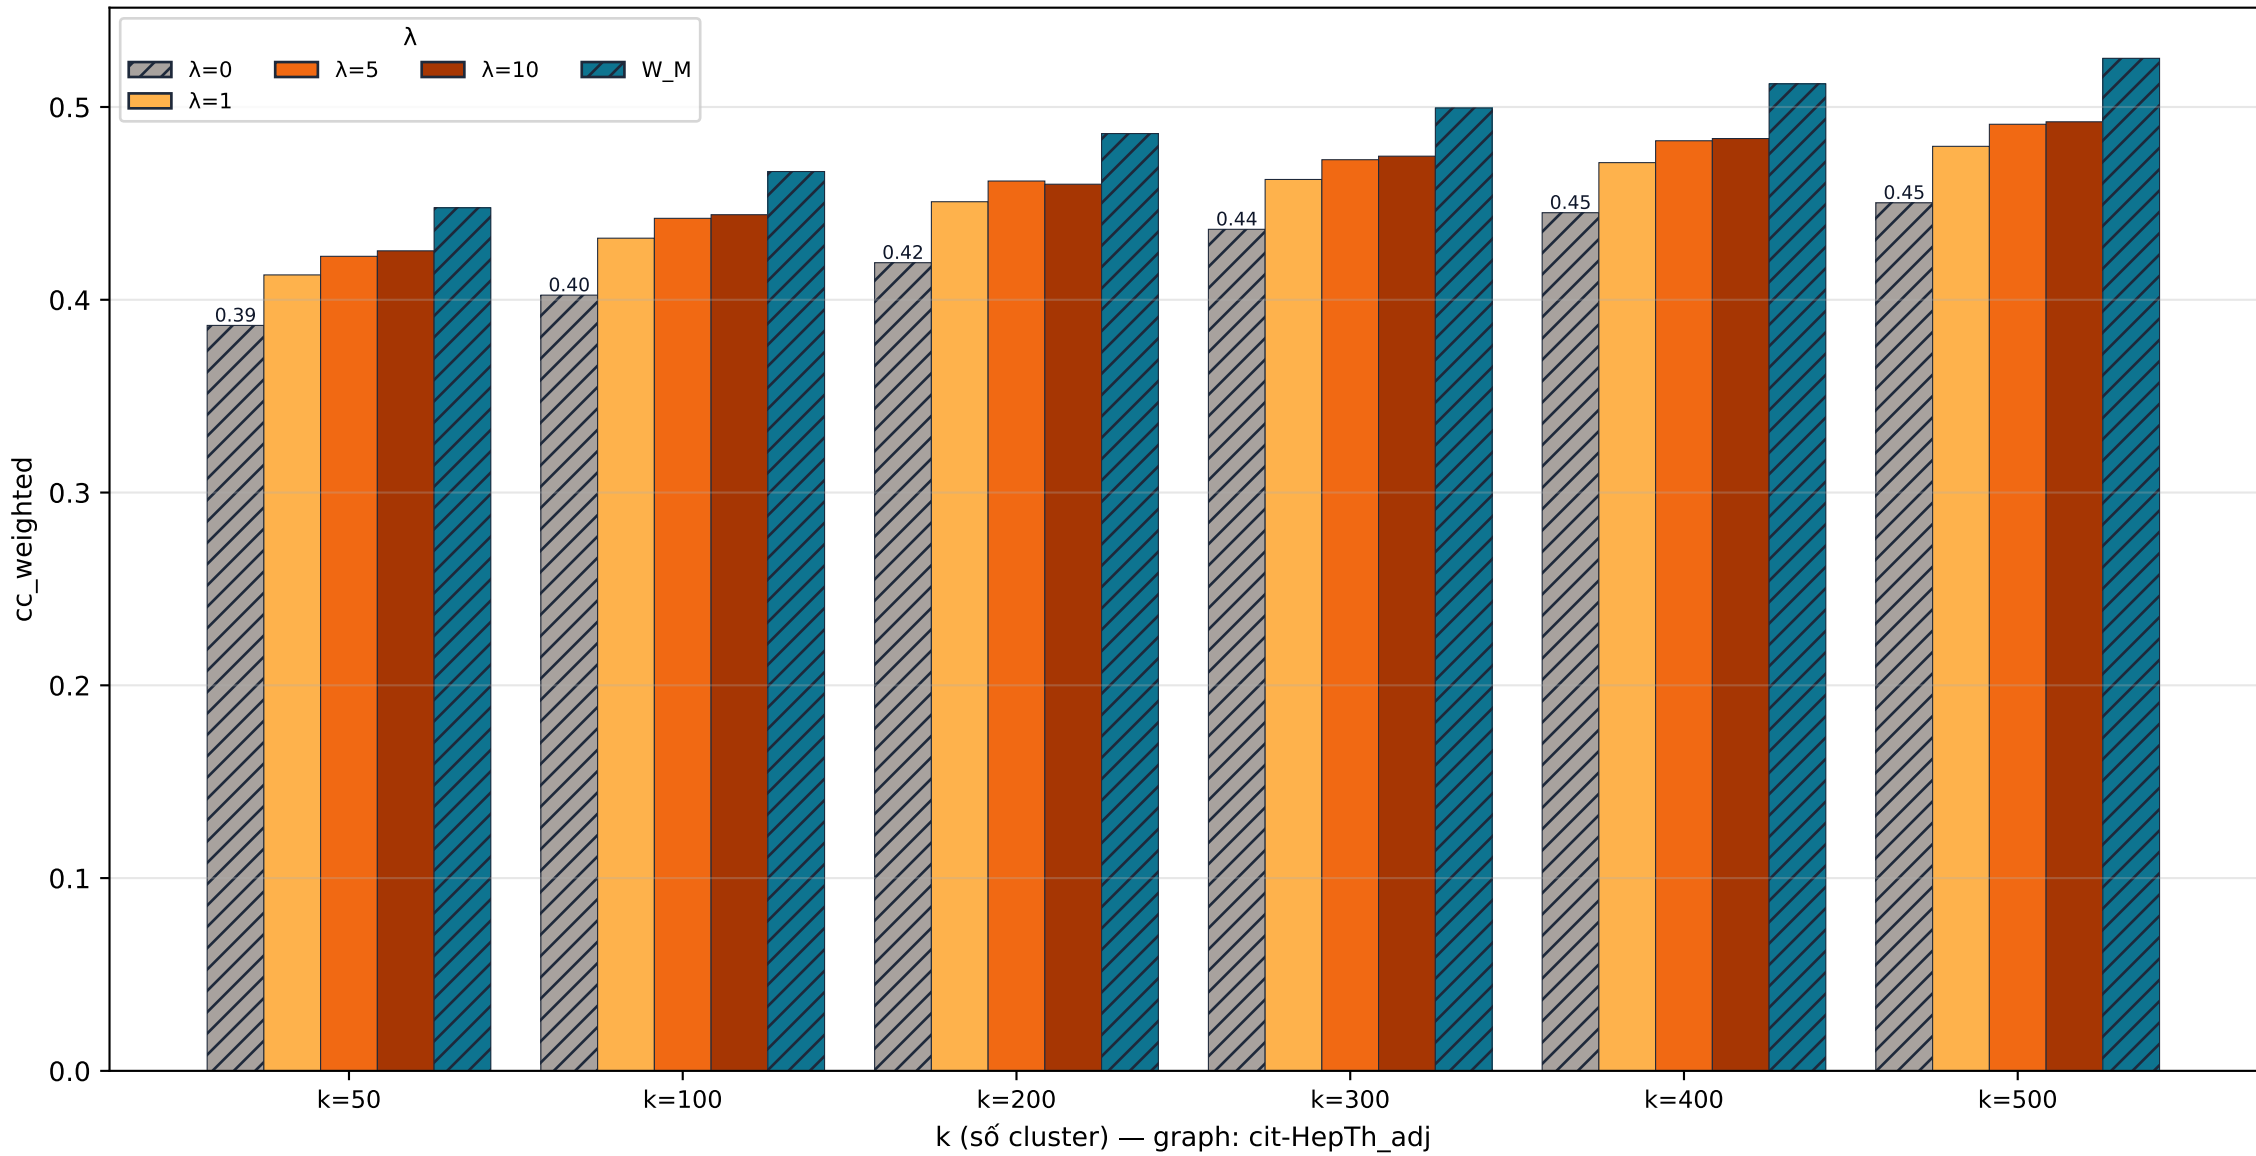


cit-HepTh_adj cut · edges_cut

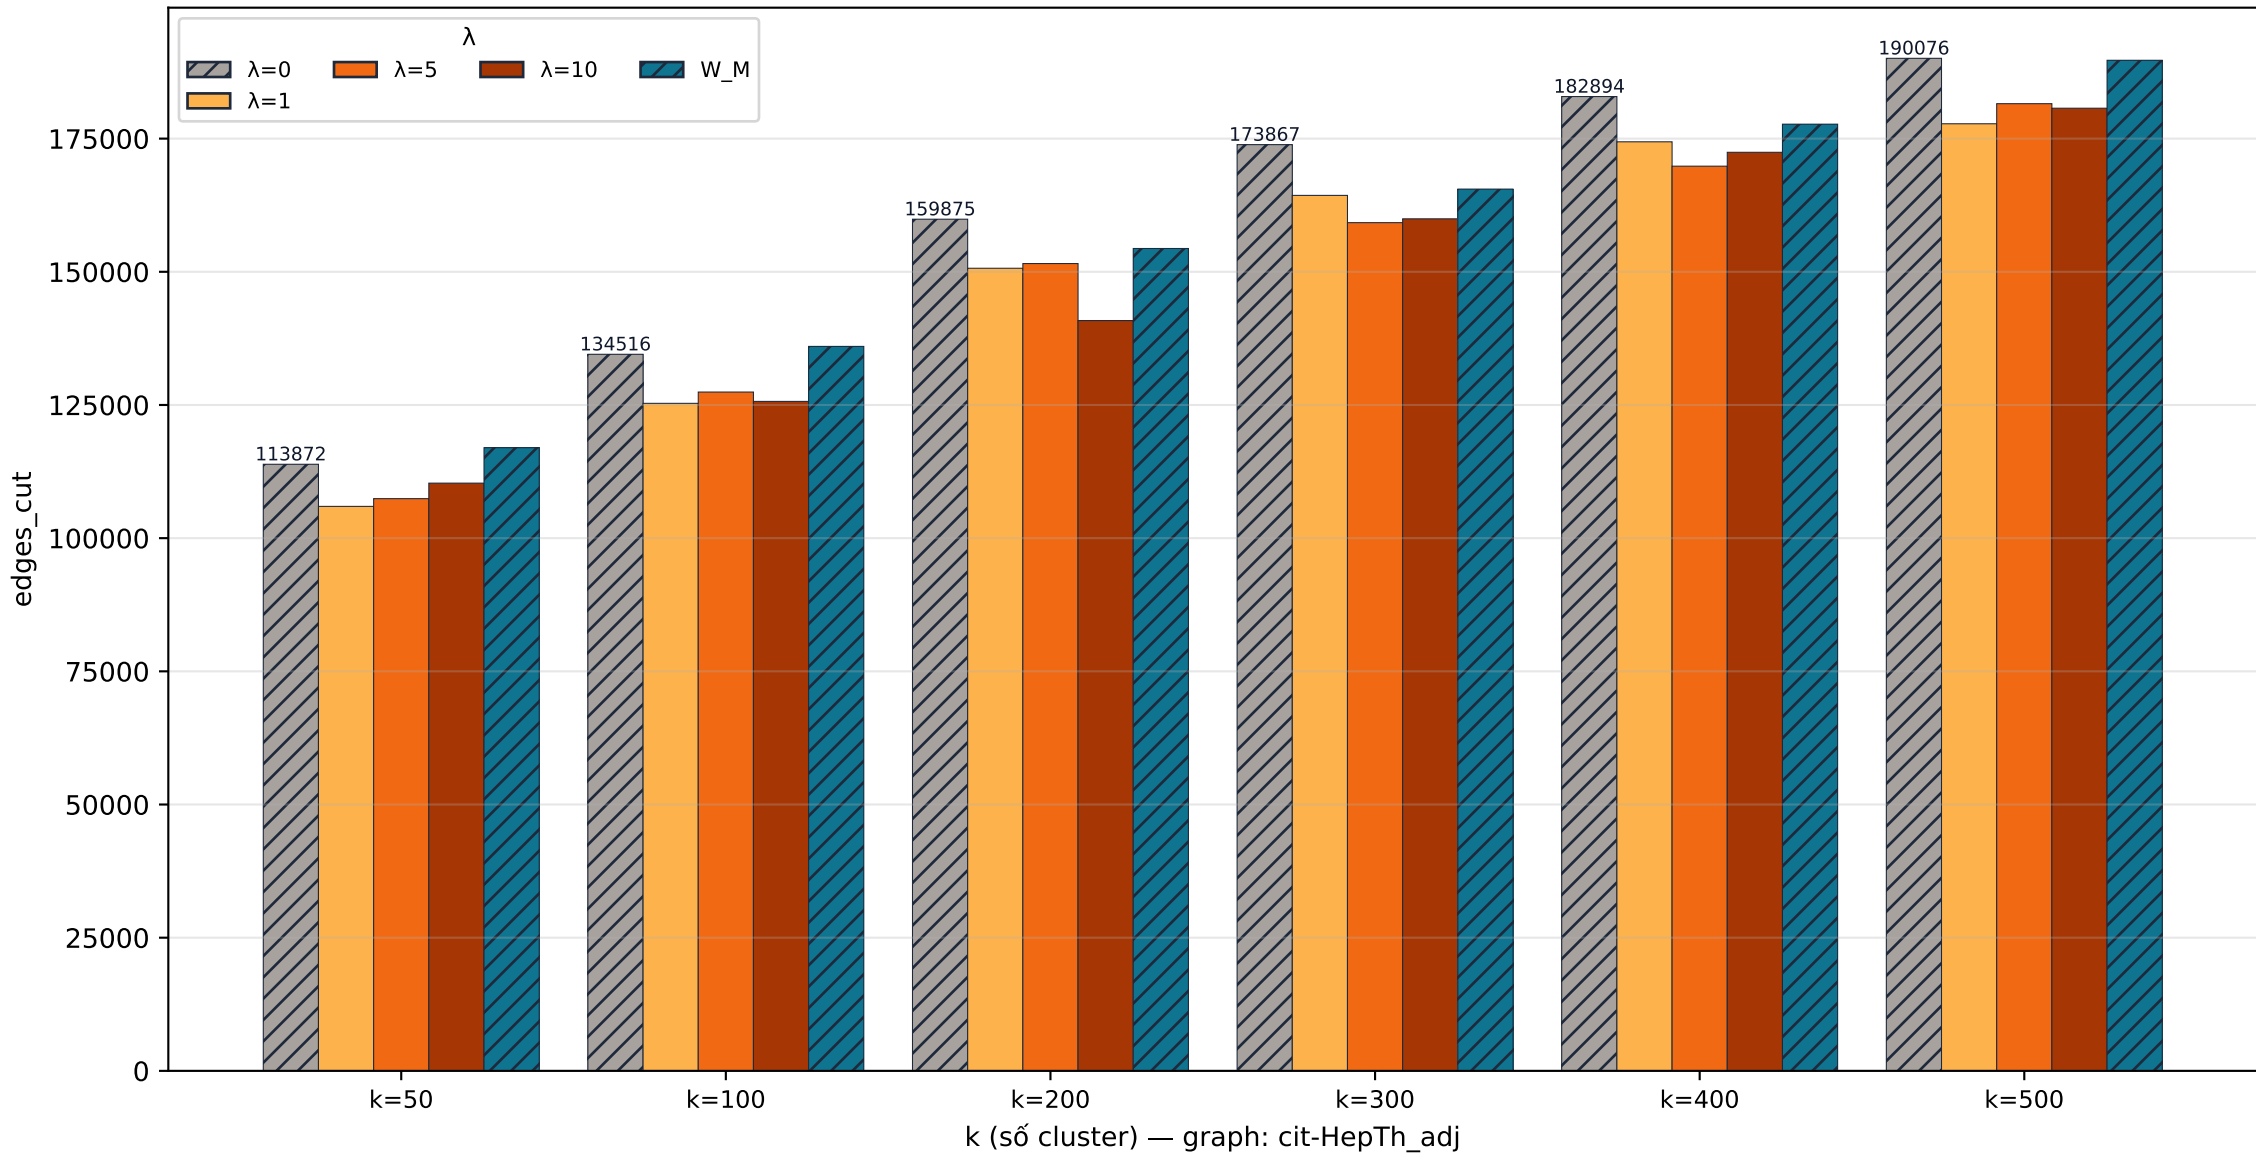

cit-HepTh_adj cut · motifs_cut

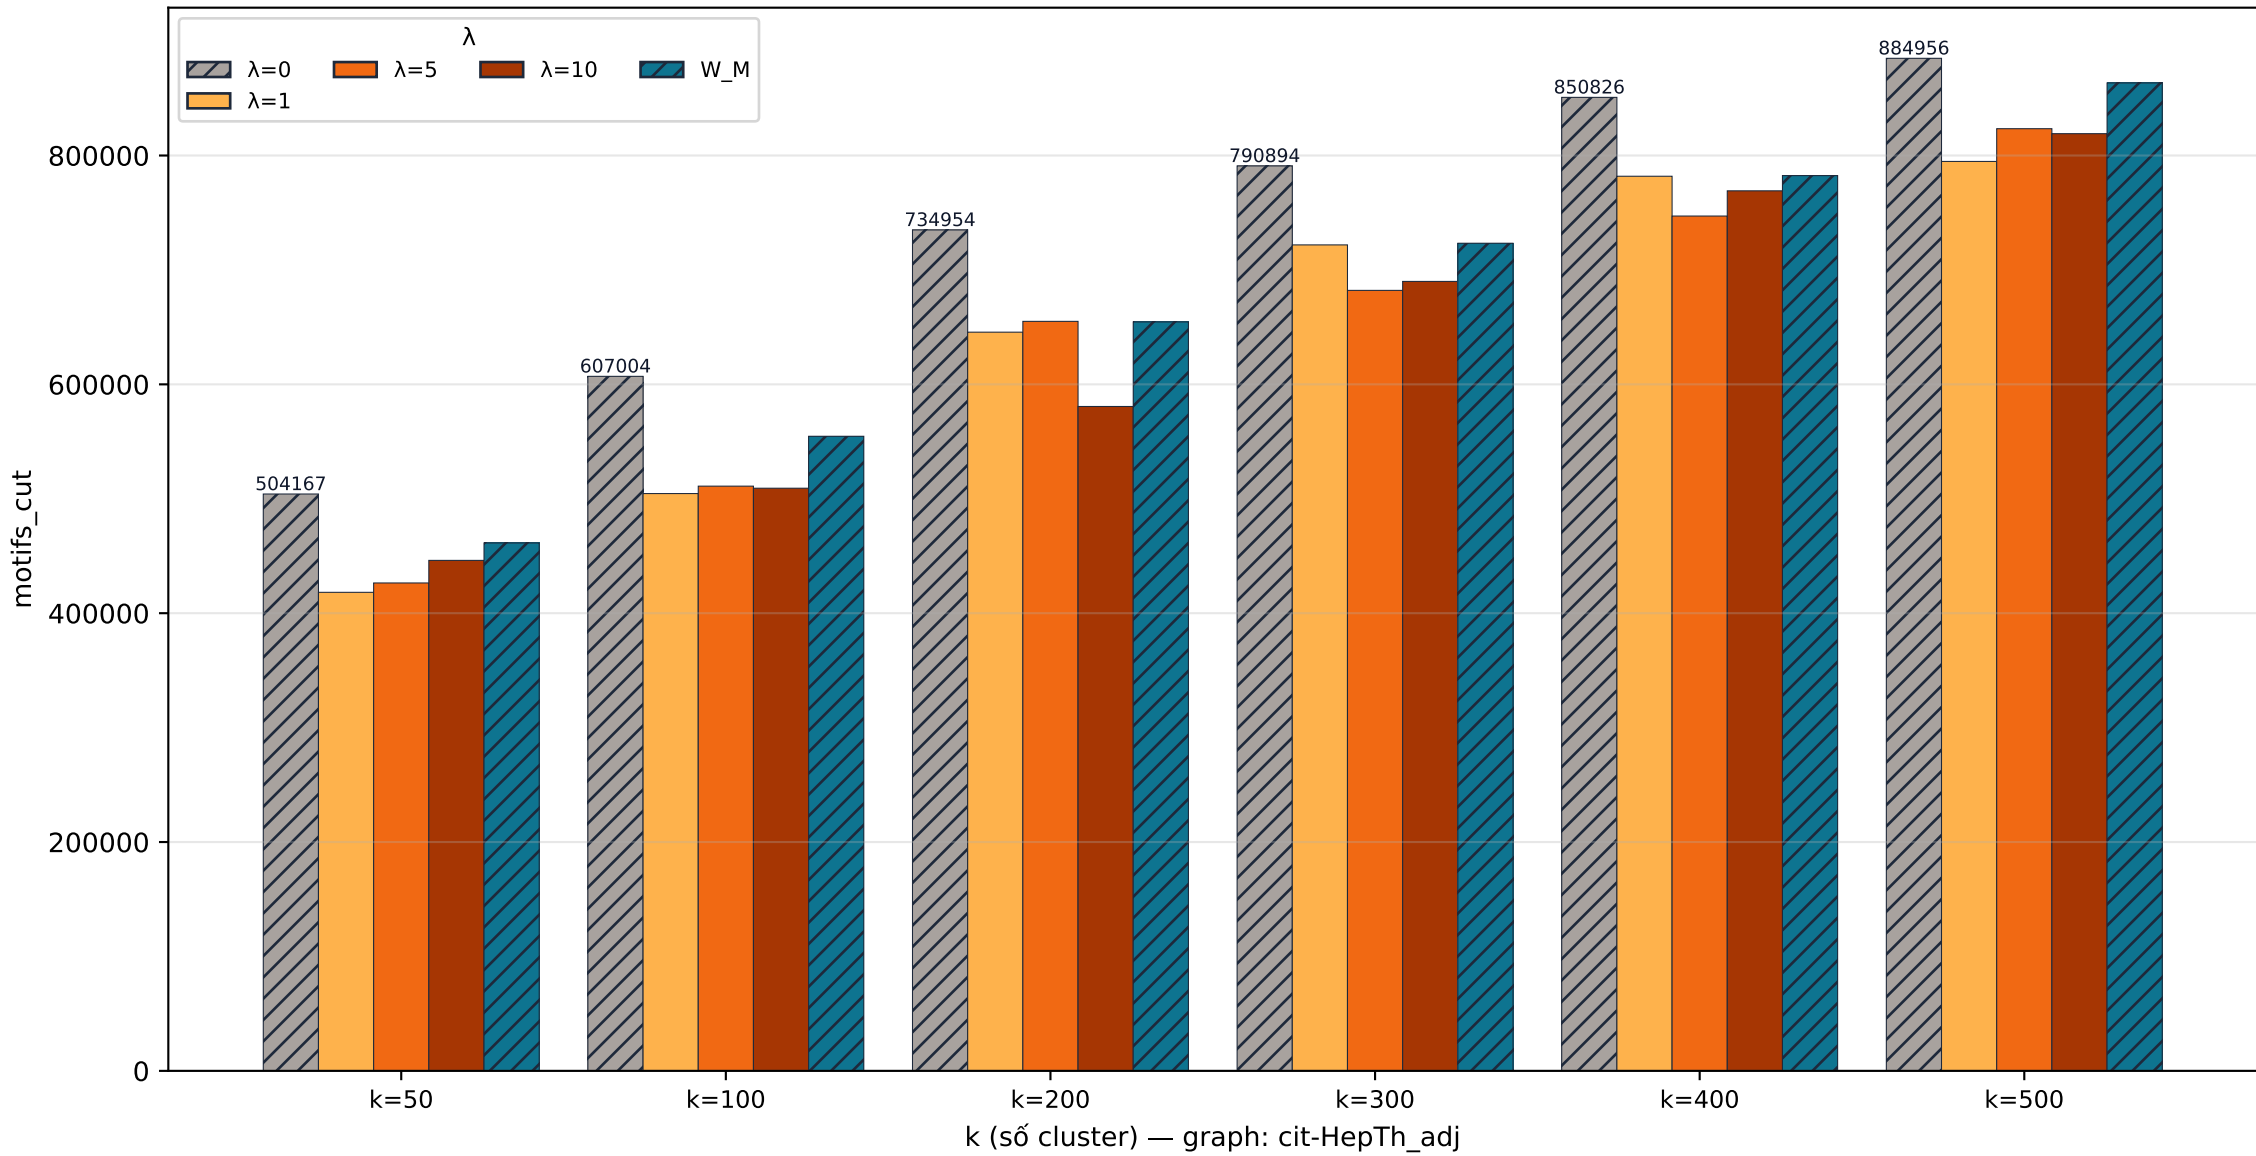

cit-HepTh_adj cut · motifs_internal

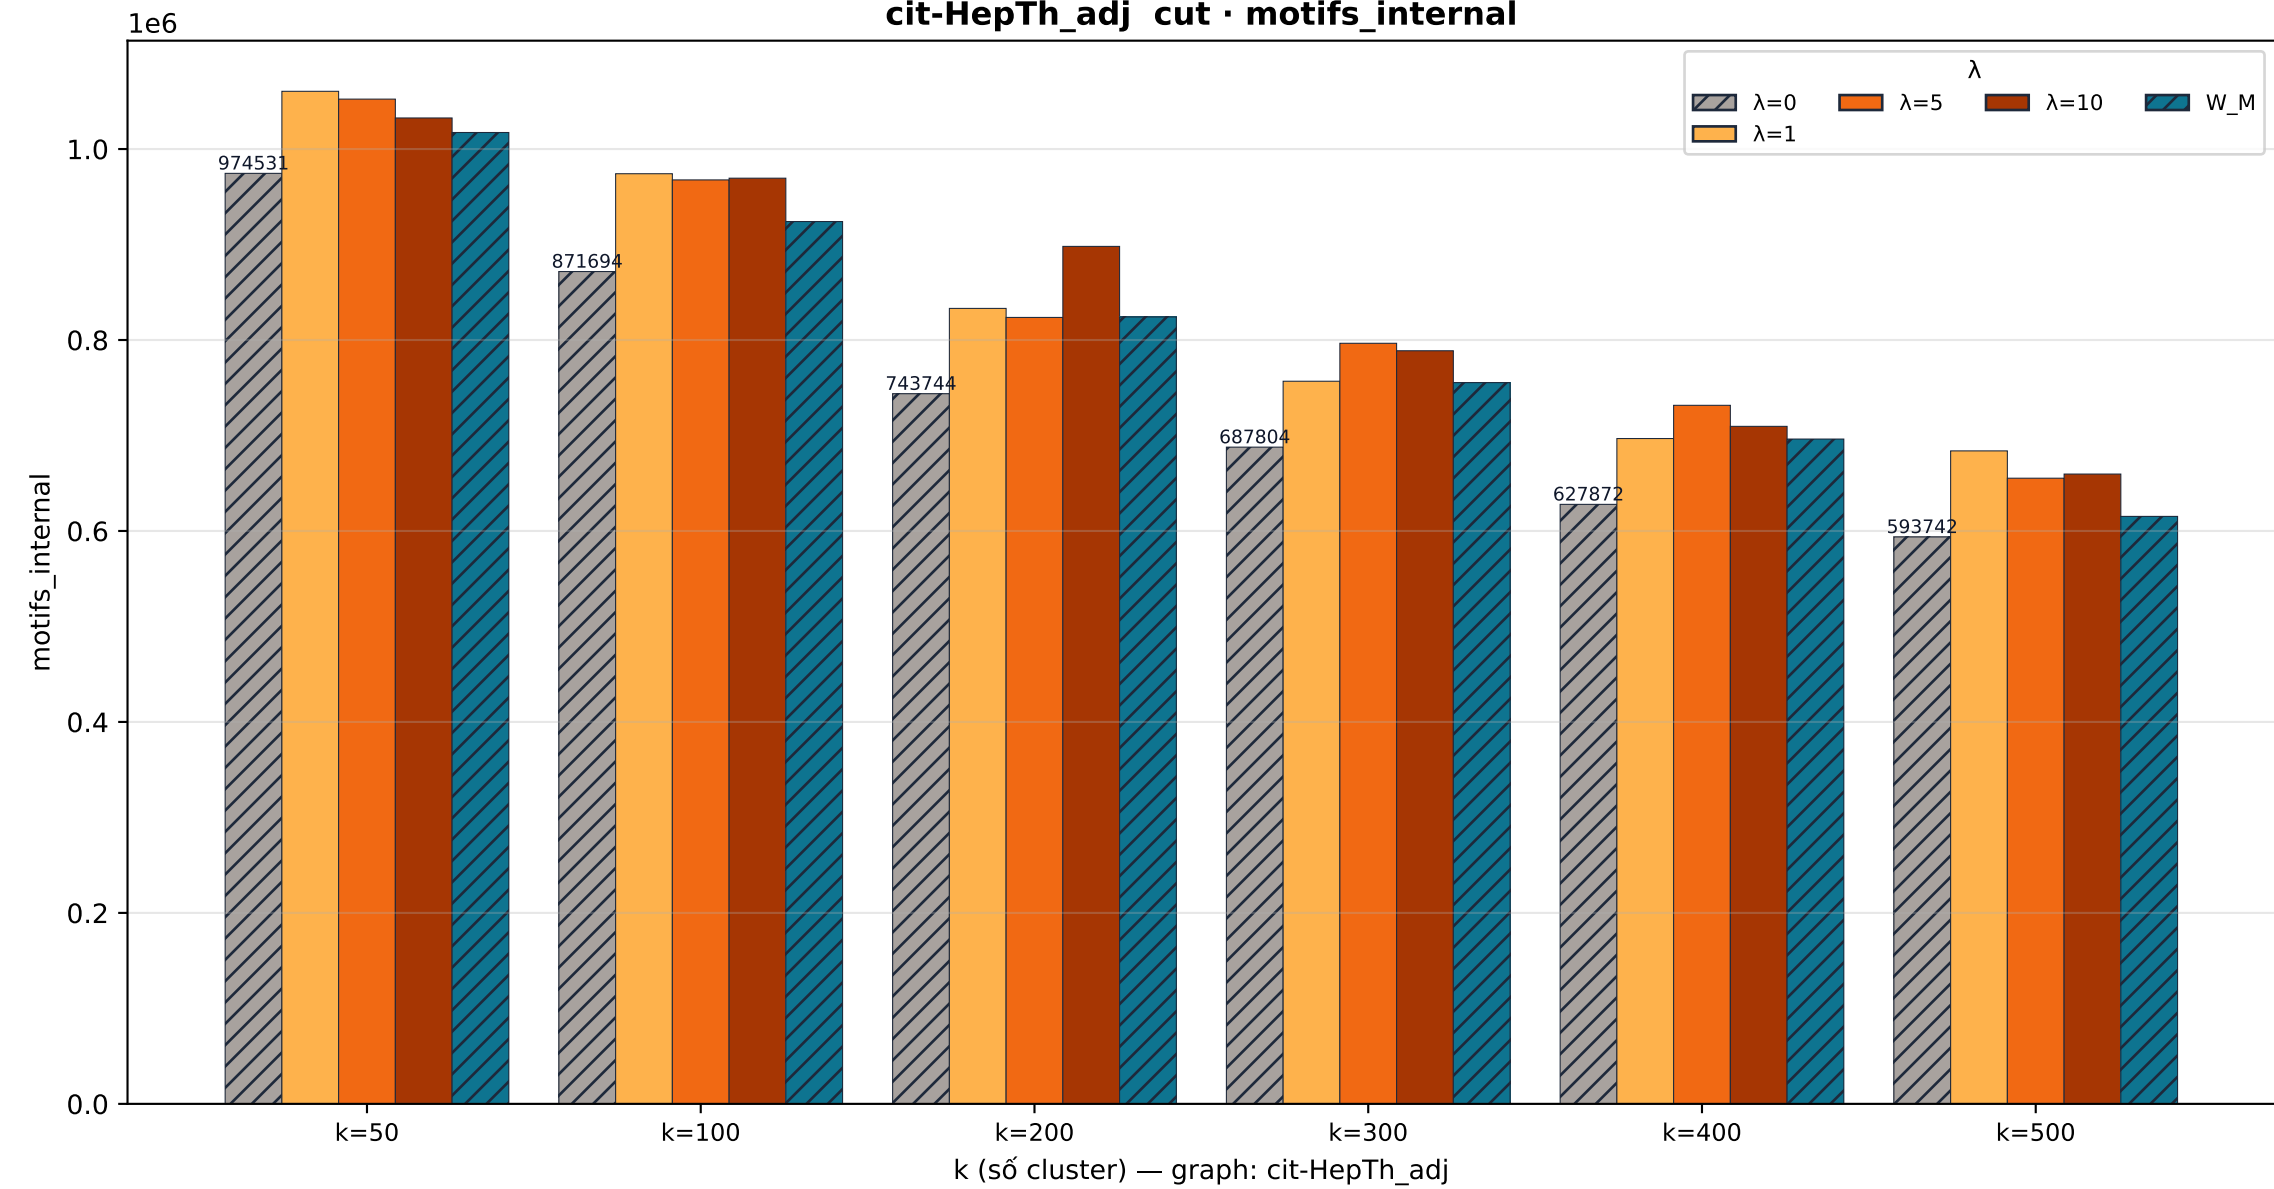

cit-HepTh_adj stability · jaccard_vs_base

