


MAIN RESULT – REAL

Real-world dataset (SNAP / MUSAE)


Top 6 bộ test có Q cải thiện mạnh nhất khi dùng mixed matrix W_λ
(filter: $Q(A) \geq 0.1$, score = $\max Q(\lambda > 0) - Q(A)$)

1. musae_ES_edges-ncut-k50	$Q(A)=0.1280$	$\rightarrow$	$Q(\lambda=1.0)=0.2183$	$\Delta Q=+0.0902$
2. musae_ES_edges-ncut-k100	$Q(A)=0.1216$	$\rightarrow$	$Q(\lambda=1.0)=0.1983$	$\Delta Q=+0.0767$
3. musae_ES_edges-ncut-k200	$Q(A)=0.1106$	$\rightarrow$	$Q(\lambda=10.0)=0.1589$	$\Delta Q=+0.0483$
4. musae_ES_edges-ncut-k300	$Q(A)=0.0960$	$\rightarrow$	$Q(\lambda=1.0)=0.1219$	$\Delta Q=+0.0259$
5. musae_ES_edges-ncut-k400	$Q(A)=0.0777$	$\rightarrow$	$Q(\lambda=1.0)=0.1084$	$\Delta Q=+0.0308$
6. musae_ES_edges-ncut-k500	$Q(A)=0.0680$	$\rightarrow$	$Q(\lambda=1.0)=0.0968$	$\Delta Q=+0.0288$


musae_ES_edges quality · modularity

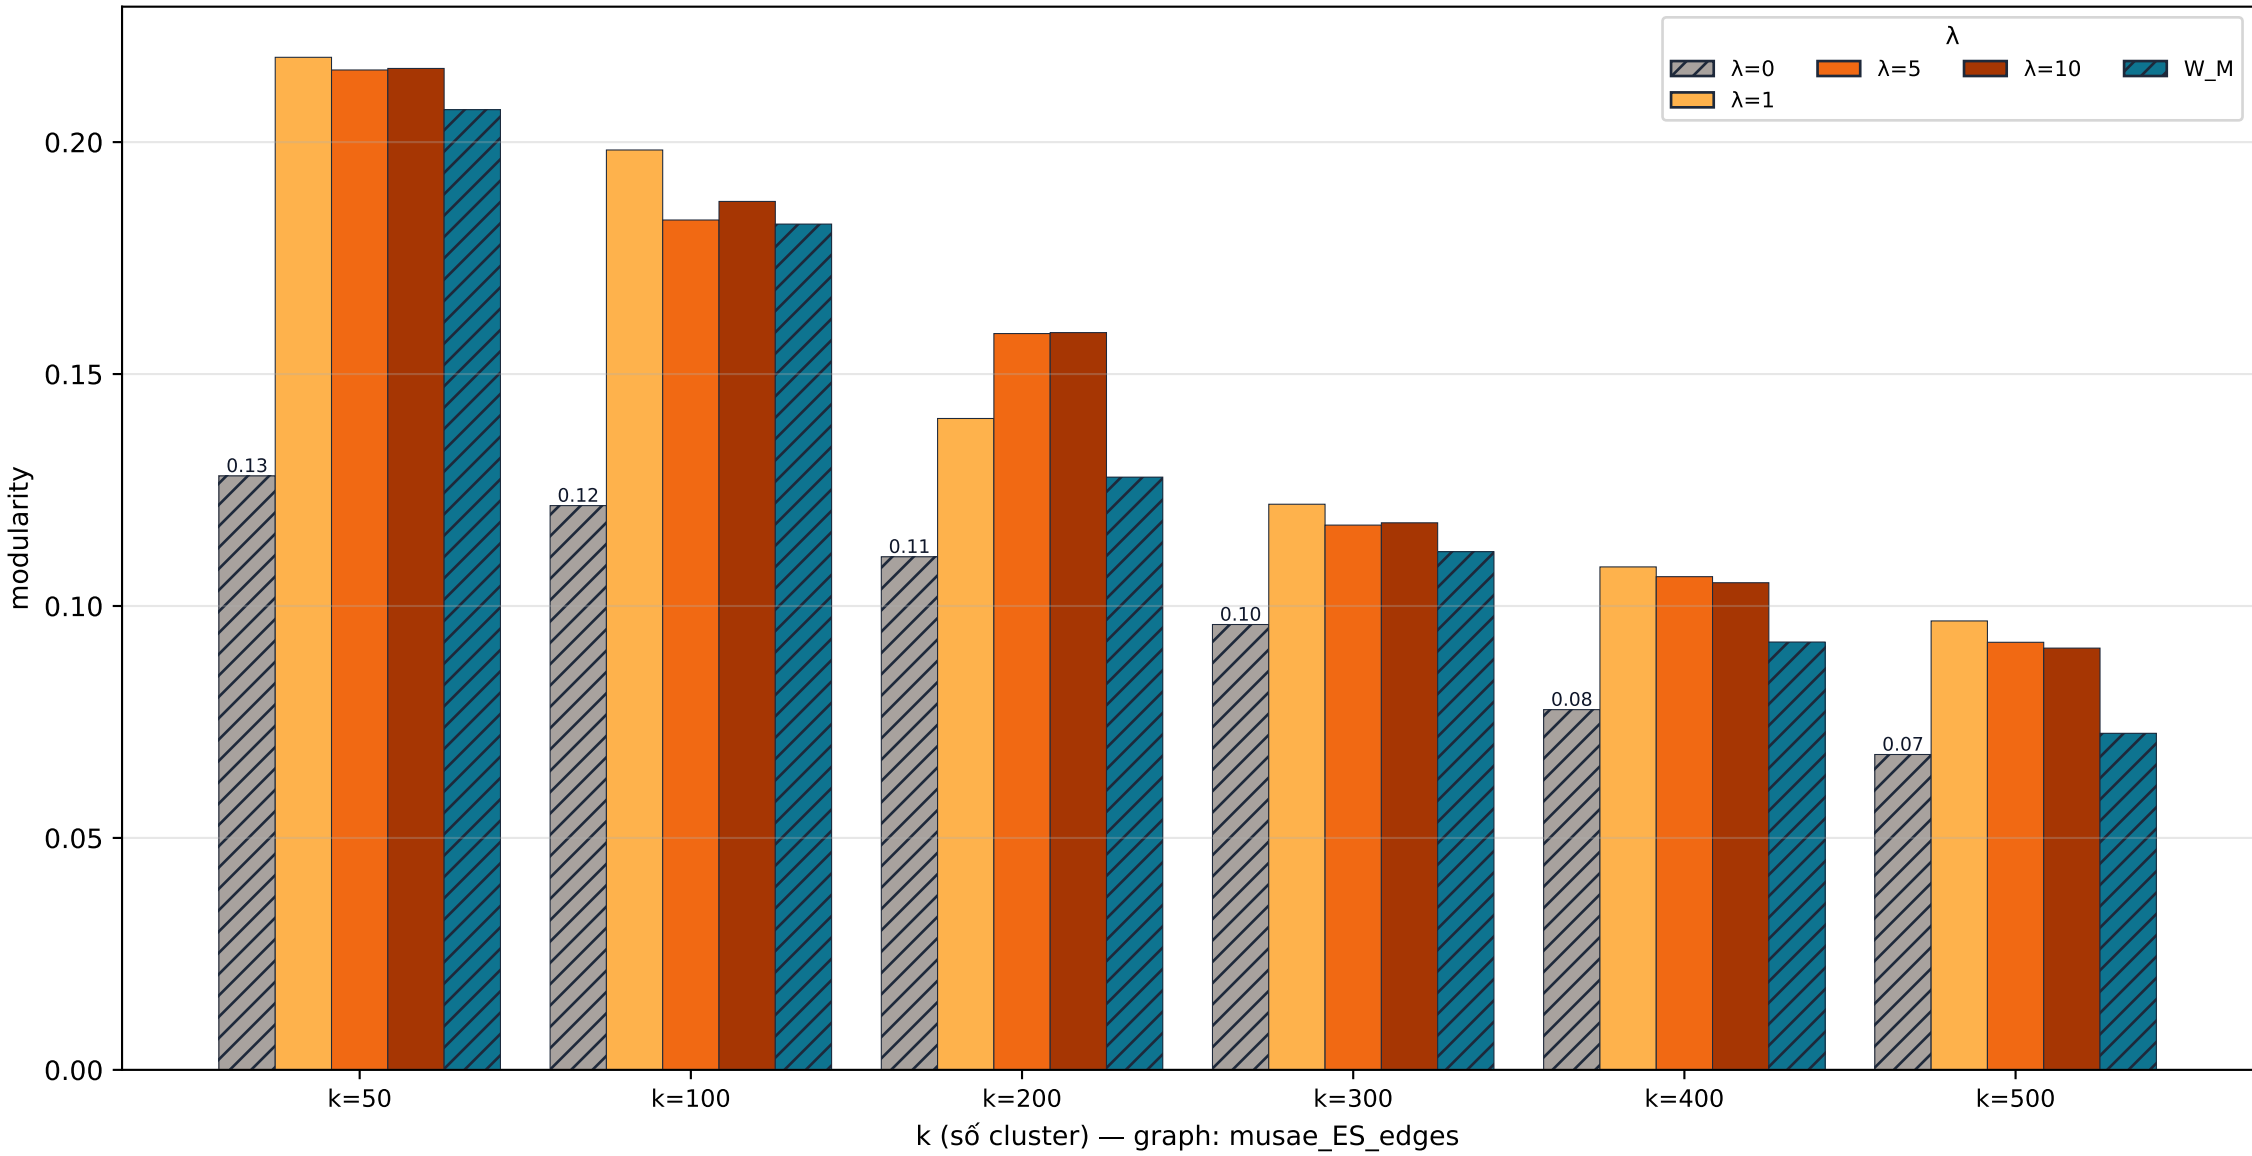


musae_ES_edges quality · cc_avg

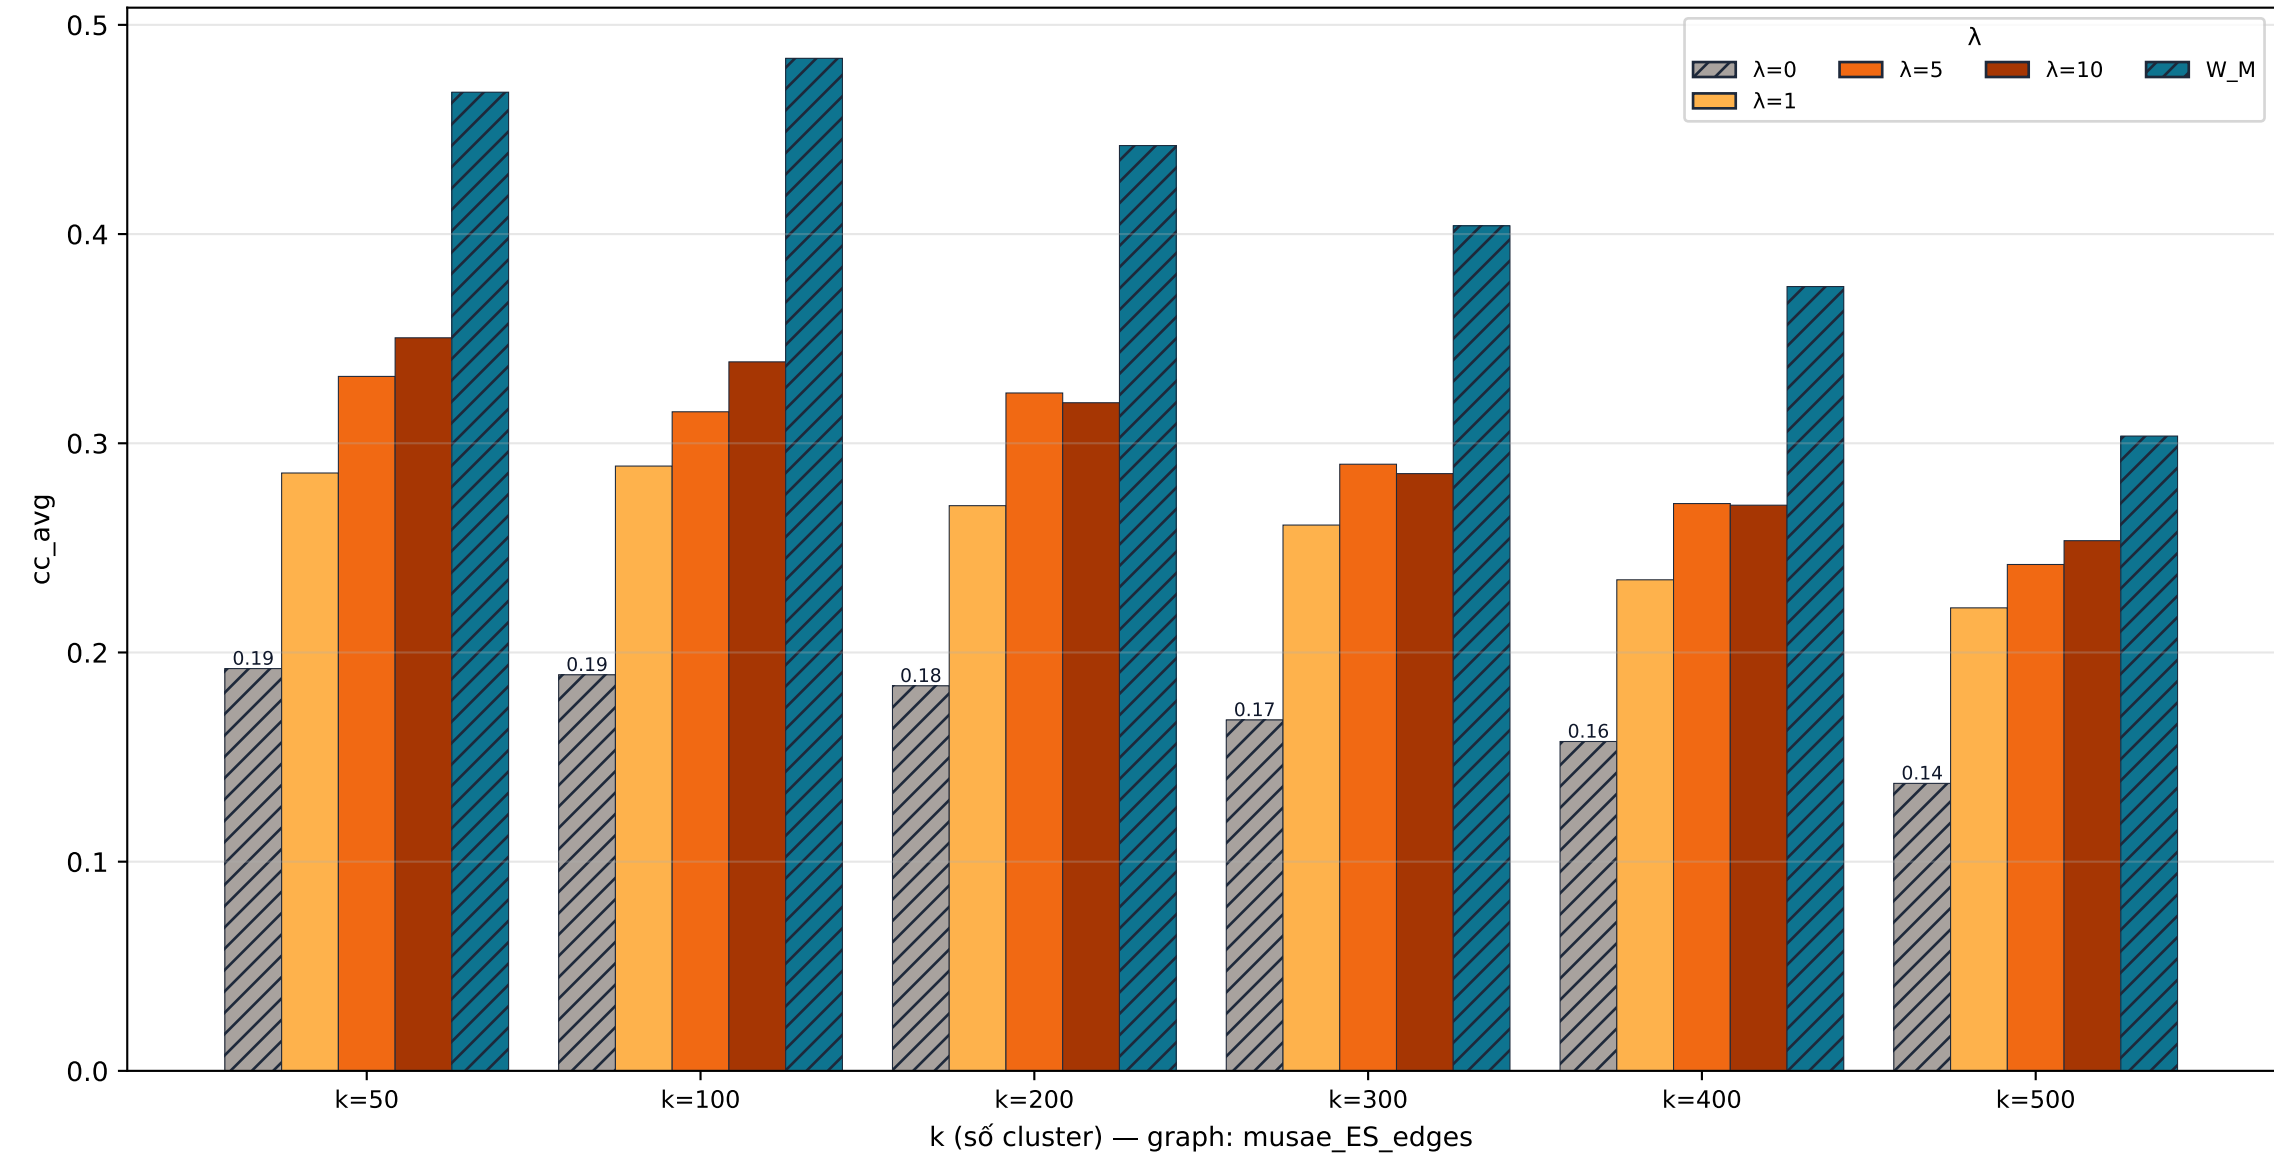


musae_ES_edges quality · cc_weighted

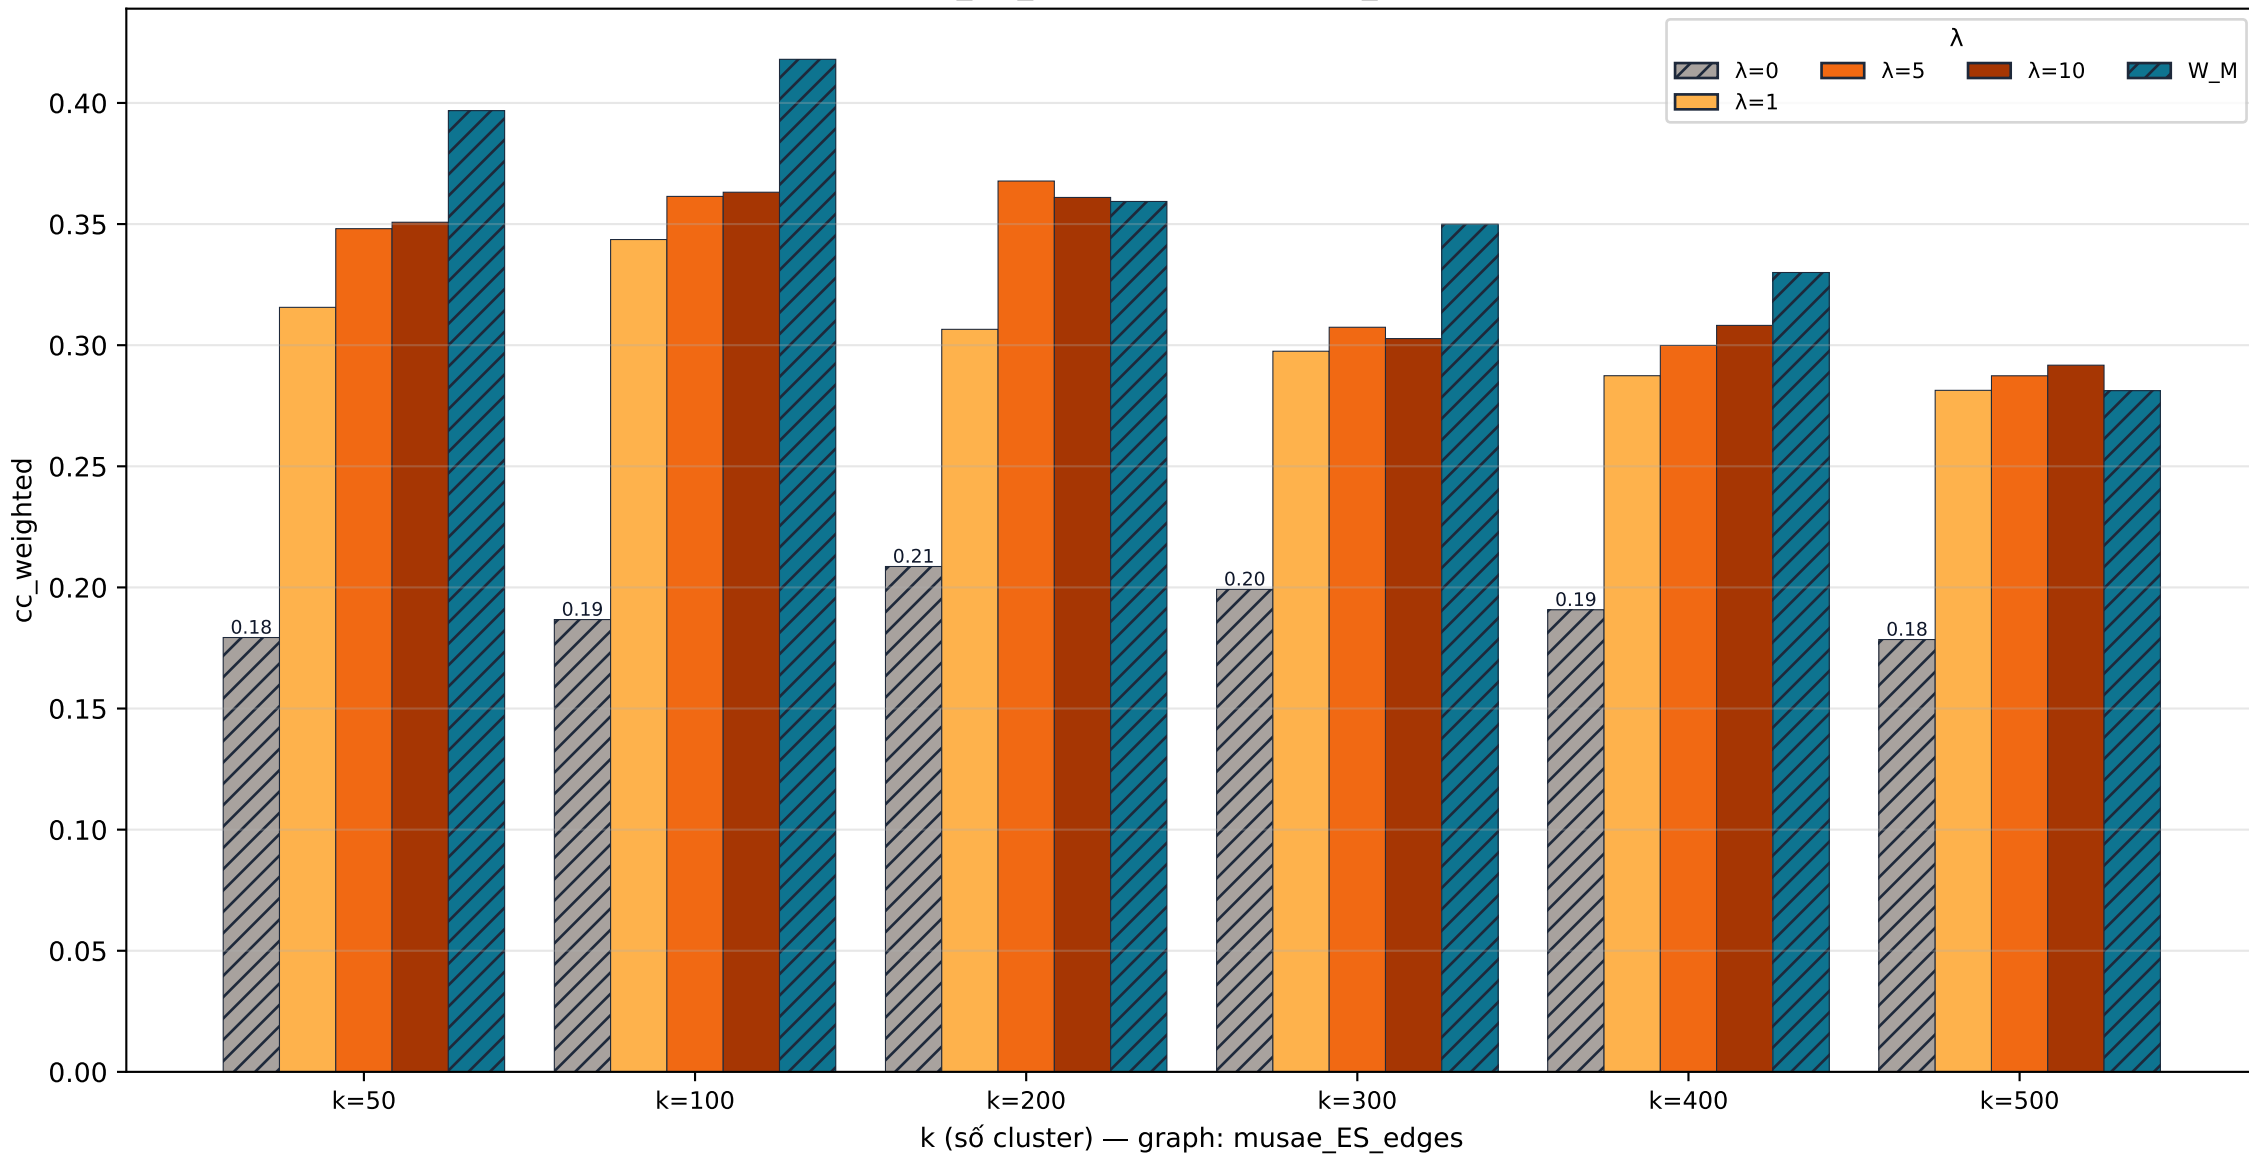


musae_ES_edges cut · edges_cut

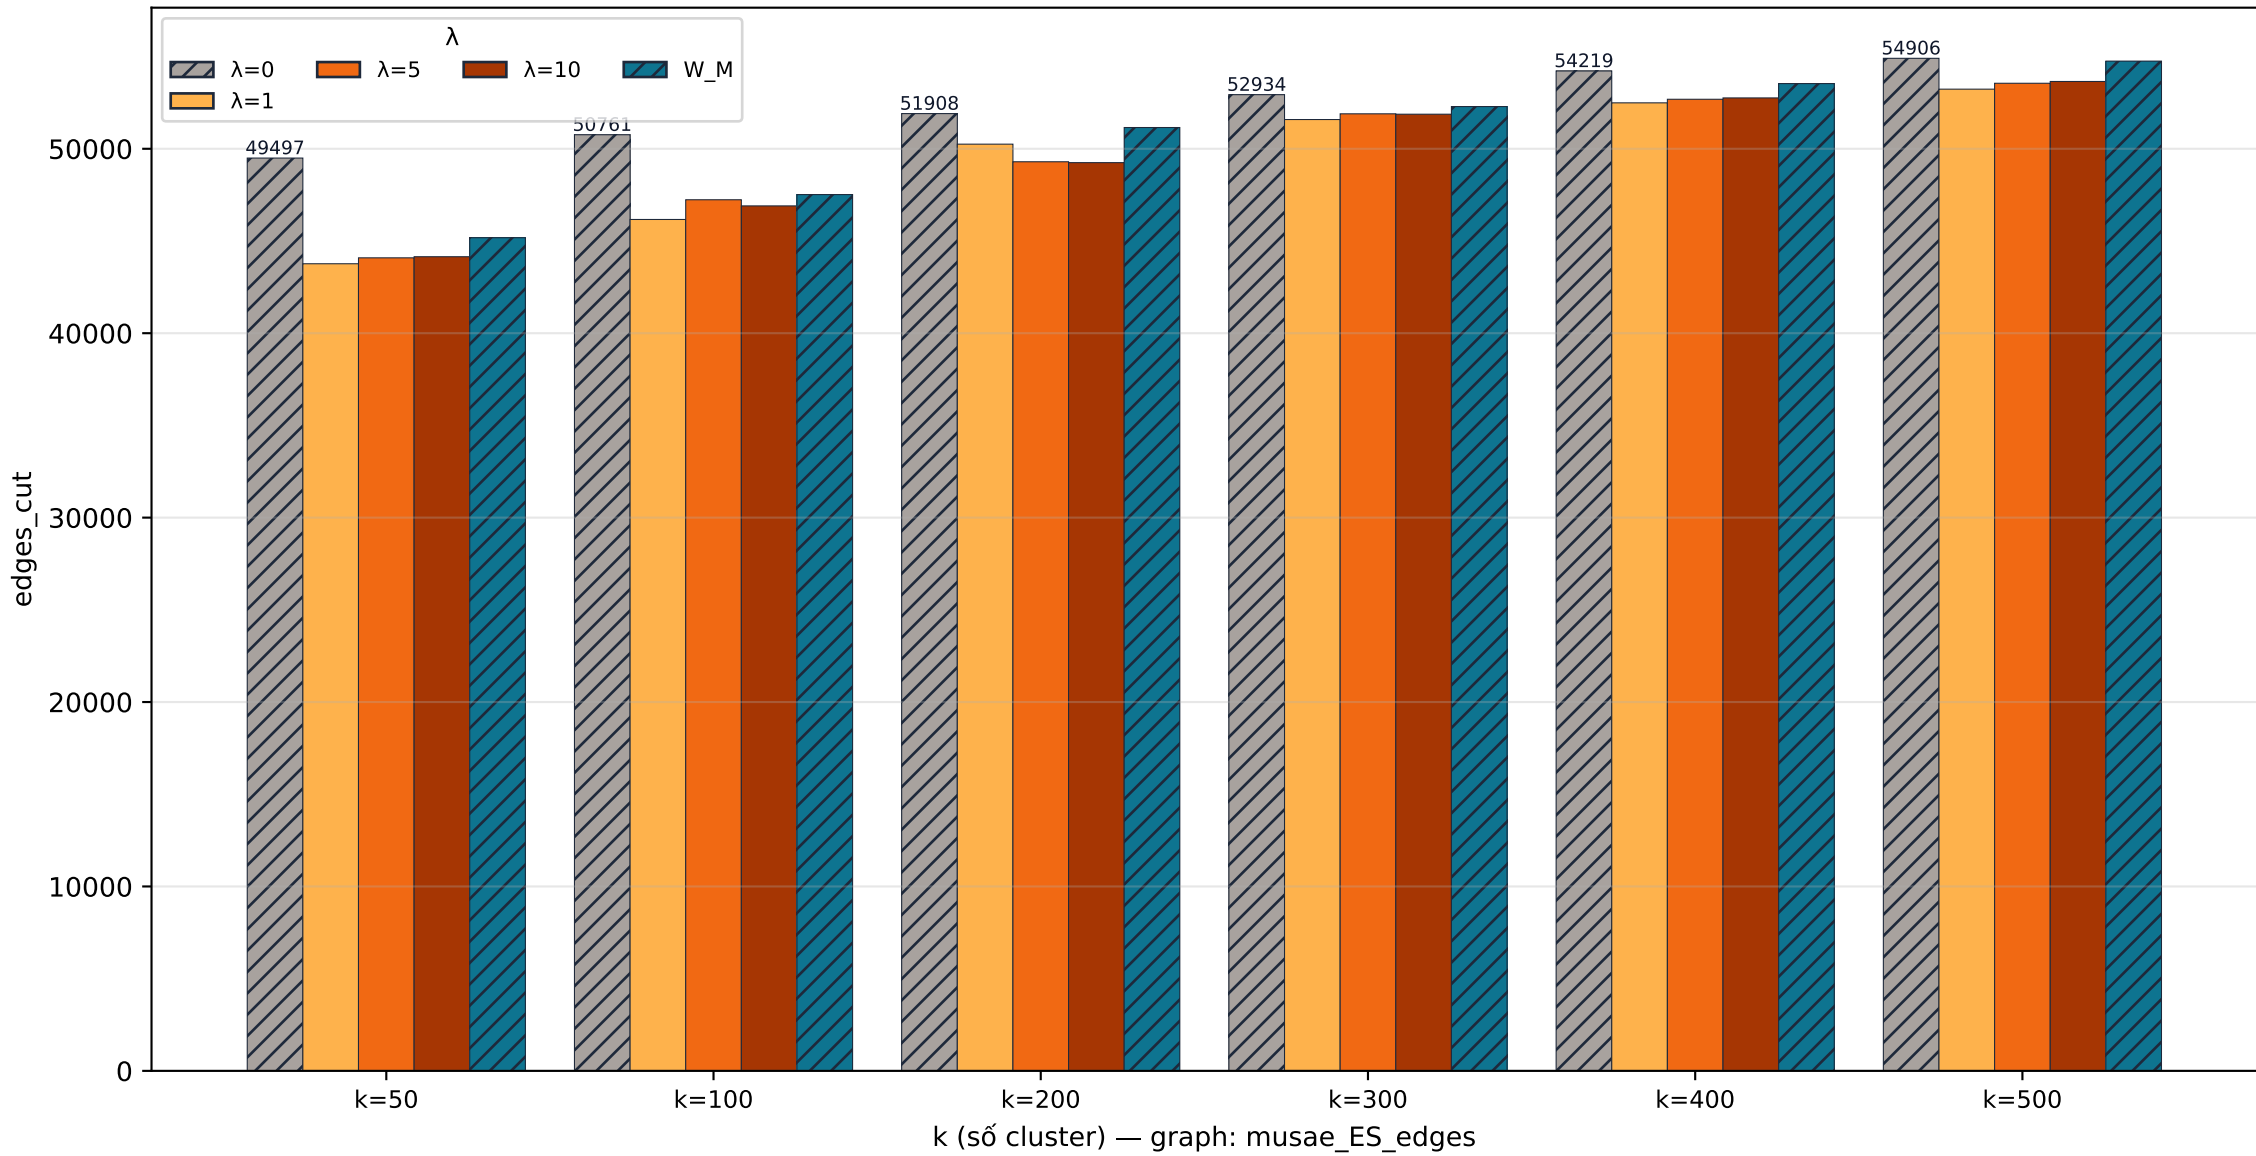

musae_ES_edges cut · motifs_cut

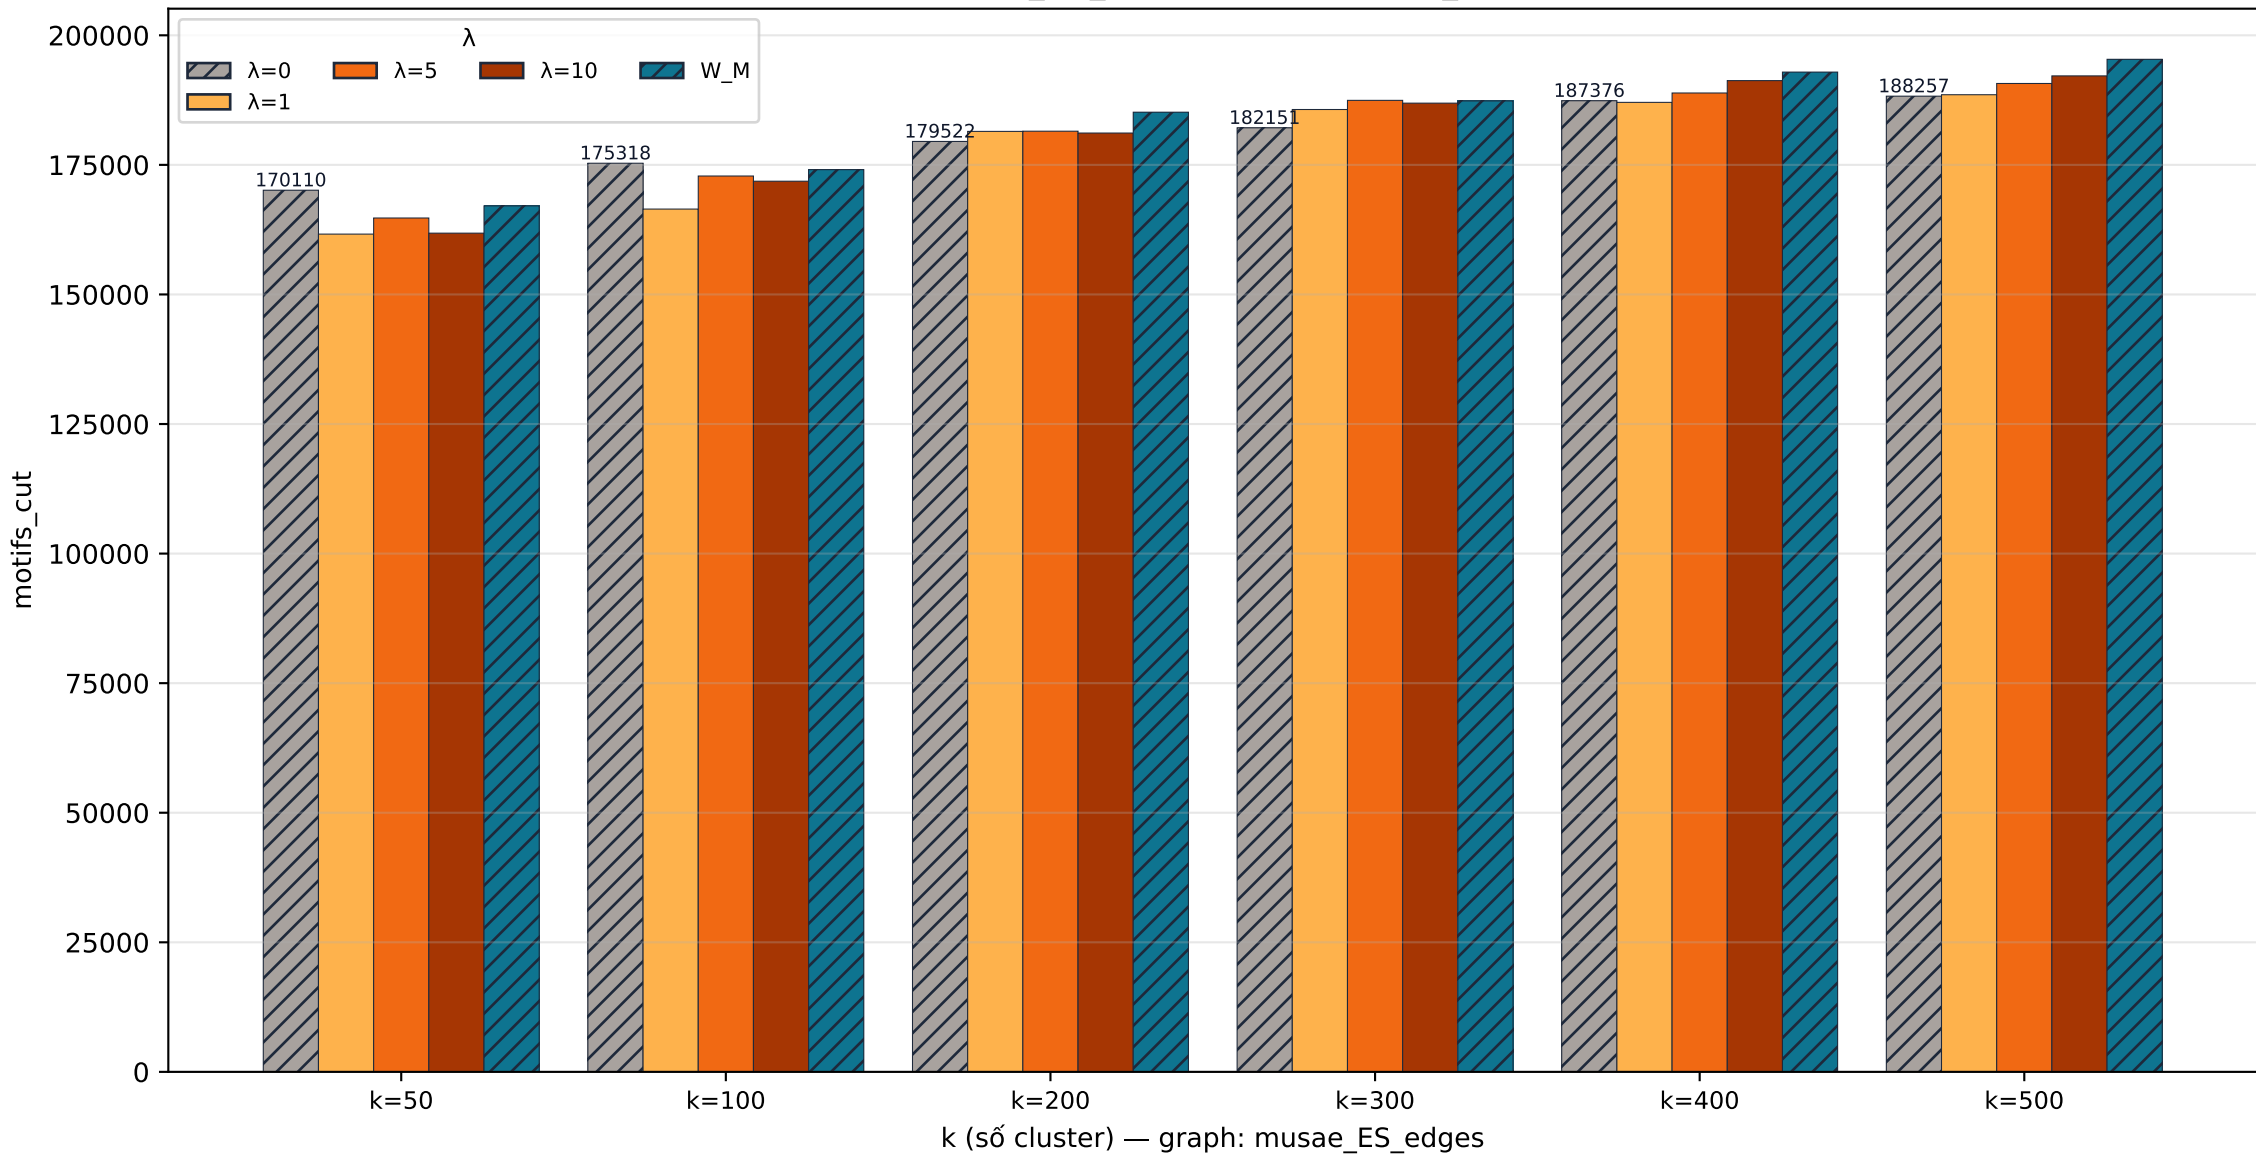

musae_ES_edges cut · motifs_internal

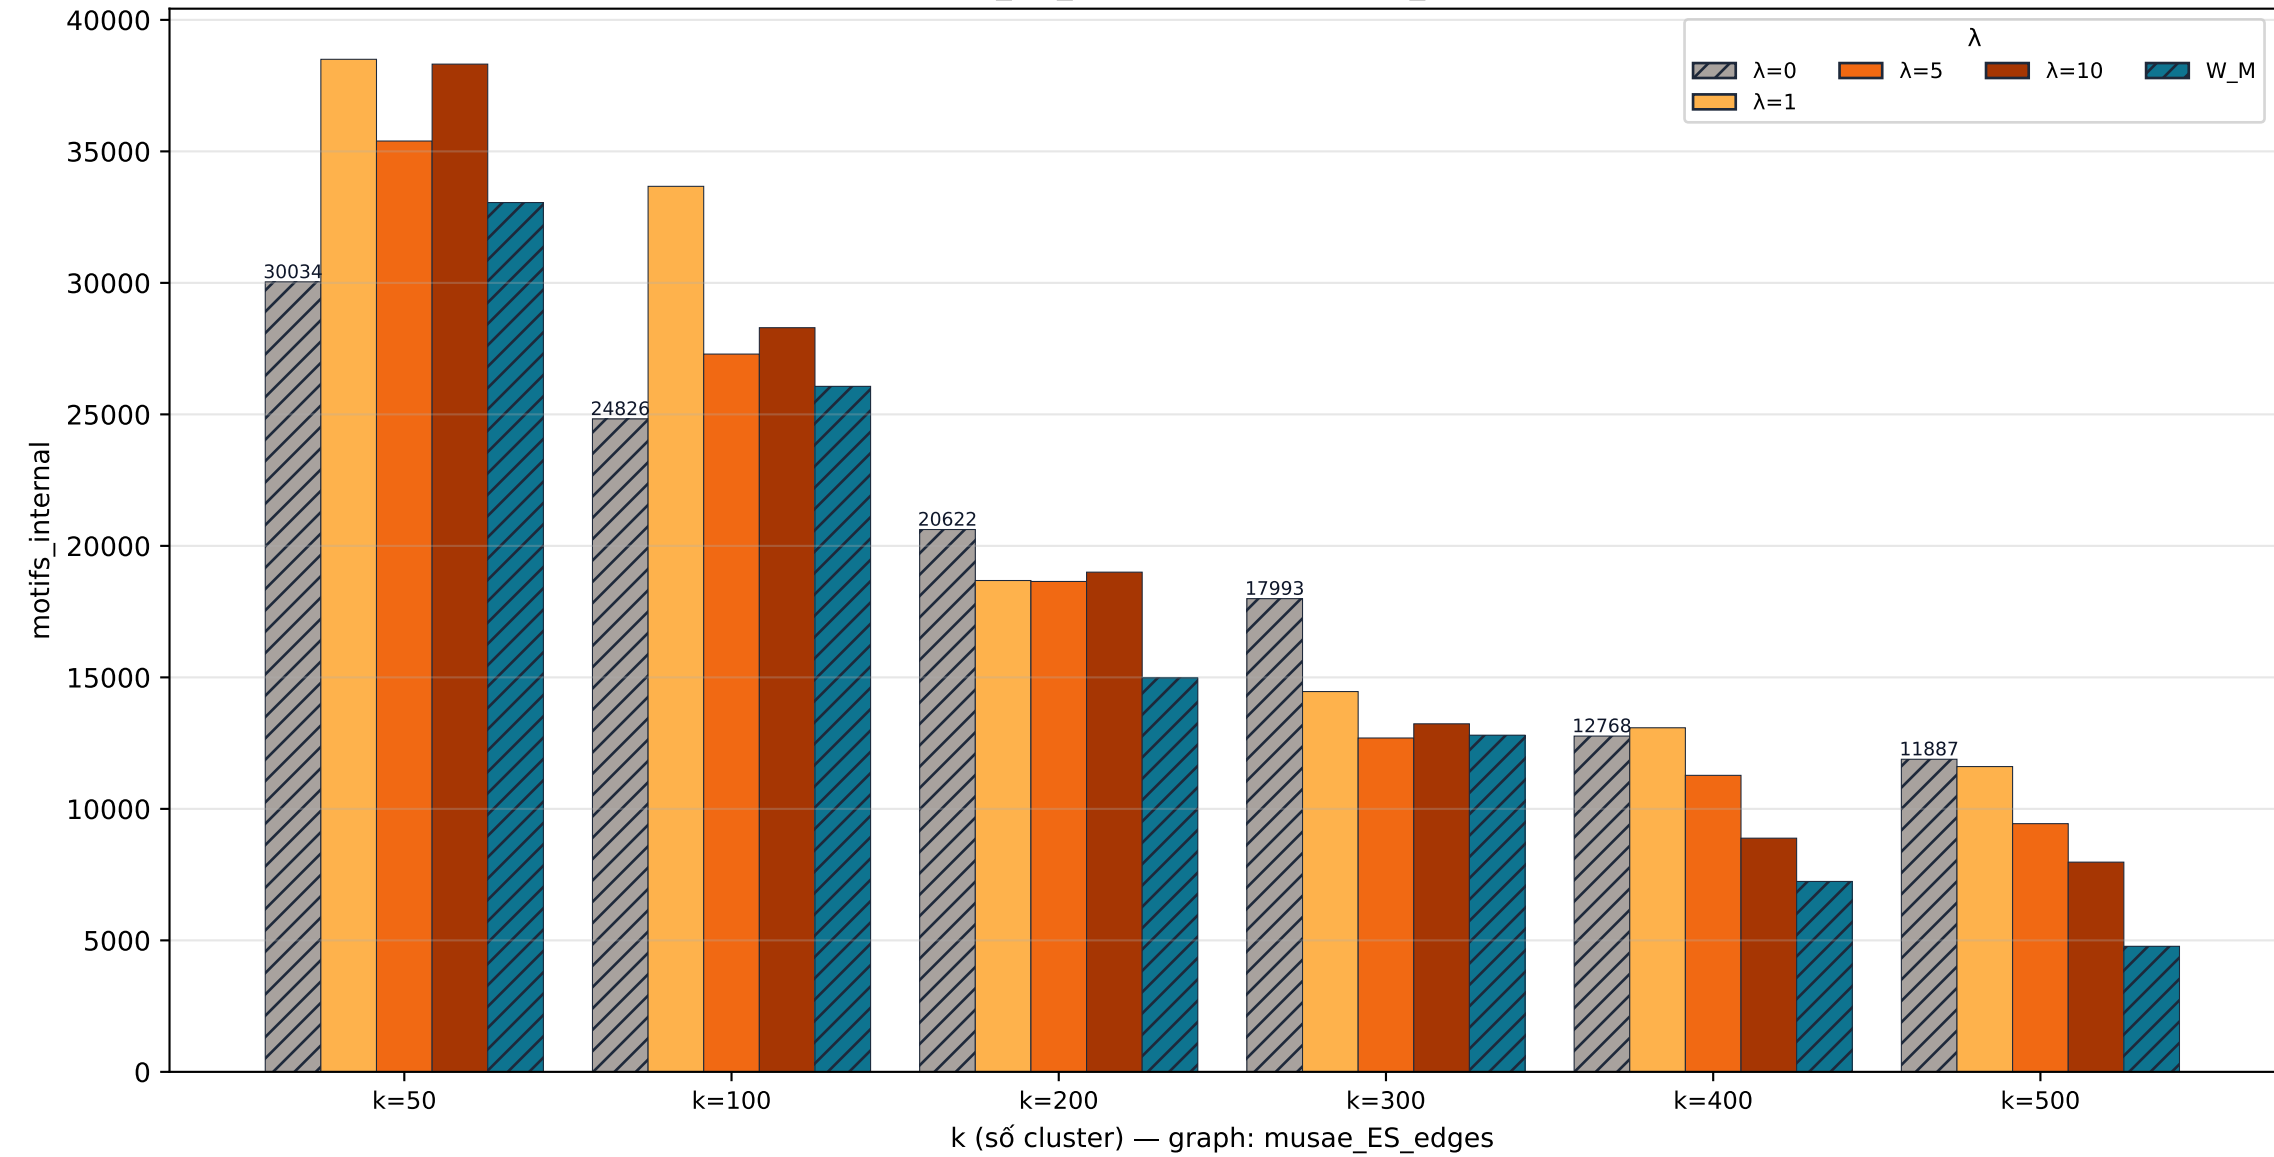

musae_ES_edges stability · jaccard_vs_base

