



ООП

Содержание

1. **Введение**
2. Методы
3. Примеры
4. Наследование
5. Method Resolution Order
6. Детали
7. Moose-like
8. ДЗ

bless

```
{  
  package Class::Name;  
  # ...  
}  
  
my $obj = bless {}, 'Package::Name';  
  
my $obj2 = bless [], '...';  
my $scalar = 42;  
my $obj2 = bless \ $scalar, '...';
```

Содержание

1. Введение
2. **Методы**
3. Примеры
4. Наследование
5. Method Resolution Order
6. Детали
7. Moose-like
8. ДЗ

Методы

```
{
  package A;

  sub set_a {
    my ($self, $value) = @_;
    $self->{a} = $value;
    return;
  }

  sub get_a {
    my ($self) = @_;
    return $self->{a};
  }
}

my $obj = bless {}, 'A';

$obj->set_a(42);
print $obj->get_a(); # 42
```

Атрибуты

```
{  
  package A;  
  sub new {  
    my ($class, %params) = @_;  
  
    return bless \%params, $class;  
  }  
}  
  
my $obj = A->new(a => 1, b => 2);  
  
print $obj->{a}; # 1  
print $obj->{b}; # 2
```

Методы класса

```
{
  package A;

  sub new {
    my ($class, %params) = @_;

    return bless \%params, $class;
  }

  sub get_a {
    my ($self) = @_;

    return $self->{a};
  }
}

my $obj = A->new(a => 42);
$obj->get_a(); # 42
```

Методы — еще варианты

```
$obj->A::get_a();
```

```
my $class = 'A';  
$class->new();
```

```
my $method_name = $cond ? 'get_a' : 'get_b';  
$obj->$method_name;
```

```
A::new(); # not the same!
```


Методы — indirect

```
new My::Class(1, 2, 3);
```

```
My::Class->new(1, 2, 3);
```

```
foo $obj(123); # $obj->foo(123);
```

```
use strict;
```

```
use warnings;
```

```
Syntax error!
```

```
exit 0;
```

Методы — WHY!?

```
use strict;  
use warnings;
```

Syntax error!

```
exit 0;
```

```
use warnings;  
use strict;  
'error' -> Syntax(!exit(0));
```

can

```
{  
  package A;  
  
  sub test {  
    return 42;  
  }  
}  
  
if (A->can('test')) {  
  print A->test;  
}  
  
print A->can('test')->('A');
```

```
my $obj = bless {}, 'A';  
$obj->can('test');
```

Filehandles

```
open(my $fh, '>', 'path/to/file');
```

```
$fh->autoflush();
```

```
$fh->print('content');
```

```
STDOUT->autoflush();
```

Пакеты

```
use Some::Package qw(a b c);  
# Some::Package->import(qw(a b c));  
  
no Some::Package;  
# Some::Package->unimport;  
  
use Some::Package 10.01  
# Some::Package->VERSION(10.01);
```

Содержание

1. Введение
2. Методы
3. **Примеры**
4. Наследование
5. Method Resolution Order
6. Детали
7. Moose-like
8. ДЗ

DBI

```
$dbh = DBI->connect(  
  $data_source,  
  $username,  
  $auth,  
  \%attr  
);  
  
$rv = $dbh->do('DELETE FROM table');
```

XML::LibXML;

```
use XML::LibXML;  
  
my $document = XML::LibXML->load_xml(  
    string => '...'  
);  
  
my $list = $document->findnodes('...');  
# XML::LibXML::NodeList
```

```
XML::LibXML::Node  
/      \  
XML::LibXML::Document XML::LibXML::Element
```


File::Spec

```
use File::Spec;  
print File::Spec->catfile('a', 'b', 'c');
```

JSON

```
use JSON;
```

```
JSON->new->utf8->decode( '... ' );
```

```
decode_json '... ';
```

Содержание

1. Введение
2. Методы
3. Примеры
4. **Наследование**
5. Method Resolution Order
6. Детали
7. Moose-like
8. ДЗ

Наследование

```
{  
  package Lynx;  
  
  BEGIN { push(@ISA, 'Dog', 'Cat') }  
  use base qw(Dog Cat);  
  use parent qw(Dog Cat);  
}
```

UNIVERSAL

```
$obj->can( 'method' );
```

```
$obj->isa( 'Animal' );
```

```
Dog->isa( 'Animal' );
```

```
$obj->VERSION(5.12);
```


SUPER

```
sub method {  
  my ($self, %params) = @_;  
  
  $self->SUPER::method(%params);  
  
  return;  
}
```

Содержание

1. Введение
2. Методы
3. Примеры
4. Наследование
5. **Method Resolution Order**
6. Детали
7. Moose-like
8. ДЗ


Method Resolution Order

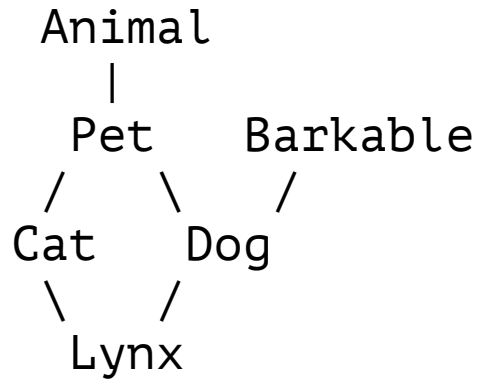

```
Lynx->method();
```

```
qw(Lynx Cat Pet Animal Dog Barkable);
```


use mro;

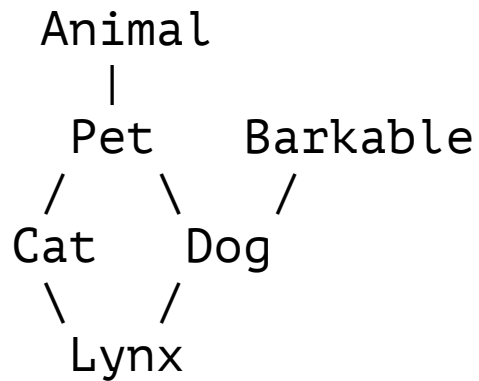

```
use mro 'c3';
```

```
Lynx->method();
```

```
qw(Lynx Cat Dog Pet Animal Barkable);
```

mro — next::method

```
package A;
use mro;

sub foo {
    my ($self, $param) = @_;

    $param++;

    return $obj->next::method($param);
}
```

Содержание

1. Введение
2. Методы
3. Примеры
4. Наследование
5. Method Resolution Order
6. **Детали**
7. Moose-like
8. ДЗ

blessed, ref

```
use JSON:
use Scalar::Util 'blessed';

ref JSON->new(); # 'JSON'
ref [];          # 'ARRAY'
ref {};          # 'HASH'
ref 0;           # ''

blessed JSON->new(); # 'JSON'
blessed [];          # undef
blessed {};          # undef
blessed 0;           # undef
```

AUTOLOAD

```
package A;
our $AUTOLOAD;
sub new {
    my ($class, %params) = @_ ;
    return bless \%params, $class;
}
sub AUTOLOAD { print $AUTOLOAD }
```

```
A->new()->test(); # test
A->can('anything'); # :(
```

```
sub UNIVERSAL::AUTOLOAD {}

# Dog->m(); Animal->m(); UNIVERSAL->m();
# Dog->AUTOLOAD(); Animal->AUTOLOAD();
# UNIVERSAL->AUTOLOAD();
```

DESTROY

```
package A;  
sub new {  
    my ($class, %params) = @_;  
    return bless \%params, $class;  
}  
  
sub DESTROY {  
    print 'D';  
}
```

```
A->new(); # print 'D'
```

DESTROY — сложности

- `die`
- `local`
- `AUTOLOAD`
- `${^GLOBAL_PHASE} eq 'DESTRUCT'`

```
sub DESTROY {  
    my ($self) = @_;  
    $self->{handle}->close() if $self->{handle};  
}
```

Class::Accessor

```
package Foo;  
use base qw(Class::Accessor);  
Foo->follow_best_practice;  
Foo->mk_accessors(qw(name role salary));
```

```
use base qw(Class::Accessor::Fast);  
use base qw(Class::XSAccessor);
```


Содержание

1. Введение
2. Методы
3. Примеры
4. Наследование
5. Method Resolution Order
6. Детали
7. **Moose-like**
8. ДЗ

Moose

```
package Person;  
  
use Moose;  
  
has first_name => (  
    is => 'rw',  
    isa => 'Str',  
);  
  
has last_name => (  
    is => 'rw',  
    isa => 'Str',  
);
```

```
Person->new(  
    first_name => 'Vadim',  
    last_name  => 'Pushtaev',  
);
```

Moose — наследование

```
package User;  
  
use Moose;  
  
extends 'Person';  
  
has password => (  
    is => 'ro',  
    isa => 'Str',  
);
```

Moose — инициализация

BUILD

```
has age      => (is => 'ro', isa => 'Int');
has is_adult => (is => 'ro', isa => 'Bool');

sub BUILD {
    my ($self) = @_;

    $self->is_adult($self->age >= 18);

    return;
}
```

Moose — инициализация

default

```
has age      => (is => 'ro', isa => 'Int');
has is_adult => (
  is => 'ro',
  isa => 'Bool',
  lazy => 1,
  default => sub {
    my ($self) = @_;
    return $self->age >= 18;
  }
);
```

Moose — инициализация

builder

```
has age      => (is => 'ro', isa => 'Int');
has is_adult => (
    is => 'ro', isa => 'Bool',
    lazy => 1,  builder => '_build_is_adult',
);

sub _build_is_adult {
    my ($self) = @_;
    return $self->age >= 18;
}
```

```
package Superman;
extends 'Person';
sub _build_is_adult { return 1; }
```

Moose — инициализация

Цепочки

```
has [qw(
    file_name
    fh
    file_content
    xml_document
    data
)] => (
    lazy_build => 1,
    # ...
);

sub _build_fh           { open(file_name) }
sub _build_file_content { read(fh) }
sub _build_xml_document { parse(file_content) }
sub _build_data         { find(xml_document) }
```

Moose — МИКСИНЫ

```
with 'Role::HasPassword';
```

```
package Role::HasPassword;
use Moose::Role;
use Some::Digest;

has password => (
    is => 'ro',
    isa => 'Str',
);

sub password_digest {
    my ($self) = @_;

    return Some::Digest->new($self->password);
}
```


Moose — делегирование

```
has doc => (  
  is      => 'ro',  
  isa     => 'Item',  
  handles => [qw(read write size)],  
);
```

```
has last_login => (  
  is      => 'rw',  
  isa     => 'DateTime',  
  handles => { 'date_of_last_login' => 'date' },  
);
```

```
{  
  handles => qr/^get_(a|b|c)|set_(a|d|e)$/ ,  
  handles => 'Role::Name',  
}
```

Moose — и т. д.

```
before 'is_adult' => sub { shift->recalculate_age }
```

```
subtype 'ModernDateTime'  
  => as 'DateTime'  
  => where { $_->year() >= 1980 }  
  => message { 'The date is not modern enough' };
```

```
has 'valid_dates' => (  
  is => 'ro',  
  isa => 'ArrayRef[DateTime]',  
);
```

```
package Config;  
use MooseX::Singleton; # instead of Moose  
has 'cache_dir' => ( ... );
```

Moose — аналоги

- Moose
- Mouse
- Moo
- Mo
- M

Содержание

1. Введение
2. Методы
3. Примеры
4. Наследование
5. Method Resolution Order
6. Детали
7. Moose-like
8. **ДЗ**

Д3 5

<https://github.com/Nikolo/Technosfera-perl/>

/homeworks/iter

```
my $iterator = Local::Iterator::Array->new(  
    array => [1, 2, 3]  
);  
$iterator->next(); # (1, 0);  
$iterator->next(); # (2, 0);  
$iterator->next(); # (3, 0);  
$iterator->next(); # (undef, 1);
```

```
my $iterator = Local::Iterator::File->new(  
    file => '/tmp/file.txt'  
);  
$iterator->next(); # ('A', 0);  
$iterator->next(); # ('B', 0);  
$iterator->all(); # [qw(C D E)]  
  
$iterator->next(); # (undef, 1);
```