SẮC KÝ v2

ADMIN STUDIO
MODULE SPECIFICATION & CODEX IMPLEMENTATION CONTRACT v1.0

Control plane for reference data, runtime configuration, assets, user data, dependency impact, versioning and audit

Product surface	Trung Tâm quản trị Sắc Ký / Admin Studio
Audience	Single owner account in v1
Default landing	Overview
Modes	Basic Mode / Advanced Mode; preference persisted
Core config lifecycle	Published → Draft → Impact Review → Publish → Version / Rollback
Reference strategy	Historical meaning snapshot; operational behavior live
Runtime rule	Config is real only when all consumers read canonical published config
Destructive ops	Module Reset + Full Reset with typed RESET confirmation
Visual authority	19 desktop screens — Pack 1 + Pack 2

1. Purpose & North Star

Admin Studio là control plane của Sắc Ký. Nó không phải một trang settings dài, không phải Supabase console, và cũng không phải một lớp UI giả phía trên các giá trị vẫn hardcode trong application. Admin Studio cho owner quản ý nghĩa sản phẩm, dữ liệu tham chiếu, asset, quy tắc vận hành, dữ liệu người dùng và lịch sử thay đổi.

Non-negotiable runtime contract
Một giá trị đã được đưa vào Admin Studio để cấu hình chỉ được coi là configurable khi tất cả consumer flows liên quan đọc cùng canonical PUBLISHED config tại runtime. Không được tồn tại một UI Admin đổi giá trị nhưng validation, scheduler, copy, counters hoặc business logic vẫn dùng một constant hardcode khác.

1.1 Product principles

- Basic Mode quản ý nghĩa sản phẩm; Advanced Mode quản cấu trúc hệ thống.
- Admin Studio là single-owner trong v1; không cần Admin/Editor/Viewer role hierarchy.
- Advanced Mode preference phải được nhớ lại giữa các lần sử dụng.
- Reference data đã từng được sử dụng không hard-delete; chỉ deactivate. Record chưa từng dùng có thể delete.
- Historical meaning được snapshot; operational behavior dùng live reference/config.
- Config changes không làm invalid dữ liệu lịch sử đã hợp lệ; thay đổi áp dụng cho mutation/eligibility tiếp theo.
- Runtime rules có Draft → Review Impact → Publish, không Save-and-apply tức thì.
- Rules & Runtime hỗ trợ Reset to Default và Version/Rollback.
- Audit Log ghi lại admin mutations đủ để trả lời: ai/ lúc nào/ đã đổi gì/ trước-sau ra sao.

2. Information Architecture

```
Admin Studio
├── Overview
├── Data Studio
│   ├── Check-in
│   │   ├── Emotion Families
│   │   ├── Emotions
│   │   ├── Needs
│   │   ├── Contexts
│   │   ├── Unknown Prompts
│   │   └── Action Catalog
│   ├── Diary
│   │   └── Diary Prompts
│   ├── Action Space
│   │   └── Reflection Outcomes
│   ├── Future Letter
│   │   └── Trigger references/config
│   └── Gift for Tomorrow
│       └── Gift references/config
├── Asset Studio
├── Rules & Runtime
├── User Data & Recovery
├── Audit Log
└── System & Advanced
```

2.1 Scope exclusions

- Garden không thuộc scope Sắc Ký v2 hiện tại.
- MyLib tạm ngoài scope build hiện tại.
- Không tạo generic database editor cho arbitrary tables ngoài product-controlled registry.

3. Overview

- Overview là landing mặc định.
- Không KPI-dashboard hóa quá mức; mục tiêu là control health và navigation.
- Hiển thị Reference Data health, Asset health, Runtime Rules status, User Data counts, Recent Changes và Warnings.

- Quick actions dẫn vào đúng domain; Overview không sở hữu mutation logic riêng.
- Warnings ưu tiên missing config, missing asset, draft config chưa publish, failed integrity checks và reset/backup concerns.

4. Data Studio — Reference & Shared Entity Management

4.1 Entity registry

- Data Studio chỉ quản entity types đã được product đăng ký rõ ràng.
- Mỗi entity type có schema, validation, usage/dependency metadata, import/export contract và snapshot policy.
- Table hỗ trợ search/filter, Active/Inactive, pagination hoặc bounded virtualization, selection và quick actions.
- Click row mở detail drawer; không bắt user đổi page cho mọi edit nhỏ.

4.2 Basic Mode

- Chỉ expose fields có ý nghĩa với product owner: tên, label, emoji/icon, family/group, color, description, active, display order.
- Cho phép inline edit với field đơn giản; field phức tạp mở detail drawer.
- Drag/drop reorder ở Basic Mode.
- Active/Inactive phải có semantics rõ: deactivate chỉ chặn usage mới, không phá historical snapshots.

4.3 Advanced Mode

- Expose internal ID, code, sort_order numeric, aliases, external mapping key, metadata JSON, timestamps, version, source, dependency counters.
- Advanced Mode toggle không bypass validation/domain invariants.
- Preference persisted per owner.
- Các field system-owned/locked phải read-only kể cả Advanced Mode nếu không an toàn để edit.

5. Historical Snapshot vs Live Reference

Canonical rule
Historical meaning is frozen. Operational behavior stays live.

5.1 Snapshot historical meaning

- Tên/label/emoji/color/description có tính ký ức hoặc presentation identity tại thời điểm ghi nhận nên snapshot nếu module cần bảo toàn lịch sử.
- Ví dụ Check-in cũ không tự đổi emotion name/color chỉ vì Admin sửa reference record hiện tại.
- Future Letter envelope/seal và Gift box asset phải snapshot version/identity khi commit để historical item không đổi hình về sau.

5.2 Live operational fields

- active/inactive
- sort_order
- search aliases
- recommendation weight
- config-driven limits và eligibility rules
- mapping availability cho future mutations

5.3 Grandfathering

- Config mới không retroactively invalid dữ liệu cũ.
- Ví dụ Diary max prompts 6 → 4: Diary đã có 6 vẫn giữ 6; mutation mới không được vượt limit 4.
- Ví dụ Check-in max active Actions 2 → 1: Check-in hiện đang có 2 không bị auto-delete; user không thể thêm Action mới cho đến khi usage trở về ≤1.

6. Used By & Dependency Graph

- Mỗi shared entity/config phải có Used By view nếu có dependency metadata.

- Show counts theo module và drill-down danh sách usage.
- Dependency graph phải dùng registry/metadata thật, không hardcode text chỉ để minh họa.
- Deactivate/Delete/Publish phải gọi dependency service để tính impact.
- Record đã được dùng → không hard delete; Deactivate + warning.
- Record chưa từng dùng và không dependency → delete eligible.

```
Dependency example
Emotion E017
├── Check-ins: 142
├── Diary: 17
├── Future Letter trigger rules: 3
├── Action suggestions: 8
└── Gift Message attachments: 4
```

7. Bulk Import / Export

7.1 Formats

- CSV và TSV là first-class import/export formats.
- TSV đặc biệt quan trọng cho workflow Excel/reference-data hiện tại.
- Import không được overwrite DB ngay khi upload.

7.2 Import pipeline

```
Upload
→ Parse
→ Detect entity type / mapping
→ Preview rows
→ Validate schema & domain constraints
→ Classify: New / Update / Conflict / Error / Skip
→ Review changes
→ Apply
→ Result summary
```

- Show row-level validation errors.
- Cho tải file lỗi/result khi cần.
- Upsert behavior phải explicit, không suy luận nguy hiểm.
- Import phải dùng cùng validation/domain service như manual edits.
- Import config/reference mutations phải tạo Audit Log.

8. Bulk Operations & Reorder

- Bulk activate/deactivate.
- Move family/group nếu schema cho phép.
- Export selected.
- Delete only eligible unused records.
- Drag-and-drop reorder in Basic Mode; numeric sort_order in Advanced Mode.
- Sau reorder, normalize sort_order deterministic.
- Bulk mutation phải show preview/confirmation khi impact đáng kể.

9. Prompt Management + Preview

- Quản Diary prompts và Unknown Check-in prompts; không tạo prompt catalog không tồn tại trong product.
- Fields: prompt text, emoji, hex_color nếu entity có, active, sort_order, discriminator/module type.
- Preview consumer UI là optional but recommended; không được trở thành blocker nếu implementation quá nặng.
- Preview phải render từ same presentation primitives/config khi khả thi; tránh mock preview tách biệt hoàn toàn với consumer component.

10. Action Catalog

Action Catalog là kho suggestion/template để Check-in hoặc các flow liên quan gợi ý một bước hành động. Catalog item không phải canonical Action của user. Khi user chọn suggestion, system tạo một Action object thật trong Action Space.

- Fields v1: title, optional description, active, sort_order/weight, mapping applicability.
- Mapping có thể gồm Emotion, Emotion Family, Need, Context khi dữ liệu hiện có hỗ trợ.
- Không biến thành recommendation engine phức tạp nếu chưa cần.
- Suggested Action phải tạo canonical Action và tuân thủ same Action limits/linkage rules.

11. Action Reflection Outcomes

- Admin-managed fields: label, emoji/icon, semantic_group, active, sort_order.
- Semantic groups: positive / neutral / negative / other.
- Action insights dùng semantic_group, không string matching label.
- Deactivate outcome không làm mất historical reflection snapshot.

12. Rules & Runtime — Canonical Config Registry

Rules & Runtime quản những rule được phép cấu hình. Mỗi rule phải có key ổn định, type, scope, default, published value, draft value, configurability level, validation, dependency metadata và version history.

12.1 Configurability levels

- Editable — owner có thể draft/publish trong Basic Mode.
- Advanced-only — chỉ chỉnh khi Advanced Mode bật.
- Locked — hiển thị/readable nhưng không cho edit trong Admin Studio.

12.2 Config object

```
RuntimeConfig
- config_key
- module
- value_type
- scope
- default_value
- published_value
- draft_value?
- configurability_level
- validation_schema
- dependency_tags[]
- published_version
- effective_from
- updated_at
```

12.3 Representative rules

- Check-in: max secondary emotions, max needs, max contexts, max active Actions.
- Diary: max prompts, max images, one Diary/day semantics where safe to expose.
- Action Space: rhythm window and other approved operational settings.
- Future Letter: random chance (default 30%), max random letters/day, enabled trigger types, comparators, max groups/conditions.
- Gift for Tomorrow: daily limit, draft cutoff 23:30, delivery 03:00, Home expiry 23:30 — with configurability level chosen deliberately.

13. Config Lifecycle — Draft → Impact Review → Publish

```
CURRENT PUBLISHED
      ↓
CREATE / EDIT DRAFT
      ↓
VALIDATE
      ↓
IMPACT PREVIEW
      ↓
PUBLISH CONFIRMATION
      ↓
NEW PUBLISHED VERSION
      ↓
RUNTIME CONSUMERS READ NEW VERSION
      ↓
ROLLBACK = CREATE/PUBLISH A NEW VERSION FROM AN OLD VALUE
```

13.1 Save Draft

- Save Draft does not change runtime behavior.
- Draft can be revisited and compared to Published and Default.
- Reset to Default updates Draft; it does not silently publish.

13.2 Impact Preview

- Show current → draft value.

- List registered consumer systems/flows.
- Show data currently above/below new threshold and grandfather behavior.
- Show copy/scheduler/validation/automation dependencies where registered.
- Impact metadata should come from dependency registry, not manually duplicated UI text.

13.3 Publish

- Publish creates a new immutable config version.
- New value becomes canonical published value and all runtime consumers must read it.
- Effective time defaults immediately after successful publish unless a future effective-date capability is explicitly added.
- Publish success page shows version, scope, effective time and summary.

14. Runtime Consumer Contract — NO PARALLEL HARDCODE

P0 implementation rule
For every configurable key, locate and replace all business constants in UI, validation, repository/domain services, schedulers/jobs, Home projections, conversion flows and copy/countdown logic. A config field is not complete until these consumers call the canonical config service.

14.1 Example — Gift cutoff

```
BAD
Admin UI: gift.draft_cutoff_time = "23:00"
Gift editor validation: if now > 23:30  # hardcoded
cleanup job: cron 23:30                 # hardcoded
warning copy: "Draft xoá lúc 23:30"    # hardcoded

GOOD
published config = 23:00
↓
Gift editor eligibility reads config
cleanup scheduler/worker resolves config
warning/countdown derives from same config
Admin impact preview knows affected consumers
Audit/version records publication
```

14.2 Example — Diary max prompts

- Diary Editor max selection reads published config.
- Gift Question → Diary conversion reads same config.
- Diary import/validation reads same config.
- Existing Diary over new limit is grandfathered; no deletion.
- Admin Impact Preview shows number of existing entries exceeding draft limit.

14.3 Config caching

- Caching is allowed only with deterministic invalidation/version refresh after publish.
- Do not cache indefinitely in client constants.
- Consumers should be able to report effective config version for diagnostics.

15. Config Versions & Rollback

- Rules & Runtime maintains version history.
- Version shows value, change summary/note, actor, timestamp, status.
- Rollback should not mutate old version; it creates a new published version using selected historical value.
- Rollback itself appears in Audit Log.
- Restoring default similarly creates a normal version when published.

16. Asset Studio

16.1 Asset Registry

- Asset Studio is registry-driven, not a folder of hardcoded frontend imports.
- Supported domains include Future Letter envelope/seal, Gift box style, Home illustrations and future asset families.
- Fields: asset_id, type, name, preview, active, sort_order, metadata, provider, external_file_id/url, current version.
- Admin UI should offer Upload/Replace/Preview/Disable/Reorder/Mapping without requiring owner to understand storage provider internals.

16.2 Version & snapshot

- Replace asset creates a new asset version where historical identity must be preserved.
- Historical Future Letter/Gift must retain asset version snapshot selected at commit/seal/send time.
- Deactivating an asset removes it from new selection but does not break historical rendering.

16.3 Storage integration

- Provider integration may be Google Drive or another external store; use a provider abstraction.
- Do not fake public URLs.
- Admin should validate actual write/upload capability before claiming upload success.

17. User Data & Recovery

17.1 Export

- Export user-generated data in a portable format (e.g., JSON and/or agreed tabular exports).
- Export must not be confused with reference-data export.

17.2 Reset by module

- Check-in, Diary, Action Space, Future Letter, Gift for Tomorrow.
- Module reset must resolve dependencies safely and avoid orphan records.
- Reset preview shows counts and dependent consequences.
- Reference data, configs and assets remain intact unless explicitly stated otherwise.

17.3 Full Reset

- Full Reset deletes all user-generated logs/content across in-scope modules.
- Preserve schema/reference/config/assets.
- Show exact counts before delete.
- Require typed RESET confirmation.
- No Admin PIN.
- Post-reset summary shows deleted counts and errors if any.
- Reset mutation is audited.

18. Audit Log

- Record timestamp, actor, domain, entity/config/asset target, action, before, after, version where relevant.
- Filter by domain/action/date.
- Track reference edits, import applies, config draft/publish/rollback, asset upload/replace, module reset, full reset.
- Audit Log is operational traceability, not compliance-grade immutable ledger in v1.
- Do not store raw sensitive user journal content in audit diff when not necessary; prefer IDs/counts/metadata for destructive ops.

19. Access, Safety & Validation

- Admin Studio v1 is accessible only to the owner account.
- No Admin PIN flow.
- All mutations are server/domain-authorized; hiding UI is not security.
- Advanced Mode is not an authorization boundary; it is an experience mode.
- Dangerous edits require domain validation even in Advanced Mode.
- Destructive/reset routes must be explicit and idempotency-aware where practical.

20. UX / Visual System

- Follow Sắc Ký v2 canonical Soft Editorial Color System.
- Admin Studio may be denser than consumer modules, but must not become generic enterprise CRUD/Supabase/Airtable clone.
- Basic Mode should feel understandable to a product owner without DB knowledge.
- Advanced Mode may use subtle indigo/slate system cues but stay in same shell.
- Use drawer for entity detail; tables are clean with strong whitespace; avoid card-inside-card overload.
- Global violet remains navigation/action accent; semantic status colors are allowed.
- Desktop/MacBook-first.

21. Canonical Screen Inventory

ID	Screen	Purpose
AS01	Overview	Control health, recent changes, warnings, quick entry
AS02	Data Studio / Entity Browser	Reference registry table, filters, search, selection
AS03	Entity Detail / Basic Mode	Business-friendly entity edit drawer
AS04	Entity Detail / Advanced Mode	IDs, metadata, version/system fields
AS05	Used By & Dependencies	Usage counts, downstream impact, drill-down
AS06	Bulk Import CSV/TSV	Upload, preview, validate, classify, apply
AS07	Bulk Operations & Reorder	Activate/deactivate, move, export, reorder
AS08	Prompt Management + Preview	Prompt editor and optional consumer preview
AS09	Action Catalog	Suggestion/template management and mappings
AS10	Rules & Runtime	Config registry and configurability level
AS11	Config Draft Editor	Published vs Draft vs Default
AS12	Config Versions & Rollback	Version history and restore-as-new-version
AS13	Asset Studio	Asset registry, mapping, status and versions
AS14	User Data & Recovery	Counts, export, module reset, danger zone
AS15	Impact Preview / Review Changes	Dependency impact before publish
AS16	Publish Confirmation + Success	Publish confirmation/result/version
AS17	Full Reset Confirmation	Typed RESET + exact deletion counts
AS18	Asset Upload / Replace	Upload/replace/version/preview workflow
AS19	Audit Log	Trace admin mutations

22. Implementation Architecture Recommendation

```
Admin UI
  ↓
Admin Domain Services
  ├── ReferenceDataService
  ├── DependencyRegistryService
  ├── ConfigDraftService
  ├── ConfigPublishService
  ├── ConfigRuntimeService
  ├── AssetRegistryService
  ├── UserDataRecoveryService
  └── AuditService
        ↓
Repositories / Supabase
        ↓
Runtime Consumers
  ├── Check-in
  ├── Diary
  ├── Action Space
  ├── Future Letter
  ├── Gift for Tomorrow
  └── Home projections
```

- Avoid Admin-specific duplicated business rules.
- Admin and consumer flows share canonical validation/config/domain services.
- Dependency registry should be code/config declared centrally so Impact Preview and Used By are trustworthy.
- Published config version should be observable for debugging/acceptance tests.

23. Required Tests & Acceptance

☐ Advanced Mode preference persists.
☐ Used record cannot hard-delete; unused record can delete.
☐ Deactivate does not rewrite historical snapshots.
☐ Bulk import preview does not mutate data.
☐ Import validation and manual edit use same domain validation.
☐ Drag reorder normalizes sort_order.
☐ Prompt editor persists emoji/hex/type/sort/active correctly.
☐ Action Catalog suggestion creates canonical user Action when selected in consumer flow.
☐ Reflection semantic_group drives Action insight grouping.
☐ Save Config Draft does not change runtime behavior.
☐ Impact Preview lists registered consumers and grandfathered data.
☐ Publish creates new immutable config version.
☐ All runtime consumers use newly published config without parallel hardcode.
☐ Rollback creates another published version; old version remains immutable.
☐ Reset to Default follows Draft→Publish lifecycle.
☐ Asset replacement creates version and historical snapshots remain stable.
☐ Asset deactivation blocks new selection but does not break old entries.
☐ Module reset handles dependencies without orphans.
☐ Full Reset preserves reference/config/assets and deletes user-generated records.
☐ Full Reset requires typed RESET.
☐ Audit Log captures reference/config/asset/reset mutations.
☐ No user-facing database/migration/debug text.
☐ Lint/tests/build pass.
☐ Authenticated browser screenshots captured for AS01-AS19 core states.

24. Suggested Codex Build Slices

Slice 1 — Admin Shell & Registry

- owner guard
- Overview
- Admin navigation
- Advanced Mode preference

Slice 2 — Data Studio

- entity registry
- table/detail drawer
- activate/deactivate/delete eligibility
- snapshot/live policy

Slice 3 — Dependency + Import/Export

- Used By
- dependency registry
- CSV/TSV preview/validation/apply
- bulk ops/reorder

Slice 4 — Prompt / Action / Reflection Admin

- prompt management
- Action Catalog
- reflection outcomes

Slice 5 — Config Control Plane

- config registry
- Draft editor
- Impact Preview
- Publish
- Runtime service

Slice 6 — Versioning / Rollback

- config versions
- restore as new version
- default reset

Slice 7 — Asset Studio

- registry
- upload/replace
- version snapshot
- provider abstraction

Slice 8 — User Data & Recovery

- export
- module reset
- full reset
- dependency-safe cleanup

Slice 9 — Audit + Hardening

- audit log
- auth/access
- errors
- responsive desktop
- tests
- visual acceptance

25. Explicit Do-Not Rules for Codex

- Do not hardcode a consumer value that Admin Studio exposes as configurable.
- Do not create config UI without wiring runtime consumers.
- Do not make Save Draft immediately effective.
- Do not retroactively rewrite historical user meaning when reference labels/colors change.
- Do not hard-delete reference records that have historical usage.
- Do not replace existing valid DB architecture just to match mockup labels.
- Do not expose raw Supabase/database errors in user-facing Admin UI.
- Do not implement Admin Studio as arbitrary direct table editor.
- Do not commit until authenticated visual acceptance and tests pass.


26. Definition of Done

- AS01-AS19 core flows exist or are explicitly phased with no fake UI.
- Reference Data, Dependency, Import/Export, Prompt, Action Catalog and Reflection admin work end-to-end.
- Rules & Runtime implements Published→Draft→Impact→Publish→Version/Rollback.
- Every exposed config has real runtime consumers wired to canonical ConfigRuntimeService.
- Grandfather semantics protect historical valid data.
- Asset registry/versioning protects historical visual identity.
- User Data module reset/full reset works safely.
- Audit Log traces admin changes.
- Advanced Mode preference persists.
- Visual language matches Sắc Ký shell while allowing higher information density.
- Lint/tests/build + authenticated desktop screenshots pass.
- No commit until owner approval.

27. Visual Authority Appendix — Pack 1


Mỗi screen sau là một visual reference riêng. Dữ liệu minh họa trong ảnh không phải source of truth.

AS01 — Overview

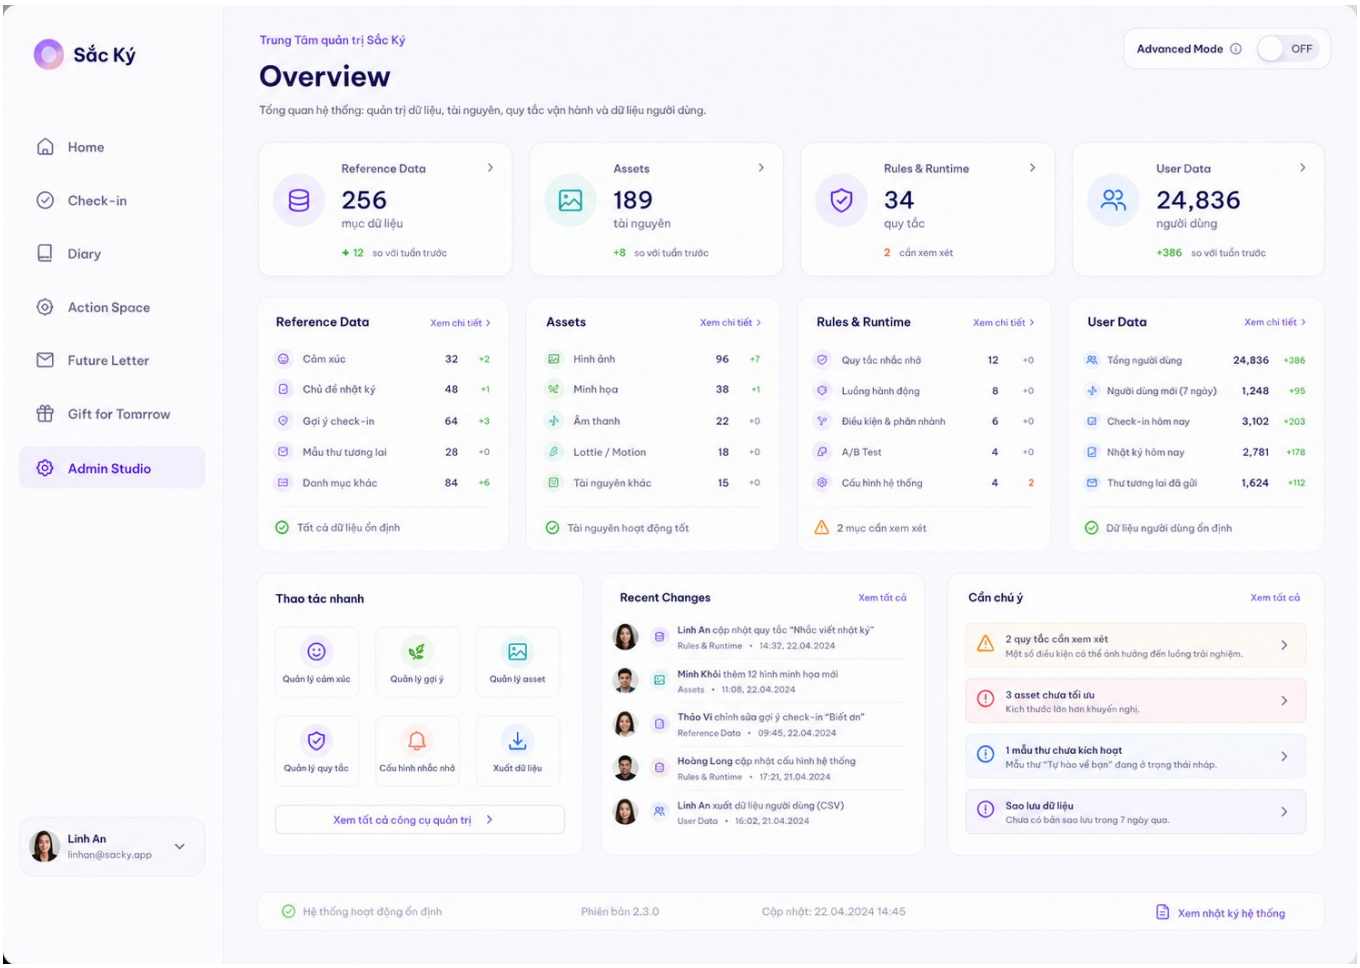


Visual authority — desktop. Follow layout intent, density, hierarchy and interaction pattern. Illustrative data/text in mockup is not runtime source of truth.

AS02 — Data Studio / Entity Browser

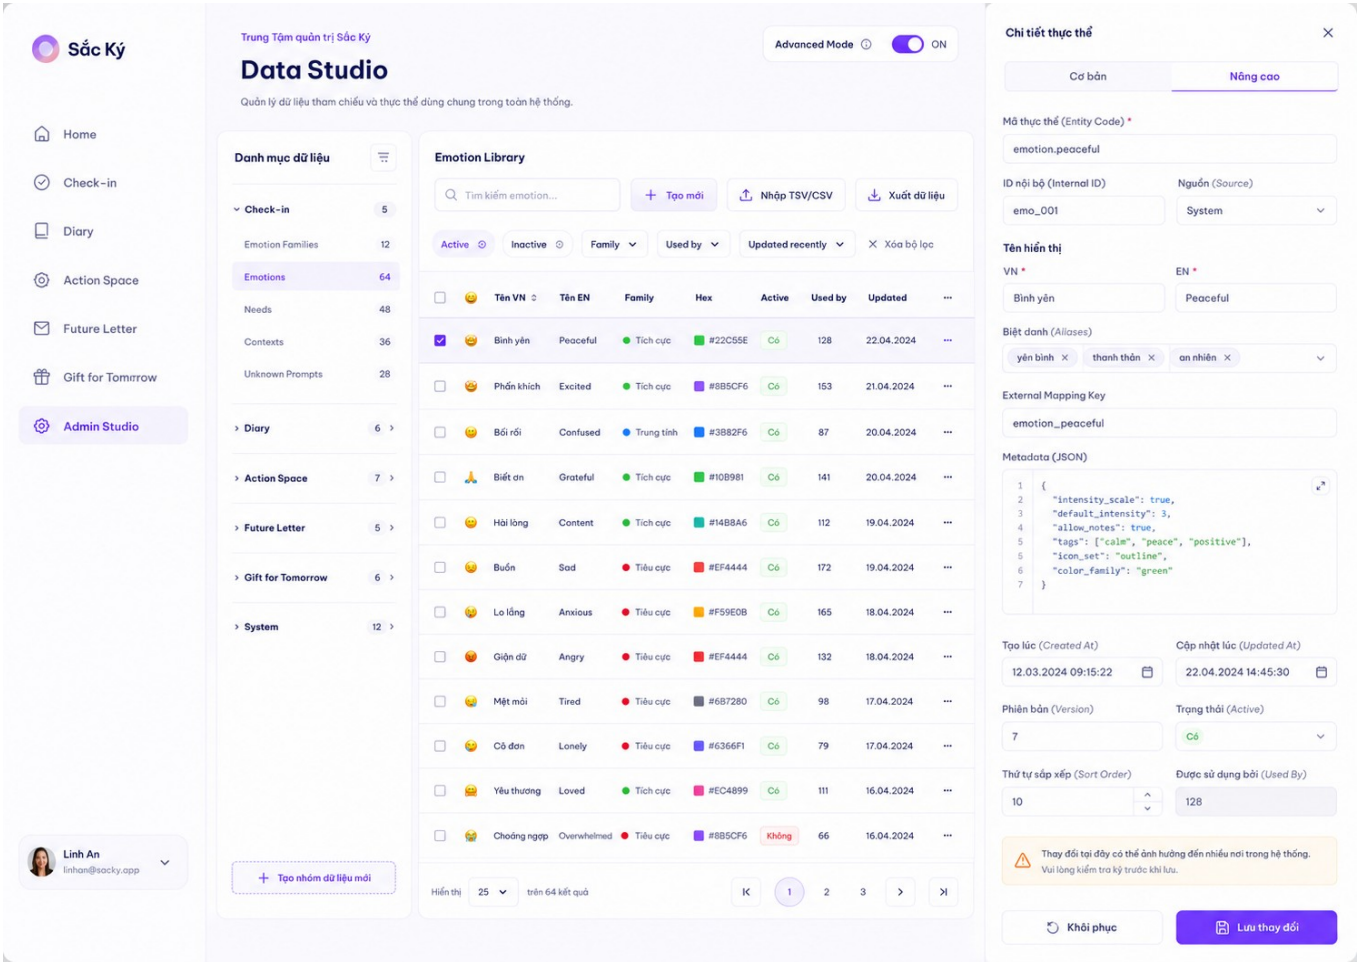


Visual authority — desktop. Follow layout intent, density, hierarchy and interaction pattern. Illustrative data/text in mockup is not runtime source of truth.

AS03 — Entity Detail / Basic Mode

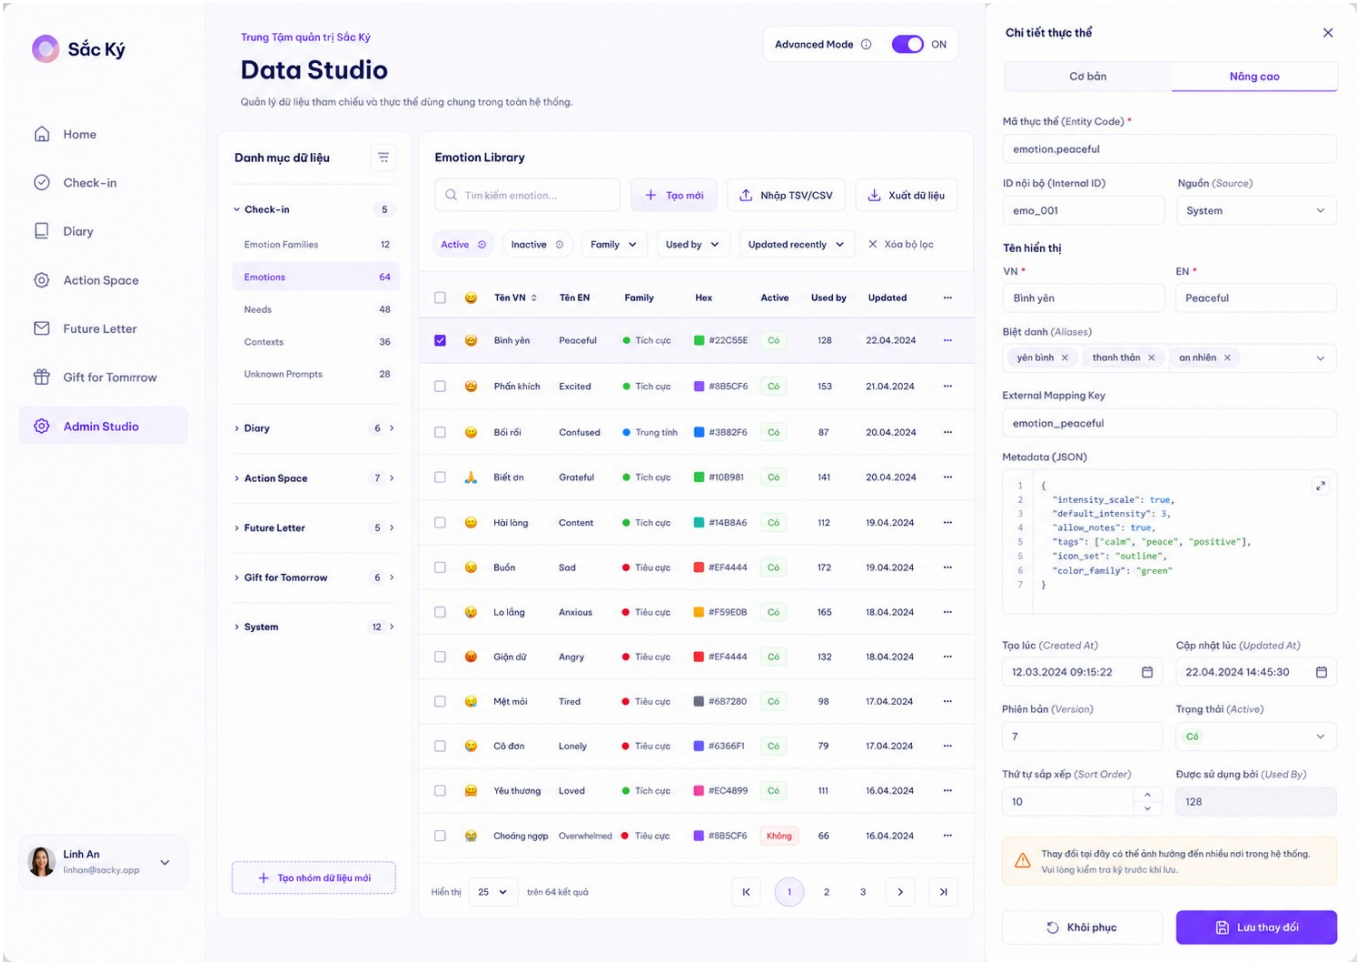


Visual authority — desktop. Follow layout intent, density, hierarchy and interaction pattern. Illustrative data/text in mockup is not runtime source of truth.

AS04 — Entity Detail / Advanced Mode

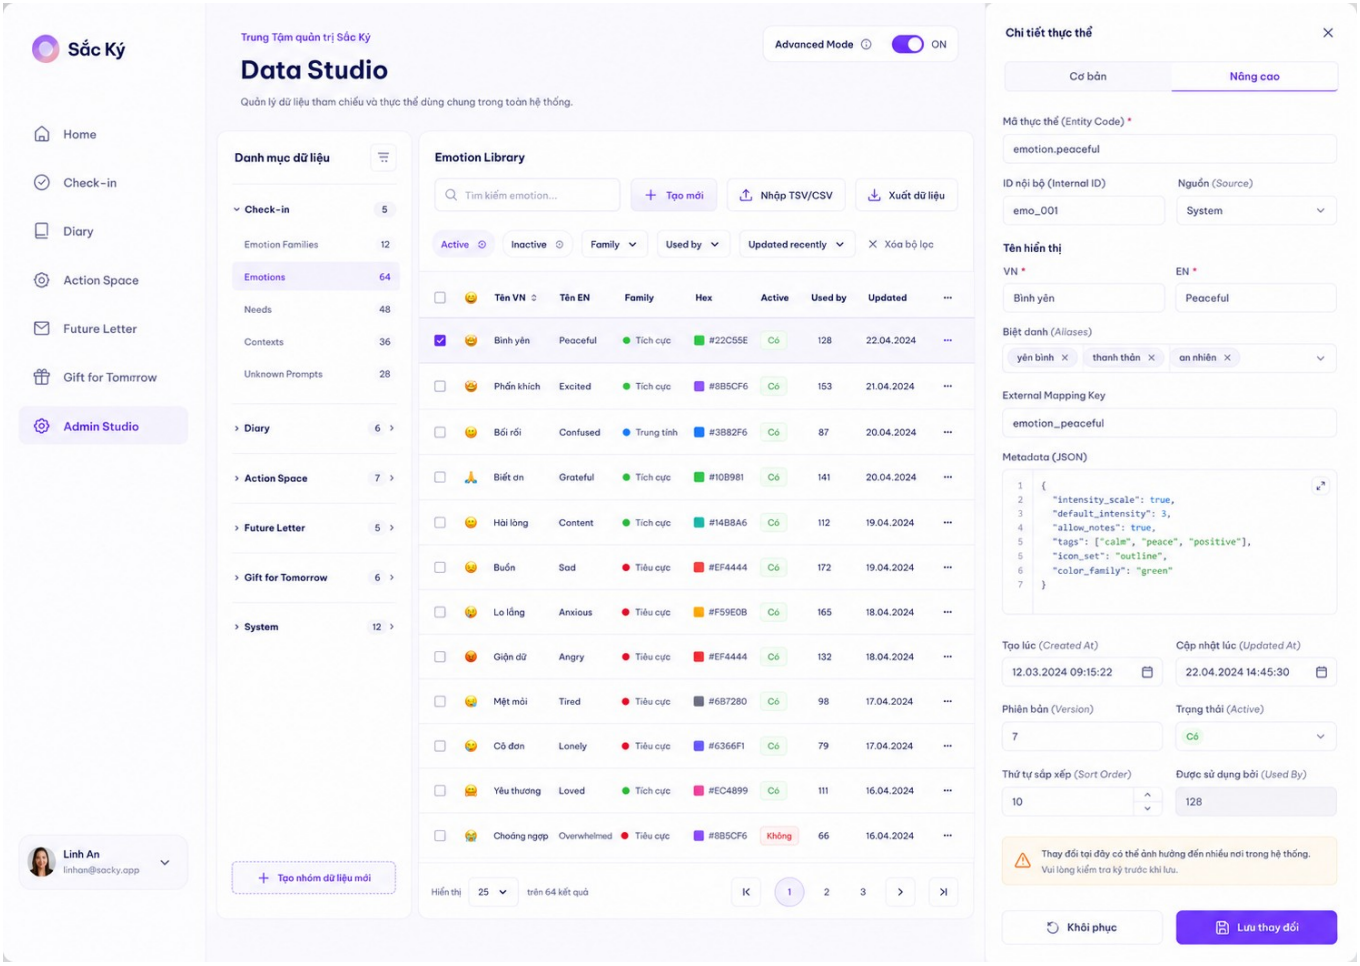


Visual authority — desktop. Follow layout intent, density, hierarchy and interaction pattern. Illustrative data/text in mockup is not runtime source of truth.

AS05 — Used By & Dependencies

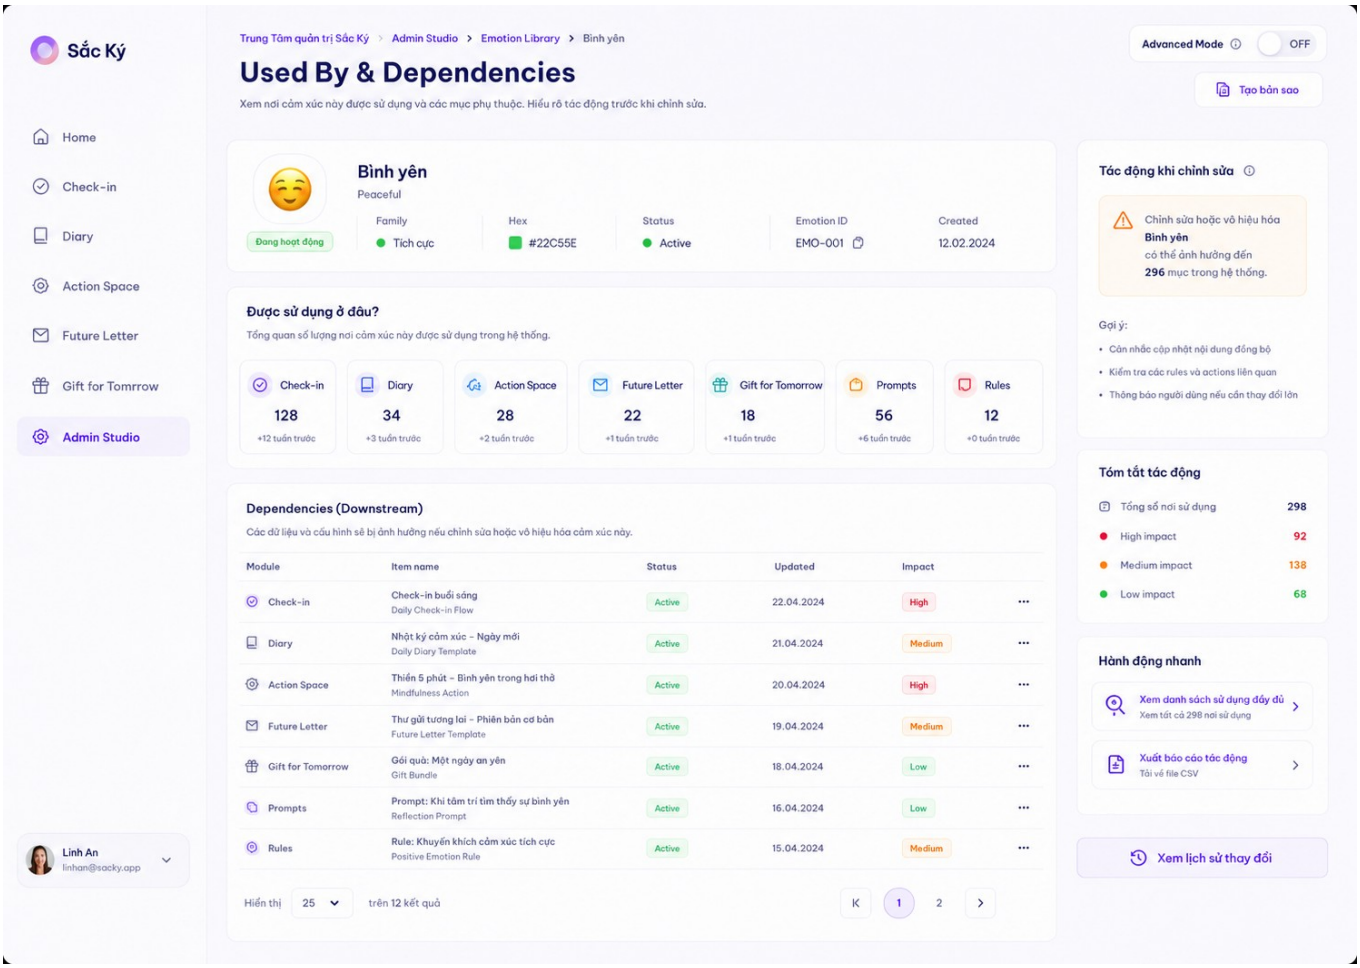


Visual authority — desktop. Follow layout intent, density, hierarchy and interaction pattern. Illustrative data/text in mockup is not runtime source of truth.

AS06 — Bulk Import CSV/TSV

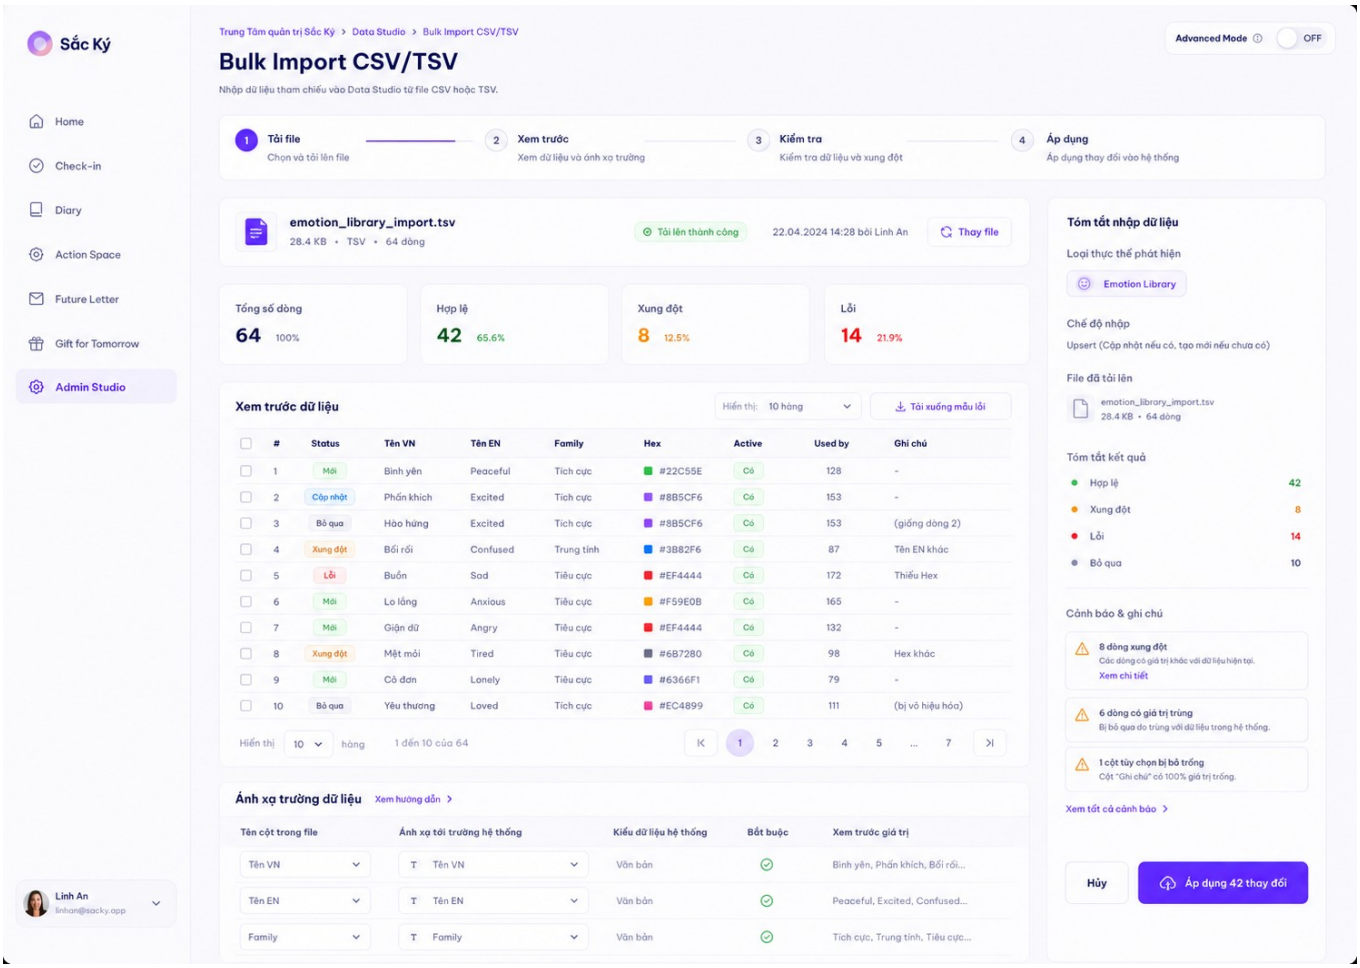


Visual authority — desktop. Follow layout intent, density, hierarchy and interaction pattern. Illustrative data/text in mockup is not runtime source of truth.

AS07 — Bulk Operations & Reorder

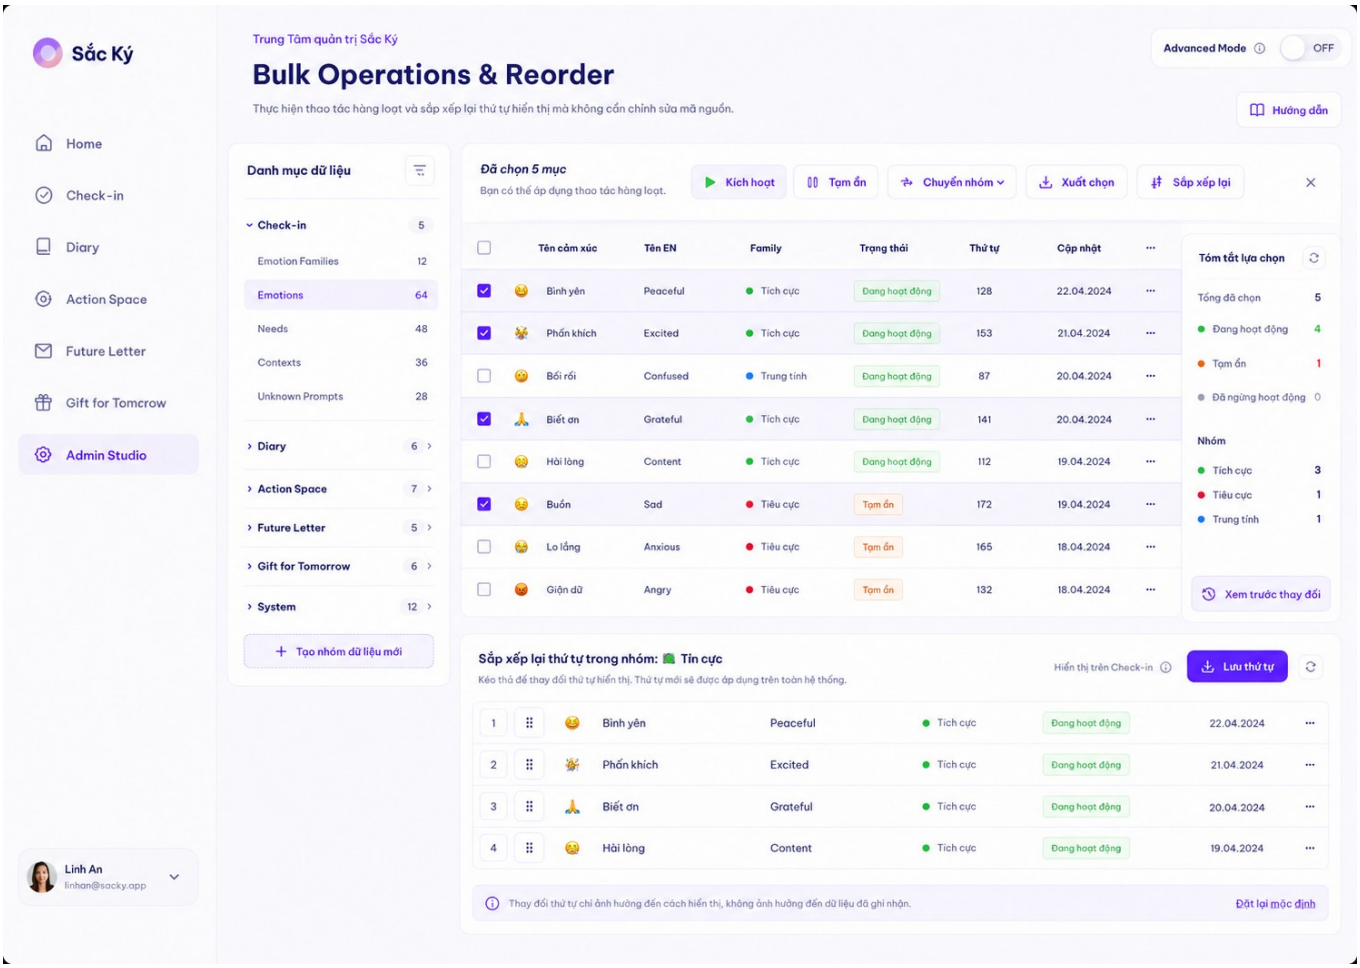


Visual authority — desktop. Follow layout intent, density, hierarchy and interaction pattern. Illustrative data/text in mockup is not runtime source of truth.

AS08 — Prompt Management + Preview

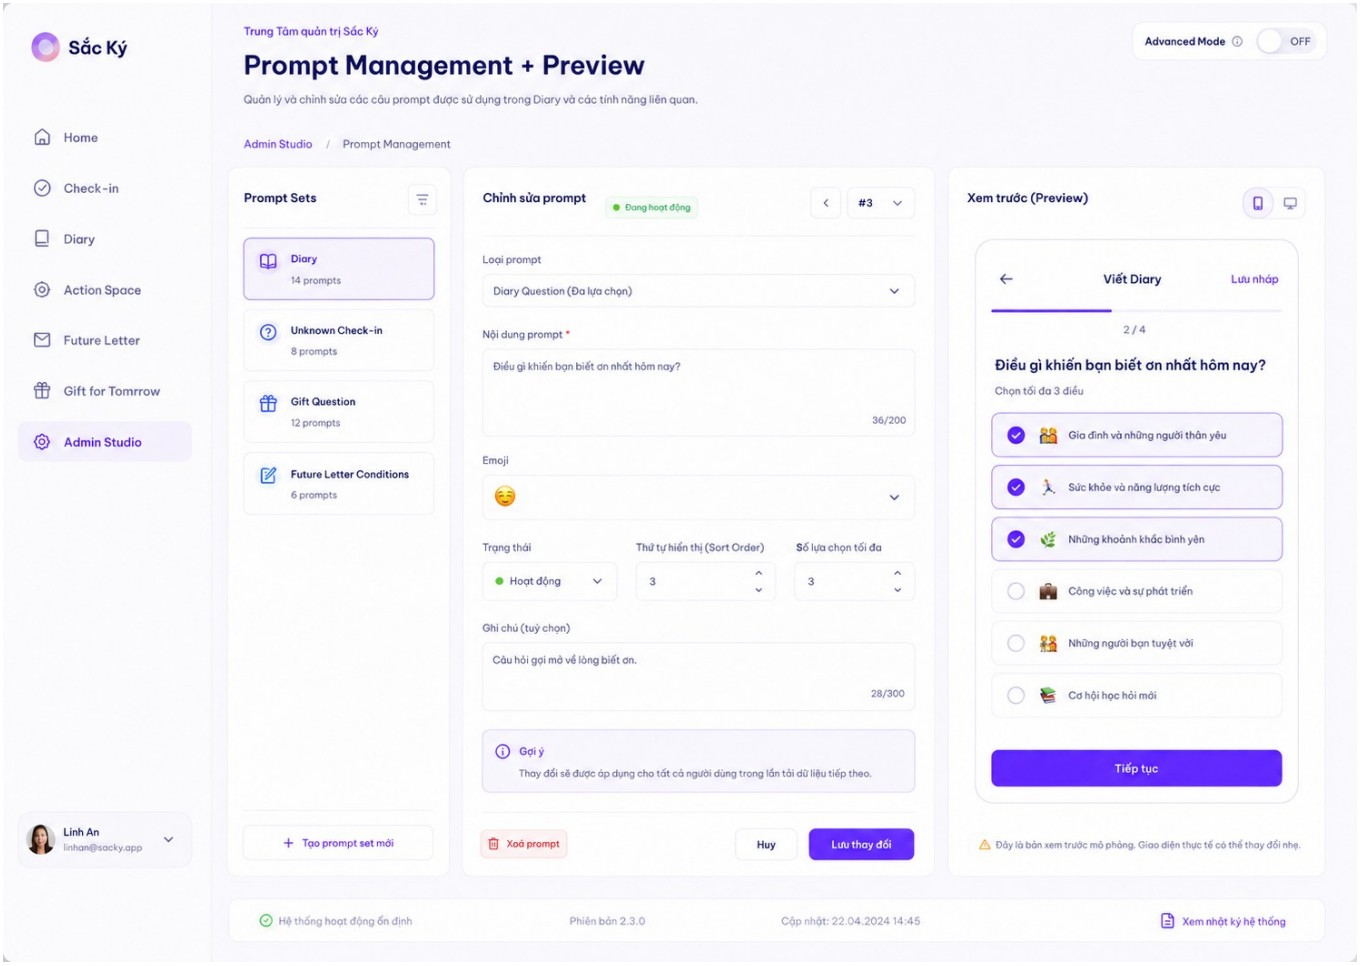


Visual authority — desktop. Follow layout intent, density, hierarchy and interaction pattern. Illustrative data/text in mockup is not runtime source of truth.

AS09 — Action Catalog

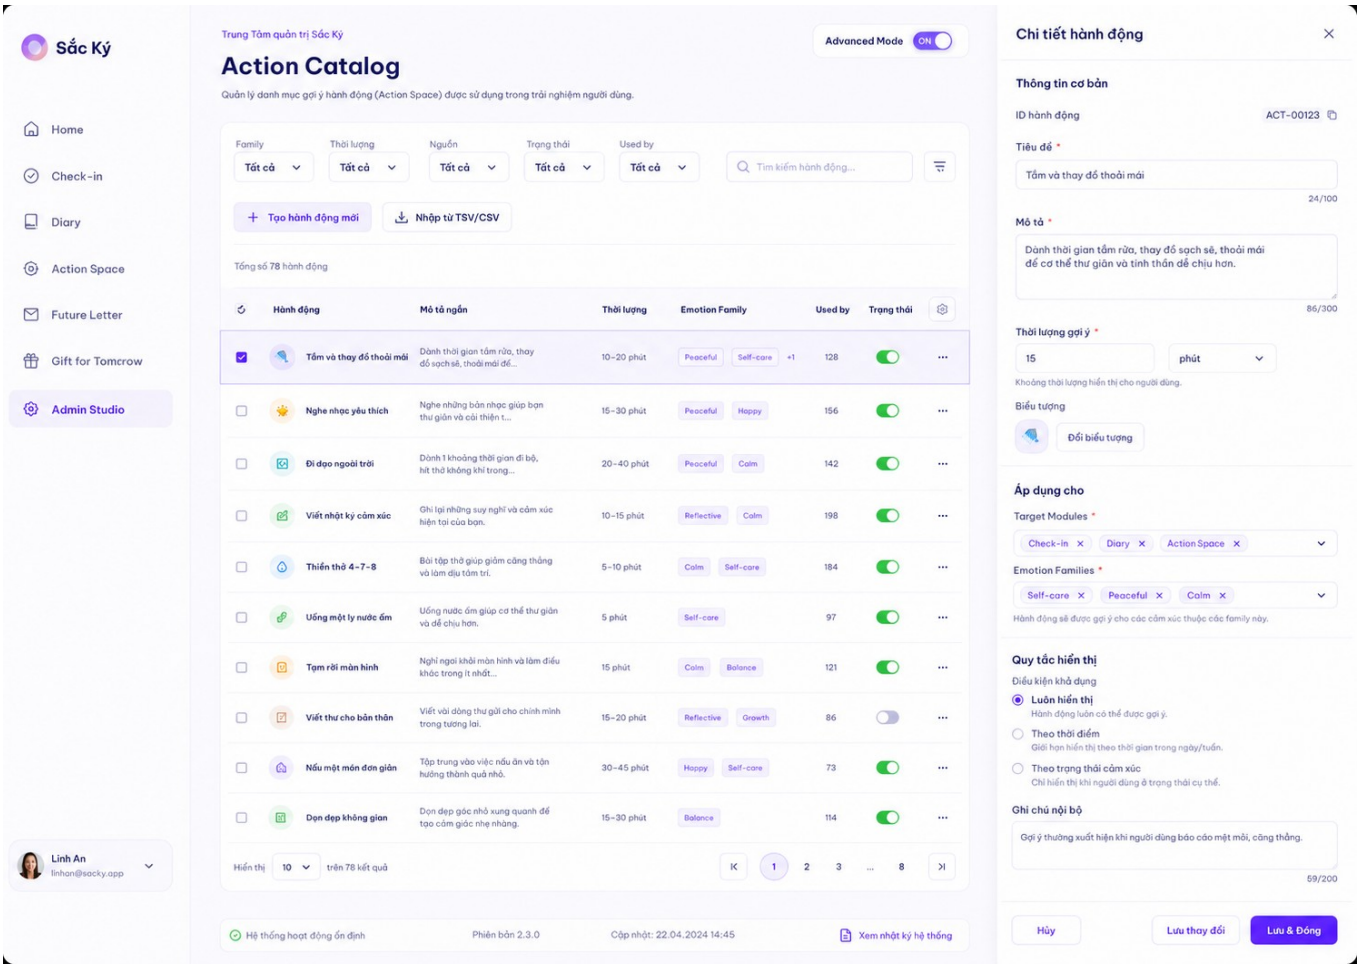

Visual authority — desktop. Follow layout intent, density, hierarchy and interaction pattern. Illustrative data/text in mockup is not runtime source of truth.

AS10 — Rules & Runtime

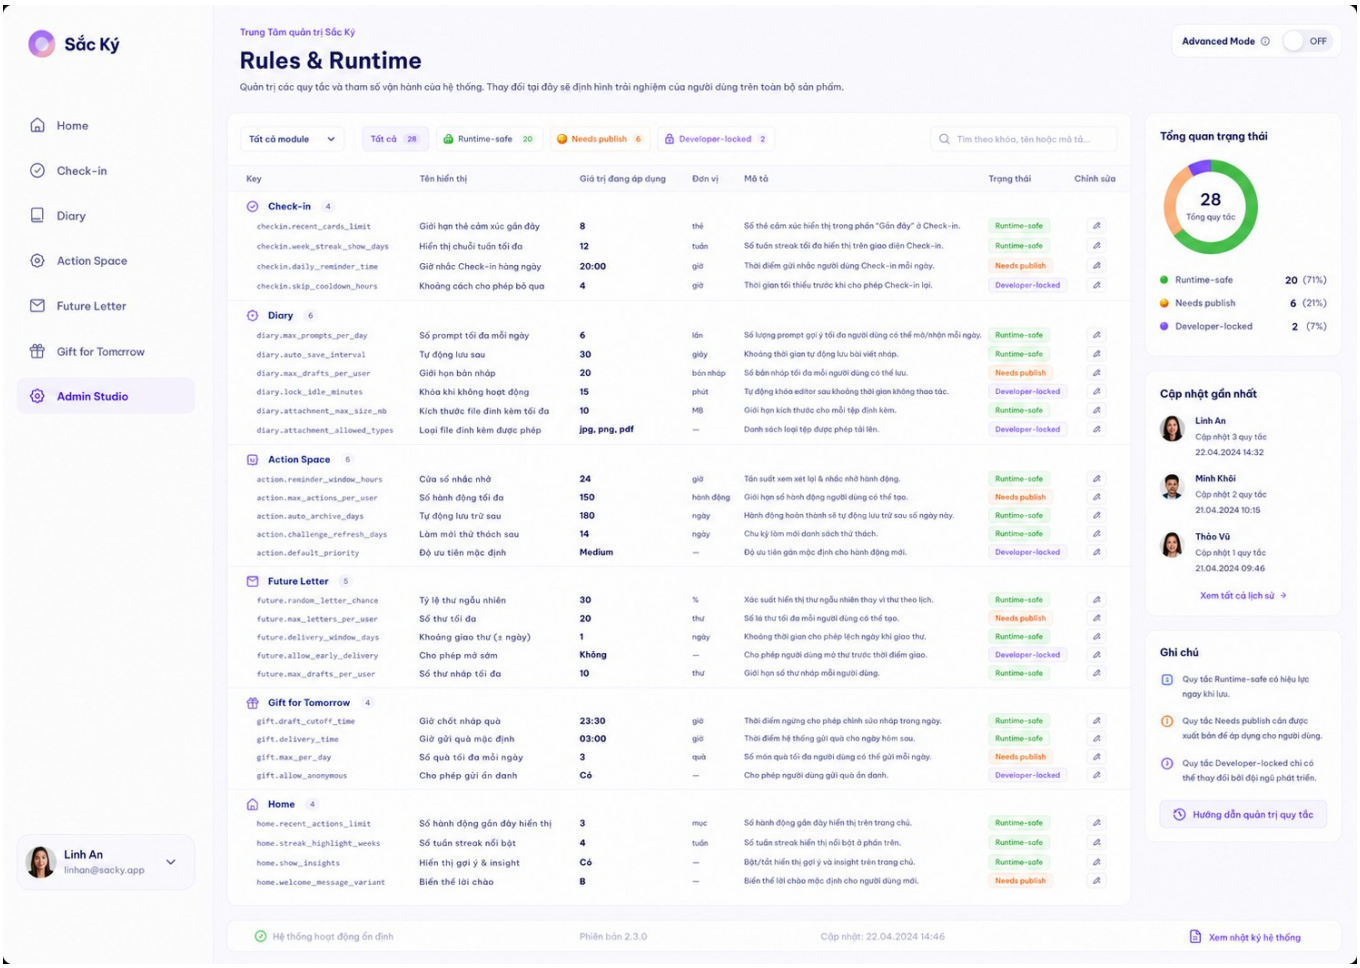


Visual authority — desktop. Follow layout intent, density, hierarchy and interaction pattern. Illustrative data/text in mockup is not runtime source of truth.

28. Visual Authority Appendix — Pack 2


Pack 2 tập trung vào config lifecycle, assets, recovery và audit.

AS11 — Config Draft Editor

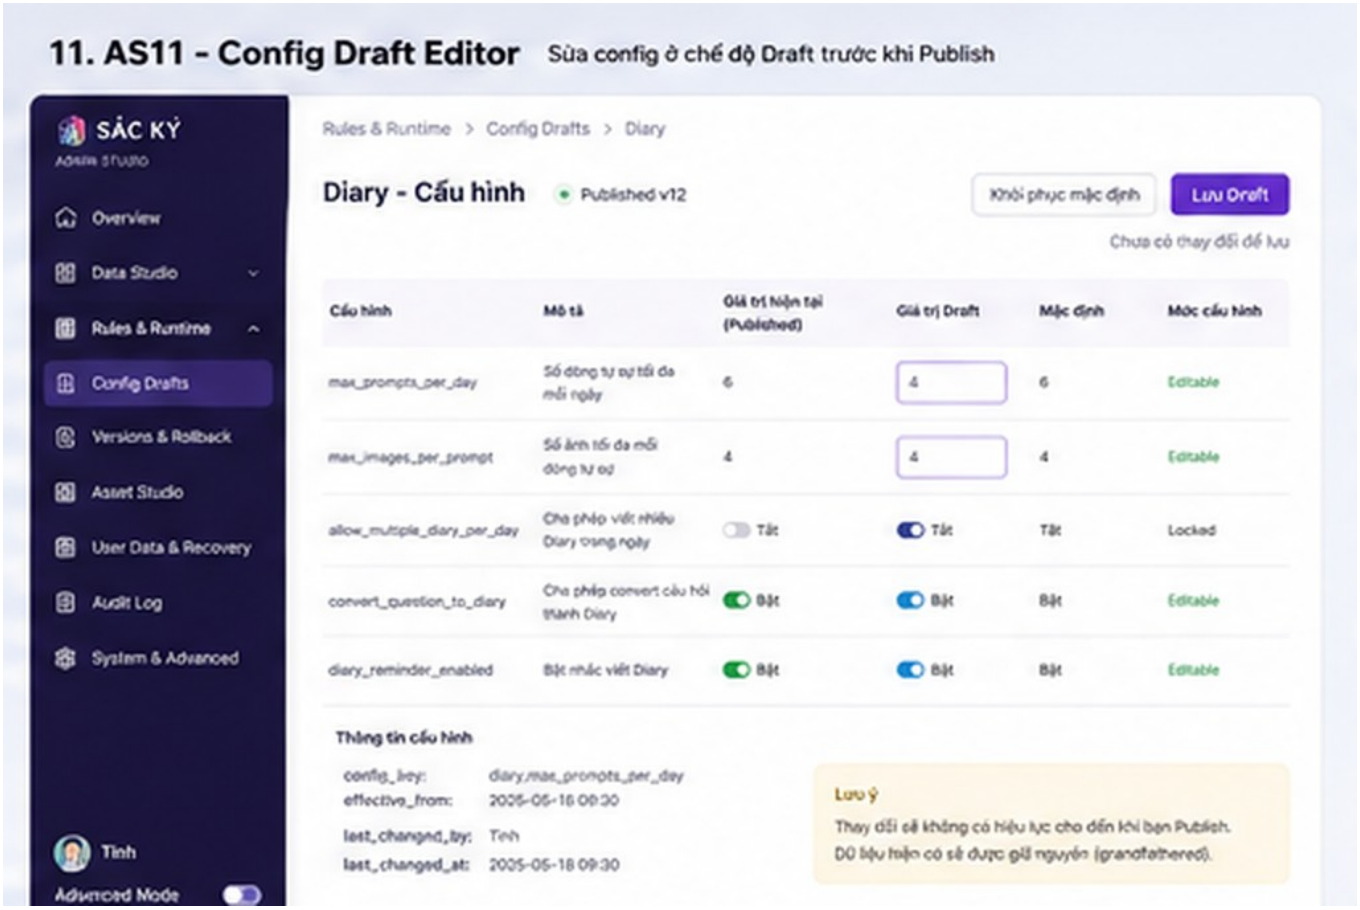


Visual authority — desktop. Follow layout intent, density, hierarchy and interaction pattern. Illustrative data/text in mockup is not runtime source of truth.

AS12 — Config Versions & Rollback

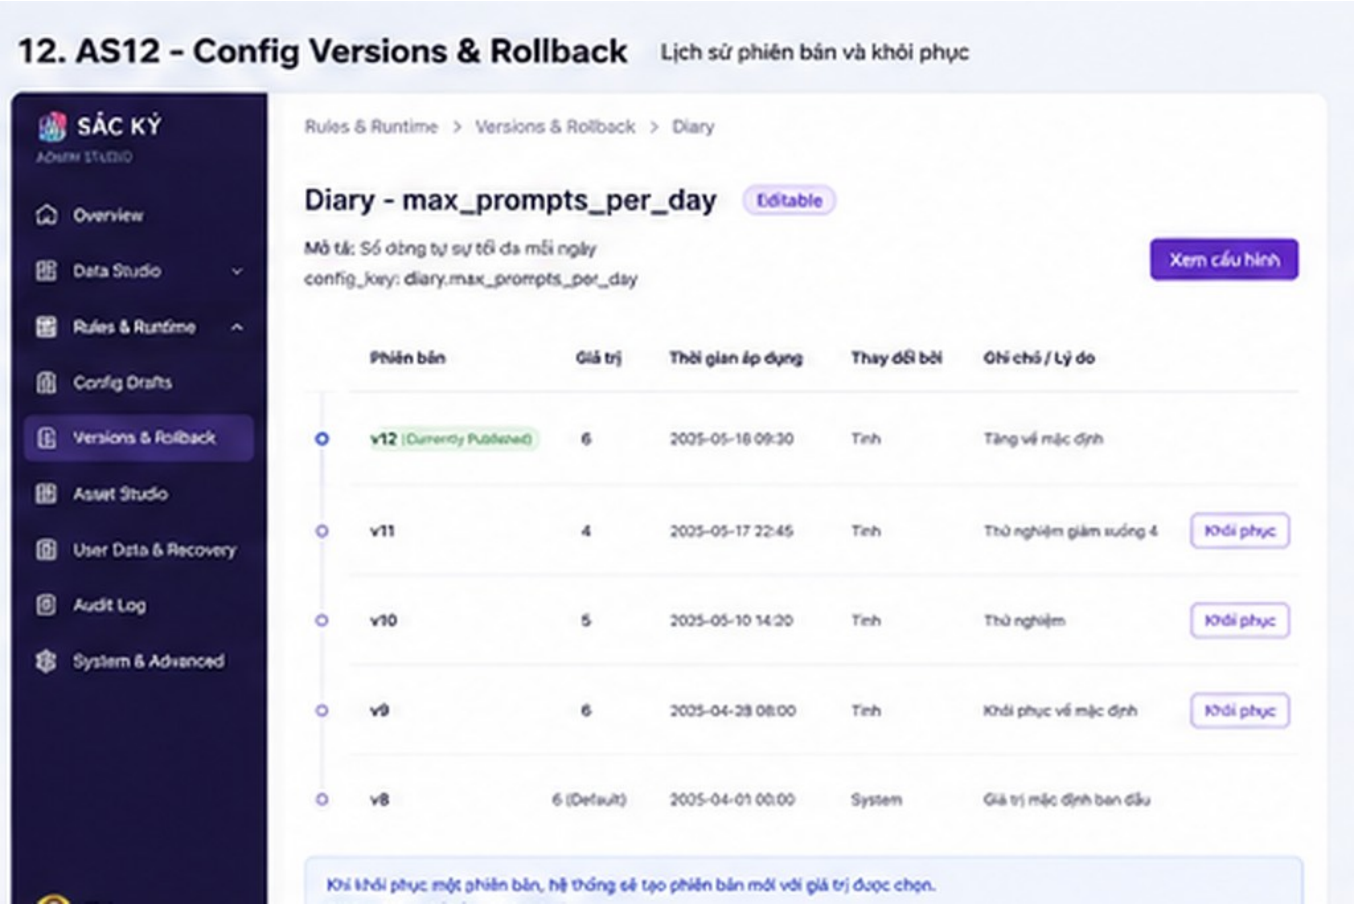


Visual authority — desktop. Follow layout intent, density, hierarchy and interaction pattern. Illustrative data/text in mockup is not runtime source of truth.

AS13 — Asset Studio

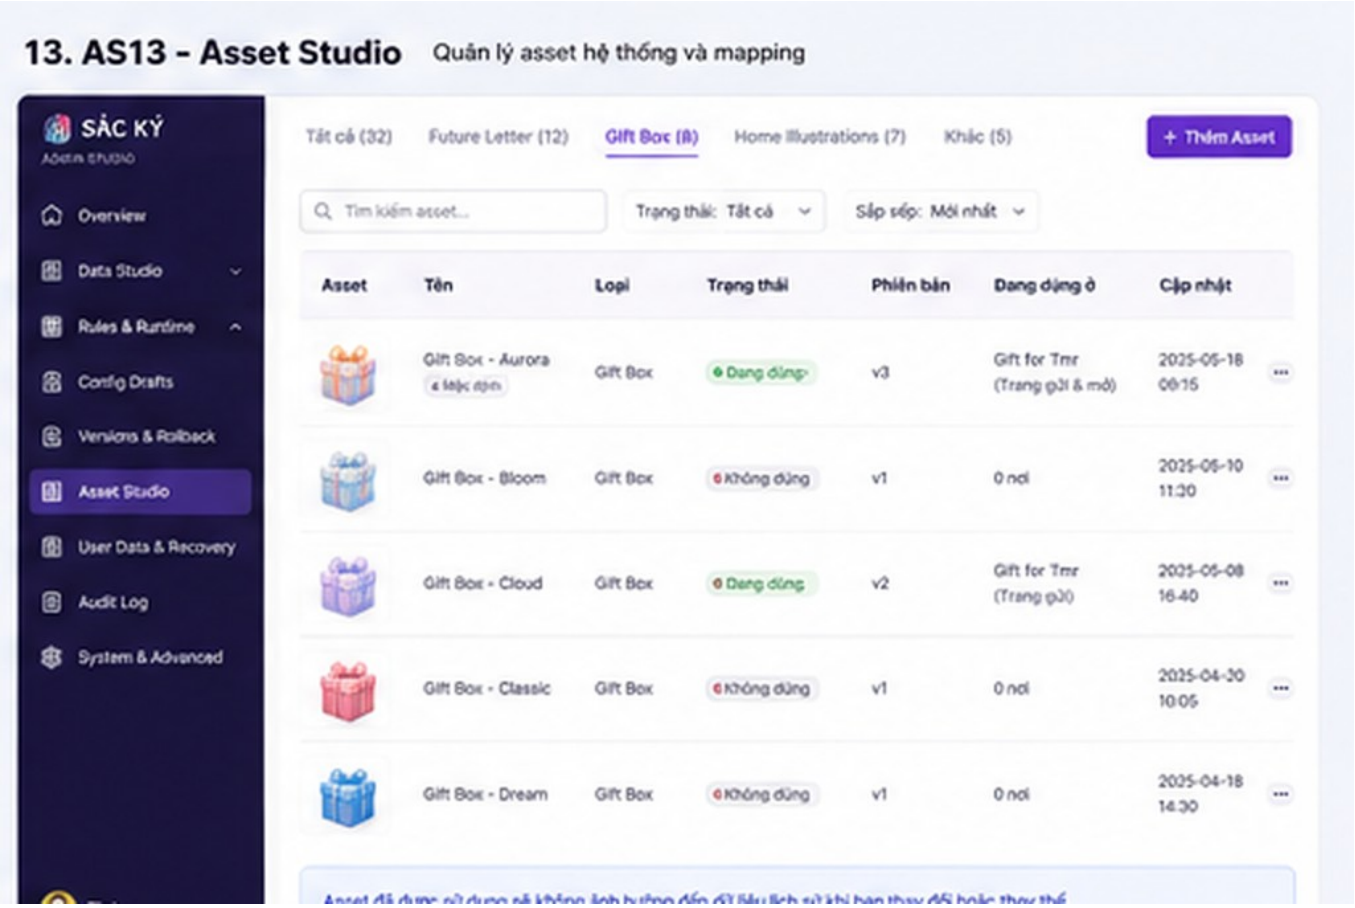


Visual authority — desktop. Follow layout intent, density, hierarchy and interaction pattern. Illustrative data/text in mockup is not runtime source of truth.

AS14 — User Data & Recovery

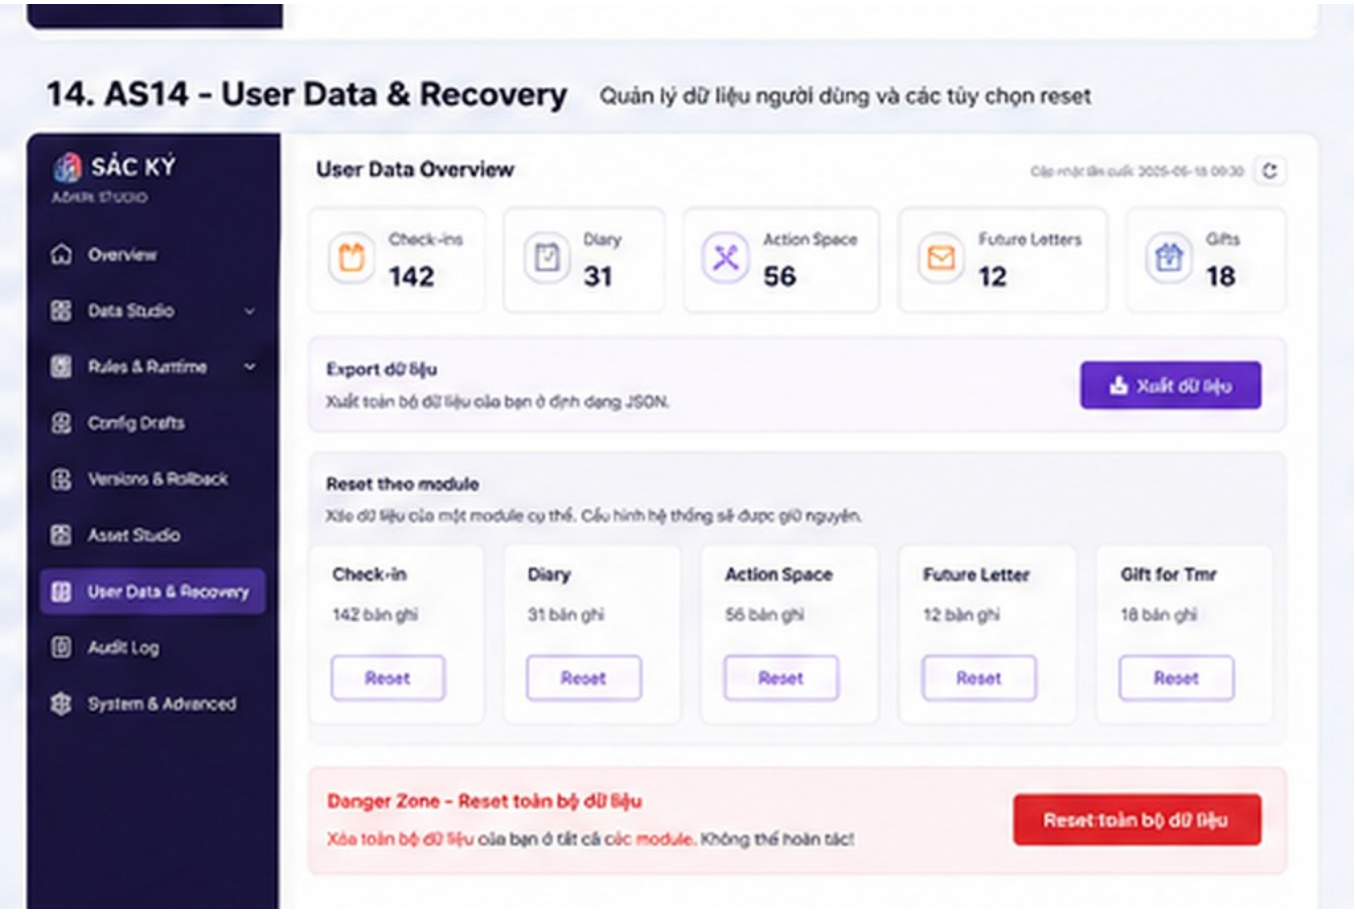


Visual authority — desktop. Follow layout intent, density, hierarchy and interaction pattern. Illustrative data/text in mockup is not runtime source of truth.

AS15 — Impact Preview / Review Changes

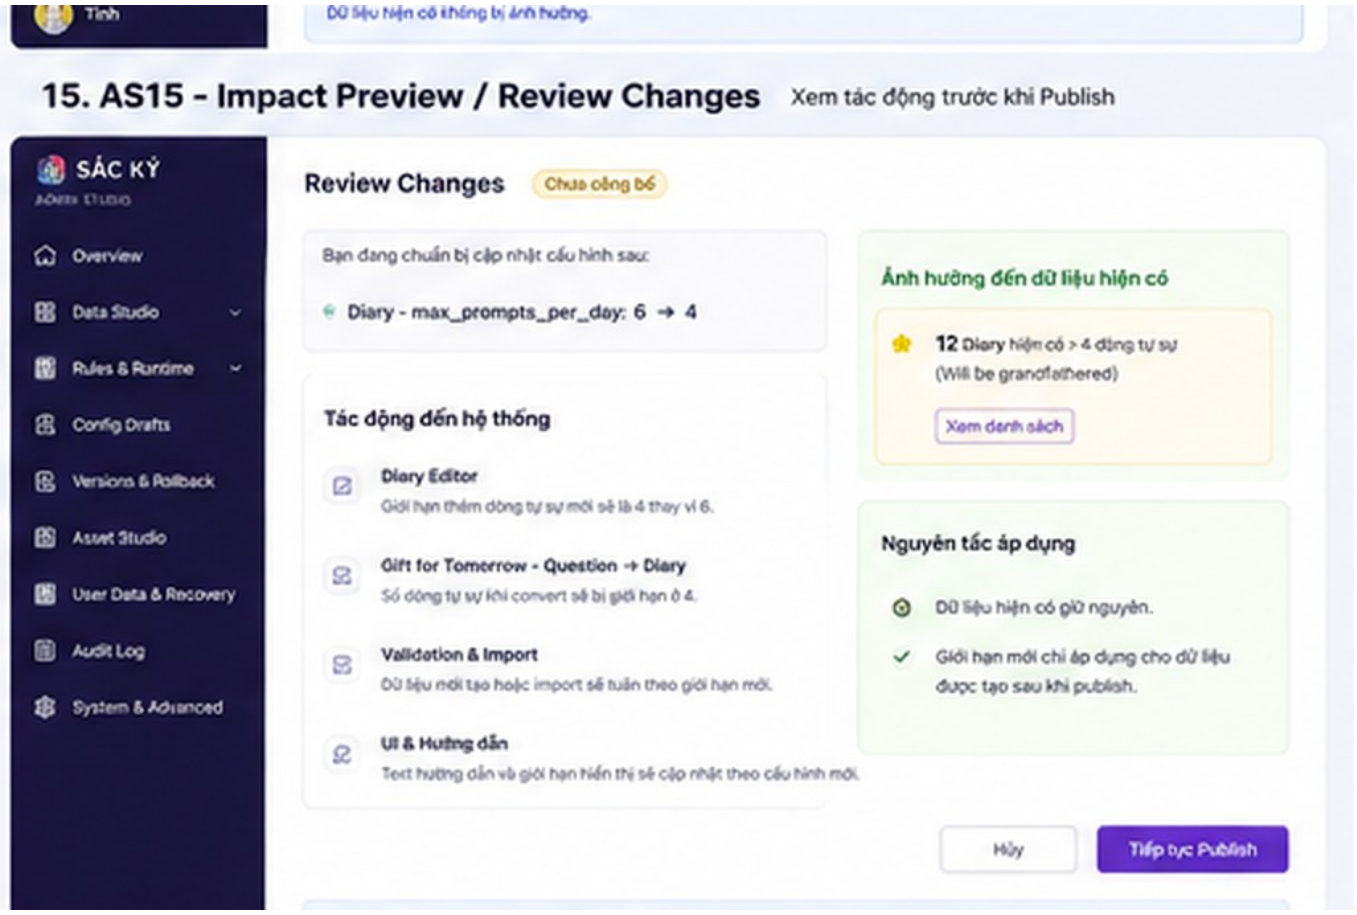


Visual authority — desktop. Follow layout intent, density, hierarchy and interaction pattern. Illustrative data/text in mockup is not runtime source of truth.

AS16 — Publish Confirmation + Success

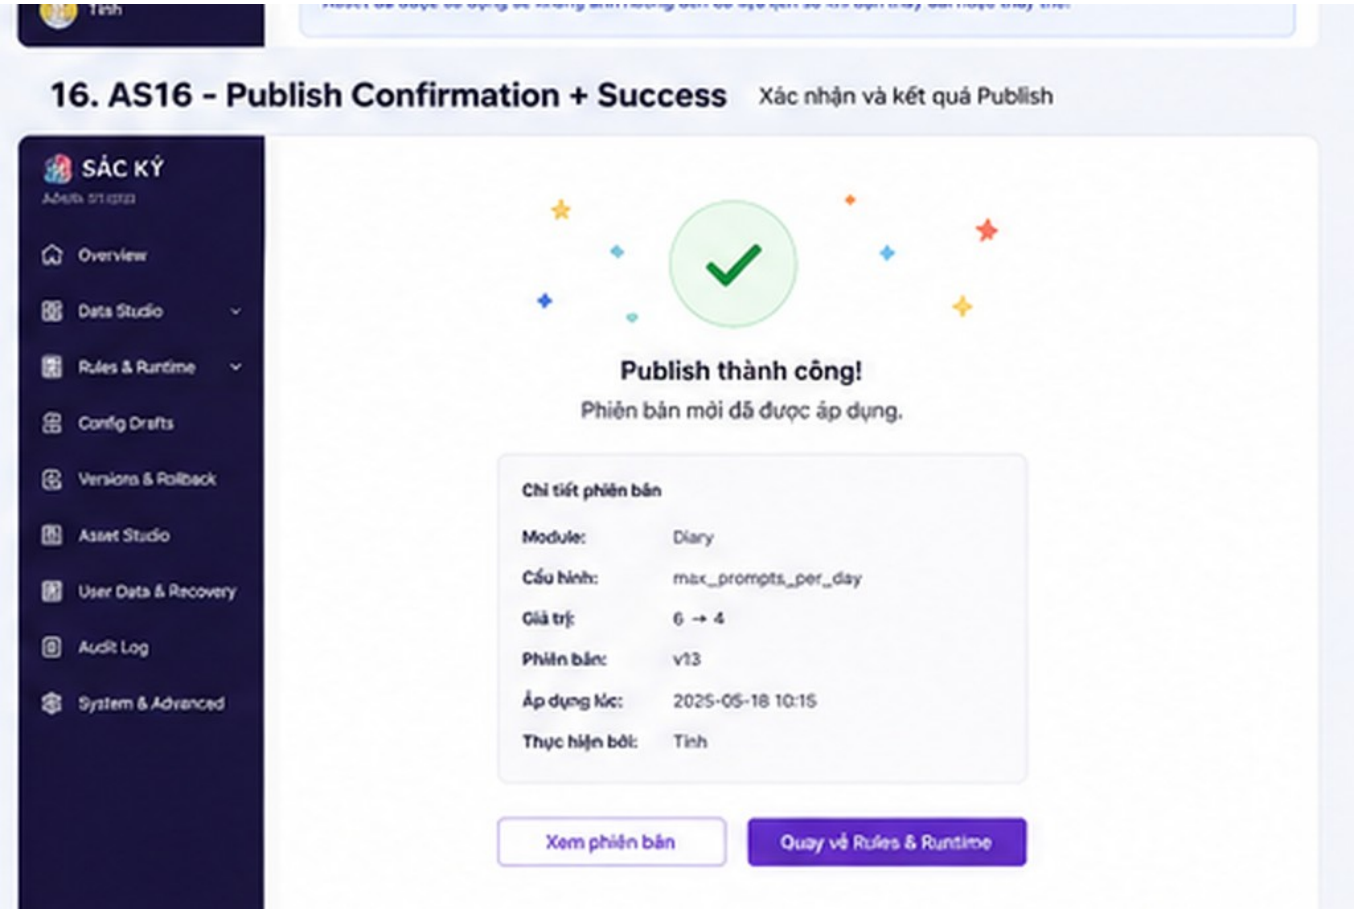


Visual authority — desktop. Follow layout intent, density, hierarchy and interaction pattern. Illustrative data/text in mockup is not runtime source of truth.

AS17 — Full Reset Confirmation

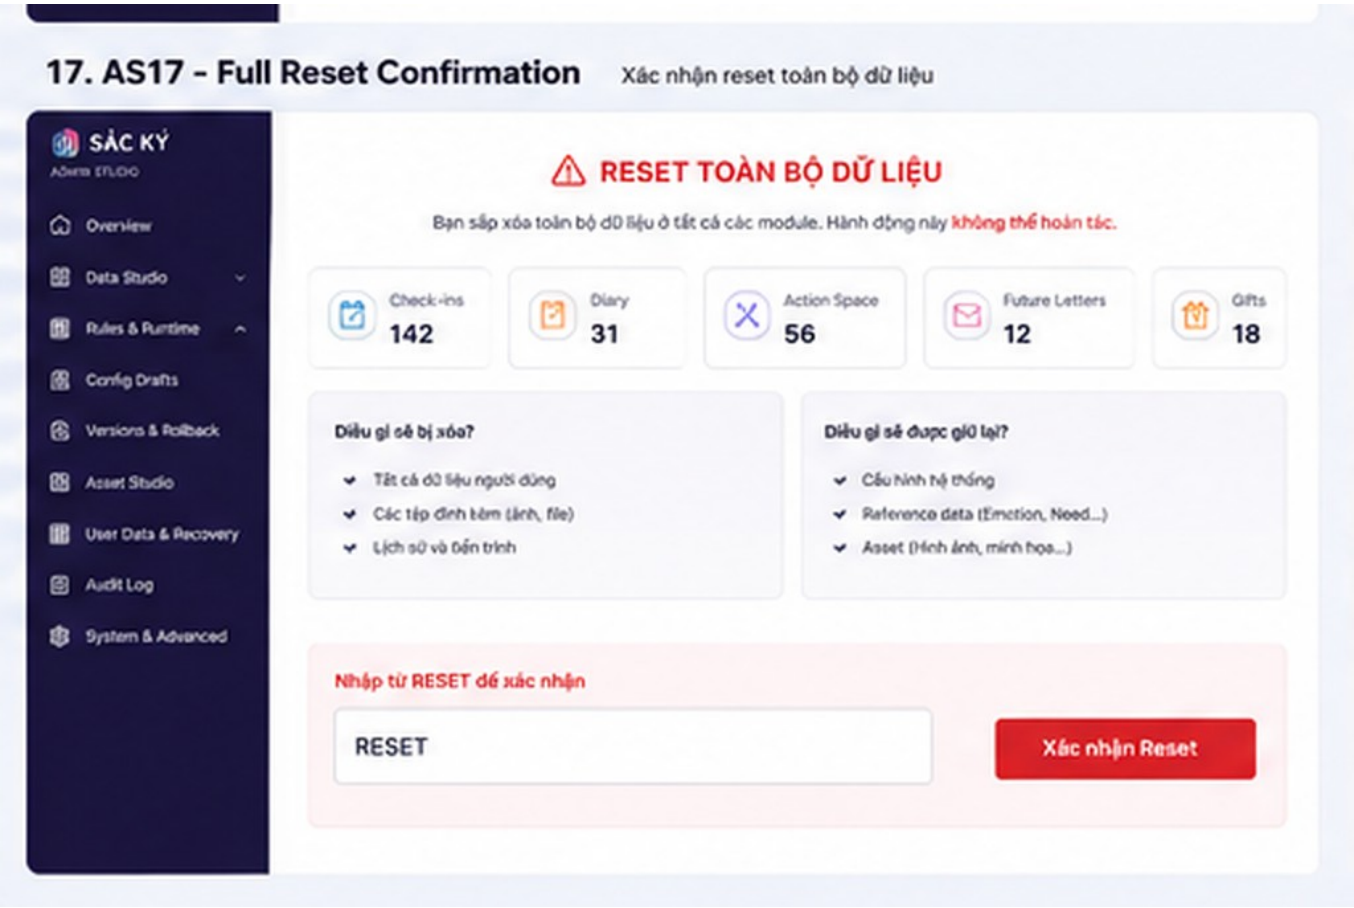


Visual authority — desktop. Follow layout intent, density, hierarchy and interaction pattern. Illustrative data/text in mockup is not runtime source of truth.

AS18 — Asset Upload / Replace

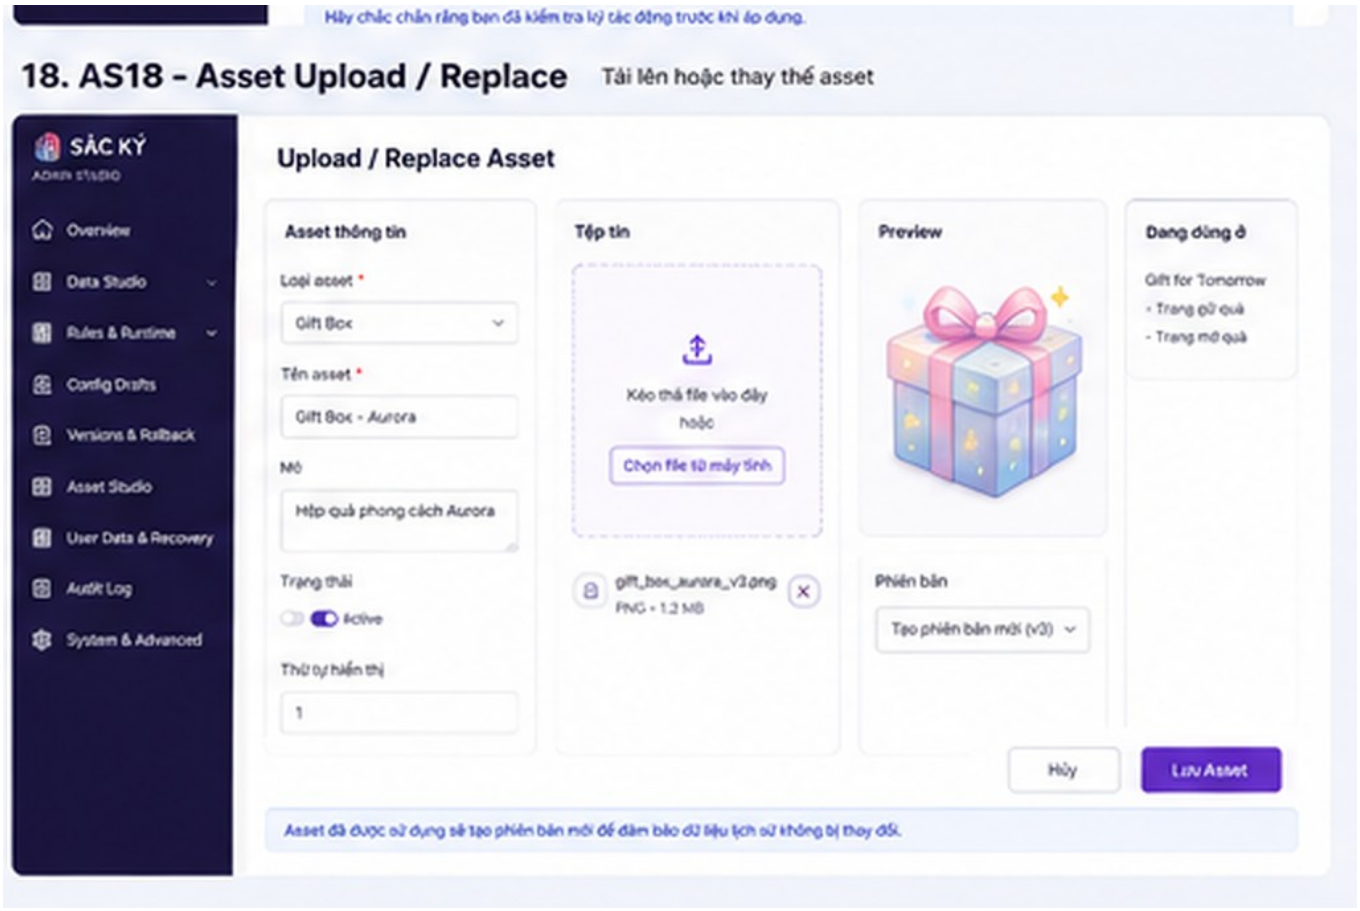

Visual authority — desktop. Follow layout intent, density, hierarchy and interaction pattern. Illustrative data/text in mockup is not runtime source of truth.

AS19 — Audit Log

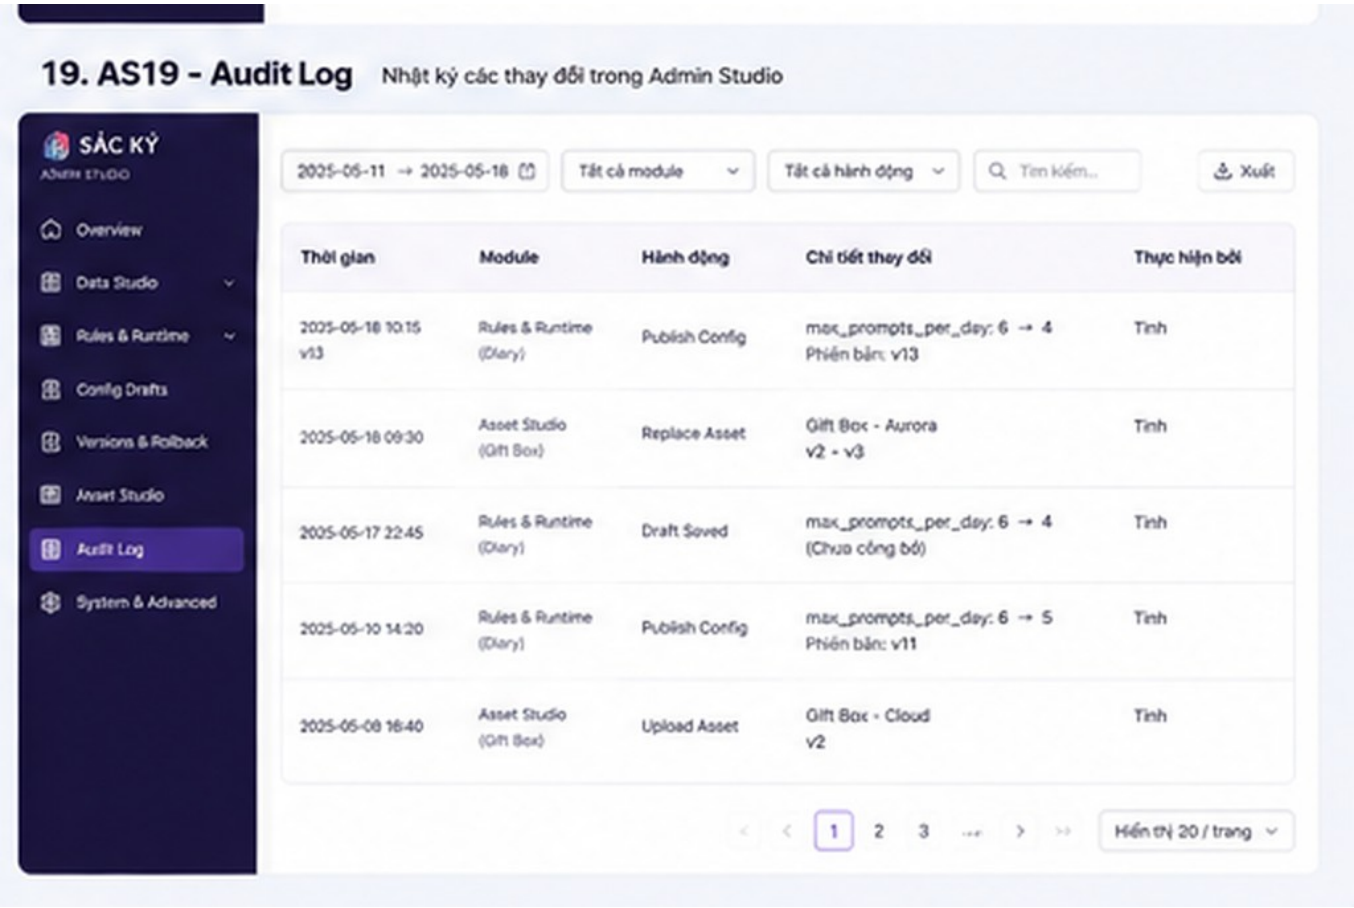

Visual authority — desktop. Follow layout intent, density, hierarchy and interaction pattern. Illustrative data/text in mockup is not runtime source of truth.