CSCI 2021: C Basics

Chris Kauffman

Last Updated:
Mon Jan 25 09:59:20 AM CST 2021

Logistics

Reading

- ▶ Bryant/O'Hallaron: Ch 1
- ▶ C references: whole language:
  types, pointers, addresses, arrays, conditionals, loops, structs,
  strings, malloc/free, preprocessor, compilation etc.

Goals

- ▶ Finish Up Introduction
- ▶ Gain working knowledge of C
- ▶ Understand correspondence to lower levels of memory

Assignments

- ▶ HW01 / Lab02 due Tue 1/26
- ▶ HW02 / Lab02 up Tue
- ▶ Project 1: Later this week

Every Programming Language

Look for the following as it should almost always be there

- ☒ Comments
- ⊟ Statements/Expressions
- ⊟ Variable Types
- ⊟ Assignment
- ⊟ Basic Input/Output
- ☐ Function Declarations
- ☐ Conditionals (if-else)
- ☐ Iteration (loops)
- ☐ Aggregate data (arrays, structs, objects, etc)
- ☐ Library System

Exercise: Traditional C Data Types

These are the traditional data types in C

Bytes*	Name	Range
	INTEGRAL	
1	char	-128 to 127
2	short	-32,768 to 32,767
4	int	-2,147,483,648 to 2,147,483,647
8	long	-9,223,372,036,854,775,808 to 9,223,372,036,854,775,807
	FLOATING	
4	float	$\pm 3.40282347E+38F$ (6-7 significant decimal digits)
8	double	$\pm 1.79769313486231570E+308$ (15 significant decimal digits)
	POINTER	
4/8	pointer	Pointer to another memory location, 32 or 64bit
		double *d or int **ip or char *s or void *p (!?)
	array	Pointer to a fixed location
		double [] or int [][] or char []

*Number of bytes for each type is NOT standard but sizes shown are common.
Portable code should NOT assume any particular size which is a huge pain in the @$$.

Inspect types closely and discuss the following:

1. Ranges of integral types?
2. Missing types you expected?
3. `void` what now?
4. How do you say `char`?

Answers: Traditional C Data Types

Ranges of signed integral types

Asymmetric: slightly more negative than positive

```
char is -128 to 127
```

Due to use of **Two's Complement** representation, many details and alternatives later in the course.

Missing: Boolean

Every piece of data in C is either truthy or falsey:

```
int x; scanf("%d", &x);
if(x){ printf("Truthy"); }  // very common
else { printf("Falsey"); }
```

Typically 0 is the only thing that is falsey

Missing: String

- ▶ char holds a single character like 'A' or '5'
- ▶ No String type: arrays of char like char str[] or char *s
- ▶ char pronounced **CAR / CARE** like "character" (debatable)

Recall: Pointers, Addresses, Derferences

```
type *ptr    Declares a pointer variable
*ptr         Dereferences pointer to get/set value pointed at
```

```
1  int *iptr;              // Declare a pointer
2  int x = 7;              // Declare/set an int
3  iptr = &x;              // Set pointer
4  int y = *iptr;          // Deref-ptr, gets x
5  *iptr = 9;              // Deref-set ptr, changes x
6
7  double z = 1.23;        // Declare/set double
8  double *dptr = &z;      // Declare/set double ptr
9  *dptr = 4.56;           // Deref-set ptr, changes z
10
11 printf("x: %d z: %f\n", // print via derefs
12         *iptr, *dptr);
```

Declaring pointer variables to specific types is the *normal and
safest* way to write C code but can be circumvented

Exercise: Void Pointers

`void *ptr; // void pointer`

- ▶ Declares a pointer to something/anything
- ▶ Useful to store an arbitrary memory address
- ▶ Removes compiler's ability to **Type Check** so introduces risks managed by the programmer

Example: void_pointer.c

- ▶ Predict output
- ▶ What looks screwy
- ▶ Anything look wrong?

File `void_pointer.c`:

```c
 1 #include <stdio.h>
 2 int main(){
 3   int a = 5;
 4   double x = 1.2345;
 5   void *ptr;
 6
 7   ptr = &a;
 8   int b = *((int *) ptr);
 9   printf("%d\n",b);
10
11   ptr = &x;
12   double y = *((double *) ptr);
13   printf("%f\n",y);
14
15   int c = *((int *) ptr);
16   printf("%d\n",c);
17
18   return 0;
19 }
```

Answers: Void Pointers

```
> cat -n void_pointer.c
     1 // Demonstrate void pointer dereferencing and the associated
     2 // shenanigans.  Compiler needs to be convinced to dereference in most
     3 // cases and circumventing the type system (compiler's ability to
     4 // check correctness) is fraught with errors.
     5 #include <stdio.h>
     6 int main(){
     7   int a = 5;                     // int
     8   double x = 1.2345;             // double
     9   void *ptr;                     // pointer to anything
    10
    11   ptr = &a;
    12   int b = *((int *) ptr);        // caste to convince compiler to deref
    13   printf("%d\n",b);
    14
    15   ptr = &x;
    16   double y = *((double *) ptr); // caste to convince compiler to deref
    17   printf("%f\n",y);
    18
    19   int c = *((int *) ptr);       // kids: this is why types are useful
    20   printf("%d\n",c);
    21
    22   return 0;
    23 }
> gcc void_pointer.c
> a.out
5
1.234500
309237645    # interpreting floating point bits as an integer
```

Byte-level Picture of Memory at `main()` line 20

```
|-------+-----+--------+-----------+------+-----------|
| BYTE  |     | VALUE  | VALUE     | VAL  | int VALUE |
| ADDR  | SYM | TYPED  | BINARY    | HEX  | in DECIMAL|
|-------+-----+--------+-----------+------+-----------|
| #2043 | ptr | v      | 0000 0000 | 0x00 |           | void *ptr occupies
| #2042 | ptr | v      | 0000 0000 | 0x00 |           | 8 contiguous bytes
| #2041 | ptr | v      | 0000 0000 | 0x00 |           | from #2036-#2043
| #2040 | ptr | v      | 0000 0000 | 0x00 |         0 | and currently points
| #2039 | ptr | v      | 0000 0000 | 0x00 |           | at #2028; the bits/bytes
| #2038 | ptr | v      | 0000 0000 | 0x00 |           | ther must be caste in
| #2037 | ptr | v      | 0000 0111 | 0x07 |           | order to dereference
| #2036 | ptr | #2028  | 1110 1100 | 0xec |      2028 |
| #2035 | x   | v      | 0011 1111 | 0x3f |           | double x occupies
| #2034 | x   | v      | 1111 0011 | 0xf3 |           | 8 contiguous bytes
| #2033 | x   | v      | 1100 0000 | 0xc0 |           | from #2028-#2035
| #2032 | x   | v      | 1000 0011 | 0x83 | 1072939139| but ptr points to
| #2031 | x   | v      | 0001 0010 | 0x12 |           | #2028 and prints bytes
| #2030 | x   | v      | 0110 1110 | 0x6e |           | #2028-2031 as a 4-byte
| #2029 | x   | v      | 1001 0111 | 0x97 |           | integer
| #2028 | x   | 1.2345 | 1000 1101 | 0x8d | 309237645 |
| #2027 | a   | v      | 0000 0000 | 0x00 |           | int a occupies
| #2026 | a   | v      | 0000 0000 | 0x00 |           | 4 contiguous bytes
| #2025 | a   | v      | 0000 0000 | 0x00 |           | from #2024-#2027
| #2024 | a   | 5      | 0000 0101 | 0x05 |         5 |
|-------+-----+--------+-----------+------+-----------|
```

Answers: Void Pointers

- ▶ The big weird integer 309237645 printed at the end is because...
  - ▶ `ptr` points at a memory location with a `double`
  - ▶ The compiler is "tricked" into treating this location as storing `int` data via the `(int *)` caste
  - ▶ Integer vs Floating layout is **very different**, we'll see this later
  - ▶ Compiler generates low level instructions to move 4 bytes of the `double` data to an integer location
  - ▶ Both size and bit layout don't match

- ▶ Since this is possible to do on a Von Neumann machine C makes it possible

- ▶ This does not mean it is a good idea: `void_pointer.c` illustrates **weird code** that usually doesn't show up

- ▶ Avoid `void *` pointers when possible, take care when you must use them (there are *many times* you must use them in C)

But wait, there're more types…

Unsigned Variants

Trade sign for larger positives

Name	Range
unsigned char	0 to 255
unsigned short	0 to 65,535
unsigned int	0 to 4,294,967,295
unsigned long	0 to… big, okay?

After our C crash course, we will discuss representation of integers with bits and relationship between signed / unsigned integer types

Fixed Width Variants since C99

Specify size / properties

int8_t int16_t int32_t int64_t	signed integer type with width of exactly 8, 16, 32 and 64 bits respectively
int_fast8_t int_fast16_t int_fast32_t int_fast64_t	fastest signed integer type with width of at least 8, 16, 32 and 64 bits respectively
int_least8_t int_least16_t int_least32_t int_least64_t	smallest signed integer type with width of at least 8, 16, 32 and 64 bits respectively
intmax_t	maximum width integer type
intptr_t	integer type capable of holding a pointer
uint8_t uint16_t uint32_t uint64_t	unsigned integer type with width of exactly 8, 16, 32 and 64 bits respectively
uint_fast8_t uint_fast16_t uint_fast32_t uint_fast64_t	fastest unsigned integer type with width of at least 8, 16, 32 and 64 bits respectively
uint_least8_t uint_least16_t uint_least32_t uint_least64_t	smallest unsigned integer type with width of at least 8, 16, 32 and 64 bits respectively
uintmax_t	maximum width unsigned integer type
uintptr_t	unsigned int capable of holding pointer

Arrays and Pointers are Related with Subtle differences

Property	Pointer	Array
Declare like…	`int *p; // rand val`	`int a[5]; // rand vals`
	`int *p = &x;`	`int a[] = {1, 2, 3};`
	`int *p = q;`	`int a[2] = {2, 4};`
Refers to a…	Memory location	Memory location
Which could be..	Anywhere	Fixed location
Location ref is	Changeable	Not changeable
Location…	Assigned by coder	Determined by compiler
Has at it..	One or more thing	One or more thing
Brace index?	Yep: `int z = p[0];`	Yep: `int z = a[0];`
Dereference?	Yep: `int y = *p;`	Nope
Arithmetic?	Yep: `p++;`	Nope
Assign to array?	Yep: `int *p = a;`	Nope
Interchangeable	`doit_a(int a[]);`	`doit_p(int *p);`
	`int *p = ...`	`int a[] = {1,2,3};`
	`doit_a(p);`	`doit_p(a);`
Tracks num elems	NOPE	NOPE
	Nada, nothin, nope	No `a.length` or `length(a)`

Example: pointer_v_array.c

```
 1  // Demonstrate equivalence of pointers and arrays
 2  #include <stdio.h>
 3  void print0_arr(int a[]){              // print 0th element of a
 4    printf("%ld: %d\n",(long) a, a[0]); // address and 0th elem
 5  }
 6  void print0_ptr(int *p){               // print int pointed at by p
 7    printf("%ld: %d\n",(long) p, *p);    // address and 0th elem
 8  }
 9  int main(){
10    int *p = NULL;                 // declare a pointer, points nowhere
11    printf("%ld: %ld\n",           // print address/contents of p
12           (long) &p, (long)p);    // by casting to 64 bit long
13    int x = 21;                    // declare an integer
14    p = &x;                        // point p at x
15    print0_arr(p);                 // pointer as array
16    int a[] = {5,10,15};           // declare array, auto size
17    print0_ptr(a);                 // array as pointer
18    //a = p;                       // can't change where array points
19    p = a;                         // point p at a
20    print0_ptr(p);
21    return 0;
22  }
```

Execution of Code/Memory 1

```
 1 #include <stdio.h>
 2 void print0_arr(int a[]){
 3   printf("%ld: %d\n",(long) a, a[0]);
 4 }
 5 void print0_ptr(int *p){
 6   printf("%ld: %d\n",(long) p, *p);
 7 }
 8 int main(){
 9   int *p = NULL;
10   printf("%ld: %ld\n",
11          (long) &p, (long)p);
<1> 12   int x = 21;
<2> 13   p = &x;
<3> 14   print0_arr(p);
15   int a[] = {5,10,15};
16   print0_ptr(a);
17   //a = p;
<4> 18   p = a;
<5> 19   print0_ptr(p);
20   return 0;
21 }
```

Memory at indicated <POS>

```
<1>
| Addr | Type | Sym | Val |
|------+------+------+-----|
| #4948 | ?    | ?    | ?    |
| #4944 | int  | a[2] | ?    |
| #4940 | int  | a[1] | ?    |
| #4936 | int  | a[0] | ?    |
| #4928 | int* | p    | NULL |
| #4924 | int  | x    | ?    |
<3>
| Addr | Type | Sym | Val   |
|------+------+------+-------|
| #4948 | ?    | ?    | ?     |
| #4944 | int  | a[2] | ?     |
| #4940 | int  | a[1] | ?     |
| #4936 | int  | a[0] | ?     |
| #4928 | int* | p    | #4924 |*
| #4924 | int  | x    | 21    |
```

14

Execution of Code/Memory 2

```
 1 #include <stdio.h>
 2 void print0_arr(int a[]){
 3   printf("%ld: %d\n",(long) a, a[0]);
 4 }
 5 void print0_ptr(int *p){
 6   printf("%ld: %d\n",(long) p, *p);
 7 }
 8 int main(){
 9   int *p = NULL;
10   printf("%ld: %ld\n",
11          (long) &p, (long)p);
<1> 12   int x = 21;
<2> 13   p = &x;
<3> 14   print0_arr(p);
15   int a[] = {5,10,15};
16   print0_ptr(a);
17   //a = p;
<4> 18   p = a;
<5> 19   print0_ptr(p);
20   return 0;
21 }
```

Memory at indicated <POS>

<4>

| Addr | Type | Sym | Val |
|-------+------+------+-------|
| #4948 | ? | ? | ? |
| #4944 | int | a[2] | 15 |*
| #4940 | int | a[1] | 10 |*
| #4936 | int | a[0] | 5 |*
| #4928 | int* | p | #4924 |
| #4924 | int | x | 21 |

<5>

| Addr | Type | Sym | Val |
|-------+------+------+-------|
#4948	?	?	?
#4944	int	a[2]	15
#4940	int	a[1]	10
#4936	int	a[0]	5
#4928	int*	p	#4936 |*
#4924	int	x	21

15

Summary of Pointer / Array Relationship

Arrays

- ▶ Arrays are allocated by the Compiler at a **fixed location**
- ▶ Bare name a references is the starting address of the array
- ▶ Must use square braces a[i] to index into them

Pointers

- ▶ Pointers can point to anything, can change, must be manually directed
- ▶ Can use square braces p[i] or deref *p to index into them

Interchangeability

- ▶ In most cases, functions that require an array can be passed a pointer
- ▶ Vice versa: requires a pointer can be passed an array BECAUSE array variables are treated as the starting memory address of the array data

Exercise: Pointer Arithmetic

"Adding" to a pointer increases the position at which it points:

▶ Add 1 to an `int*`: point to the next `int`, add 4 bytes
▶ Add 1 to a `double*`: point to next `double`, add 8 bytes

Examine `pointer_arithmetic.c` below. Show memory contents and what's printed on the screen

```
     1 #include <stdio.h>
     2 void print0_ptr(int *p){
     3   printf("%ld: %d\n",(long) p, *p);
     4 }
     5 int main(){
     6   int x = 21;
     7   int *p;
     8   int a[] = {5,10,15};
<1>  9   p = a;
    10   print0_ptr(p);
    11   p = a+1;
<2> 12   print0_ptr(p);
    13   p++;
<3> 14   print0_ptr(p);
    15   p+=2;
<4> 16   print0_ptr(p);
    17   return 0;
    18 }
```

<1>

Addr	Type	Sym	Val
#4948	?	?	
#4944	int	a[2]	15
#4940	int	a[1]	10
#4936	int	a[0]	5
#4928	int*	p	?
#4924	int	x	21

<2> ???
<3> ???
<4> ???

Answers: Pointer Arithmetic

```
    5 int main(){
    6   int x = 21;
    7   int *p;
    8   int a[] = {5,10,15};
<1> 9   p = a;
   10   print0_ptr(p);
   11   p = a+1;
<2> 12   print0_ptr(p);
   13   p++;
<3> 14   print0_ptr(p);
   15   p+=2;
<4> 16   print0_ptr(p);
   17   return 0;
   18 }
```

<3>

Addr	Type	Sym	Val	SCREEN:
#4948	?	?	?	5
#4944	int	a[2]	15	10
#4940	int	a[1]	10	
#4936	int	a[0]	5	
#4928	int*	p	#4944	
#4924	int	x	21	

<4>

Addr	Type	Sym	Val	SCREEN:
#4952	?	?	?	5
#4948	?	?	?	10
#4944	int	a[2]	15	15
#4940	int	a[1]	10	
#4936	int	a[0]	5	
#4928	int*	p	#4952	
#4924	int	x	21	

<2>

Addr	Type	Sym	Val	SCREEN:
#4948	?	?	?	5
#4944	int	a[2]	15	
#4940	int	a[1]	10	
#4936	int	a[0]	5	
#4928	int*	p	#4940	
#4924	int	x	21	

18

Pointer Arithmetic Alternatives

Pointer arithmetic often has more readable alternatives

```
printf("enter 5 doubles\n");
double arr[5];
for(int i=0; i<5; i++){
  // POINTER: ick              // PREFERRED
  scanf("%lf", arr+i);    OR   scanf("%lf", &arr[i]);
}
printf("you entered:\n");
for(int i=0; i<5; i++){
  // POINTER: ick              // PREFERRED
  printf("%f ", *(arr+i)); OR  printf("%f ",arr[i]);
}
```

But not always: following uses pointer arithmetic to append strings

```
char name[128];                    // up to 128 chars
printf("first name: ");
scanf(" %s", name);                // read into name
int len = strlen(name);            // compute length of string
name[len] = ' ';                   // replace \0 with space
printf("last name: ");
scanf(" %s",name+len+1);           // read last name at offset
printf("full name: %s\n",name);
```

Allocating Memory with `malloc()` and `free()`

Dynamic Memory

▶ Most C data has a fixed size: single vars or arrays with sizes specified at compile time

▶ `malloc(nbytes)` is used to manually allocate memory

  ▶ single arg: number of bytes of memory

  ▶ frequently used with `sizeof()` operator

  ▶ returns a `void*` to bytes found or `NULL` if not enough space could be allocated

▶ `free()` is used to release memory

malloc_demo.c

```c
#include <stdio.h>
#include <stdlib.h> // malloc / free
int main(){
  printf("how many ints: ");
  int len;
  scanf(" %d",&len);

  int *nums = malloc(sizeof(int)*len);

  printf("initializing to 0\n");
  for(int i=0; i<len; i++){
    nums[i] = 0;
  }
  printf("enter %d ints: ",len);
  for(int i=0; i<len; i++){
    scanf(" %d",&nums[i]);
  }
  printf("nums are:\n");
  for(int i=0; i<len; i++){
    printf("[%d]: %d\n",i,nums[i]);
  }
  free(nums);
  return 0;
}
```

Exercise: Allocation Sizes

How Big

How many bytes allocated?
How many elements in the array?

```
char    *a = malloc(16);
char    *b = malloc(16*sizeof(char));
int     *c = malloc(16);
int     *d = malloc(16*sizeof(int));
double  *e = malloc(16);
double  *f = malloc(16*sizeof(double));
int     **g = malloc(16);
int     **h = malloc(16*sizeof(int*));
```

Allocate

- ▶ Want an array of `ints` called ages, quantity 32

- ▶ Want an array of doubles called dps, quantity is in variable `int size`

Deallocate

Code to deallocate ages / dps

How many bytes CAN be allocated?

- ▶ Examine `malloc_all_memory.c`

Answers: Allocation Sizes

```c
char   *a = malloc(16);                 // 16
char   *b = malloc(16*sizeof(char));    // 16
int    *c = malloc(16);                 // 16
int    *d = malloc(16*sizeof(int));     // 64
double *e = malloc(16);                 // 16
double *f = malloc(16*sizeof(double));  // 128
int    **g = malloc(16);                // 16
int    **h = malloc(16*sizeof(int*));   // 128

int *ages = malloc(sizeof(int)*32);
int size = ...;
double *dps = malloc(sizeof(double)*size);

free(ages);
free(dps);
```

When Should I `malloc()`?

Compile Time

► Some sizes are known at **Compile Time**

► Compiler can calculate, sizes of fixed variables, arrays, sizes of stack frames for function calls

► Most of these are automatically managed on the **function call stack** and don't require an special action

Run Time

► Compiler can't predict the future, at **Run Time** programs must react to

  ► Typed user input like names
  ► Size of a file that is to be read
  ► Elements to be added to a data structure
  ► Memory allocated in one function and returned to another

► As these things are determined, `malloc()` is used to allocate memory in the **heap**, when it is finished `free()` it

Common Misconception: `sizeof(thing)`

- ▶ `sizeof(thing)` determines the **Compile Time Size** of thing
- ▶ Useful when `malloc()`'ing stuff as in
  `int *arr = malloc(count * sizeof(int);`
- ▶ **NOT USEFUL** for size of arrays/strings
  ```
  int *arr = ...;
  int nelems = sizeof(arr);  // always 8 on 64-bit systems
  // REASON: arr is an (int *) and pointers are 8 bytes big
  ```
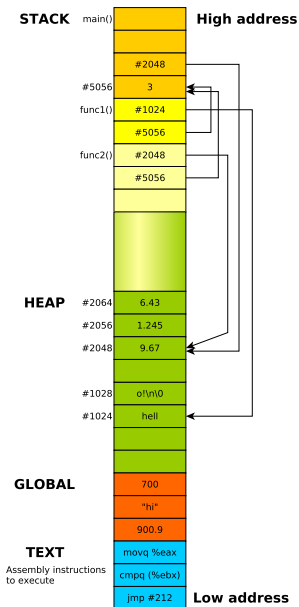- ▶ To determine the size of arrays, must be given size OR have an ending sentinel value
- ▶ Strings commonly use `strlen()` to determine length:
  ```
  char *str = "Hello world!\n";
  int len = strlen(str);  // 13
  ```

The Parts of Memory

- Running program typically has 4 regions of memory
    1. Stack: automatic, push/pop with function calls
    2. Heap: `malloc()` and `free()`
    3. Global: variables outside functions, `static` vars
    4. Text: Assembly instructions
- Stack grows into Heap, hitting the boundary results in **stack overflow**
- Will study ELF file format for storing executables
- Heap uses **memory manager**, will do an assignment on this

STACK main() **High address**
#2048
#5056 3
func1() #1024
#5056
func2() #2048
#5056

HEAP #2064 6.43
#2056 1.245
#2048 9.67
#1028 o!\n\0
#1024 hell

GLOBAL 700
"hi"
900.9

TEXT movq %eax
Assembly instructions to execute cmpq (%ebx)
jmp #212 **Low address**

Memory Tools on Linux/Mac

Valgrind[1]: Suite of tools including Memcheck

- ▶ Catches most memory errors[2]
    - ▶ Use of uninitialized memory
    - ▶ Reading/writing memory after it has been free'd
    - ▶ Reading/writing off the end of malloc'd blocks
    - ▶ Memory leaks
- ▶ Source line of problem happened (but not cause)
- ▶ Super easy to use
- ▶ Slows execution of program *way* down

---

[1] http://valgrind.org/
[2] http://en.wikipedia.org/wiki/Valgrind

Valgrind in Action

See some common problems in `badmemory.c`

```
# Compile with debugging enabled: -g
> gcc -g badmemory.c

# run program through valgrind
> valgrind a.out
==12676== Memcheck, a memory error detector
==12676== Copyright (C) 2002-2013, and GNU GPL'd, by Julian Seward et al.
==12676== Using Valgrind-3.10.1 and LibVEX; rerun with -h for copyright info
==12676== Command: a.out
==12676==
Uninitialized memory
==12676== Conditional jump or move depends on uninitialised value(s)
==12676==    at 0x4005C1: main (badmemory.c:7)
==12676==
==12676== Conditional jump or move depends on uninitialised value(s)
==12676==    at 0x4E7D3DC: vfprintf (in /usr/lib/libc-2.21.so)
==12676==    by 0x4E84E38: printf (in /usr/lib/libc-2.21.so)
==12676==    by 0x4005D6: main (badmemory.c:8)
...
```

Link: Description of common Valgrind Error Messages

Exercise: `free()`'ing in the Wrong Spot

Common use for `malloc()` is for one function to allocate memory and return its location to another function (such as in A1). Question becomes when to free() such memory.

Program to the right is buggy, produces following output on one system

```
> gcc free_twice.c
> ./a.out
ones[0] is 0
ones[1] is 0
ones[2] is 1
ones[3] is 1
ones[4] is 1
```

▶ Why does this bug happen?

▶ How can it be fixed?

▶ Answers in `free_twice.c`

```
1
2 #include <stdlib.h>
3 #include <stdio.h>
4
5 int *ones_array(int len){
6   int *arr = malloc(sizeof(int)*len);
7   for(int i=0; i<len; i++){
8     arr[i] = 1;
9   }
10  free(arr);
11  return arr;
12 }
13
14 int main(){
15  int *ones = ones_array(5);
16  for(int i=0; i<5; i++){
17    printf("ones[%d] is %d\n",i,ones[i]);
18  }
19
20  free(ones);
21  return 0;
22 }
23
```

Answers: `free()`'ing in the Wrong Spot

- ▶ Once a `malloc()`'d area is `free()`'d, it is no longer valid
- ▶ Don't `free()` data that is the `return` value of a function
- ▶ Never `free()` twice

```
> gcc -g free_twice.c
> a.out
ones[0] is 0
ones[1] is 0
ones[2] is -1890717680
ones[3] is 22008
ones[4] is 1
free(): double free detected in tcache 2
Aborted (core dumped)

> valgrind a.out
==10125== Memcheck, a memory error detector
...
==10125== Invalid free()
==10125== at 0x48399AB: free
==10125== by 0x10921A: main (free_twice.c:24)
```

```
 9 int *ones_array(int len){
10   int *arr = malloc(sizeof(int)*len);
11   for(int i=0; i<len; i++){
12     arr[i] = 1;
13   }
14   free(arr);  // should not free an array
15   return arr; // being returned
16 }
17
18 int main(){
19   int *ones = ones_array(5);
20   for(int i=0; i<5; i++){
21     printf("ones[%d] is %d\n",i,ones[i]);
22   }
23
24   free(ones);  // 2nd free
25   return 0;
26 }
```

Note that the Valgrind output gives an **exact line number** where the problem occurs but this is **not the line to change** to fix the problem.

Answers: `free()`'ing in the Wrong Spot

INCORRECT 1: Before ones_array() calls free()

INCORRECT 2: ones_array() calls free()

INCORRECT 3: ones_array() returns free()'d array

CORRECT 1: ones_array() before return, no free()

CORRECT 2: ones_array() returns valid array

free_twice.c Program

ABOVE: Incorrect free version free()'s array before returning leading to main() getting a memory area that has no longer valid and has been marked for re-use by free().

BELOW: Corrected version which comments out the free() call in ones_array(); a valid memory area is returned which is printed by main() and then free()'d

structs: Heterogeneous Groupings of Data

- ▶ Arrays are homogenous: all elements the same type
- ▶ structs are C's way of defining heterogenous data
- ▶ Each **field** can be a different kind
- ▶ One instance of a struct has all fields
- ▶ Access elements with 'dot' notation
- ▶ Several syntaxes to declare, we'll favor modern approach
- ▶ Convention: types have _t at the end of their name to help identify them (not a rule but a good idea)

```
typedef struct{  // declare type
  int    field1;
  double field2;
  char   field3;
  int    field4[6];
} thing_t;

thing_t a_thing;    // variable
a_thing.field1    = 5;
a_thing.field2    = 9.2;
a_thing.field3    = 'c';
a_thing.field4[2] = 7;
int i = a_thing.field1;


thing_t b_thing = {  // variable
  .field1 = 15,      // initialize
  .field2 = 19.2,    // all fields
  .field3 = 'D',
  .field4 = {17, 27, 37,
             47, 57, 67}
};
```

Add Slide on dots vs arrows to clarify this

struct Ins/Outs

Recursive Types

► structs can have pointers to their same kind

► Syntax is a little wonky

```
                 vvvvvvvvvv
typedef struct node_struct {
  char data[128];
  struct node_struct *next;
         ^^^^^^^^^^^
} node_t;
```

Arrow Operator

► Pointer to struct, want to work with a field

► Use 'arrow' operator -> for this (dash/greater than)

Dynamically Allocated Structs

► Dynamic Allocation of structs requires size calculation

► Use sizeof() operator

```
node_t *one_node =
  malloc(sizeof(node_t));
int length = 5;
node_t *node_arr =
  malloc(sizeof(node_t) * length);


node_t *node = ...;
if(node->next == NULL){ ... }

list_t *list = ...;
list->size = 5;
list->size++;
```

Exercise: Structs in Memory

- ▶ Structs allocated in memory are laid out compactly
- ▶ Compiler may *pad* fields to place them at nice alignments (even addresses or word boundaries)

```c
typedef struct {
  double x;
  int y;
  char nm[4];
} small_t;

int main(){
  small_t a =
    {.x=1.23, .y=4, .nm="hi"};
  small_t b =
    {.x=5.67, .y=8, .nm="bye"};
}
```

Memory layout of `main()`

Addr	Type	Sym	Val
#1031	char	b.nm[3]	\0
#1030	char	b.nm[2]	e
#1029	char	b.nm[1]	y
#1028	char	b.nm[0]	b
#1024	int	b.y	8
#1016	double	b.x	5.67
#1015	char	a.nm[3]	?
#1014	char	a.nm[2]	\0
#1013	char	a.nm[1]	i
#1012	char	a.nm[0]	h
#1008	int	a.y	4
#1000	double	a.x	1.23

Result of?

```c
scanf("%d",  &a.y); // input 7
scanf("%lf", &b.x); // input 9.4
scanf("%s",  b.nm); // input yo
```

34

Answers: Structs in Memory

```c
scanf("%d", &a.y); // input 7
scanf("%lf", &b.x); // input 9.4
scanf("%s", b.nm); // input yo
```

Addr	Type	Sym	Val Before	Val After
#1031	char	b.nm[3]	\0	
#1030	char	b.nm[2]	e	\0
#1029	char	b.nm[1]	y	o
#1028	char	b.nm[0]	b	y
#1024	int	b.y	8	
#1016	double	b.x	5.67	9.4
#1015	char	a.nm[3]	?	
#1014	char	a.nm[2]	\0	
#1013	char	a.nm[1]	i	
#1012	char	a.nm[0]	h	
#1008	int	a.y	4	7
#1000	double	a.x	1.23	

read_structs.c: malloc() and scanf() for structs

```c
1  // Demonstrate use of pointers, malloc() with structs, scanning
2  // structs fields
3
4  #include <stdlib.h>
5  #include <stdio.h>
6
7  typedef struct {                        // simple struct
8    double x;    int y;    char nm[4];
9  } small_t;
10
11 int main(){
12   small_t c;                            // stack variable
13   small_t *cp = &c;                     // address of stack var
14   scanf("%lf %d %s", &cp->x, &cp->y, cp->nm); // read struct fields
15   printf("%f %d %s\n",cp->x, cp->y, cp->nm); // print struct fields
16
17   small_t *sp = malloc(sizeof(small_t));     // malloc'd struct
18   scanf("%lf %d %s", &sp->x, &sp->y, sp->nm); // read struct fields
19   printf("%f %d %s\n",sp->x, sp->y, sp->nm); // print struct fields
20
21   small_t *sarr = malloc(5*sizeof(small_t)); // malloc'd struct array
22   for(int i=0; i<5; i++){
23     scanf("%lf %d %s", &sarr[i].x, &sarr[i].y, sarr[i].nm); // read
24     printf("%f %d %s\n", sarr[i].x, sarr[i].y, sarr[i].nm); // print
25   }
26
27   free(sp);                             // free single struct
28   free(sarr);                           // free struct array
29   return 0;
30 }
```

36

File Input and Output

▶ Standard C I/O functions for reading/writing file data.
▶ Work with text data: formatted for human reading

```
FILE *fopen(char *fname, char *mode);
// open file named fname, mode is "r" for reading, "w" for writing
// returns a File Handle (FILE *) on success
// returns NULL if not able to open file; do not fclose(NULL)

int fclose(FILE *fh);
// close file associated with fh, writes pending data to file,
// free()'s memory associated with open file
// Do not fclose(NULL)

int fscanf(FILE *fh, char *format, addr1, addr2, ...);
// read data from an open file handle according to format string
// storing parsed tokens in given addresses returns EOF if end of file
// is reached

int fprintf(FILE *fh, char *format, arg1, arg2, ...);
// prints data to an open file handle according to the format string
// and provided arguments

void rewind(FILE *fh);
// return the given open file handle to the beginning of the file.
```

Example of use in struct_text_io.c

Binary Data I/O Functions

- ▶ Open/close files same way with `fopen()`/`fclose()`
- ▶ Read/write raw bytes (not formatted) with the following

```
size_t fread(void *dest, size_t byte_size, size_t count, FILE *fh);
// read binary data from an open file handle. Attempt to read
// byte_size*count bytes into the buffer pointed to by dest.
// Returns number of bytes that were actually read

size_t fwrite(void *src, size_t byte_size, size_t count, FILE *fh);
// write binary data to an open file handle. Attempt to write
// byte_size*count bytes from buffer pointed to by src.
// Returns number of bytes that were actually written
```

See examples of use in `struct_binary_io.c`

Tradeoffs between Binary and Textual Files

- ▶ Binary files usually smaller than text and can be directly read into memory but NOT easy on the eyes
- ▶ Text data more readable but more verbose, must be parsed and converted to binary numbers

Strings are Character Arrays

Conventions

- ▶ Convention in C is to use character arrays as strings
- ▶ Terminate character arrays with the \0 null character to indicate their end

  ```
  char str1[6] =
  {'C','h','r','i','s','\0'};
  ```

- ▶ Null termination done by compiler for string constants

  ```
  char str2[6] = "Chris";
  // is null terminated
  ```

- ▶ Null termination done by most standard library functions like scanf()

Be aware

- ▶ fread() does not append nulls when reading binary data
- ▶ Manually manipulating a character array may overwrite ending null

String Library

- ▶ Include with <string.h>
- ▶ Null termination expected
- ▶ strlen(s): length of string
- ▶ strcpy(dest, src): copy chars from src to dest
- ▶ Limited number of others

Exercise: Common C operators

Arithmetic `+ - * / %`

Comparison `== > < <= >= !=`

Logical `&& || !`

Memory `& and *`

Compound `+= -= *= /= ...`

Bitwise Ops `^ | & ~`

Conditional `? :`

Bitwise Ops

Will discuss soon

```
int x = y << 3;
int z = w & t;
long r = x | z;
```

Integer/Floating Division

Predict values for each variable

```
int q = 9 / 4;
int r = 9 % 4;
double x = 9 / 4;
double y = (double) 9 / 4;
double z = ((double)9) / 4;
double w = 9.0 / 4;
double t = 9 / 4.0;
int a=9, b=4;
double t = a / b;
```

Conditional (ternary) Operator

```
double x = 9.95;
int y = (x < 10.0) ? 2 : 4;
```

Answers: Integer vs Floating Division

Integer versus real division: **values** for each of these are…

```
int q = 9 / 4;                    // quotient 2
int r = 9 % 4;                    // remainder 1
double x = 9 / 4;                 // 2.0 (int quotient first)
double y = (double) 9 / 4;        // 2.25
double z = ((double)9) / 4;       // 2.25
double w = 9.0 / 4;               // 2.25
double t = 9 / 4.0;               // 2.25
int a=9, b=4;
double t = a / b;                 // 2 (int quotient)
```

C Control Structures

Looping/Iteration

```
// while loop
while(truthy){
  stuff;
  more stuff;
}

// for loop
for(init; truthy; update){
  stuff;
  more stuff;
}

// do-while loop
do{
  stuff;
  more stuff;
} while( truthy );
```

Conditionals

```
// simple if
if( truthy ){
  stuff;
  more stuff;
}

// chained exclusive if/elses
if( truthy ){
  stuff;
  more stuff;
}
else if(other){
  stuff;
}
else{
  stuff;
  more stuff;
}

// ternary ? : operator
int x = (truthy) ? yes : no;
```

Jumping Around in Loops

break: often useful

```c
// break statement ends loop
// only valid in a loop
while(truthy){
  stuff;
  if( istrue ){
    something;
    break;-----+
  }          |
  more stuff; |
}            |
after loop; <--+

// break ends inner loop,
// outer loop advances
for(int i=0; i<10; i++){
  for(int j=0; j<20; j++){
    printf("%d %d ",i,j);
    if(j == 7){
      break;-----+
    }          |
  }            |
  printf("\n");<-+
}
```

continue: occasionally useful

```c
// continue advances loop iteration
// does update in for loops

                +------+
                V      |
for(int i=0; i<10; i++){  |
  printf("i is %d\n",i);  |
  if(i % 3 == 0){         |
    continue;------------+
  }
  printf("not div 3\n");
}

Prints
i is 0
i is 1
not div 3
i is 2
not div 3
i is 3
i is 4
not div 3
...
```

43

Really Jumping Around: goto

- Machine-level control involves jumping to different instructions
- C exposes this as
  - `somewhere:` label for code position
  - `goto somewhere;` jump to that location
- `goto_demo.c` demonstrates a loop with gotos
- **Avoid** `goto` unless you have a compelling motive
- Beware spaghetti code...

```
1  // Demonstrate control flow with goto
2  // Low level assembly jumps are similar
3  #include <stdio.h>
4  int main(){
5    int i=0;
6  beginning:        // a label for gotos
7    printf("i is %d\n",i);
8    i++;
9    if(i < 10){
10     goto beginning; // go back
11   }
12   goto ending;      // go forward
13   printf("print me please!\n");
14 ending:            // label for goto
15   printf("i ends at %d\n",i);
16   return 0;
17 }
```


XKCD #292

switch()/case: the **worst** control structure

- ▶ switch/case allows jumps based on an integral value
- ▶ Frequent source of errors
- ▶ switch_demo.c shows some features
  - ▶ use of break
  - ▶ fall through cases
  - ▶ default catch-all
  - ▶ Use in a loop
- ▶ May enable some small compiler optimizations
- ▶ Almost **never** worth correctness risks: one good use in my experience
- ▶ **Favor** if/else if/else unless compelled otherwise

```
1  // Demonstrate peculiarities of switch/case
2  #include <stdio.h>
3  int main(){
4    while(1){
5      printf("enter a char: ");
6      char c;
7      scanf(" %c",&c); // ignore preceding spaces
8      switch(c){        // switch on read char
9        case 'j':      // entered j
10         printf("Down line\n");
11         break;        // go to end of switch
12       case 'a':       // entered a
13         printf("little a\n");
14       case 'A':       // entered A
15         printf("big A\n");
16         printf("append mode\n");
17         break;        // go to end of switch
18       case 'q':       // entered q
19         printf("Quitting\n");
20         return 0;     // return from main
21       default:        // entered anything else
22         printf("other '%c'\n",c);
23         break;        // go to end of switch
24     }                 // end of switch
25   }
26   return 0;
27 }
```

A Program is Born: Compile, Assemble, Link, Load

▶ Write some C code in `program.c`

▶ Compile it with toolchain like GNU Compiler Collection

   `gcc -o program prog.c`

▶ Compilation is a multi-step process
   ▶ Check syntax for correctness/errors
   ▶ Perform optimizations on the code if possible
   ▶ Translate result to **Assembly Language** for a specific target processor (Intel, ARM, Motorola)
   ▶ **Assemble** the code into **object code**, binary format (ELF) which the target CPU understands
   ▶ **Link** the binary code to any required libraries (e.g. printing) to make an **executable**

▶ Result: executable `program`, but...

▶ To run it requires a **loader**: program which copies executable into memory, initializes any shared library/memory references required parts, sets up memory to refer to initial instruction

Review Exercise: Memory Review

1. How do you allocate memory on the Stack? How do you de-allocate it?

2. How do you allocate memory dynamically (on the Heap)? How do you de-allocate it?

3. What other parts of memory are there in programs?

4. How do you declare an array of 8 integers in C? How big is it and what part of memory is it in?

5. Describe several ways arrays and pointers are similar.

6. Describe several ways arrays and pointers are different.

7. Describe how the following to arithmetic expressions differ.

```
int  x=9, y=20;
int *p = &x;
x = x+1;
p = p+1;
```

Answers: Memory Review

1. How do you allocate memory on the Stack? How do you de-allocate it?

   Declare local variables in a function and call the function. Stack frame has memory for all locals and is de-allocated when the function finishes/returns.

2. How do you allocate memory on the Heap? How do you de-allocate it?

   Make a call to ptr = malloc(nbytes) which returns a pointer to the requested number of bytes. Call free(ptr) to de-allocate that memory.

3. What other parts of memory are there in programs?

   Global area of memory has constants and global variables. Text area has binary assembly code for CPU instructions.

4. How do you declare an array of 8 integers in C? How big is it and what part of memory is it in?

   An array of 8 ints will be 32 bytes big (usually).

   On the stack: int arr[8]; De-allocated when function returns.

   On the heap: int *arr = malloc(sizeof(int) * 8); Deallocated with

Answers: Memory Review

5. Describe several ways arrays and pointers are similar.

   Both usually encoded as an address, can contain 1 or more items, may use square brace indexing like arr[3] = 17; Interchangeable as arguments to functions. Neither tracks size of memory area referenced.

6. Describe several ways arrays and pointers are different.

   Pointers may be deref'd with *ptr; can't do it with arrays. Can change where pointers point, not arrays. Arrays will be on the Stack or in Global Memory, pointers may also refer to the Heap.

7. Describe how the following to arithmetic expressions differ.

```
int  x=9, y=20;    // x at #1024
int *p = &x;       // p hold VALUE #1024 (points at x)
x = x+1;           // x is now 10:    normal arithmetic
p = p+1;           // p is now #1028: pointer arithmetic
                   // may or may not point at y
```