
1. You can use the “cut” command to cut the data and show them vertically. In this case, you may need to put the option “-c” to cut the data by character and put the number of characters you want to cut.



2. Now, let’s cut the entire folder and count how many there are in each alphabet. We need to pipe this command to “sort” to arrange in alphabetical order and then, pipe it again to “uniq” to remove duplicates. *The screenshot may continue all the way to Zz*




3. You can now count how many each character has with the “-c” option to count.

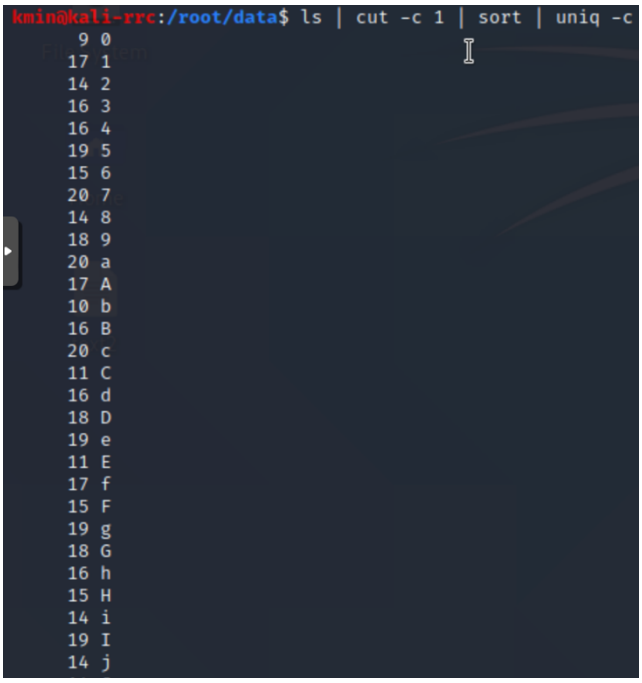


4. Now, let’s search how many files are there in each type of file extension. In this case, you may need to cut based on the delimiter, and the option “-d” stands for that. Put the period inside the quote since we want to cut before that.




5. Let's count how many files are there in each extension. Since we want the second part after the period sign, put the option "-f 2".

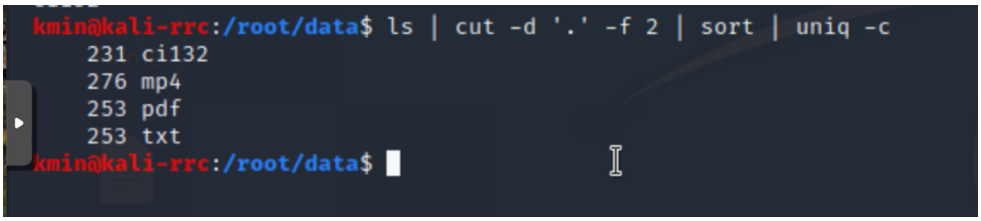

6. Now, we'll count how many users are there who can log in and how many can't.

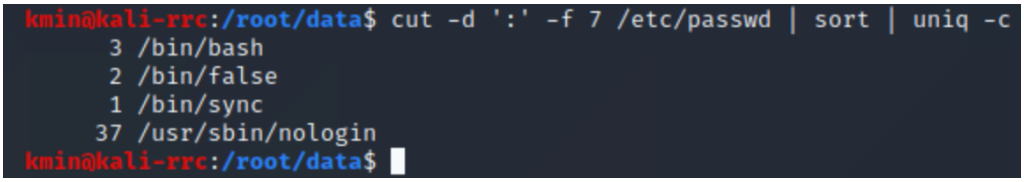

7. Another efficient way to solve this problem if we have a lot of column to count is to reverse the output and then reverse it again to view in normal.

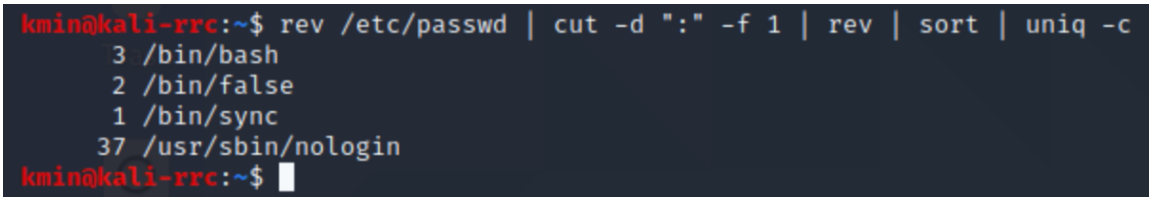

8. Let's see the hashes in the shadow file in the same way. If you only want the bottom part of the output, use the "tail" command to display only the last 10 lines of your output. If you use the option "-n" with a number, it'll only show you the number of lines you want from the bottom of your output.

