


1. You can add a new user by typing the command “adduser”. You will need to use the “sudo” command, which acts like the root user temporarily, in front of it since adding a new user needs special permission.

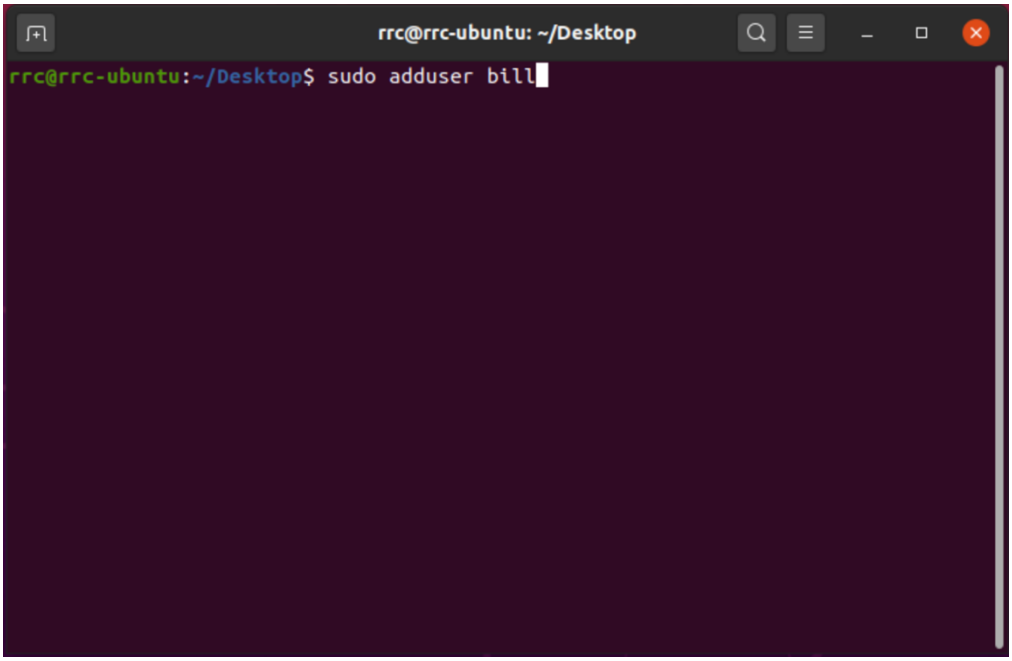


2. Type your current user password. Then, type your new user password and follow the instructions to continue.

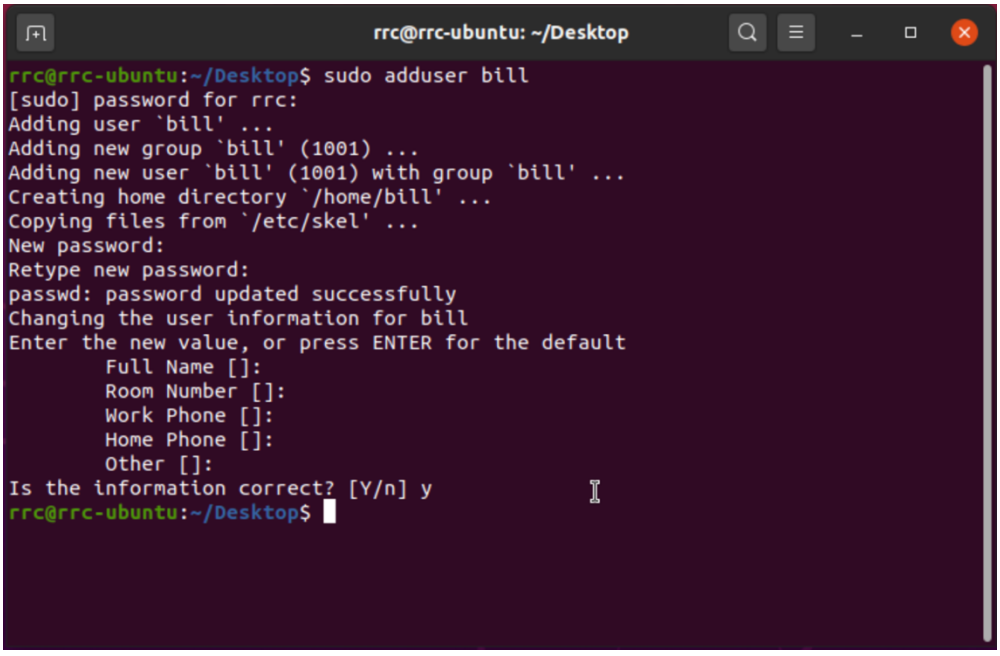


3. You can change the user using the “su” command.

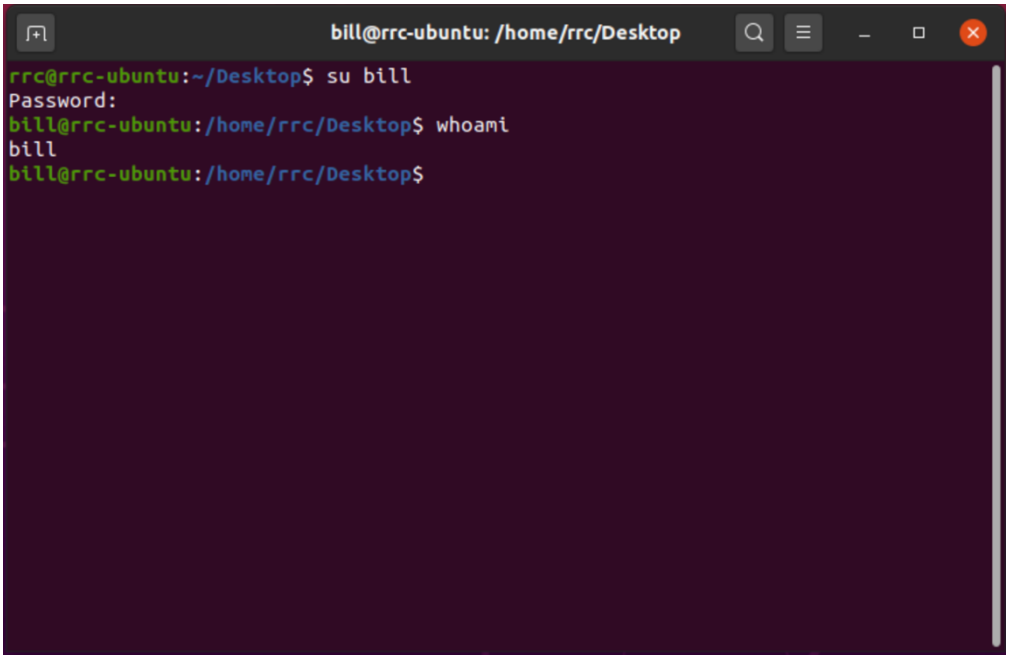


4. You can change a file's permission using "chmod" command with the file permission for owner, group, and everyone with a set of number from 0 to 7.

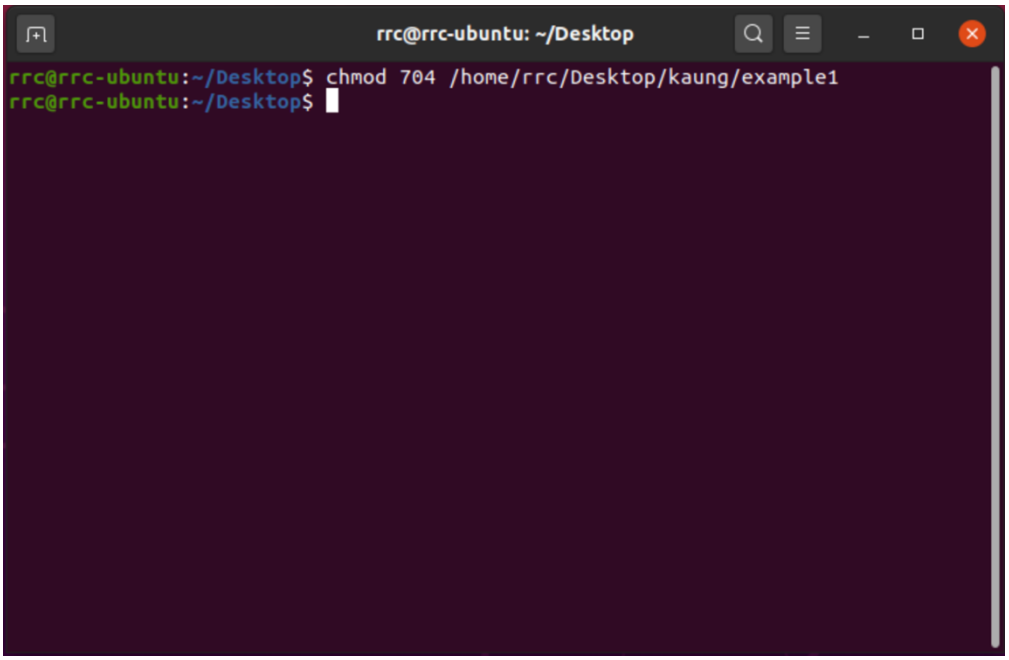


5. The new user cannot run things as “sudo” since he is not in the sudo group.
   You can see the sudoers file in the “/etc” location. This file may require the “sudo” command to open.

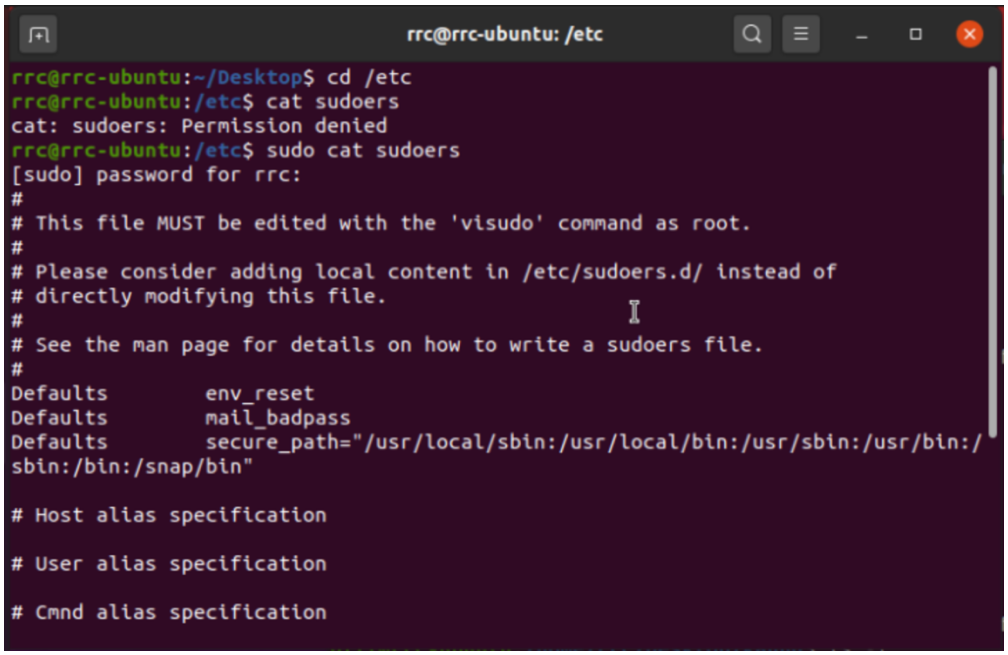

6. You will need the command “visudo” to open what’s inside the sudoers file and you still need to run as sudo.

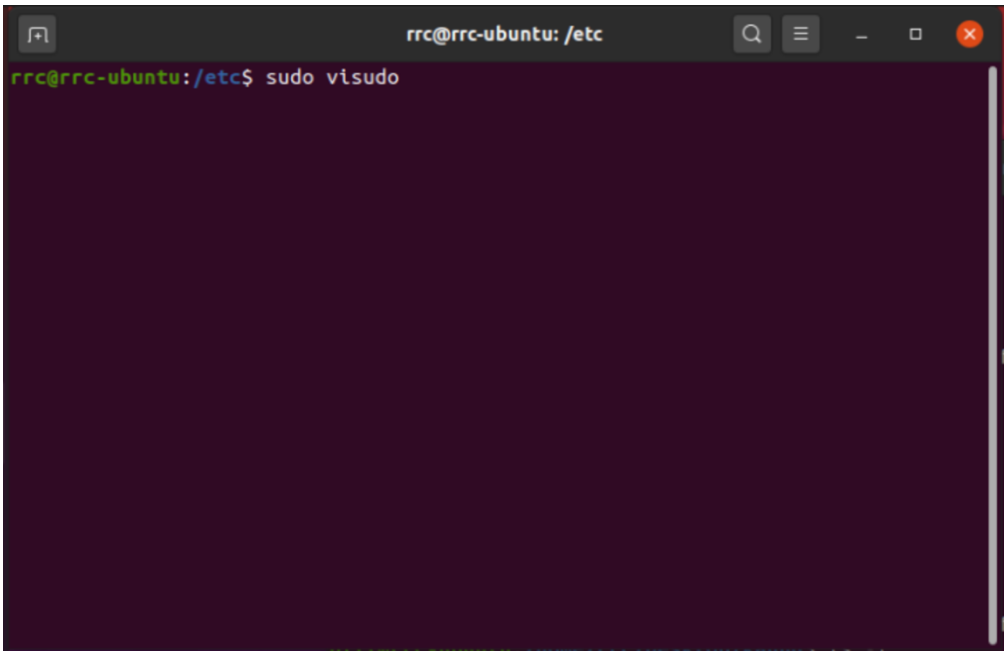


7. You can give access to the new user to the “sudo” access by adding him to the sudo group. You will need to run this command as the rrc user who has “sudo” access. The command to use here is the “usermod” command. You will need “-a” for an additional group. If not, it will remove the new user from the current group. You will also need “-G” to mention what you would like him to add is a group. The new user has to log out and log in back again in order to be able to use the “sudo” command.

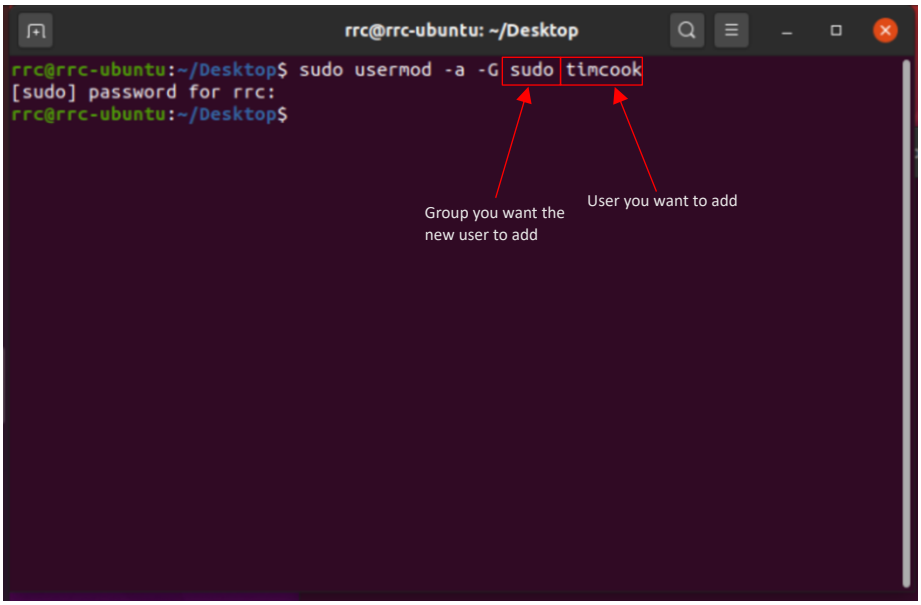

Use the “exit” command to log out and log in back again to restart your account which will give you access to use “sudo” command in this case.

8. You can user the “userdel -r” command to delete the user and his files. If you still need his files, you can user the “userdel” instead.

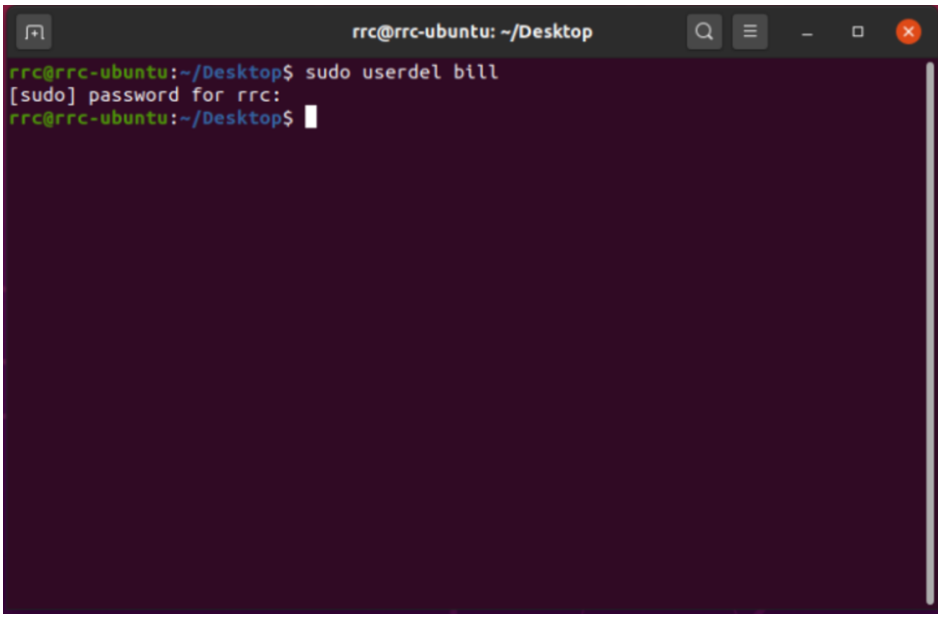
rrc@rrc-ubuntu: ~/Desktop
rrc@rrc-ubuntu:~/Desktop$ sudo userdel bill
[sudo] password for rrc:
rrc@rrc-ubuntu:~/Desktop$