


1. You can temporarily block your current IP address by using the “flush” command as shown.

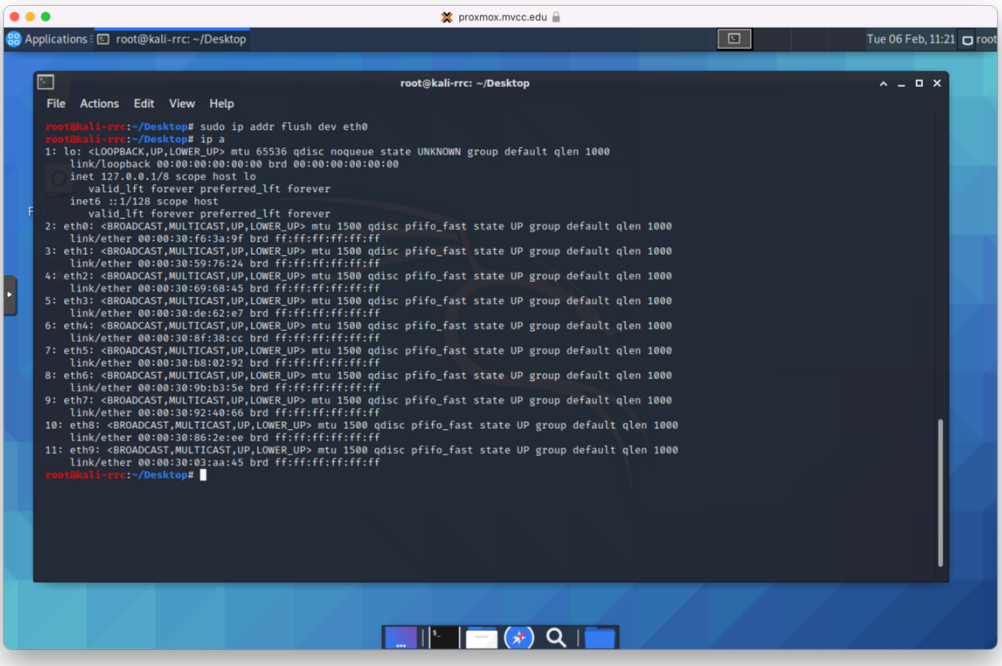


2. You will need to restart your network with the “systemctl” command to get your IP address back.

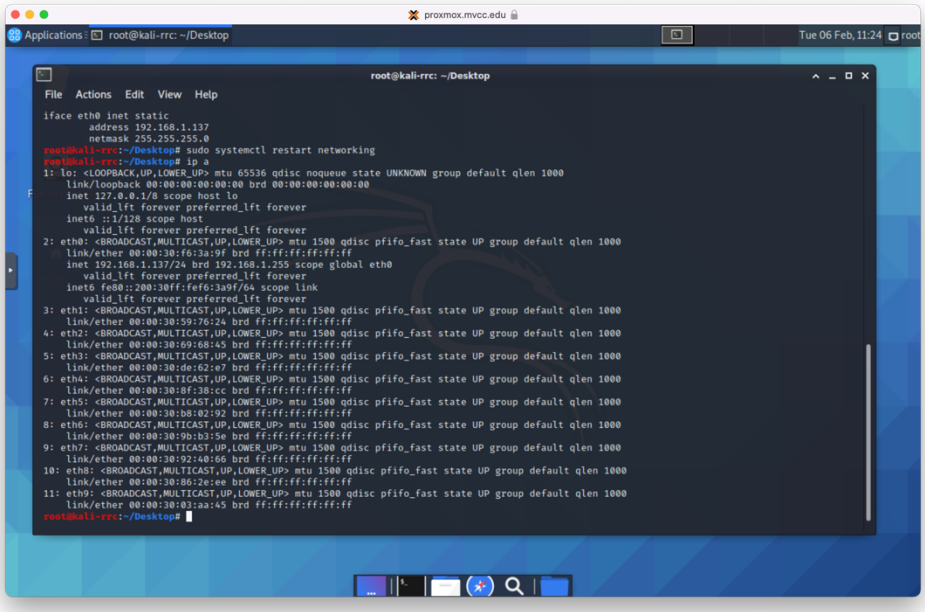


3. You can set a temporary IP address with “ip addr” command. U can use flush command to remove the temporary command.

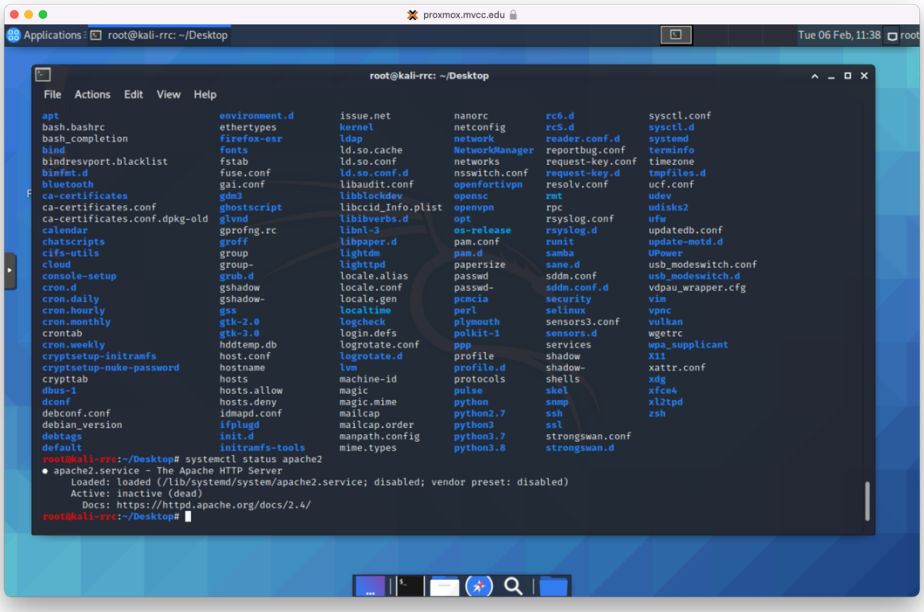


4. You can create a web server using apache2. You can see the status of apache can be checked as shown.

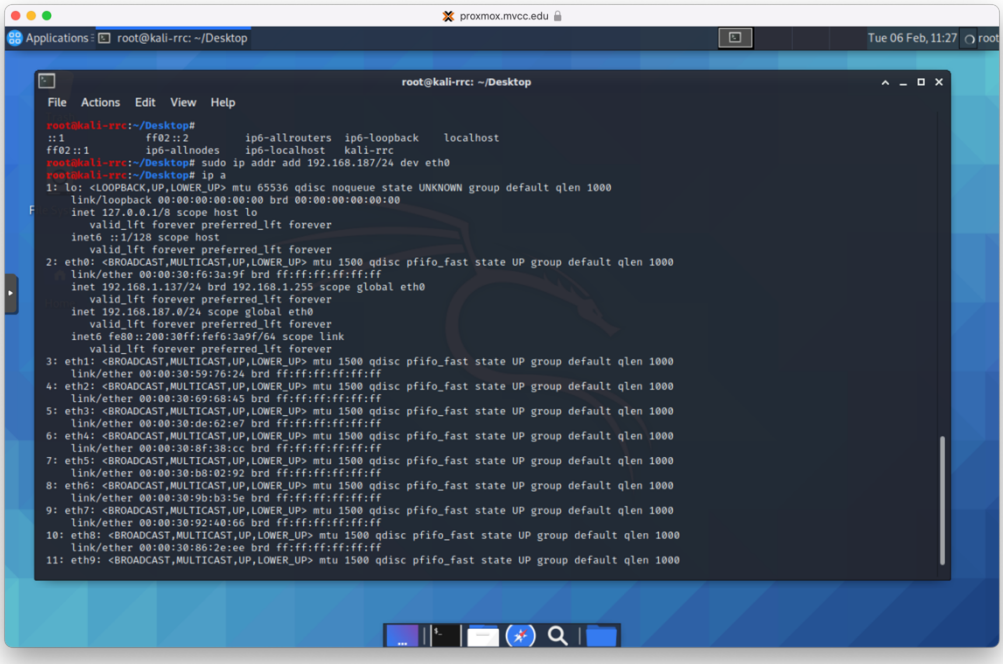


5. You can start your apache service by using the command shown below.

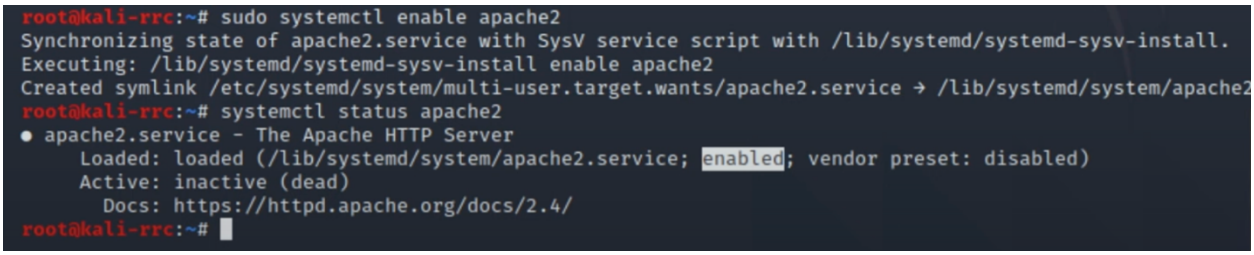


6. Start your apache using “systemctl” and check your status.

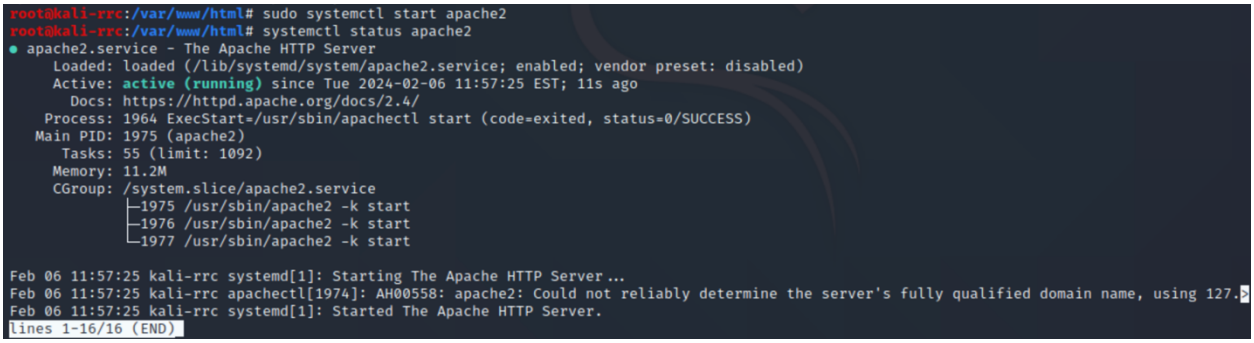

7. You can edit your web server in the file path “var/www/html/”

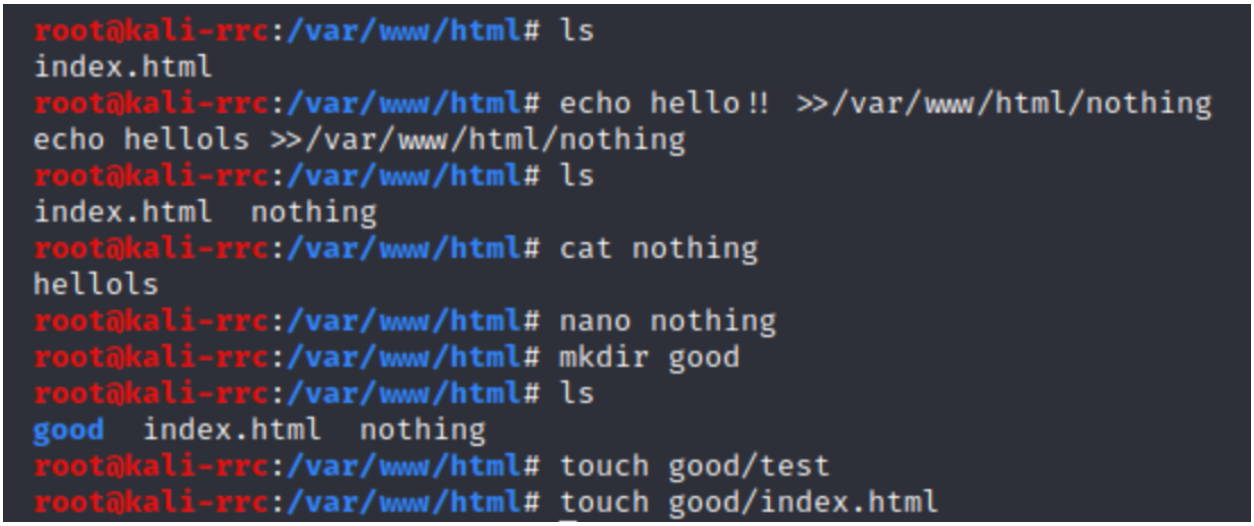

8. You can visit a website in CentOS using “curl” command.

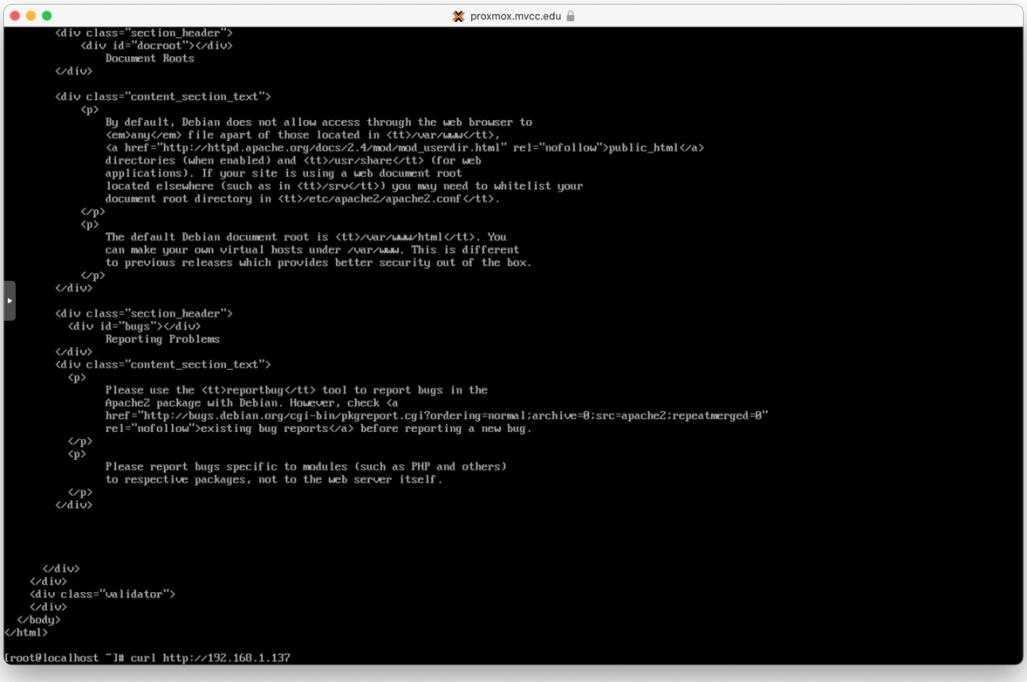
proxmox.mvcc.edu

Document Roots

By default, Debian does not allow access through the web browser to
any file apart of those located in <tt>/var/www</tt>,
public_html
directories (when enabled) and <tt>/usr/share</tt> (for web
applications). If your site is using a web document root
located elsewhere (such as in <tt>/srv</tt>) you may need to whitelist your
document root directory in <tt>/etc/apache2/apache2.conf</tt>.

The default Debian document root is <tt>/var/www/html</tt>. You
can make your own virtual hosts under /var/www. This is different
to previous releases which provides better security out of the box.

Reporting Problems

Please use the <tt>reportbug</tt> tool to report bugs in the
Apache2 package with Debian. However, check <a
href="http://bugs.debian.org/cgi-bin/pkgreport.cgi?ordering=normal;archive=0;src=apache2;repeatmerged=0"
rel="nofollow">existing bug reports before reporting a new bug.

Please report bugs specific to modules (such as PHP and others)
to respective packages, not to the web server itself.

</body>
</html>
[root@localhost ~]# curl http://192.168.1.137