

1. Scp the script from jrice's machine to yours




2. Run the script to get random files with random extensions.

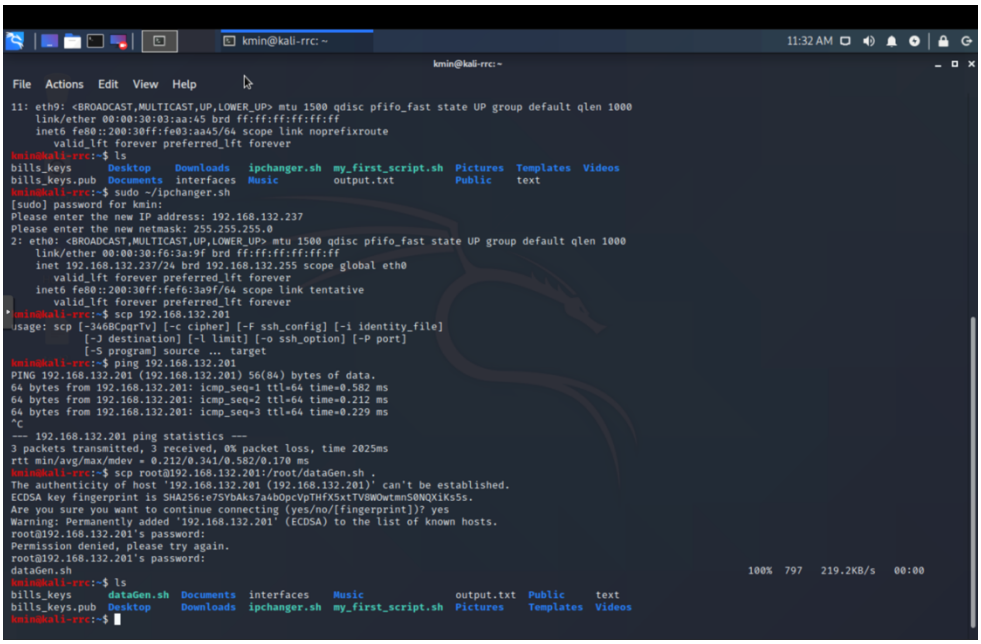


3. You can see how much data you have using the word count command with the "-l" option since we only want to know how many line breaks there are.

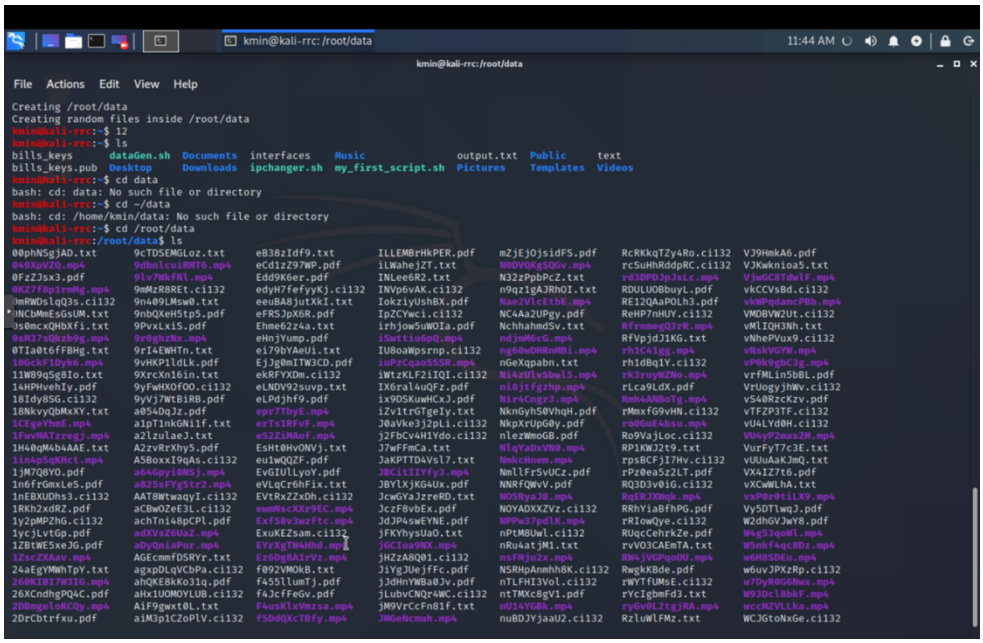


4. You can use the command “ls *.txt” to view all the files with the txt extension. You can also copy it to a new folder using the cp command and check how many txt files are there.

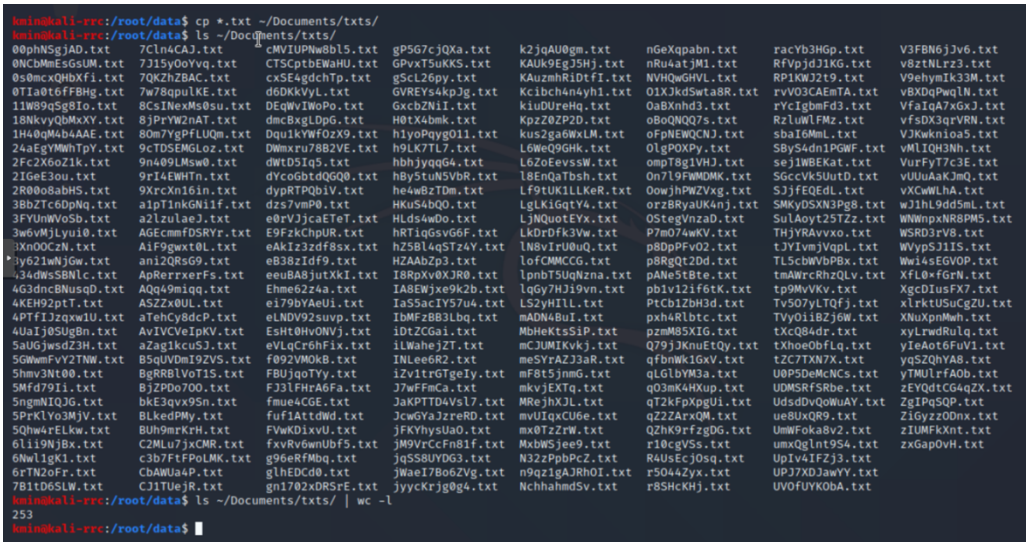


5. Now, let’s filter the files that contain “j”.

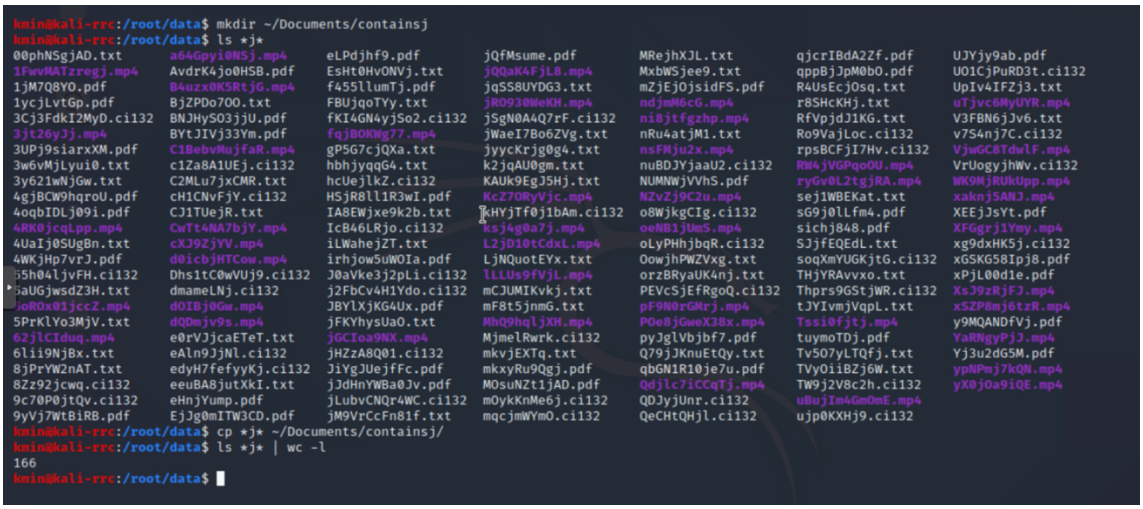


6. Let's make the "j" more specific. In this case, we want to find either the lowercase or uppercase "j". You can use the square bracket to identify anything inside them as a single character.

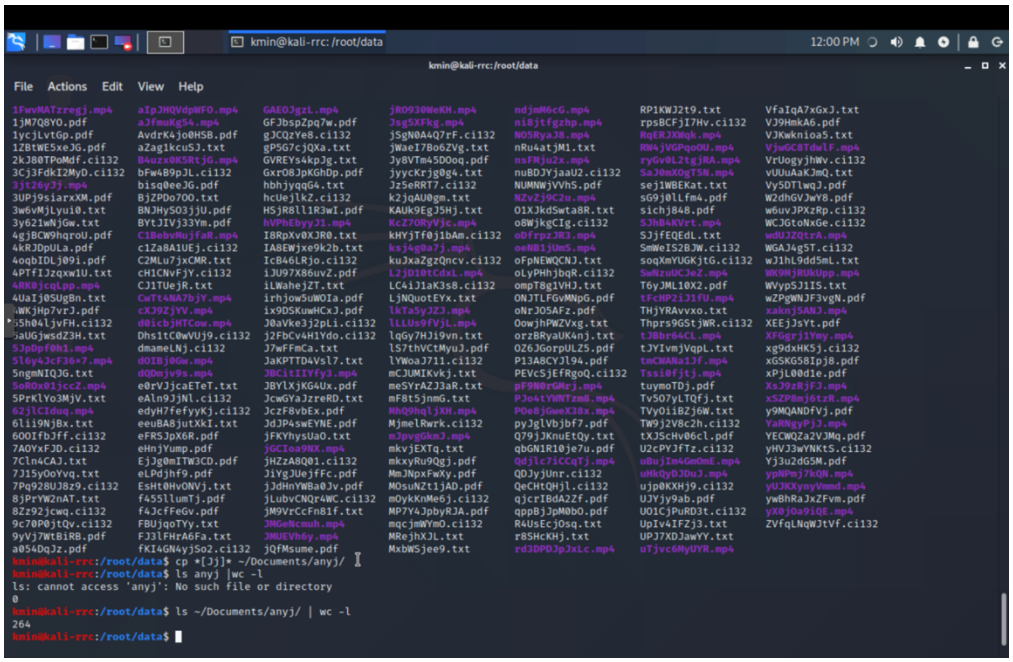


7. Let's find files with j or J as the third character. * means anything but, ? is a more specific version meaning any single character.

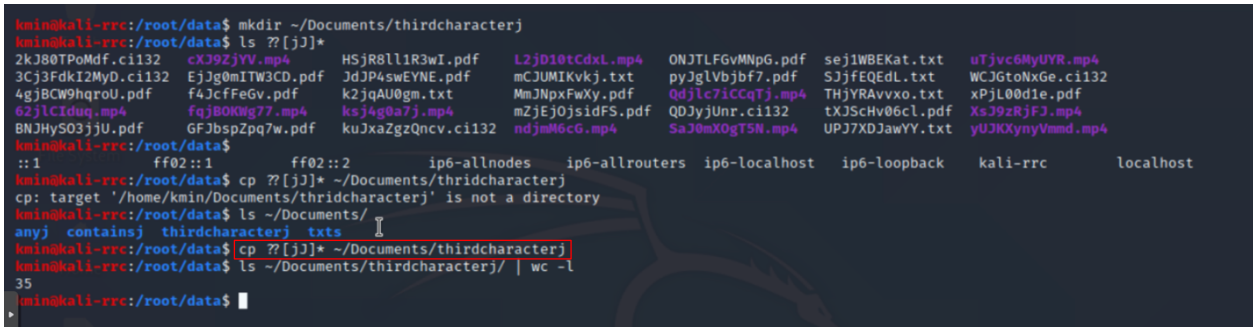


8. Let's also find two consecutive numbers in the file name. We may need to write .* since we don't want the file extension to count as two consecutive numbers.

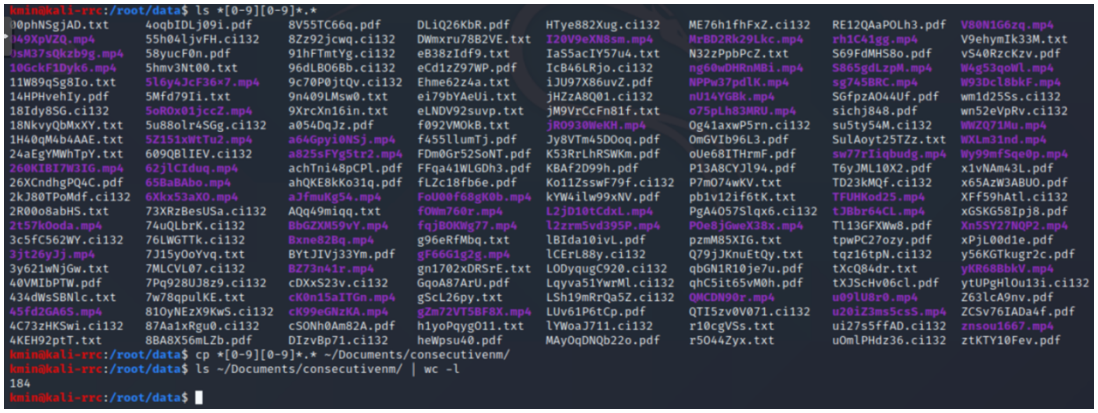

9. The next filter is to find file names with exactly eight characters. We need to use ? to specify any single character and .* for the file extension.

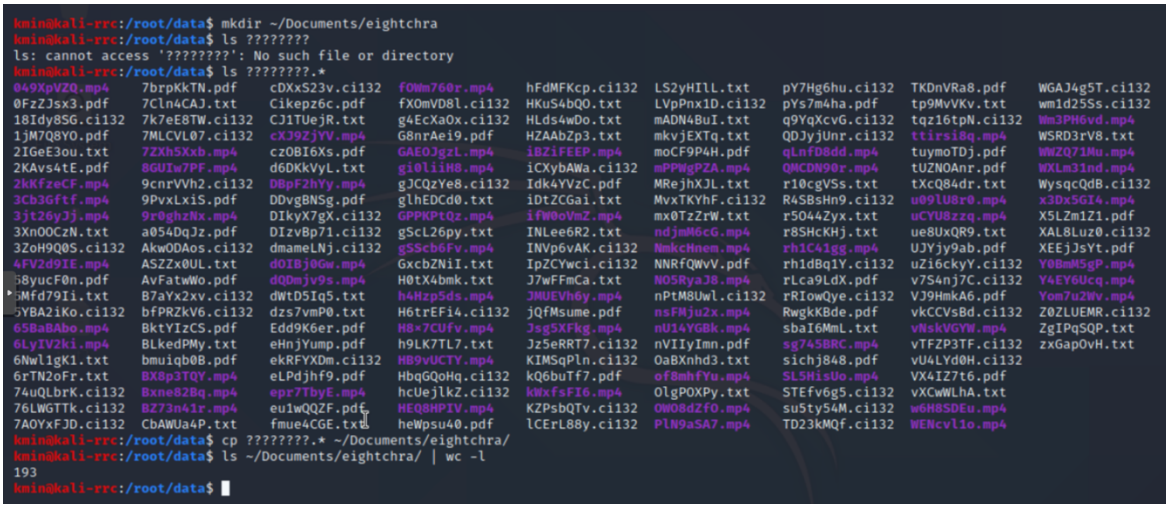

10. This is the filter for the files that start with capital letters.

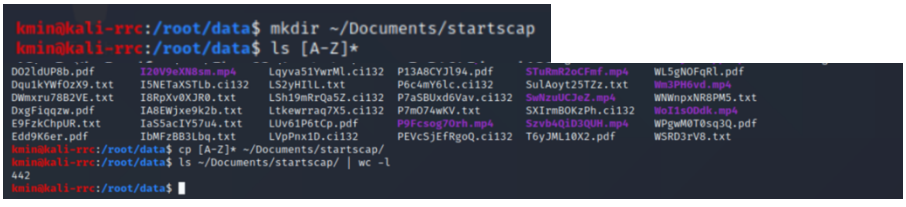

11. If you want to search a file that starts with a capital letter but, the second character not a capital, you can use the “!” notation.

