


1. You can see which user you are logged in as using the “whoami” command.

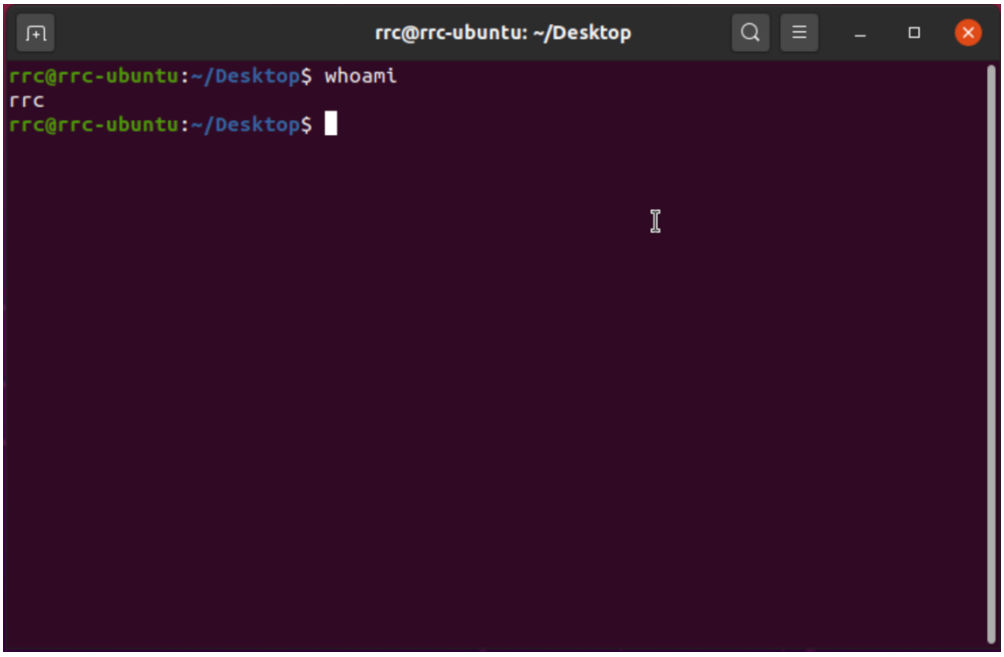


2. You can add a new user by typing the command “adduser”. You will need to use the “sudo” command, which acts like the root user temporarily, in front of it since adding a new user needs special permission.

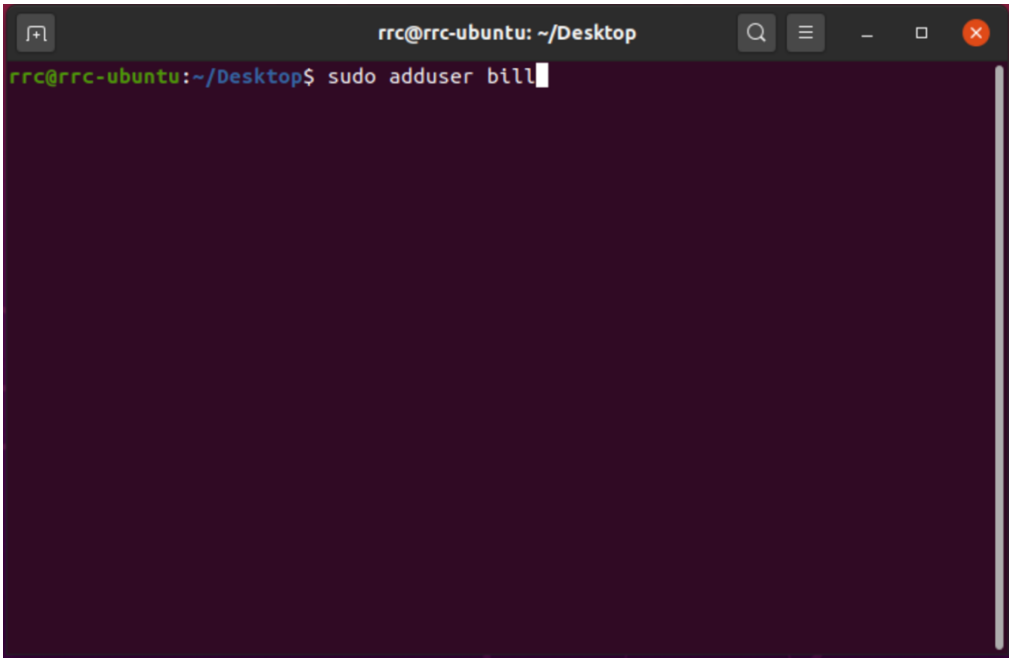


3. Type your current user password. Then, type your new user password and follow the instructions to continue.

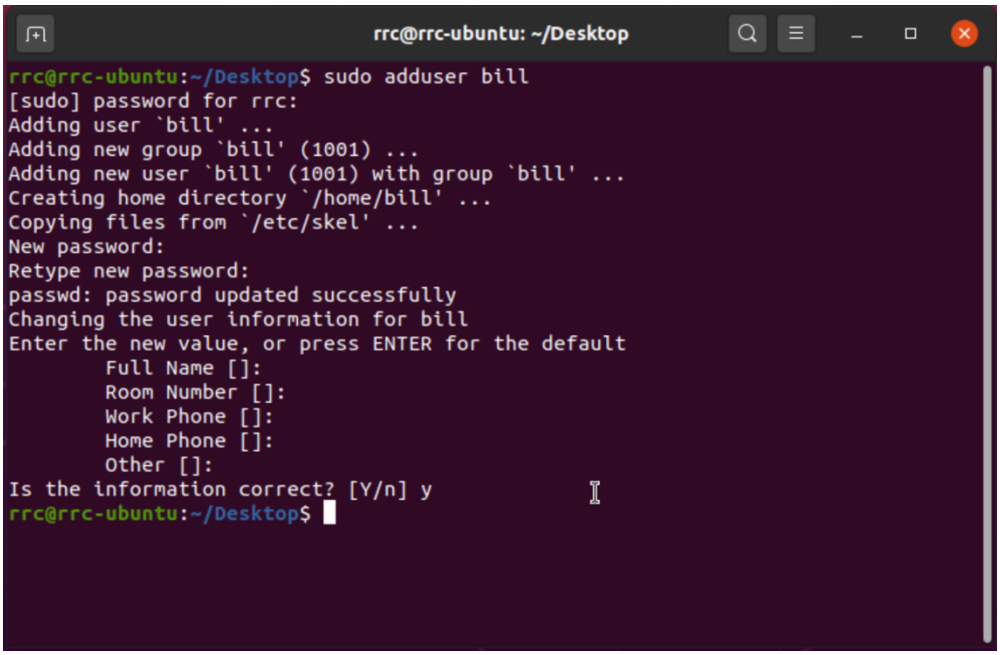


4. You can change the user using the “su” command.

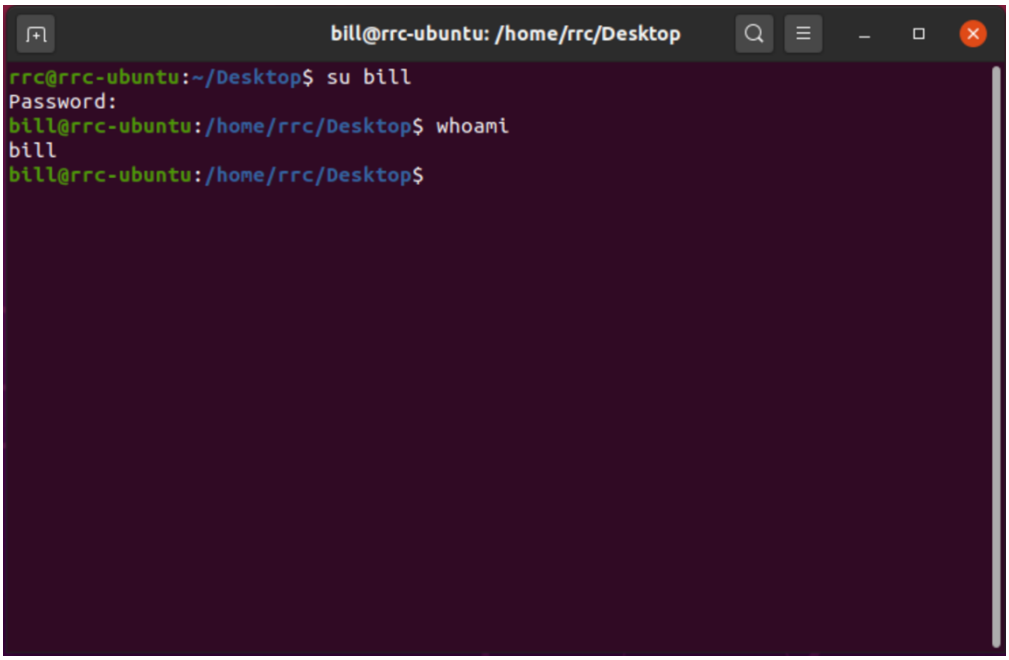

5. Now, the new user has permission to do normal things like looking at files and creating files within his permission.

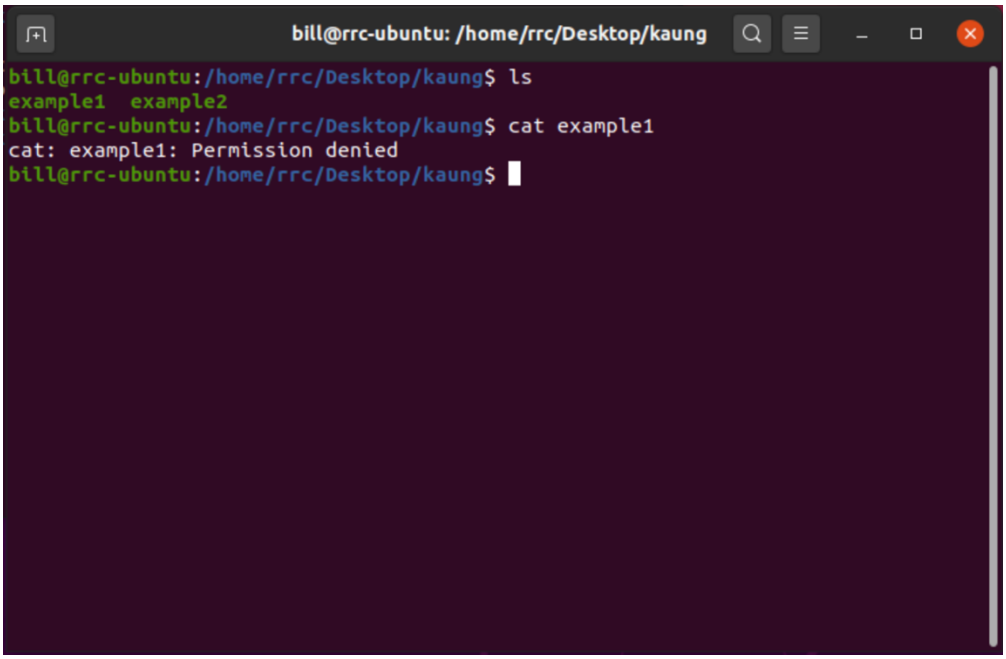


6. With the “ls-l” command, you can view the file’s permission. “r” for read, “w” for write, and “x” for execute. The first “rwx” is for the file’s owner meaning they have full access to the file. The second is for the group member and the third is for everyone.

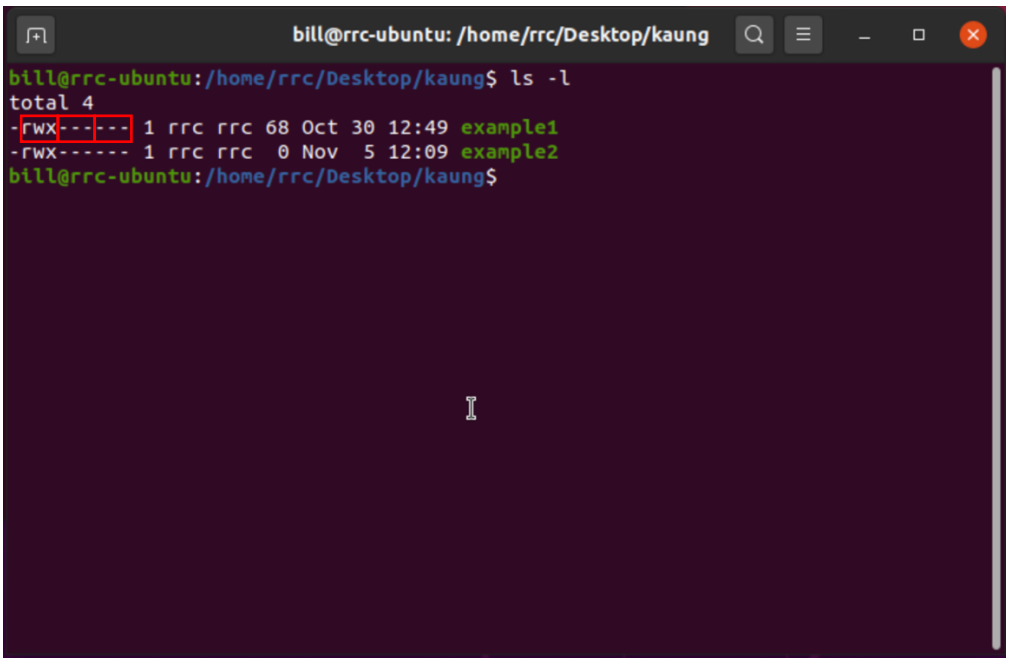


7. With the user account that has “sudo” access, you can change a file permission.
   In Linux, there are three types of permissions read, write, and execute.
   Each permission has its own number as follows.
   Read – 4
   Write – 2
   Execute – 1

8. Let’s use the account that has “sudo” access to change permission for the new user, which is to read. In this case, you will need to use the number “4” for the read access.


   You have to use the “chmod” command to change the permissions of a file from the account that has “sudo” access.

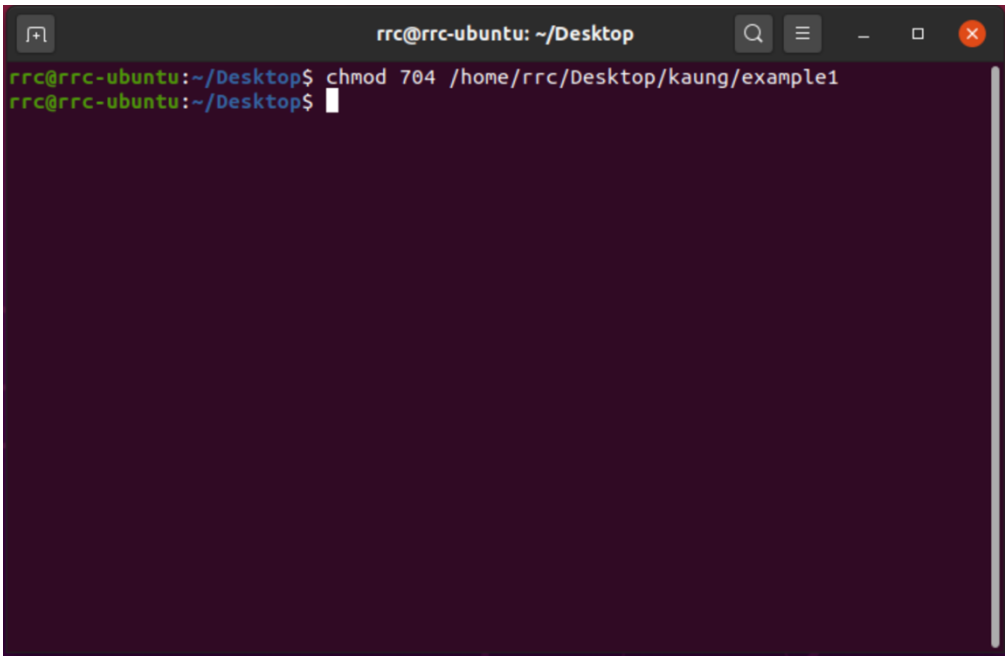


9. The new user cannot run things as “sudo” since he is not in the sudo group.
   You can see the sudoers file in the “/etc” location. This file may require the “sudo” command to open.

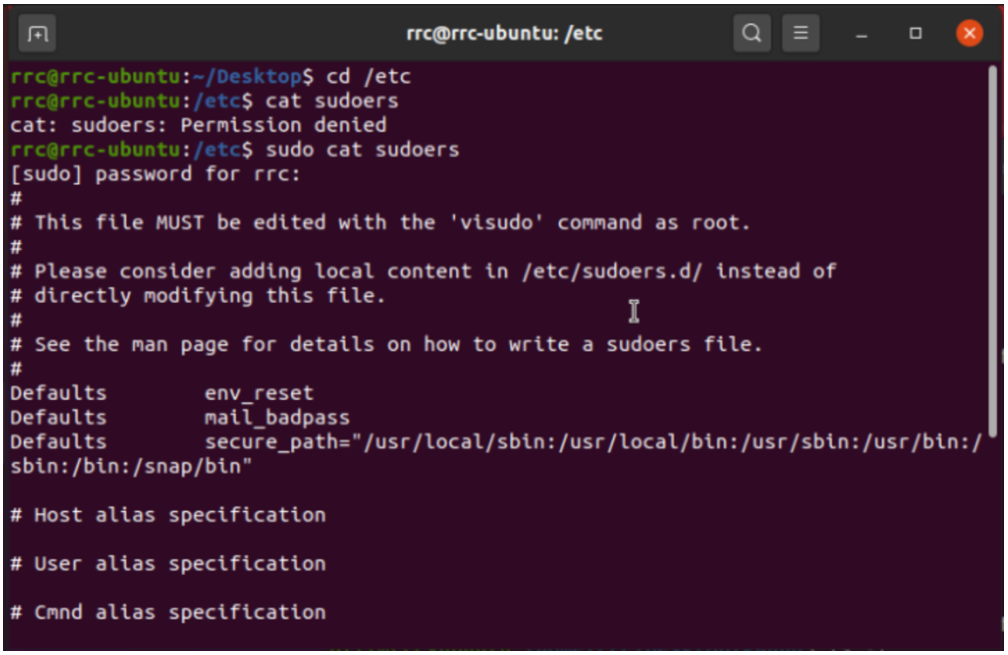

10. You will need the command “visudo” to open what’s inside the sudoers file and you still need to run as sudo.

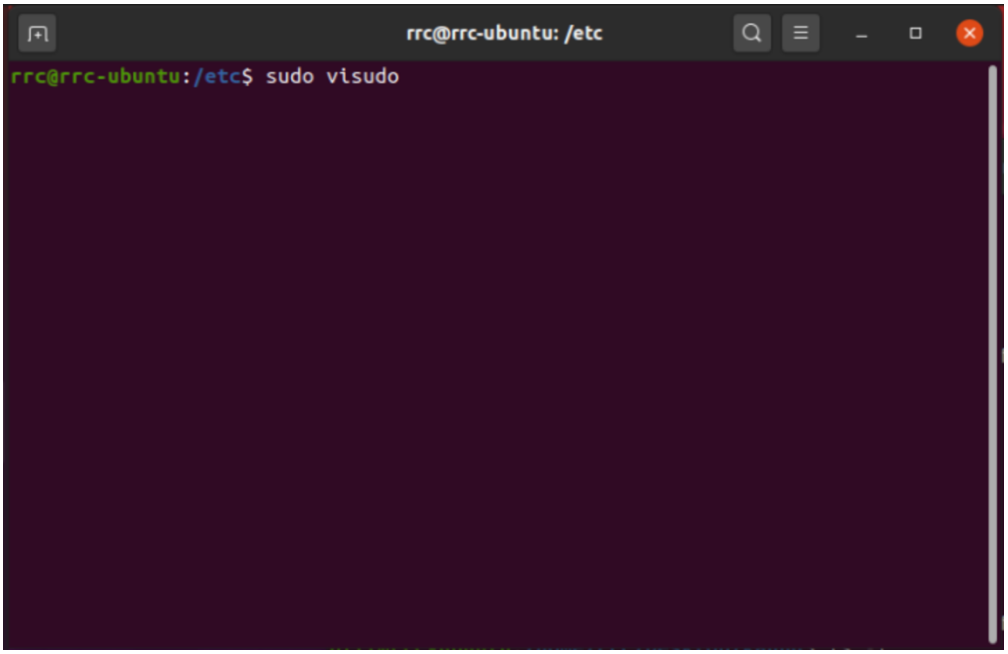

11. You can add the new user “bill” in this case to have “sudo” access by adding his name and copying the same thing from above. And press “Ctrl X” then “Y” to confirm.

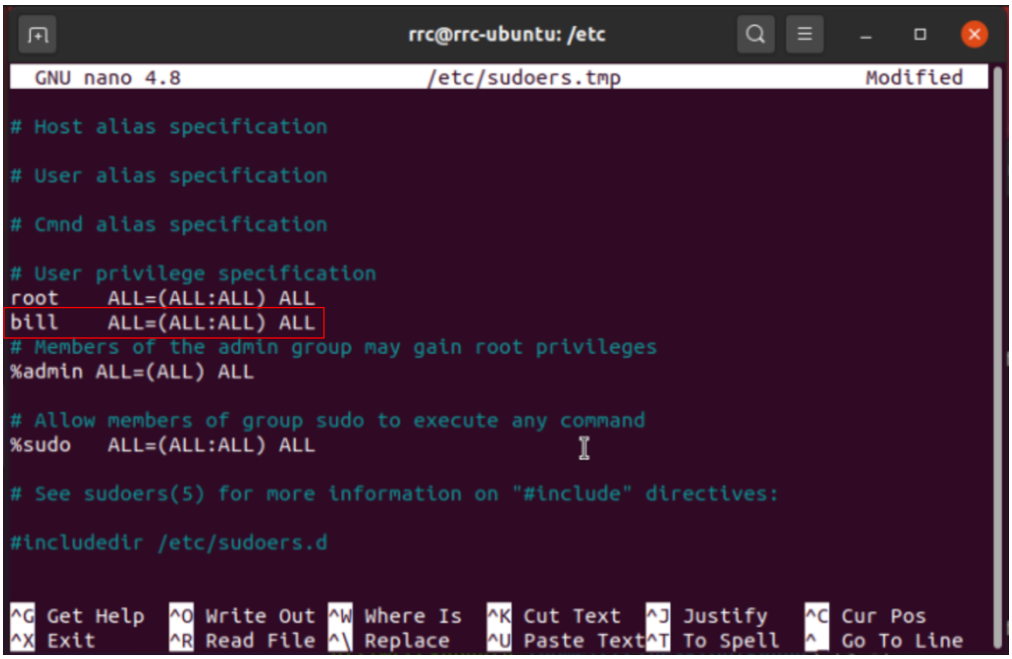

12. To log out safely as a user, you can use the “exit command to log out properly.

13. You can user the “userdel -r” command to delete the user and his files. If you still need his files, you can user the “userdel” file.

