
1. You can use the “date” command to show your current time.



2. You can use the “man” command to view the official documentation for help within the CLI.

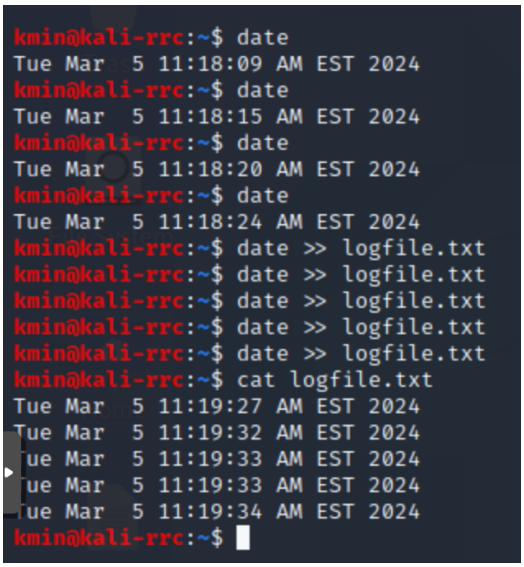

3. You can search for something out of the man page using the grep command.

```
kmin@kali-rrc:~$ man ls | grep "\-a"
       -a, --all
       -A, --almost-all
       --author
       -f     do not sort, enable -aU, disable -ls --color
              do not list implied entries matching shell PATTERN (overridden by -a or -A)
              use quoting style WORD for entry names: literal, locale, shell, shell-always, shell-escape,  shell-escape-always,  c,  escape  (overrides
kmin@kali-rrc:~$
```

4. You can use the “less” command to view the scorable read-only text.

```
kmin@kali-rrc:~$ set | less
kmin@kali-rrc:~$
```


5. You can use the “set” command to see the environment variables.

```
BASH=/bin/bash
BASHOPTS=checkwinsize:cmdhist:complete_fullquote:expand_aliases:extglob:extquote:force_fignore:globasciiranges:histappend:interactive_comments:progcomp:pro
mptvars:sourcepath
BASH_ALIASES=()
BASH_ARGC=([0]="0")
BASH_ARGV=()
BASH_CMDS=()
BASH_COMPLETION_VERSINFO=([0]="2" [1]="11")
BASH_LINENO=()
BASH_SOURCE=()
BASH_VERSINFO=([0]="5" [1]="0" [2]="18" [3]="1" [4]="release" [5]="x86_64-pc-linux-gnu")
BASH_VERSION='5.0.18(1)-release'
COLORFGBG='15;0'
COLUMNS=155
DBUS_SESSION_BUS_ADDRESS=unix:path=/run/user/1000/bus
DESKTOP_SESSION=lightdm-xsession
DIRSTACK=()
DISPLAY=:0.0
EUID=1000
GDMSESSION=lightdm-xsession
GROUPS=()
HISTCONTROL=ignoreboth
HISTFILE=/home/kmin/.bash_history
HISTFILESIZE=2000
HISTSIZE=1000
HOME=/home/kmin
HOSTNAME=kali-rrc
HOSTTYPE=x86_64
IFS=$' \t\n'
LANG=en_US.utf8
LANGUAGE=
LINES=43
LOGNAME=kmin
LS_COLORS='rs=0:di=01;34:ln=01;36:mh=00:pi=40;33:so=01;35:do=01;35:bd=40;33;01:cd=40;33;01:or=40;31;01:mi=00:su=37;41:sg=30;43:ca=30;41:tw=30;42:ow=34;42:s
t=37;44:ex=01;32:*.tar=01;31:*.tgz=01;31:*.arc=01;31:*.arj=01;31:*.taz=01;31:*.lha=01;31:*.lz4=01;31:*.lzh=01;31:*.lzma=01;31:*.tlz=01;31:*.txz=01;31:*.tzo
=01;31:*.t7z=01;31:*.zip=01;31:*.z=01;31:*.dz=01;31:*.gz=01;31:*.lrz=01;31:*.lz=01;31:*.lzo=01;31:*.xz=01;31:*.zst=01;31:*.tzst=01;31:*.bz2=01;31:*.bz=01;3
1:*.tbz=01;31:*.tbz2=01;31:*.tz=01;31:*.deb=01;31:*.rpm=01;31:*.jar=01;31:*.war=01;31:*.ear=01;31:*.sar=01;31:*.rar=01;31:*.alz=01;31:*.ace=01;31:*.zoo=01;
31:*.cpio=01;31:*.7z=01;31:*.rz=01;31:*.cab=01;31:*.wim=01;31:*.swm=01;31:*.dwm=01;31:*.esd=01;31:*.jpg=01;35:*.jpeg=01;35:*.mjpg=01;35:*.mjpeg=01;35:*.gif
=01;35:*.bmp=01;35:*.pbm=01;35:*.pgm=01;35:*.ppm=01;35:*.tga=01;35:*.xbm=01;35:*.xpm=01;35:*.tif=01;35:*.tiff=01;35:*.png=01;35:*.svg=01;35:*.svgz=01;35:*.
mng=01;35:*.pcx=01;35:*.mov=01;35:*.mpg=01;35:*.mpeg=01;35:*.m2v=01;35:*.mkv=01;35:*.webm=01;35:*.ogm=01;35:*.mp4=01;35:*.m4v=01;35:*.mp4v=01;35:*.vob=01;3
5:*.qt=01;35:*.nuv=01;35:*.wmv=01;35:*.asf=01;35:*.rm=01;35:*.rmvb=01;35:*.flc=01;35:*.avi=01;35:*.fli=01;35:*.flv=01;35:*.gl=01;35:*.dl=01;35:*.xcf=01;35:
*.xwd=01;35:*.yuv=01;35:*.cgm=01;35:*.emf=01;35:*.ogv=01;35:*.ogx=01;35:*.aac=00;36:*.au=00;36:*.flac=00;36:*.m4a=00;36:*.mid=00;36:*.midi=00;36:*.mka=00;3
:
```


6. You can use these environment variables directly in your commands using the “echo” to display these commands.

```
kmin@kali-rrc:~$ echo $LOGNAME
kmin
kmin@kali-rrc:~$ echo $HOME
/home/kmin
kmin@kali-rrc:~$
```


7. You can run the exit code to check if the previous command worked or not.

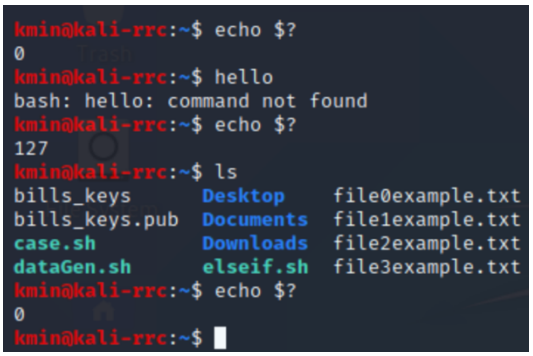


8. Let's use the vi text editor to make a script file more powerful without typing it all over again. Make a copy of your interfaces file and edit the copied file with vi editor. Manually enter the necessary information for a script file like "#!/bin/bash" on the top. Now, let's select the characters using "Control+V" keyboard shortcut for the visual block. Use your arrow key to select different lines

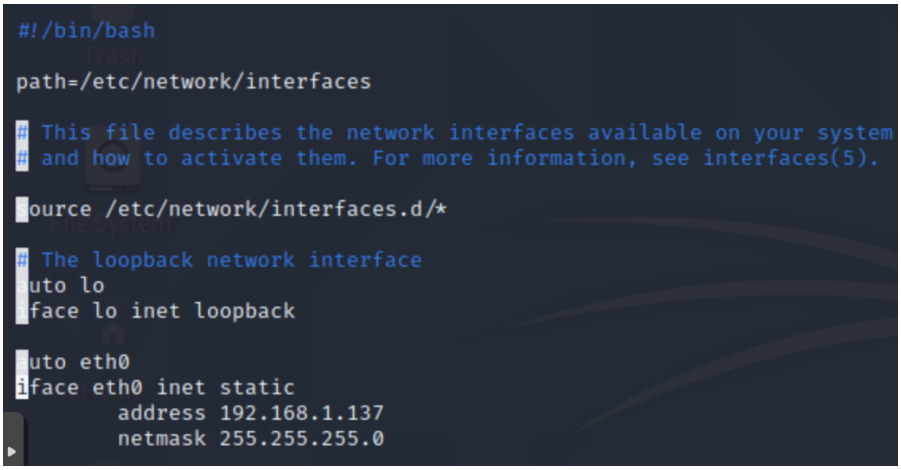

9. "Shift+i" to go to insert mode and type as shown.

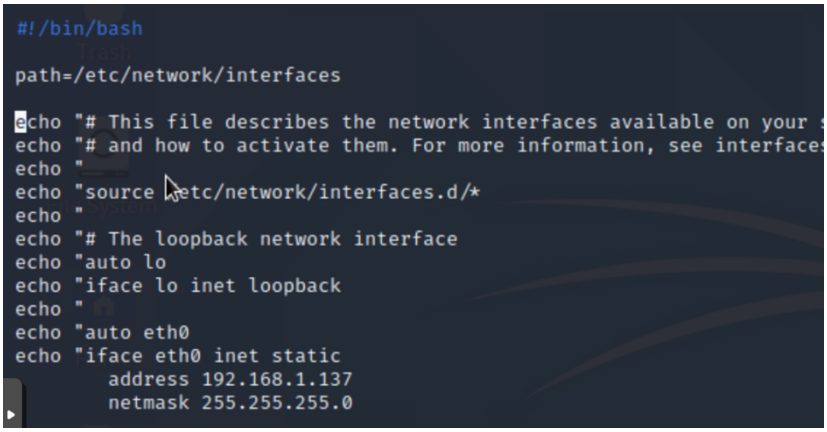

10. Now, you can copy the last part of the script with a redirect sign using the keyboard command v to go to visual mode. Then, use y on your keyboard to copy and p to paste. The rest of the script continues typing as shown.

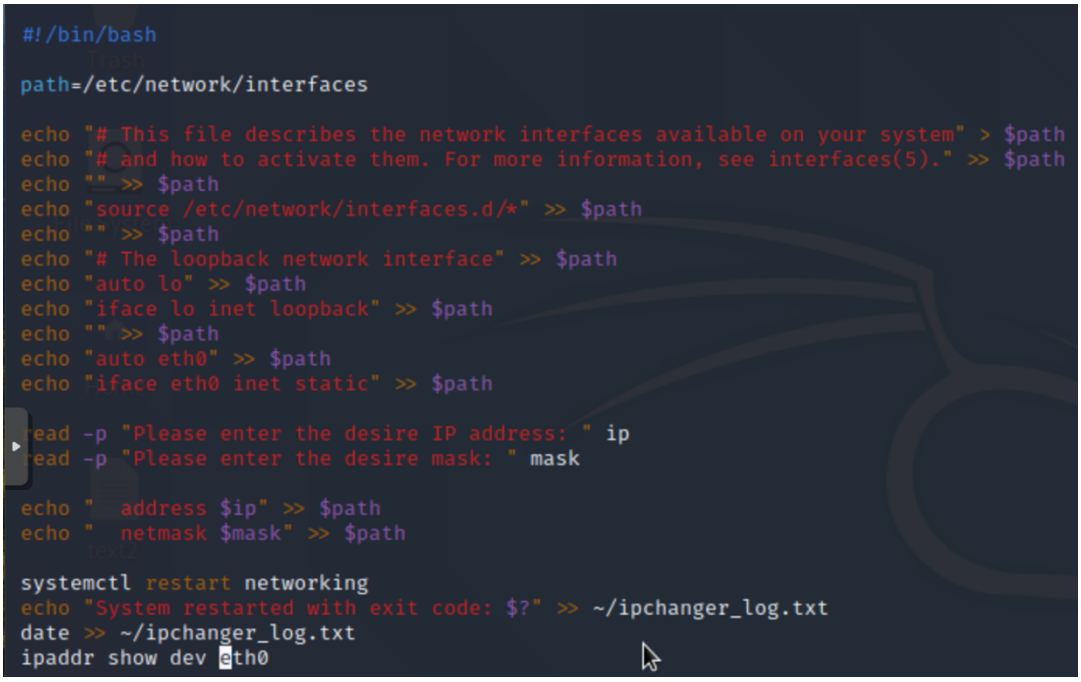

11. Make it a script file and give execute permission and, you can run it to change your IP address.

