



1. Now, let's make a loop that keeps the script going until the user stops it. You may need to use "while do done" to make a loop. In this script, we're going to make a loop that runs from 0 to 9. The output is provided on the right.

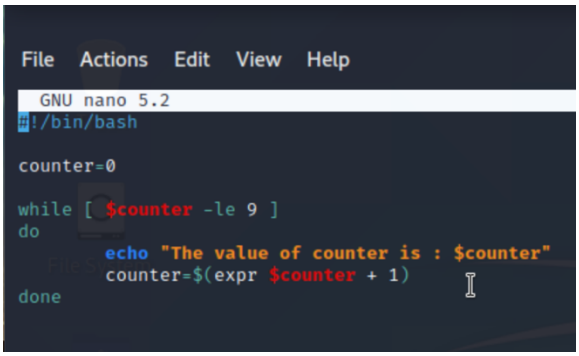

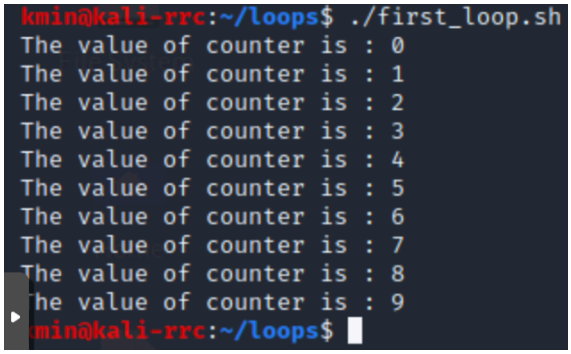


2. Now, let's do a loop that stops at a special location or character. In this script, it'll stop at the number "5". You can write this script by putting the if statement in a while loop. The output is shown in the right.

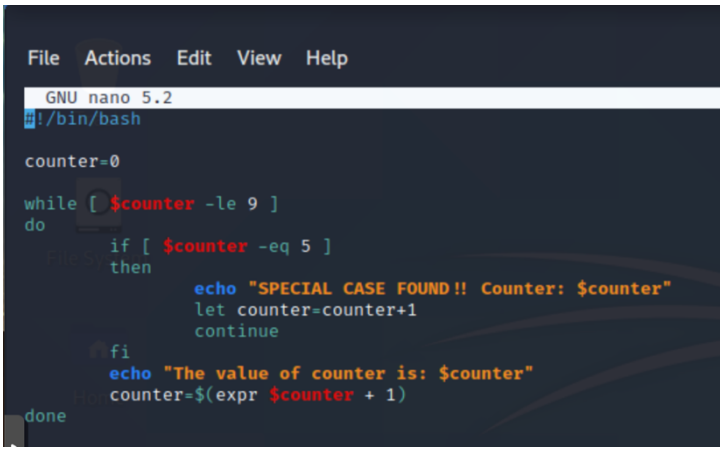


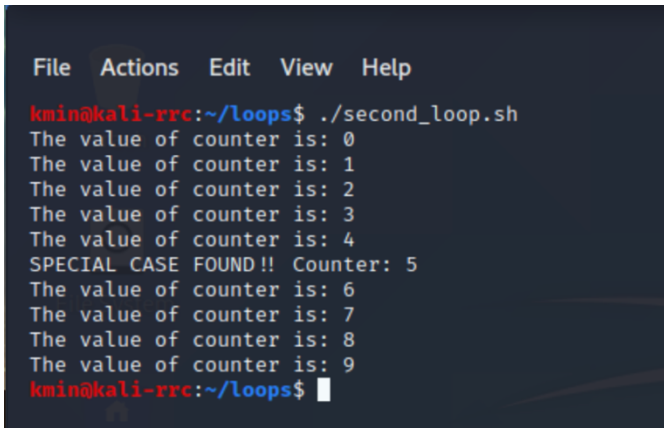


3. If you don't want to continue, you can break the loop right after the special case is found.

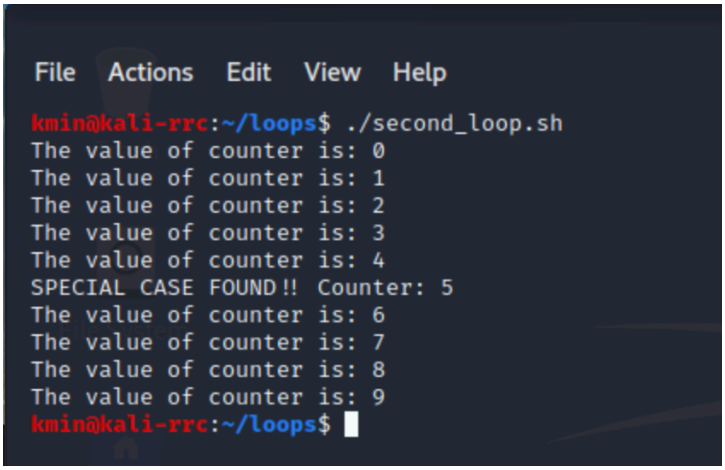

4. Let's make a script that creates files with names that are in the format "file1example.txt". You need to use the touch command and you may also need to use { } after the $ so that you can name the file in one word.

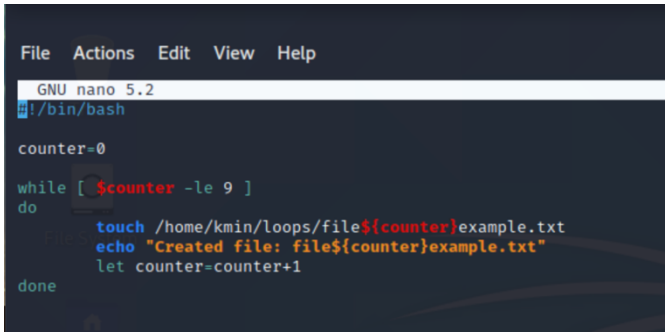

Here's the output

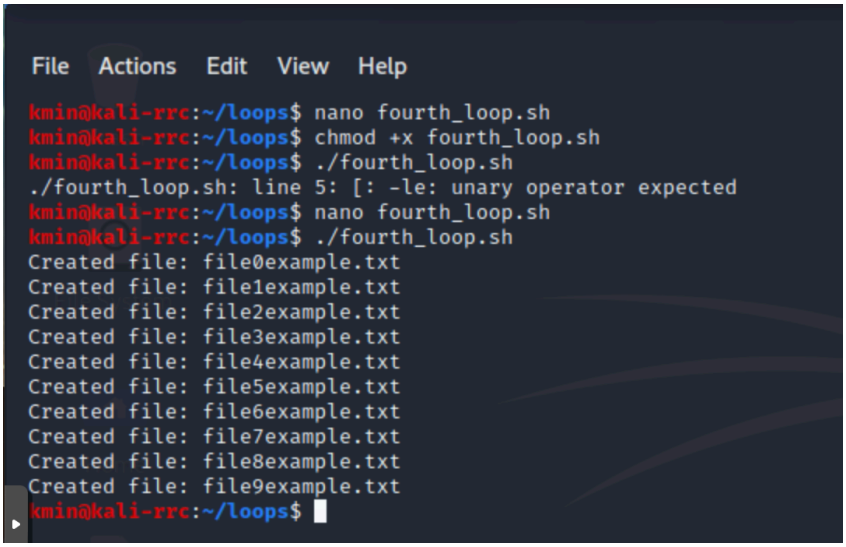

5. Now, let's make a script that writes something inside each text file. We'll use the for loop instead of the while loop in this case, but it's a choice.

```
#!/bin/bash

files=$(ls *.txt)
counter=0

for f in $files
do
        echo "hello" >> $f
        echo "This is file $counter" >> $f
        let counter=counter+1
done
```

6. If you run the command, it'll result as shown.

```
kmin@kali-rrc:~/loops$ nano fifth_loop.sh
kmin@kali-rrc:~/loops$ chmod +x fifth_loop.sh
kmin@kali-rrc:~/loops$ ./fifth_loop.sh
kmin@kali-rrc:~/loops$ cat file0example.txt
hello
kmin@kali-rrc:~/loops$ cat file9example.txt
hello
kmin@kali-rrc:~/loops$ nano fifth_loop.sh
kmin@kali-rrc:~/loops$ ./fifth_loop.sh
kmin@kali-rrc:~/loops$ cat file0example.txt
hello
hello
This is file 0
kmin@kali-rrc:~/loops$ cat file9example.txt
hello
hello
This is file 9
kmin@kali-rrc:~/loops$
```

7. To create a loop script that finds a special case in files, you need to write the script as shown and the result is on the right.

```
  GNU nano 5.2
#!/bin/bash

files=$(ls *.txt)

for file in $files
do
        grep 5 $file >> /dev/null
        if [ $? -eq 0 ]
        then
                cp $file ~
                echo "Special file found! Copied to ~"
                continue
        fi
        echo "Special case not found for file: $file"
done
```

```
kmin@kali-rrc:~/loops$ nano sixth_loop.sh
kmin@kali-rrc:~/loops$ ./sixth_loop.sh
Special case not found for file: file0example.txt
Special case not found for file: file1example.txt
Special case not found for file: file2example.txt
Special case not found for file: file3example.txt
Special case not found for file: file4example.txt
This is file 5
Special file found!! Copied to ~
Special case not found for file: file6example.txt
Special case not found for file: file7example.txt
Special case not found for file: file8example.txt
Special case not found for file: file9example.txt
kmin@kali-rrc:~/loops$ nano sixth_loop.sh
kmin@kali-rrc:~/loops$ nano sixth_loop.sh
kmin@kali-rrc:~/loops$
kmin@kali-rrc:~/loops$ ./sixth_loop.sh
Special case not found for file: file0example.txt
Special case not found for file: file1example.txt
Special case not found for file: file2example.txt
Special case not found for file: file3example.txt
Special case not found for file: file4example.txt
Special file found!! Copied to ~
Special case not found for file: file6example.txt
Special case not found for file: file7example.txt
Special case not found for file: file8example.txt
Special case not found for file: file9example.txt
kmin@kali-rrc:~/loops$
```