


1. You can user the “shuf” command to shuffle with -i option which you can put the number range.

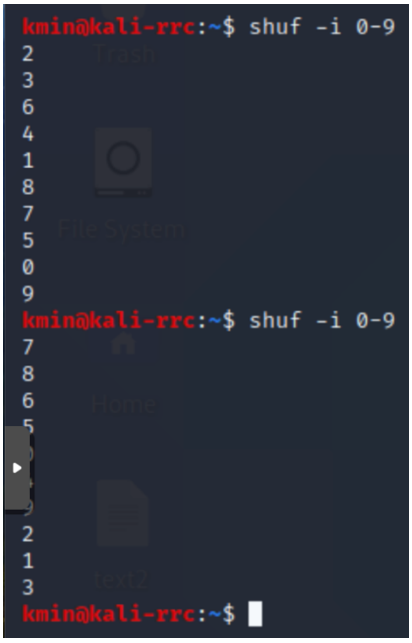

2. You can also add -n option to put how many numbers you want out of the range.

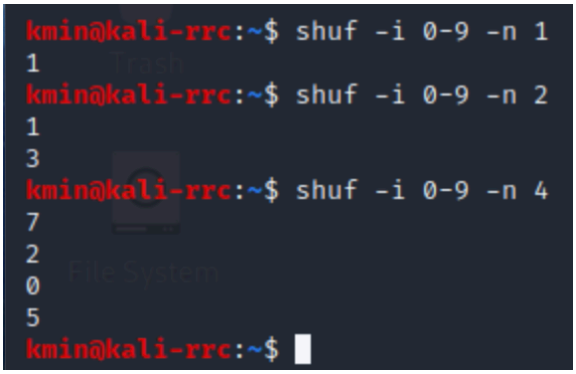

3. Let's make a script that shuffles a random number and checks if it is between 1 and 4.

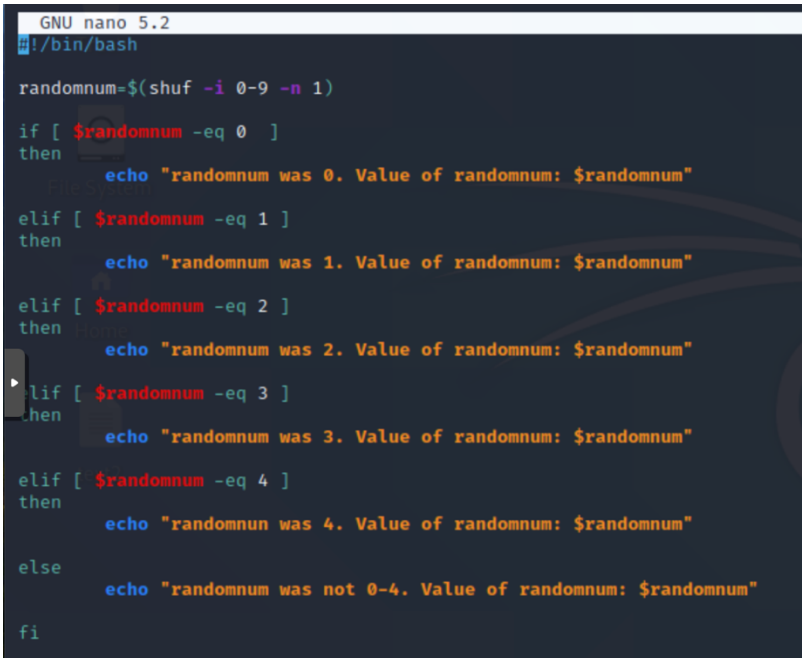

```
  GNU nano 5.2
#!/bin/bash

randomnum=$(shuf -i 0-9 -n 1)

if [ $randomnum -eq 0  ]
then
        echo "randomnum was 0. Value of randomnum: $randomnum"

elif [ $randomnum -eq 1 ]
then
        echo "randomnum was 1. Value of randomnum: $randomnum"

elif [ $randomnum -eq 2 ]
then
        echo "randomnum was 2. Value of randomnum: $randomnum"


lif [ $randomnum -eq 3 ]
hen
        echo "randomnum was 3. Value of randomnum: $randomnum"

elif [ $randomnum -eq 4 ]
then
        echo "randomnun was 4. Value of randomnum: $randomnum"

else
        echo "randomnum was not 0-4. Value of randomnum: $randomnum"


fi
```

4. Here's the output of the script.

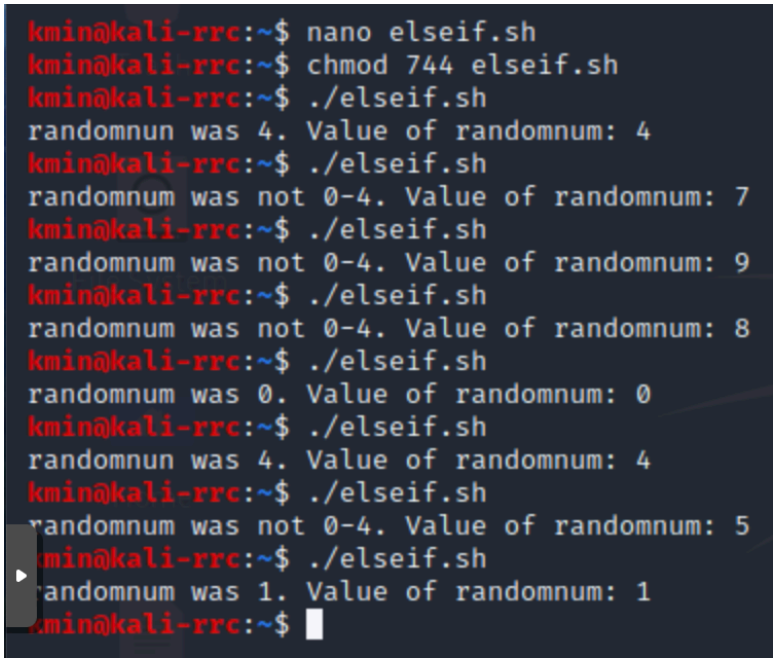


```
kmin@kali-rrc:~$ nano elseif.sh
kmin@kali-rrc:~$ chmod 744 elseif.sh
kmin@kali-rrc:~$ ./elseif.sh
randomnun was 4. Value of randomnum: 4
kmin@kali-rrc:~$ ./elseif.sh
randomnum was not 0-4. Value of randomnum: 7
kmin@kali-rrc:~$ ./elseif.sh
randomnum was not 0-4. Value of randomnum: 9
kmin@kali-rrc:~$ ./elseif.sh
randomnum was not 0-4. Value of randomnum: 8
kmin@kali-rrc:~$ ./elseif.sh
randomnum was 0. Value of randomnum: 0
kmin@kali-rrc:~$ ./elseif.sh
randomnun was 4. Value of randomnum: 4
kmin@kali-rrc:~$ ./elseif.sh
randomnum was not 0-4. Value of randomnum: 5
min@kali-rrc:~$ ./elseif.sh
andomnum was 1. Value of randomnum: 1
min@kali-rrc:~$
```

5. You can write the same script with different commands. Case is similar to if but written in different methods. The result of this script will be the same as the previous one.

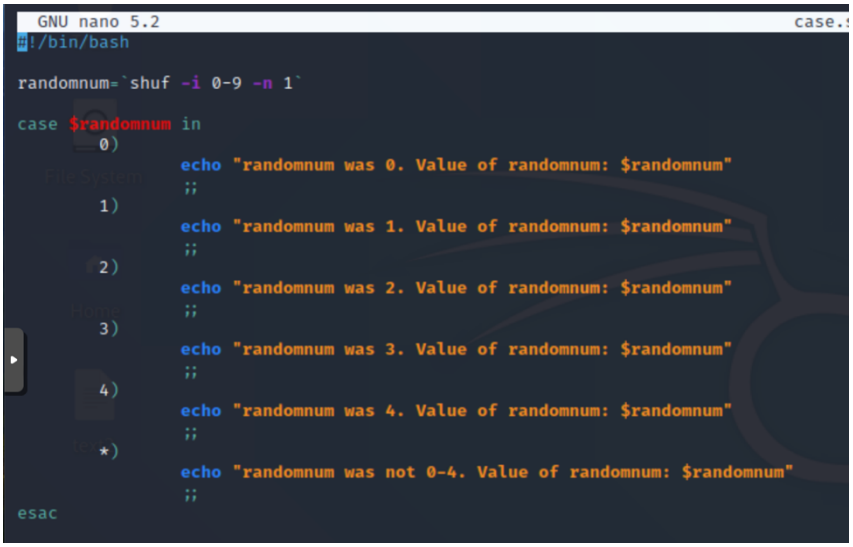

6. If you put “hello” as your random number, -eq will break.

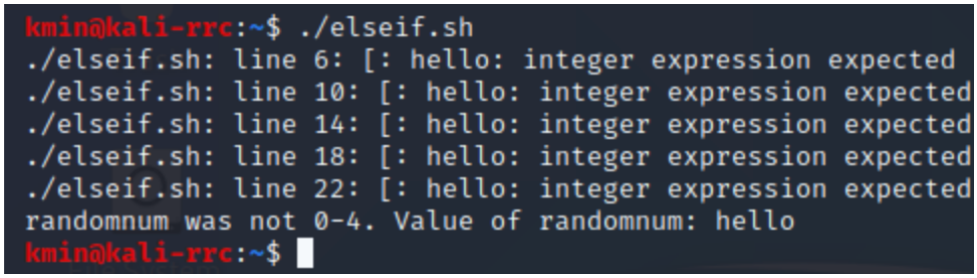

7. There’s a way to solve this problem. You can use single = and put the number in quotes. In this way, it will both work for letters and numbers.

```
#!/bin/bash

randomnum=$(shuf -i 0-9 -n 1)
#randomnum="hello"

if [ $randomnum = "0" ]
then
        echo "randomnum was 0. Value of randomnum: $randomnum"
elif [ $randomnum = "1" ]
then
        echo "randomnum was 1. Value of randomnum: $randomnum"
elif [ $randomnum = "2" ]
then
        echo "randomnum was 2. Value of randomnum: $randomnum"
elif [ $randomnum = "3" ]
then
        echo "randomnum was 3. Value of randomnum: $randomnum"
elif [ $randomnum = "4" ]
then
        echo "randomnum was 4. Value of randomnum: $randomnum"
else
```

8. Here's the result of the command.


```
kmin@kali-rrc:~$ nano elseif.sh
kmin@kali-rrc:~$ ./elseif.sh
randomnum was not 0-4. Value of randomnum: hello
kmin@kali-rrc:~$ ./elseif.sh
randomnum was not 0-4. Value of randomnum: hello
kmin@kali-rrc:~$ nano elseif.sh
kmin@kali-rrc:~$ ./elseif.sh
randomnum was not 0-4. Value of randomnum: 6
kmin@kali-rrc:~$ ./elseif.sh
randomnum was not 0-4. Value of randomnum: 8
kmin@kali-rrc:~$
```

9. You can make an "and" or and "or" using || and && in the script.

```
randomnum=$(shuf -i 0-9 -n 1)
#randomnum="hello"

if [ $randomnum = "0" ]
then
        echo "randomnum was 0. Value of randomnum: $randomnum"
elif [ $randomnum = "1" ]
then
        echo "randomnum was 1. Value of randomnum: $randomnum"
elif [ $randomnum = "2" ]
then
        echo "randomnum was 2. Value of randomnum: $randomnum"
elif [ $randomnum = "3" ] || [ $randomnum = "hello" ]
then
        echo "randomnum was 3. Value of randomnum: $randomnum"
elif [ $randomnum = "4" ] && [ $randomnum -gt 3 ]
then
        echo "randomnum was 4. Value of randomnum: $randomnum"
else
        echo "randomnum was not 0-4. Value of randomnum: $randomnum"
fi
```

10. Here’s the output of the script.

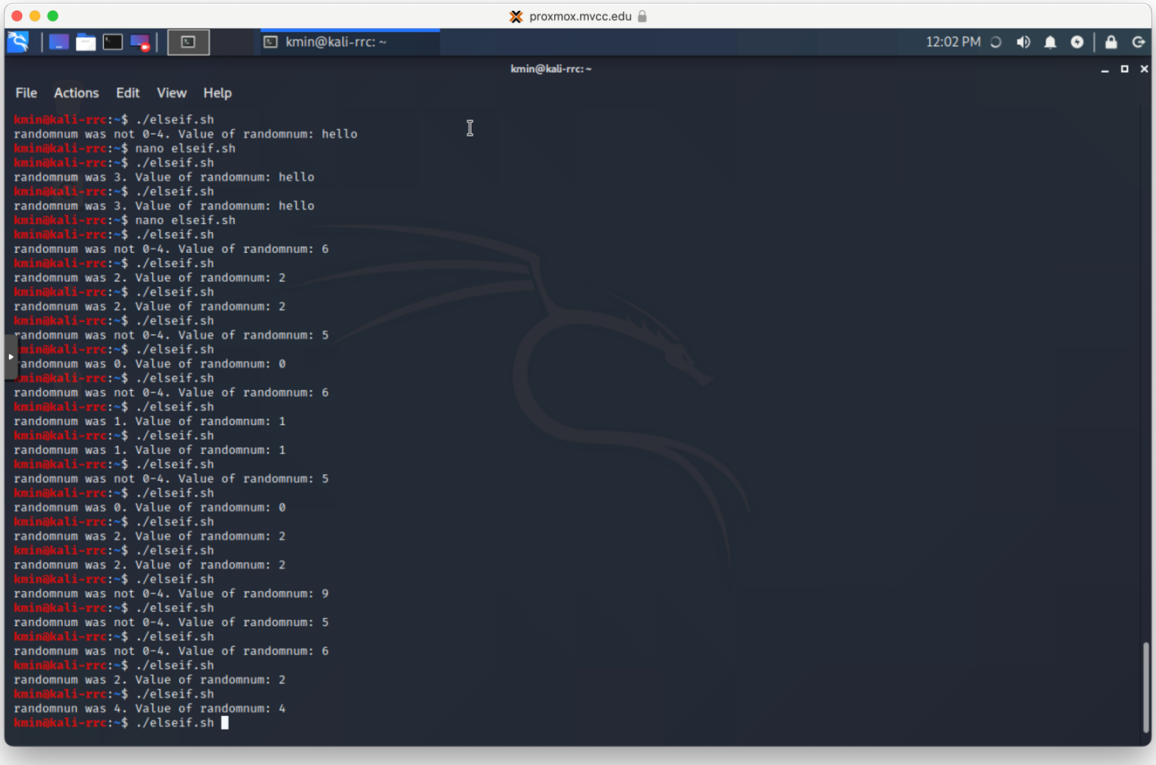

11. Here’s the script for the rock, paper, scissors assignment.

```
#!/bin/bash

echo "rock=1"
echo "paper=2"
echo "scissors=3"

rock=1
paper=2
scissors=3

while true
do
read -p "Enter your choice: " player_choice

computer_choice=$(shuf -i 1-3 -n 1)

case $computer_choice in
        1)
                echo "Computer choice: $Computer_choice"
                ;;
        2)
                echo "Computer choice: $computer_choice"
                ;;
        3)
                echo "Computer choice: $computer_choice"
                ;;
esac

if [ $player_choice == $computer_choice ]
then
        echo "It's a tie!"
elif [ $player_choice == $rock ] && [ $computer_choice == 3 ]
then
        echo "You won!"
elif [ $player_choice == $paper ] && [ $computer_choice == 1 ]
then
        echo "You won!"
elif [ $player_choice == $scissors ] && [ $computer_choice == 2 ]
then
        echo "You won!"
else
        echo "The computer won!"
fi

read -p "Do you want to play again(y/n): " still_play

if [ $still_play != y ]
then
        break
fi
done
```

12. The result of the game can be seen below.

```
kmin@kali-rrc:~$ ./rps.sh
rock=1
paper=2
scissors=3
Enter your choice: 2
Computer choice: 3
The computer won!
Do you want to play again(y/n): y
Enter your choice: 3
Computer choice: 2
You won!
Do you want to play again(y/n): y
Enter your choice: 1
Computer choice: 3
You won!
Do you want to play again(y/n): y
Enter your choice: 1
Computer choice: 2
The computer won!
Do you want to play again(y/n): y
Enter your choice: 1
Computer choice: 2
The computer won!
Do you want to play again(y/n): y
Enter your choice: 2
Computer choice: 2
It's a tie!
Do you want to play again(y/n):
```