1. You can use the “find” command to search for something with “iname” option.

```
kmin@kali-rrc:~$ find ~ -iname "d*"
/home/kmin/Desktop
/home/kmin/dataGen.sh
/home/kmin/.config/dconf
/home/kmin/.config/xfce4/desktop
/home/kmin/.config/xfce4/xfconf/xfce-perchannel-xml/displays.xml
/home/kmin/.cache/sessions/thumbs-kali-rrc:0/Default.png
/home/kmin/.cache/sessions/thumbs-kali-rrc:1/Default.png
/home/kmin/Documents
/home/kmin/Documents/txts/d6DKkVyL.txt
/home/kmin/Documents/txts/dzs7vmP0.txt
/home/kmin/Documents/txts/dmcBxgLDpG.txt
/home/kmin/Documents/txts/DEqWvIWoPo.txt
/home/kmin/Documents/txts/dWtD5Iq5.txt
/home/kmin/Documents/txts/dYcoGbtdQGQ0.txt
```

2. You can put “type” to specify a directory or file with the abbreviation d for directory and f for file.

```
kmin@kali-rrc:~$ find ~ -iname "d*" -type d
/home/kmin/Desktop
/home/kmin/.config/dconf
/home/kmin/.config/xfce4/desktop
/home/kmin/Documents
/home/kmin/Downloads
kmin@kali-rrc:~$
```

```
kmin@kali-rrc:~$ find ~ -iname "d*" -type f
/home/kmin/dataGen.sh
/home/kmin/.config/xfce4/xfconf/xfce-perchannel-xml/displays.xml
/home/kmin/.cache/sessions/thumbs-kali-rrc:0/Default.png
/home/kmin/.cache/sessions/thumbs-kali-rrc:1/Default.png
/home/kmin/Documents/txts/d6DKkVyL.txt
/home/kmin/Documents/txts/dzs7vmP0.txt
/home/kmin/Documents/txts/dmcBxgLDpG.txt
/home/kmin/Documents/txts/DEqWvIWoPo.txt
/home/kmin/Documents/txts/dWtD5Iq5.txt
/home/kmin/Documents/txts/dYcoGbtdQGQ0.txt
/home/kmin/Documents/txts/Dqu1kYWfOzX9.txt
/home/kmin/Documents/txts/DWmxru78B2VE.txt
/home/kmin/Documents/txts/dypRTPQbiV.txt
/home/kmin/Documents/consecutivenm/DLiQ26KbR.pdf
/home/kmin/Documents/consecutivenm/DIzvBp71.ci132
/home/kmin/Documents/consecutivenm/DWmxru78B2VE.txt
/home/kmin/Documents/1stcap2ndnotcap/Dhs1tC0wVUj9.ci132
/home/kmin/Documents/1stcap2ndnotcap/D8vvoEgAP.ci132
/home/kmin/Documents/1stcap2ndnotcap/D2TtruKQVPh.ci132
/home/kmin/Documents/1stcap2ndnotcap/DeR5gUdmd.pdf
/home/kmin/Documents/1stcap2ndnotcap/DxgFiqqzw.pdf
```

3. You can user the “-o” option to add another option using the same “find” command.

```
kmin@kali-rrc:~$ find ~ -iname "d*.txt" -type f -o -iname "d*.pdf"
/home/kmin/Documents/txts/d6DKkVyL.txt
/home/kmin/Documents/txts/dzs7vmP0.txt
/home/kmin/Documents/txts/dmcBxgLDpG.txt
/home/kmin/Documents/txts/DEqWvIWoPo.txt
/home/kmin/Documents/txts/dWtD5Iq5.txt
/home/kmin/Documents/txts/dYcoGbtdQGQ0.txt
/home/kmin/Documents/txts/Dqu1kYWfOzX9.txt
/home/kmin/Documents/txts/DWmxru78B2VE.txt
/home/kmin/Documents/txts/dypRTPQbiV.txt
/home/kmin/Documents/consecutivenm/DLiQ26KbR.pdf
/home/kmin/Documents/consecutivenm/DWmxru78B2VE.txt
/home/kmin/Documents/1stcap2ndnotcap/DeR5gUdmd.pdf
/home/kmin/Documents/1stcap2ndnotcap/DxgFiqqzw.pdf
/home/kmin/Documents/1stcap2ndnotcap/Dqu1kYWfOzX9.txt
/home/kmin/Documents/eightchra/d6DKkVyL.txt
/home/kmin/Documents/eightchra/dzs7vmP0.txt
/home/kmin/Documents/eightchra/dWtD5Iq5.txt
/home/kmin/Documents/eightchra/DDvgBNSg.pdf
/home/kmin/Documents/startscap/DLiQ26KbR.pdf
/home/kmin/Documents/startscap/DeR5gUdmd.pdf
/home/kmin/Documents/startscap/DO2ldUP8b.pdf
/home/kmin/Documents/startscap/DxgFiqqzw.pdf
/home/kmin/Documents/startscap/DEqWvIWoPo.txt
/home/kmin/Documents/startscap/Dqu1kYWfOzX9.txt
/home/kmin/Documents/startscap/DDvgBNSg.pdf
/home/kmin/Documents/startscap/DWmxru78B2VE.txt
kmin@kali-rrc:~$
```

4. You can use the “-user” option to find something that belongs to a certain user.

```
kmin@kali-rrc:~$ find ~ -user root
/home/kmin/output.txt
/home/kmin/interfaces
kmin@kali-rrc:~$
```

5. You can also use this “find” command to see how many files and folders are in the computer by redirecting to the wild card.

```
kmin@kali-rrc:~$ sudo find / -type d | wc -l
24991
kmin@kali-rrc:~$ sudo find / | wc -l
298875
kmin@kali-rrc:~$
```

6. You can use “-i” option to ignore the case and “-n” option to show the line number in the grep command.


```
kmin@kali-rrc:/var/www/html$ grep -i "this is the default welcome page" index.html
                This is the default welcome page used to test the correct
kmin@kali-rrc:/var/www/html$ grep -i -n "this is the default welcome page" index.html
223:                This is the default welcome page used to test the correct
kmin@kali-rrc:/var/www/html$
```

7. Use the +233 to jump to line 233 using nano command to edit the file.

```
kmin@kali-rrc:/var/www/html$ sudo nano +223 index.html
```

8. If you use vi, you can type ":233" to jump to line 233 after you open the file with vi.

9. You can use the "sed" command just like the "cat" command if you don't put anything inside the quote.

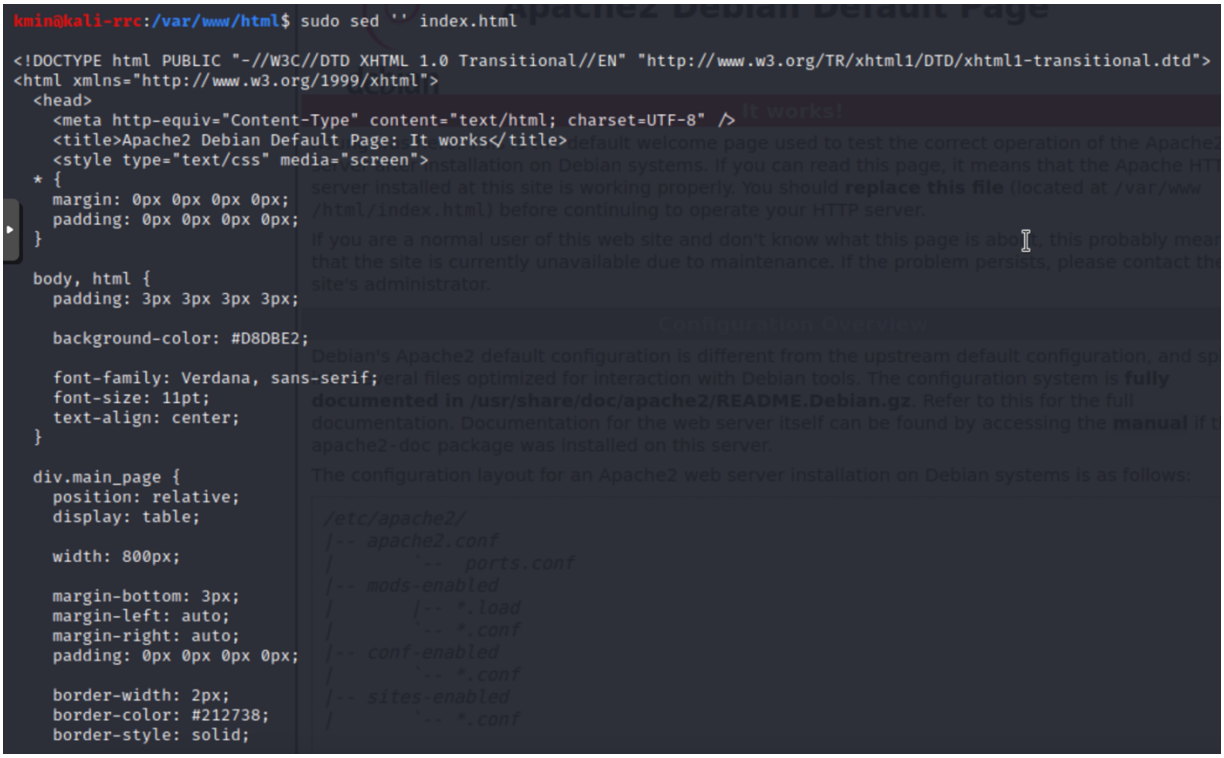

```
kmin@kali-rrc:/var/www/html$ sudo sed '' index.html

<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN" "http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">
<html xmlns="http://www.w3.org/1999/xhtml">
  <head>
    <meta http-equiv="Content-Type" content="text/html; charset=UTF-8" />
    <title>Apache2 Debian Default Page: It works</title>
    <style type="text/css" media="screen">
  * {
    margin: 0px 0px 0px 0px;
    padding: 0px 0px 0px 0px;
  }

  body, html {
    padding: 3px 3px 3px 3px;

    background-color: #D8DBE2;

    font-family: Verdana, sans-serif;
    font-size: 11pt;
    text-align: center;
  }

  div.main_page {
    position: relative;
    display: table;

    width: 800px;

    margin-bottom: 3px;
    margin-left: auto;
    margin-right: auto;
    padding: 0px 0px 0px 0px;

    border-width: 2px;
    border-color: #212738;
    border-style: solid;
```

10. You can put p inside the quotes to print and it'll print both the original and the printed version of it meaning you'll have two same lines for each line.

```
kmin@kali-rrc:/var/www/html$ sudo sed -n 'p' index.html

<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN" "http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">
<html xmlns="http://www.w3.org/1999/xhtml">
  <head>
    <meta http-equiv="Content-Type" content="text/html; charset=UTF-8" />
    <title>Apache2 Debian Default Page: It works</title>
    <style type="text/css" media="screen">
  * {
    margin: 0px 0px 0px 0px;
    padding: 0px 0px 0px 0px;
  }

  body, html {
    padding: 3px 3px 3px 3px;

    background-color: #D8DBE2;

    font-family: Verdana, sans-serif;
    font-size: 11pt;
    text-align: center;
  }

  div.main_page {
    position: relative;
    display: table;

    width: 800px;

    margin-bottom: 3px;
    margin-left: auto;
```

11. You can jump to any line you want by putting the line number inside the quote.

```
kmin@kali-rrc:/var/www/html$ sudo sed -n '223p' index.html
                Kaung was here. This is the default welcome page used to test the correct
kmin@kali-rrc:/var/www/html$ sudo sed -n '223,224p' index.html
                Kaung was here. This is the default welcome page used to test the correct
                operation of the Apache2 server after installation on Debian systems.
kmin@kali-rrc:/var/www/html$
```

12. You can replace using the sed command as shown below.


```
kmin@kali-rrc:/var/www/html$ sudo sed 's/Kaung/Min/g' index.html

<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN" "http://www.w3.org/TR/xhtml
<html xmlns="http://www.w3.org/1999/xhtml">
  <head>
    <meta http-equiv="Content-Type" content="text/html; charset=UTF-8" />
```


13. Running this will only show the preview but, you can add “-i” option to make changes permanently.

```
kmin@kali-rrc:/var/www/html$ sudo sed -i 's/Kaung/Min/g' index.html
kmin@kali-rrc:/var/www/html$
```

14. You can use the “sed” and “find” commands to find something and temporarily show words with their substitutes for certain reasons. In this case, it will show “bill” instead of whatever the user is.

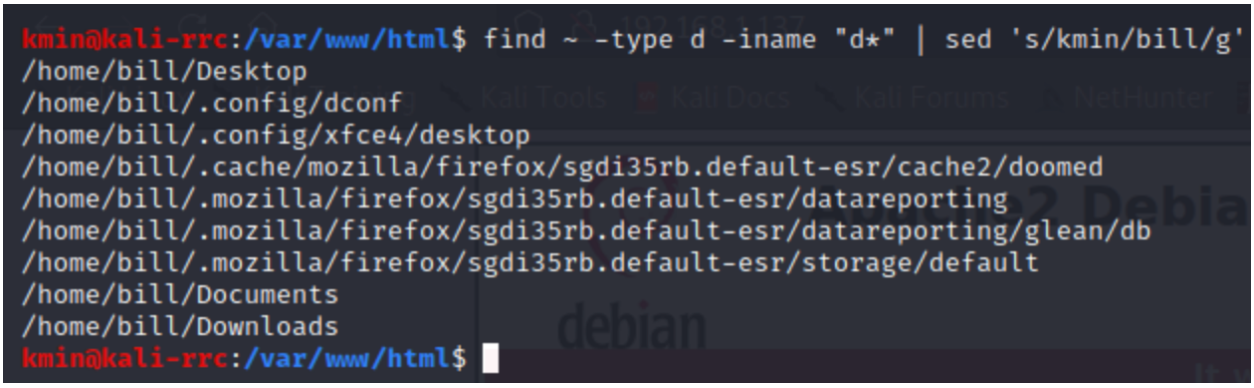


15. If you want to put / inside the / but, not want the / to close, you can use \

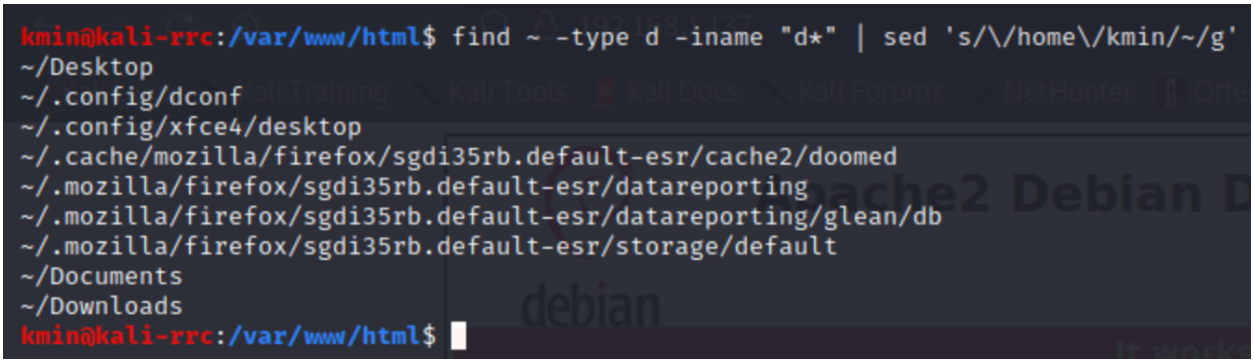


16. You can also search using the “sed” command. You won’t need the “s” part since we are not substituting but, you may need to close it with “p” to print again.

