ONE PHYSICAL UNIT CAN SERVE MULTIPLE TASK HEADS

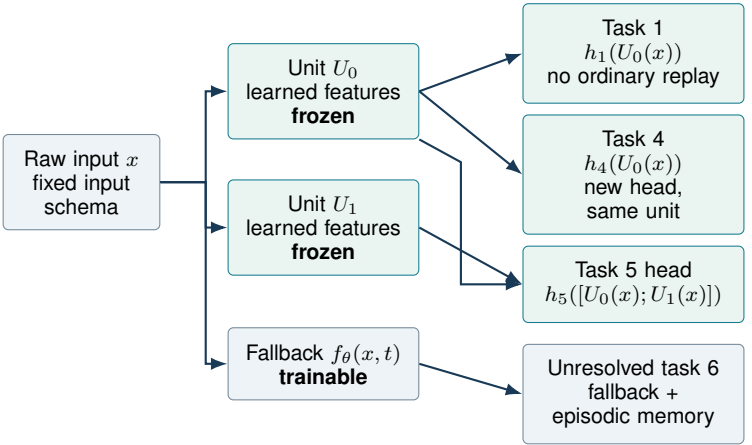

Task ID chooses route.
Task-aware inference.
Only new heads train;
old units stay frozen.

Count units, heads, witnesses, routes and fallback.
Ablate U_0 on every client task to test dependence.