

PROJECT REPORT ON  
**PRISON SYSTEM**  
BACHELOR OF COMPUTER APPLICATIONS  
BENGALURU NORTH UNIVERSITY



BENGALURU-560049

PRESENTED BY

Surya V

R1918102

UNDER GUIDENCE OF



EAST POINT COLLEGE OF HIGHER EDUCATION  
DEPARTMENT OF COMPUTER APPLICATIONS  
East Point Campus Jnana Prabha Virgo Nagar Post  
Bengaluru-49



Department of Computer Science-BCA-(BNU)

East Point Campus, Jnana Prabha Virgo Nagar Post Bengaluru-560049

DATE:\_\_\_\_\_

### **CERTIFICATE**

This is to certify that I have done project work on **PRISON SYSTEM** submitted to the Bangalore North University in the partial fulfilment of the requirement for the award of the degree of work carried out, under the guidance and supervision of **MR.LOGANAYAGAN V(Assistant professor)**

**SURYA V [R1918102]**

.....

**GUIDE**

.....

**PRINCIPAL**

.....

**HOD**

East Point Campus

M: +91 991 686 5999

Jnana Prabha Virgo Nagar Post

E: [info](mailto:info@eastpoint.ac.in) Bengaluru-560049

[www.eastpoint.ac.in](http://www.eastpoint.ac.in) @eastpoint.ac.in



### **DECLARATION**

I do hereby declare that the project work entitled **PRISON SYSTEM** Submitted to the Bengaluru North University in the partial fulfillment of the requirements for the award of degree of Bachelor of Computer Applications is a record of confide and independent project work carried out by ourself under guidance and supervision of **MR.LOGANAYAGAN V** (Assistant professor, Department of BCA) and this report does not form any part previous dissertations or report previously submitted to this University or any other universities for the award of degree or diploma.

SURYA V

[R1918102]



### **ACKNOWLEDGEMENT**

We take this opportunity to express our deep sense of gratitude to our founder chairman **Dr. VENKATAPATHI S.M.**

We express our sincere thanks to our respected principal **Dr. VIJAYA BHASKARAN** and , coordinator of BCA Department for providing all necessary help during our project work.

We also express our sincere thanks to our project guide **MR.LOGANAYAGAN V**(assistant professor), Department of BCA for valuable guidance keen interest and helpful during this project.

Also, we would like to thank our Head of department **Dr.PERIYASAMY**, for his guidance throughout the project

We also,thank our staffs and friends and all other who have directly and indirectly helped us in the successful completion of this project.

SURYA V

[R1918102

# **INDEX**

<b>SL.NO</b>	<b>CONTENTS</b>	<b>PAGE NUMBER</b>
1	Introduction	
2	Abstract	
3	Objective	
4	Scope of the project	
5	Modules	
6	System requirements	
7	Java Technologies Used	
8	JSP Literature	
9	Overview Of MySQL	
10	Functional & Non-Functional Requirements	
11	Feasibility Study	
10	Table Dictionary	
11	Data Flow Diagram Level-0,1	
12	ER Diagram	
13	Source Code	
14	Snapshots	
15	Test Cases	
16	Conclusion & Future Enhancements	
17	Bibliography	

# INTRODUCTION

My project title is prison system. I have tried my best to make the complicated process of prison System as simple as possible using java and my sql . I have tried to design the Project in such a way that user may not have any difficulty in using this package & further expansion is possible without much effort. Even though I cannot claim that this work to be entirely exhaustive, the main purpose of my exercise is perform each citizen activity in computerized way rather than manually which is time consuming I am confident that this software package can be readily used by non-programming personal avoiding human handled chance of error.

This system is made to keep records about the prisoners and about the crimes. Jailor can log in as a user and can add the details of prisoners like name, age, crime, and punishment. This system gives a unique id to every FIR as required and the prisoner number will also be unique.

This system has one more user which is admin. Admin can add the user and delete the user. All other attributes can only be changed by the user. This system talks about any crime that is done and if any complaint is made to the police or if any fir is done and if the criminal gets caught and we can update the information about the case and one other benefit is that if the complaint is registered online then it can be checked by all the registered users and if there is any update about any complaint then it can be added online.

It increases the efficiency of the police to caught criminals. The prison system can be implemented in every prison without any problem. This system has the capability to maintain an infinite number of records. It is very useful as the written papers have a limited time period and can get lost but in the crime management, this is not possible as a backup file will be created automatically and also updated automatically when any change is made in any record.

Managing the prisoner record and monitoring of prisoner / visitor was always difficult since most of the records were normally maintained manually, so the concerned authorities were required to go through all the registers to find out the details and status of the inmate as well as of the visitor. Using prison management system it will easy to maintain all the details about the prisoners.

citizen can verify and add users but cannot see the complaints that are saved by users in the database because these files must be kept secret and only the required person could check the files. Some other features are criminals' details, checking records, registering users, etc. Moving on Further we will see the designing of the system and attributes of it on the principles of which our system does work properly.

## **ABSTRACT**



The system aims at the maintenance and management of different crime that are available in different places. It mainly takes care of the crime and prison management at the core of the database. The system provides the information regarding the different crimes and prisoners that are available and their status. The citizen can visit the project and first register and then can file case as many as he need at the desired place.

The total front end was developed using jsp. At all proper levels high care was taken to check that the system manages the consistency with the proper database connectivity, the authorization was cross checked at all stages and the entire backend to store the data was designed in MySQL..

This project will have many different pages with an inbuilt authentication (username and password). This project will contain many text boxes, labels boxes, and also many command buttons etc.

Further the details of each and every process and the user manuals are attached to make the software and report clear, simple, and error free which makes it so special and one of its kind.

## **OBJECTIVE**

During the past several decades personnel function has been transformed from a relatively obscure record keeping staff to central and top level management function. There are many factors that have influenced this transformation like technological advances, professionalism, and general recognition of human beings as most important resources.

- A computer based management system is designed to handle all the primary informations.
- It helps to maintain to handle all the details required for the correct statement calculation and generation.
- This project intends to introduce more user friendliness in the various activities such as record updation, maintenance, and searching.
- The searching of record has been made quite simple as all the details of the customer can be obtained by simply keying in to the datatables of our project.
- Similarly, record maintenance and updation can also be accomplished by using the identification of the customer with all the details being automatically generated. These details are also being promptly automatically updated in the master file thus keeping the record absolutely up-to-date.
- The entire information has maintained in the database or Files and whoever wants to retrieve can't retrieve, only authorization user can retrieve the necessary information which can be easily be accessible from the file.

The main objective of the entire activity is to automate the process of day to day.

activities of prison system like:

- Admission of a New Citizen.
- Citizen sign in.
- File a case according to citizen's demand,
- Unique FIR id for each person.
- Updating FIR according to the status.
- Adding prisoners.

## **SCOPE OF THE PROJECT**

I have designed the given proposed system in the JAVA to automate the process of prison system. This project is useful for the authorities which keep track of all the crime registered in a particular place .The authority can add prisoner, cell no details, unique FIR id etc.

The following steps that give the detailed information of the need of proposed system are:

**Performance:** During past several decades, the records are supposed to be manually handled for all activities. The manual handling of the record is time consuming and highly prone to error.

To improve the performance of the prison System, the computerized system is to be undertaken. This project is fully computerized and user friendly even that any of the members can see the report.

**Efficiency:** The basic need of this project is efficiency. The project should be efficient so that whenever a new citizen submits his/her details the record of the citizen is updated automatically. This record will be useful for other users instantly.

**Control:** The complete control of the project is under the hands of authorized person who has the password to access this project and illegal access is not supposed to deal with. All the control is under the administrator and the other members have the rights to just see the records not to change any transaction or entry.

**Security:** Security is the main criteria for the proposed system. Since illegal access may corrupt the database. So security has to be given in this project.

## MODULES

This system has two main interfaces one for the admin panel and the other is for the citizen panel.

**Along with these, we have other interfaces which can be discussed as below:**

### **Citizen registration:**

Citizens need to be registered in the prison management system so as to use the system and add the criminals' details, add complaints, update closed cases, etc. If the user is not registered in the prison management system, he/she cannot do any task with it like writing FIRs, adding prisoner crime and punishment details, etc.

### **Citizen Login:**

After registration one can log in to the system as the operator of the system on the behalf of the user. After this, he has the other user interfaces available for further actions.

### **Admin login:**

This module maintains the information regarding the case booked by specific member at the specific location. The admin can login with the username and the password and can look at the details about the crime details using the system.

The admin login page consists of two blocks which must be submitted by the admin so that he can enter into the system. First, the username which will be 'admin' and then the password of his wish, after submitting all the required details by the admin he can view the specified results of the prison system. The admin module is connected to the database in the backend, so all the details entered in the page will be updated in the MySQL data tables.

After the admin login many features are available like add crime data, missing person, fir, update fir and profile etc.

### **FIR:**

This option is provided in the prison management system is writing FIR. We all know FIR is First Information Report. All FIRs have unique complaint numbers, Dates, Times, and locations. A similar interface is provided for writing FIR in this system. FIR written cannot be lost and fast actions can be taken on the basis of it as it will be uploaded on server and others can see it.

In this system, FIR has all the options that are in the old handwritten system but is more secure as no changes can be made once the FIR is submitted and only the authorized users can see it.

**FILE COMPLAINT:**

This option that is given in this is one of the most important that is file complaint. the crime can be updated in the prison system.

Then later these details can be used further and there is no option to delete the prisoner's data so once the prisoner is added to the database, no one can delete the data of the criminal and it will be helpful as papers can get lost or can be theft but, in this case, information cannot be lost and there is no use of theft this data as no changes can be made in the database.

Prisoners' data cannot be lost because the backup of the database is there and the backup gets updated as soon as the changes are made into the database. module is connected to the database in the backend ,so all the details entered in the page will be updated in the MySQL datatables

**VIEW FILED COMPLAINTS:**

This important feature that is provided by this system is view filed complaints. In this module citizen can view his filed complaint and status of the case like case in progress or case is completed. Citizen can see the details like id, date of case booked, booked for ,email, gender etc. module is connected to the database in the backend ,so all the details entered in the page will be updated in the MySQL datatables.



## **SYSTEM REQUIREMENTS**

## **HARDWARE REQUIREMENTS:**

The minimum requirements to implement the project are as follows:

1. System : Pentium IV 2.4 GHz Onwards.
2. Hard Disk : 40 GB Onwards
3. Floppy Drive : 44 Mb Onwards.
4. Monitor : 15 VGA Colour.
5. Mouse : any
6. Keyboard : standard windows keyboard
7. Ram : 512 Mb Onwards.

## **SOFTWARE REQUIREMENTS:**

The minimum requirements to implement the project are as follows:

1. Operating system : Windows XP/7 Onwards.
2. Coding Language : JAVA/J2EE
3. IDE : Netbeans 7.4
4. Database : MYSQL

## **JAVA TECHNOLOGIES USED**

**Technologies Used:**

1. JSP as front end.
2. MYSQL as Back end

**Software Used:**

1. Windows 10.
2. Netbeans IDE.
3. My SQL

**Hardware Requirements:**

1. Processor – Pentium IV or higher version.
2. Ram – 4GB onwards
3. Hard Disk – 100 GB Onwards

## **JSP Literature**

## **What is JavaServer Pages?**

JavaServer Pages (JSP) is a technology for developing web pages that support dynamic content which helps developers insert java code in HTML pages by making use of special JSP tags, most of which start with `<%` and end with `%>`.

A JavaServer Pages component is a type of Java servlet that is designed to fulfill the role of a user interface for a Java web application. Web developers write JSPs as text files that combine HTML or XHTML code, XML elements, and embedded JSP actions and commands.

Using JSP, you can collect input from users through web page forms, present records from a database or another source, and create web pages dynamically.

JSP tags can be used for a variety of purposes, such as retrieving information from a database or registering user preferences, accessing JavaBeans components, passing control between pages and sharing information between requests, pages etc.

## **Why Use JSP?**

JavaServer Pages often serve the same purpose as programs implemented using the Common Gateway Interface (CGI). But JSP offer several advantages in comparison with the CGI.

- Performance is significantly better because JSP allows embedding Dynamic Elements in HTML Pages itself instead of having a separate CGI files.
- JSP are always compiled before it's processed by the server unlike CGI/Perl which requires the server to load an interpreter and the target script each time the page is requested.
- JavaServer Pages are built on top of the Java Servlets API, so like Servlets, JSP also has access to all the powerful Enterprise Java APIs, including JDBC, JNDI, EJB, JAXP etc.
- JSP pages can be used in combination with servlets that handle the business logic, the model supported by Java servlet template engines.

Finally, JSP is an integral part of Java EE, a complete platform for enterprise class applications. This means that JSP can play a part in the simplest applications to the most complex and demanding.

### **Advantages of JSP:**


Following is the list of other advantages of using JSP over other technologies:

- **vs. Active Server Pages (ASP):** The advantages of JSP are twofold. First, the dynamic part is written in Java, not Visual Basic or other MS specific language, so it is more powerful and easier to use. Second, it is portable to other operating systems and non-Microsoft Web servers.
- **vs. Pure Servlets:** It is more convenient to write (and to modify!) regular HTML than to have plenty of `println` statements that generate the HTML.
- **vs. Server-Side Includes (SSI):** SSI is really only intended for simple inclusions, not for "real" programs that use form data, make database connections, and the like.
- **vs. JavaScript:** JavaScript can generate HTML dynamically on the client but can hardly interact with the web server to perform complex tasks like database access and image processing etc.
- **vs. Static HTML:** Regular HTML, of course, cannot contain dynamic information.

The web server needs a JSP engine ie. container to process JSP pages. The JSP container is responsible for intercepting requests for JSP pages. This tutorial makes use of Apache which has built-in JSP container to support JSP pages development.

A JSP container works with the Web server to provide the runtime environment and other services a JSP needs. It knows how to understand the special elements that are part of JSPs.

Following diagram shows the position of JSP container and JSP files in a Web Application.

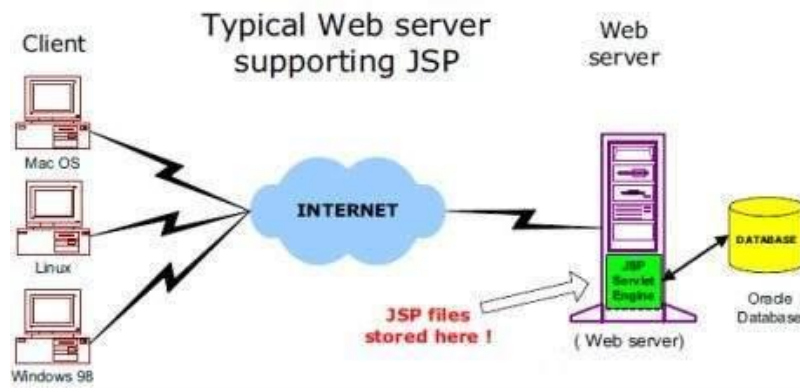


### JSP Processing:

The following steps explain how the web server creates the web page using JSP:

- As with a normal page, your browser sends an HTTP request to the web server.
- The web server recognizes that the HTTP request is for a JSP page and forwards it to a JSP engine. This is done by using the URL or JSP page which ends with **.jsp** instead of **.html**.
- The JSP engine loads the JSP page from disk and converts it into a servlet content. This conversion is very simple in which all template text is converted to `println( )` statements and all JSP elements are converted to Java code that implements the corresponding dynamic behavior of the page.
- The JSP engine compiles the servlet into an executable class and forwards the original request to a servlet engine.
- A part of the web server called the servlet engine loads the Servlet class and executes it. During execution, the servlet produces an output in HTML format, which the servlet engine passes to the web server inside an HTTP response.
- The web server forwards the HTTP response to your browser in terms of static HTML content.
- Finally web browser handles the dynamically generated HTML page inside the HTTP response exactly as if it were a static page.

All the above mentioned steps can be shown below in the following diagram:



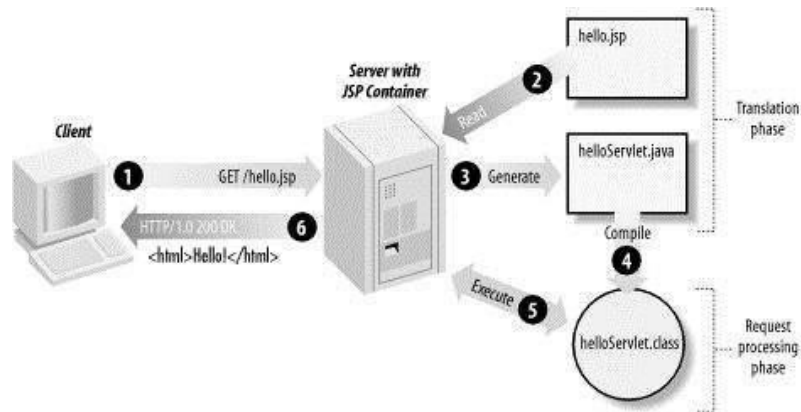

Typically, the JSP engine checks to see whether a servlet for a JSP file already exists and whether the modification date on the JSP is older than the servlet. If the JSP is older than its generated servlet, the JSP container assumes that the JSP hasn't changed and that the generated servlet still matches the JSP's contents. This makes the process more efficient than with other scripting languages (such as PHP) and therefore faster.

So in a way, a JSP page is really just another way to write a servlet without having to be a Java programming wiz. Except for the translation phase, a JSP page is handled exactly like a regular servlet.

## OVERVIEW OF MYSQL

MySQL is the most popular Open Source Relational SQL database management system. MySQL is one of the best RDBMS being used for developing web-based software applications.

This tutorial will give you quick start with MySQL and make you comfortable with MySQL programming.

### **What is Database?**

A database is a separate application that stores a collection of data. Each database has one or more distinct APIs for creating, accessing, managing, searching and replicating the data it holds.

Other kinds of data stores can be used, such as files on the file system or large hash tables in memory but data fetching and writing would not be so fast and easy with those types of systems.

So nowadays, we use relational database management systems (RDBMS) to store and manage huge volume of data. This is called relational database because all the data is stored into different tables and relations are established using primary keys or other keys known as foreign keys.

A **Relational DataBase Management System (RDBMS)** is a software that:

- Enables you to implement a database with tables, columns and indexes.
- Guarantees the Referential Integrity between rows of various tables.
- Updates the indexes automatically.
- Interprets an SQL query and combines information from various tables.

RDBMS Terminology:

Before we proceed to explain MySQL database system, let's revise few definitions related to database.

- **Database:** A database is a collection of tables, with related data.
- **Table:** A table is a matrix with data. A table in a database looks like a simple spreadsheet.
- **Column:** One column (data element) contains data of one and the same kind, for example the column postcode.

- **Row:** A row (= tuple, entry or record) is a group of related data, for example the data of one subscription.
- **Redundancy:** Storing data twice, redundantly to make the system faster.
- **Primary Key:** A primary key is unique. A key value can not occur twice in one table. With a key, you can find at most one row.
- **Foreign Key:** A foreign key is the linking pin between two tables.
- **Compound Key:** A compound key (composite key) is a key that consists of multiple columns, because one column is not sufficiently unique.
- **Index:** An index in a database resembles an index at the back of a book.
- **Referential Integrity:** Referential Integrity makes sure that a foreign key value always points to an existing row.

#### **MySQL Database:**

MySQL is a fast, easy-to-use RDBMS being used for many small and big businesses. MySQL is developed, marketed, and supported by MySQL AB, which is a Swedish company. MySQL is becoming so popular because of many good reasons:

- MySQL is released under an open-source license. So you have nothing to pay to use it.
- MySQL is a very powerful program in its own right. It handles a large subset of the functionality of the most expensive and powerful database packages.
- MySQL uses a standard form of the well-known SQL data language.
- MySQL works on many operating systems and with many languages including PHP, PERL, C, C++, JAVA, etc.
- MySQL works very quickly and works well even with large data sets.
- MySQL is very friendly to PHP, the most appreciated language for web development.
- MySQL supports large databases, up to 50 million rows or more in a table. The default file size limit for a table is 4GB, but you can increase this (if your operating system can handle it) to a theoretical limit of 8 million terabytes (TB).

- MySQL is customizable. The open-source GPL license allows programmers to modify the MySQL software to fit their own specific environments.

Properly defining the fields in a table is important to the overall optimization of your database. You should use only the type and size of field you really need to use; don't define a field as 10 characters wide if you know you're only going to use 2 characters. These types of fields (or columns) are also referred to as data types, after the **type of data** you will be storing in those fields.

MySQL uses many different data types broken into three categories: numeric, date and time, and string types.

### **Numeric Data Types:**

MySQL uses all the standard ANSI SQL numeric data types, so if you're coming to MySQL from a different database system, these definitions will look familiar to you. The following list shows the common numeric data types and their descriptions:

- **INT** - A normal-sized integer that can be signed or unsigned. If signed, the allowable range is from -2147483648 to 2147483647. If unsigned, the allowable range is from 0 to 4294967295. You can specify a width of up to 11 digits.
- **TINYINT** - A very small integer that can be signed or unsigned. If signed, the allowable range is from -128 to 127. If unsigned, the allowable range is from 0 to 255. You can specify a width of up to 4 digits.
- **SMALLINT** - A small integer that can be signed or unsigned. If signed, the allowable range is from -32768 to 32767. If unsigned, the allowable range is from 0 to 65535. You can specify a width of up to 5 digits.
- **MEDIUMINT** - A medium-sized integer that can be signed or unsigned. If signed, the allowable range is from -8388608 to 8388607. If unsigned, the allowable range is from 0 to 16777215. You can specify a width of up to 9 digits.
- **BIGINT** - A large integer that can be signed or unsigned. If signed, the allowable range is from -9223372036854775808 to 9223372036854775807. If unsigned, the allowable range is from 0 to 18446744073709551615. You can specify a width of up to 20 digits.
- **FLOAT(M,D)** - A floating-point number that cannot be unsigned. You can define the display length (M) and the number of decimals (D). This is not required and will

default to 10,2, where 2 is the number of decimals and 10 is the total number of digits (including decimals). Decimal precision can go to 24 places for a FLOAT.

- **DOUBLE(M,D)** - A double precision floating-point number that cannot be unsigned. You can define the display length (M) and the number of decimals (D). This is not required and will default to 16,4, where 4 is the number of decimals. Decimal precision can go to 53 places for a DOUBLE. REAL is a synonym for DOUBLE.
- **DECIMAL(M,D)** - An unpacked floating-point number that cannot be unsigned. In unpacked decimals, each decimal corresponds to one byte. Defining the display length (M) and the number of decimals (D) is required. NUMERIC is a synonym for DECIMAL.

### Date and Time Types:

The MySQL date and time datatypes are:

- **DATE** - A date in YYYY-MM-DD format, between 1000-01-01 and 9999-12-31. For example, December 30th, 1973 would be stored as 1973-12-30.
- **DATETIME** - A date and time combination in YYYY-MM-DD HH:MM:SS format, between 1000-01-01 00:00:00 and 9999-12-31 23:59:59. For example, 3:30 in the afternoon on December 30th, 1973 would be stored as 1973-12-30 15:30:00.
- **TIMESTAMP** - A timestamp between midnight, January 1, 1970 and sometime in 2037. This looks like the previous DATETIME format, only without the hyphens between numbers; 3:30 in the afternoon on December 30th, 1973 would be stored as 19731230153000 ( YYYYMMDDHHMMSS ).
- **TIME** - Stores the time in HH:MM:SS format.
- **YEAR(M)** - Stores a year in 2-digit or 4-digit format. If the length is specified as 2 (for example YEAR(2)), YEAR can be 1970 to 2069 (70 to 69). If the length is specified as 4, YEAR can be 1901 to 2155. The default length is 4.

### String Types:

Although numeric and date types are fun, most data you'll store will be in string format. This list describes the common string datatypes in MySQL.

- **CHAR(M)** - A fixed-length string between 1 and 255 characters in length (for example CHAR(5)), right-padded with spaces to the specified length when stored. Defining a length is not required, but the default is 1.

- **VARCHAR(M)** - A variable-length string between 1 and 255 characters in length; for example VARCHAR(25). You must define a length when creating a VARCHAR field.
- **BLOB or TEXT** - A field with a maximum length of 65535 characters. BLOBs are "Binary Large Objects" and are used to store large amounts of binary data, such as images or other types of files. Fields defined as TEXT also hold large amounts of data; the difference between the two is that sorts and comparisons on stored data are case sensitive on BLOBs and are not case sensitive in TEXT fields. You do not specify a length with BLOB or TEXT.
- **TINYBLOB or TINYTEXT** - A BLOB or TEXT column with a maximum length of 255 characters. You do not specify a length with TINYBLOB or TINYTEXT.
- **MEDIUMBLOB or MEDIUMTEXT** - A BLOB or TEXT column with a maximum length of 16777215 characters. You do not specify a length with MEDIUMBLOB or MEDIUMTEXT.
- **LOB or LONGTEXT** - A BLOB or TEXT column with a maximum length of 4294967295 characters. You do not specify a length with LOB or LONGTEXT.

**ENUM** - An enumeration, which is a fancy term for list. When defining an ENUM, you are creating a list of items from which the value must be selected (or it can be NULL). For example, if you wanted your field to contain "A" or "B" or "C", you would define your ENUM as ENUM ('A', 'B', 'C') and only those values (or NULL) could ever populate that field.

## **FUNCTIONAL REQUIREMENTS**



The functional requirements are those requirements that are necessary to the eye of the user and the client. Here we try to make the module possible to accomplish the need of the desired function.

Few of its functional requirements are as follows:

- ▶ **Add crime details:**-In this section, Admin add crime details to citizen(update status, profile , case details, length etc)
- ▶ **citizen:** citizen's need to file their cases in their portal to file a complaint and their required details,
  - ▶ Name
  - ▶ Booked for
  - ▶ Gender
  - ▶ Date of booking
  - ▶ Case booked by
  - ▶ Case registered at
  - ▶ Photo
  - ▶ Email id
- ▶ **Edit password:** It is used to reset the password

## **NON-FUNCTIONAL REQUIREMENTS**

Non-functional Requirements define system attributes such as security, reliability, performance, maintainability, scalability, and usability. They serve as constraints or restrictions on the design of the system across the different backlogs.

Few of its Non-functional requirements are as follows:

### **Speed**

Speed determines how fast an application responds to commands. For example, if you type a word into a search engine, the speed of the engine determines how quickly you receive search results

### **Security**

To protect sensitive data, you may consider developing non-functional security features. For example, professionals at healthcare facilities use secure databases to store patients' medical records.

### **Compatibility**

Highly compatible systems typically function well when other applications are running on a device. Compatibility also allows people who have different operating systems to use the same applications.

### **Portability**

Portability means how effectively a system performs in one environment compared to another. For example, a user might purchase a new cell phone model and download a mobile application they had on their last device.

### **Reliability**

Technology that is highly reliable functions with the same or similar efficiency after extensive use. Here are three ways you can assess a device's reliability:

1. Number of critical failures
2. Percentage of the probability of failure
3. Time between critical failures

## **FEASIBILITY STUDY**

The feasibility study proposes one or more feasible conceptual solutions to the problem set of the project. The conceptual solutions give an idea of what the new system will look like. They indicate what inputs are needed by the system and what outputs will be produced. Three things to be done to establish feasibility. First, it must be checked that the project is technically feasible. Second, operational feasibility must be established. For this, it is necessary to consult the system users to see if the proposed solution satisfies user objectives and can be fitted in to current system operation. Third, economic feasibility must be checked. The study must determine whether the project's goal can be achieved within the resource limits allocated to it. It must also determine whether it is worthwhile to proceed with the project at all or whether the benefits obtained from the new system are not worth the cost, in which case the project will be terminated.

Feasibility study is necessary to determine whether the proposed system is feasible considering the technical, operational and economic factors. By having detailed feasibility study one can have a clear view of the proposed system with respect to its benefits and drawbacks. For a successful feasibility study of system feasibility, the existing systems and proposed system are studied carefully.

**System Feasibility** The feasibility study is carried out to determine whether the proposed system can be developed with the available resources.

- Operational Feasibility
- Technical Feasibility
- Economic Feasibility
- Motivational Feasibility
- Schedule Feasibility

## **TECHNICAL FEASIBILITY**

Technical feasibility is the study of resource availability that may affect the ability to achieve an acceptable system. Technical feasibility is the most difficult area to ensure at initial stages. Since the objectives, functions and performance cannot be predicted to its fullest, everything seems possible provided proper assumptions are made. It is essential that the process of technical feasibility. The consideration that is normally associated with technical feasibility included resource availability at the organization where the project is to be developed and implemented.

## **ECONOMICAL FEASIBILITY**

An evaluation of development cost weighted against the ultimate income or benefit derived from the developed system. Economical economic justification includes a broad range of concerns that include cost-benefit analysis. Cost benefit delineates costs for project development and weighs them against tangible and intangible benefits of a system. Regarding the cost and benefits, the project, which is to man-hours with compared to man that are required to record data about activity task report manually and also in terms of money benefits by the selling of this system as a product. Thus, this project work is economically feasible for the development in any company.

## **MOTIVATIONAL FEASIBILITY**

An evaluation of the probability that the company is significantly motivated to support the development and implementation of the application with necessary user participation, resources, training etc. the participation and support by the organization during system study was encouraging thus eliminating any resistance in this regard. So, from behavioral aspect the new system is supposed to have efficient from the company.

## **SCHEDULE FEASIBILITY**

The time schedule required for the development of this project is very important since overruns result in escalated projects costs and also hinders in the development of the other systems.

## **OPERATIONAL FEASIBILITY**

The project is going to be used by the organization under different circumstances. Anyone can work with this application as it supports user-friendly approach. It provides graphical user interfaces to the user, so that user can easily interact with the system. Users no need to have the knowledge about ASP. Net, MSSQL concepts to use the application. The application is designed in such a way that it can be easily implemented in any android version device or cell.

## **TABLE DICTIONARY**

<input type="checkbox"/>	u	pwd
<input type="checkbox"/>	a	a
*	(NULL)	(NULL)

<input type="checkbox"/>	Category	User	Pwd	Stationtype
<input type="checkbox"/>	Crime	v1	v1	Vijaynagar
*	(NULL)	(NULL)	(NULL)	(NULL)

<input type="checkbox"/>	Aadharno	fname	addres	gender	mobile	email	pwd
<input type="checkbox"/>	123123123123	abc	a	Male	1212312312	a@g.co	Aa123123
<input type="checkbox"/>	111111111111	aaaaaaaaaaaa	ssssss	Male	1111111111	asd@G.COM	aA123123
<input type="checkbox"/>	555555555555	SURYA	BBBB BBBB	Male	9986760618	SURYA@GMAIL.COM	sURYA123
<input type="checkbox"/>	444555555444	JAYANTH	AJASGC	Male	9965626522	ABC@GMAIL.COM	Jayanth123
<input type="checkbox"/>	555544444444	kaushik	vvv vvvvvvvv	Male	6666666666	k@gmail.com	Kaushik123
*	(NULL)	(NULL)	(NULL)	(NULL)	(NULL)	(NULL)	(NULL)

<input type="checkbox"/>	FirId	CName	AliasName	Bookedfor	dateofBooking	Casebookedby	Caseregat	Gender	Convictedcharges	Prison	Convictedfor	Photo	CELLNO
<input type="checkbox"/>	1	ASD	asdf	asdf	2022-08-24	ASFD	rajajinagar	M	ADSF	ASDF	ASDF	bmap.gif	1
*	(NULL)	(NULL)	(NULL)	(NULL)	(NULL)	(NULL)	(NULL)	(NULL)	(NULL)	(NULL)	(NULL)	(NULL)	(NULL)

<input type="checkbox"/>	id	CName	Age	DOB	Gender	Dateofmissing	Location	Height	Weight	Colour	Identification	Photo
<input type="checkbox"/>	1000	dhanush	21	Male	2022-09-01	2022-09-02	blore	5	55	dusky	short	miss.p
*	(NULL)	(NULL)	(NULL)	(NULL)	(NULL)	(NULL)	(NULL)	(NULL)	(NULL)	(NULL)	(NULL)	(NULL)

<input type="checkbox"/>	Category	User	Pwd	Stationtype
<input type="checkbox"/>	Crime	v1	v1	Vijaynagar
*	(NULL)	(NULL)	(NULL)	(NULL)



<input type="checkbox"/>	City	Area	Date	Time	Reasons	Total_Number
<input type="checkbox"/>	BENGALURU URBAN	VIJAYANAGAR	2022-09-01	14:39	asaxaxa	1
*	(NULL)	(NULL)	(NULL)	(NULL)	(NULL)	(NULL)

<input type="checkbox"/>	Id	CName	AliasName	Gender	Bookedfor	dateofBooking	Casebookedby	Caseregat	Photo
<input type="checkbox"/>	1000	dhanush	dfds	Male	theft	2022-08-26	surya	rajajinagar	admin.jfif
<input type="checkbox"/>	1001	saa	asdasd	Male	sdasda	2022-09-02	SdsD	SdDS	black-simple-finger-presses-on-2
<input type="checkbox"/>	1002	dhanush	P	Male	theft	2022-08-26	surya	rajajinagar	miss.png
<input type="checkbox"/>	1003	jay	s	Male	murder	2022-08-30	surya	kr puram	book_left_image.jpg
*	(NULL)	(NULL)	(NULL)	(NULL)	(NULL)	(NULL)	(NULL)	(NULL)	(NULL)

<input type="checkbox"/>	City	Area	Date	Time	Reasons	Total_Number
<input type="checkbox"/>	BENGALURU RURAL	KRISHNARAJAPURAM	2022-09-06	16:48	aaaaaaaaaa	22
<input type="checkbox"/>	BENGALURU URBAN	KRISHNARAJAPURAM	2022-10-06	17:35	zzzzzzzzzz	2
*	(NULL)	(NULL)	(NULL)	(NULL)	(NULL)	(NULL)


## DATA FLOW DIAGRAM

A data-flow diagram is a way of representing a flow of data through a process or a system (usually an information system). The DFD also provides information about the outputs and inputs of each entity and the process itself. A data-flow diagram has no control flow, there are no decision rules and no loops. Specific operations based on the data can be represented by flowcharts.


There are several notations for displaying data-flow diagrams. For each data-flow at least one of the endpoints (source and /or destination) must exist in a process. The refined representation of a process can be done in another data flow diagram. Which subdivides this process into sub processes.

The data-flow diagram is a part of the structured-analysis modelling tools. When using UML, the activity diagram typically takes over the role of the data-flow diagram. A special form of data-flow plan is a site-oriented data-flow plan.


#### **DFD SYMBOLS:**

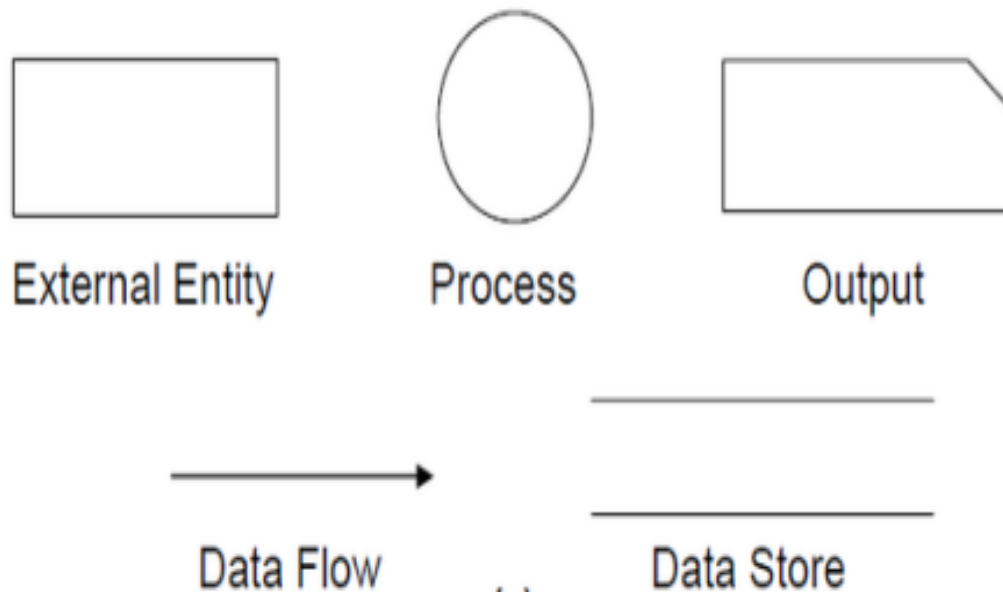

### Level-0

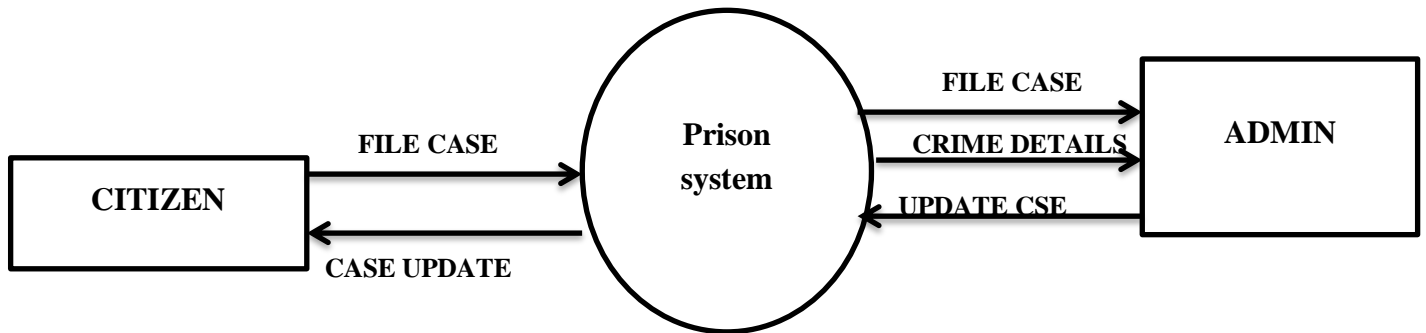

### LEVEL-1

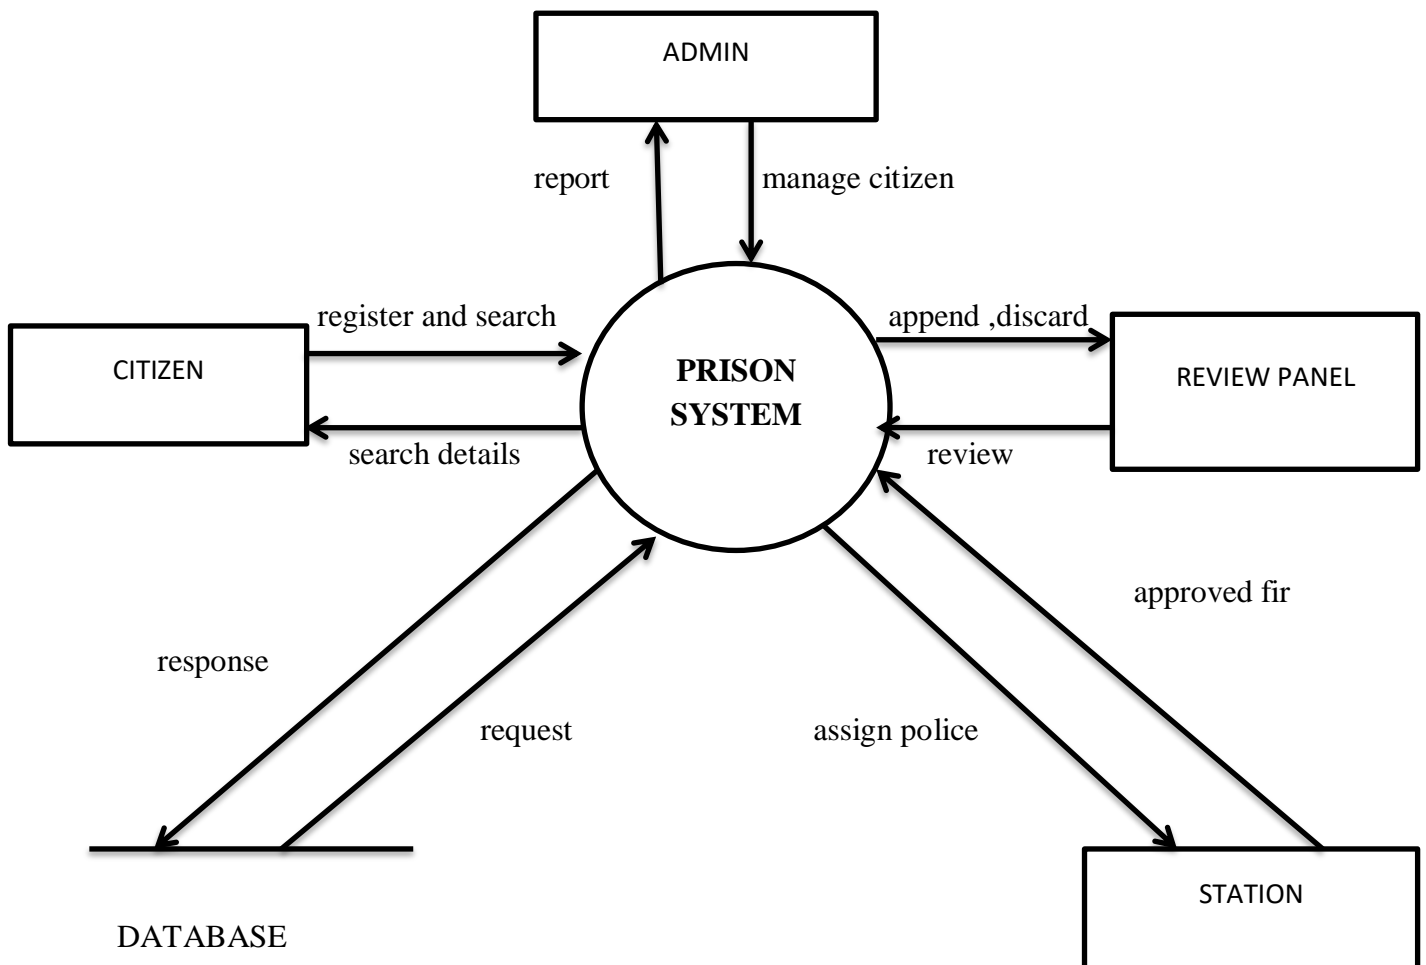


## ER DIAGRAM


An entity-relationship model (or ER model) describes interrelated things of interest in a specific domain of knowledge. A basic ER model is composed of entity types (which classify the things of interest) and specifies relationships that can exist between entities (instances of those entity type).

In software engineering, an ER model is commonly formed to represent things a business needs to remember in order to perform business processes. Consequently, the ER model becomes an abstract model, that defines a data or information structure which can be implemented in a database, typically a relational database.

### SYMBOLS USED IN ER DIAGRAM:

There are three basic elements in an ER diagram: entity, attribute, relationship. They are weak entity, multi valued attribute, derived attribute, weak relationship, and recursive relationship. Cardinality and ordinary are two other notations used in ER diagrams to further define relationships.

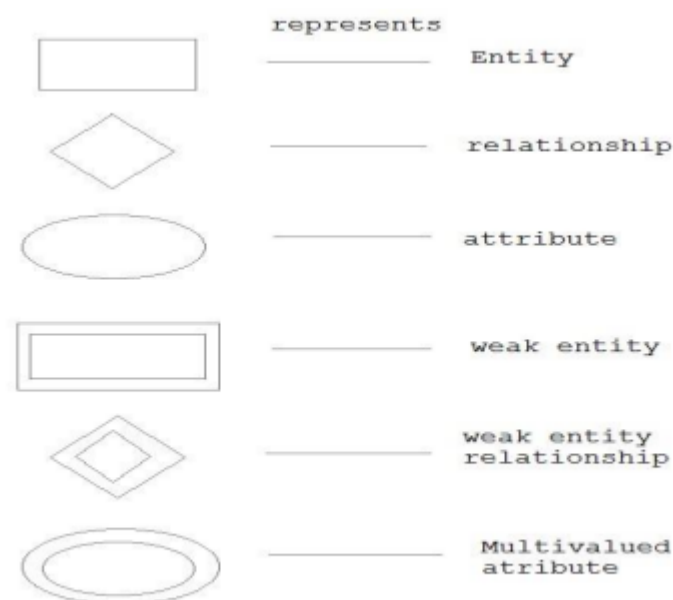

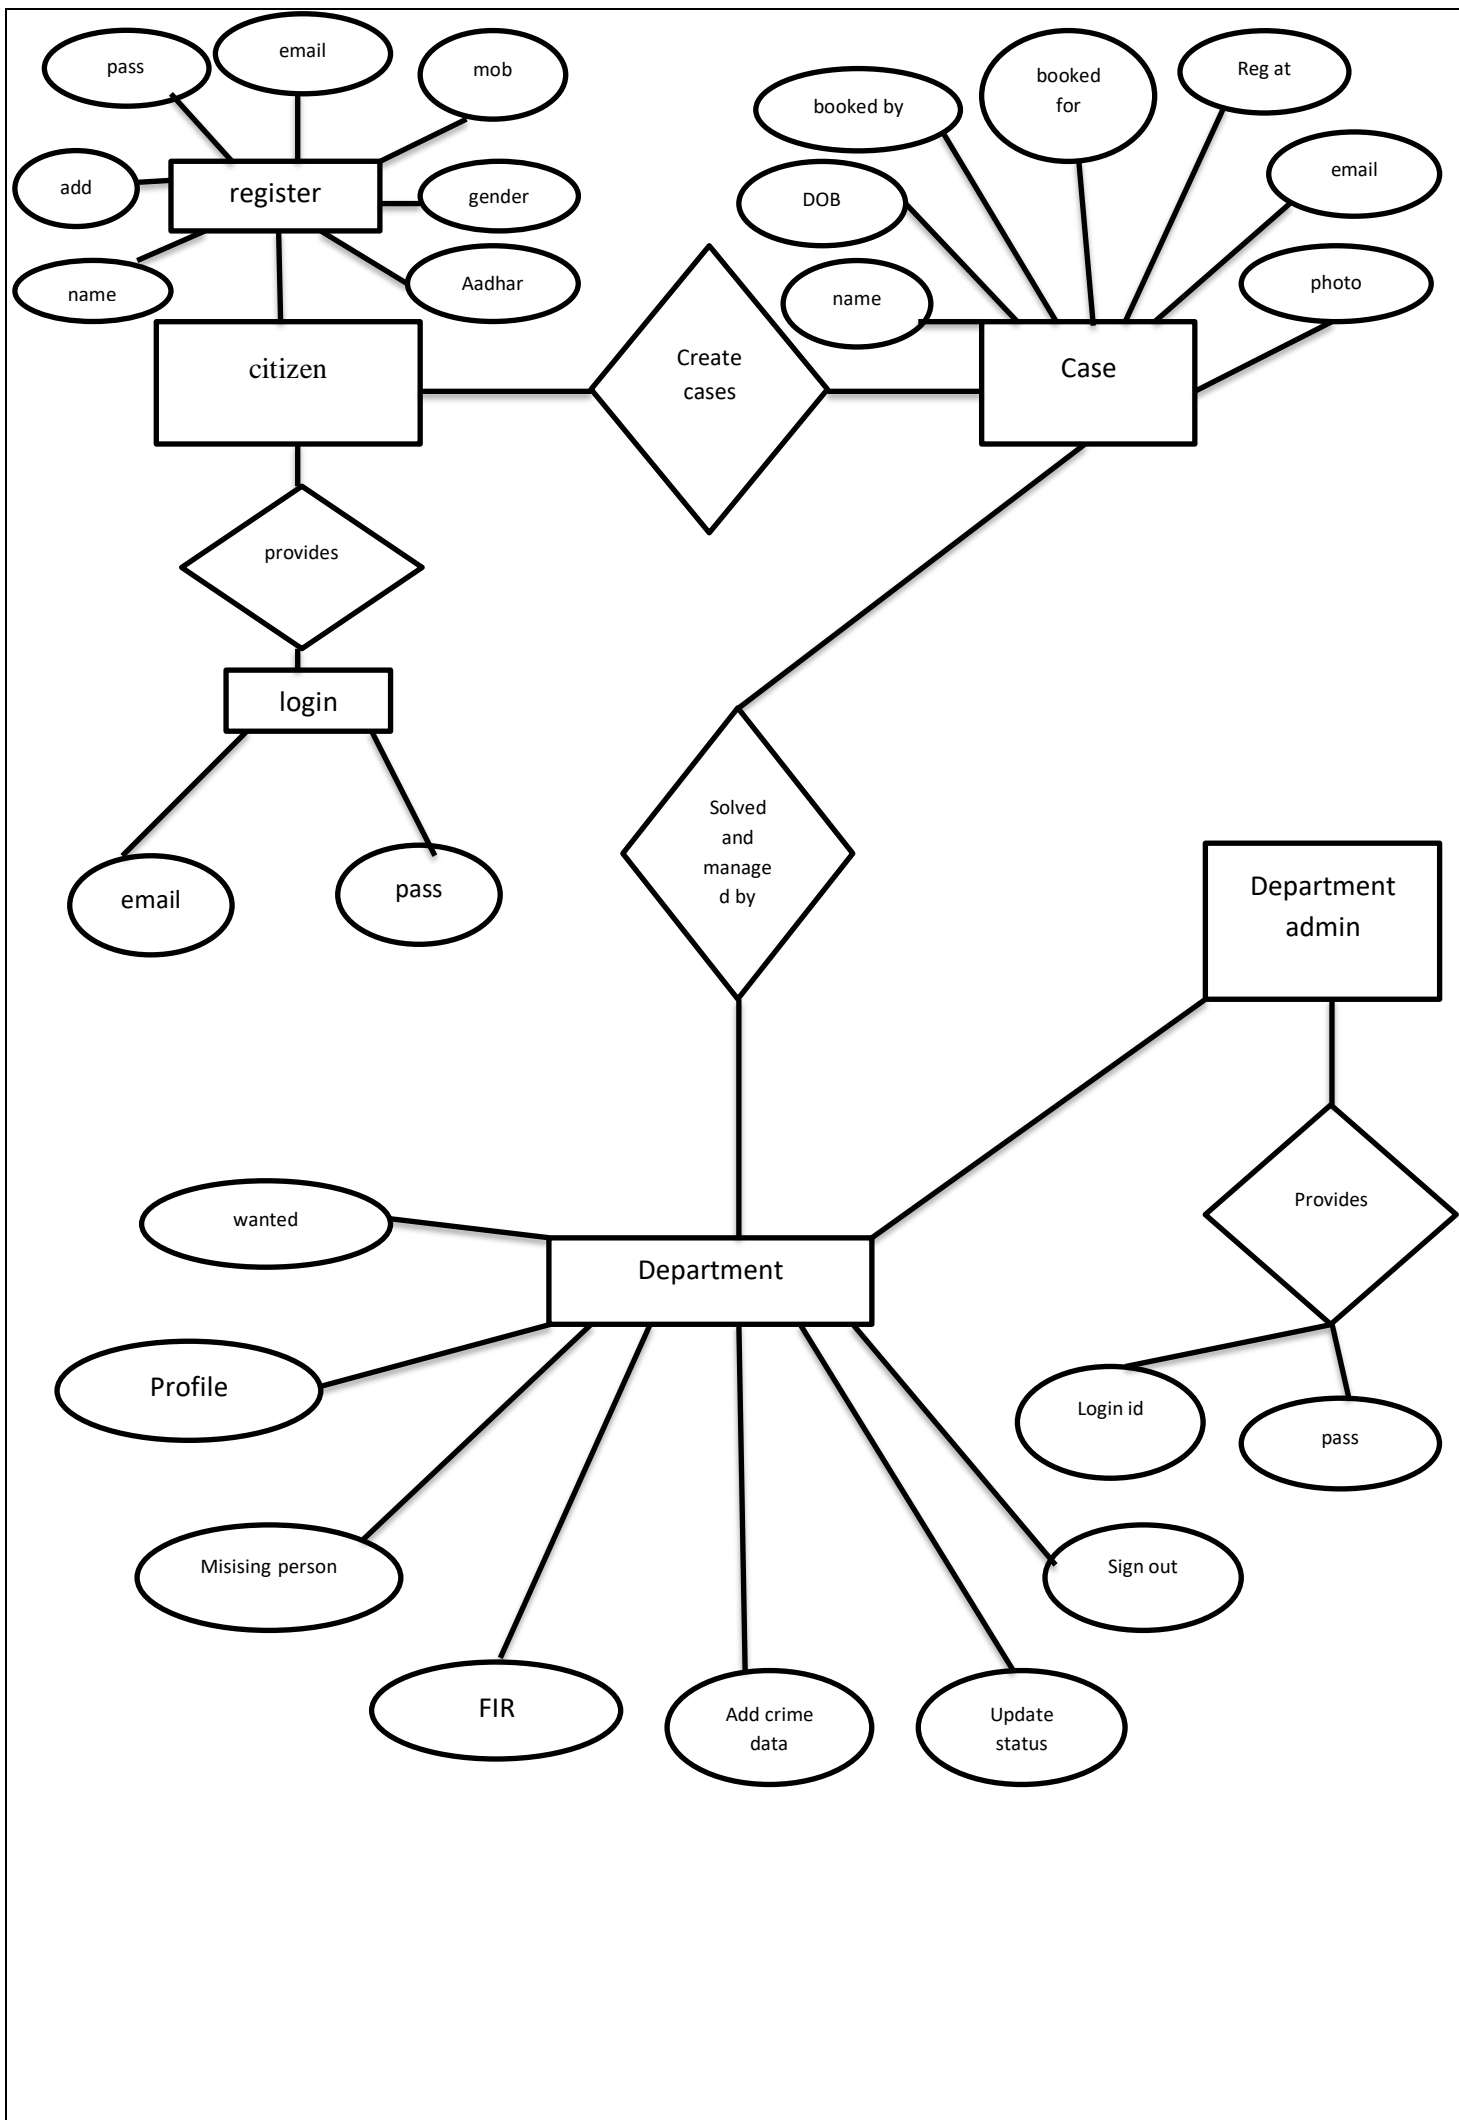

**Source Code**



## About.jsp:

```
<%@ page contentType="text/html; charset=utf-8" language="java" import="java.sql.*" errorPage="" %>
<!DOCTYPE html>
<html>
<head>
<meta charset="utf-8">
<meta http-equiv="X-UA-Compatible" content="IE=edge,chrome=1">
<!--
Victory Template
http://www.templatemo.com/tm-507-victory
-->
<title>ABOUT US</title>
<meta name="description" content="">
<meta name="viewport" content="width=device-width, initial-scale=1">
<link rel="apple-touch-icon" href="apple-touch-icon.png">

<link rel="stylesheet" href="css/bootstrap.min.css">
<link rel="stylesheet" href="css/bootstrap-theme.min.css">
<link rel="stylesheet" href="css/fontAwesome.css">
<link rel="stylesheet" href="css/hero-slider.css">
<link rel="stylesheet" href="css/owl-carousel.css">
<link rel="stylesheet" href="css/templatemo-style.css">

<link
href="https://fonts.googleapis.com/css?family=Spectral:200,200i,300,300i,400,400i,500,500i,600,600i,700,700i
,800,800i" rel="stylesheet">
<link href="https://fonts.googleapis.com/css?family=Roboto:100,300,400,500,700,900" rel="stylesheet">

<script src="js/vendor/modernizr-2.8.3-respond-1.4.2.min.js"></script>
</head>

<body>
<div class="header">
<div class="container"><a href="#" class="navbar-brand scroll-top">PRISON SYSTEM </a>
<nav class="navbar navbar-inverse" role="navigation">
<div class="navbar-header">
<button type="button" id="nav-toggle" class="navbar-toggle" data-toggle="collapse" data-target="#main-nav">
<span class="sr-only">Toggle navigation</span>
<span class="icon-bar"></span>
<span class="icon-bar"></span>
<span class="icon-bar"></span>
</button>
</div>
<!--/.navbar-header-->
<div id="main-nav" class="collapse navbar-collapse">
<ul class="nav navbar-nav">
<li><a href="about.jsp">About Us</a></li>
<li><a href="faq.jsp">FAQ</a></li>
<li><a href="signin.jsp">Signin</a></li>
<li><a href="bangaloremap.jsp">Bangalore Map</a></li>
<li><a href="citizen.jsp">Citizen Signup</a></li>
</ul>
</div>
<!--/.navbar-collapse-->
</nav>
<!--/.navbar-->
</div>
<!--/.container-->
</div>
```

```

<!--/.header-->

<section class="blog-page">

<div class="container">
<div class="row">

<p><strong>ABOUT US</strong></p>
<p> <strong> PRISON SYSTEM </strong> is a web based application which provides facility for reporting
online crimes such as complaints , most wanted criminal details etc. The main objective of this web based
application is to reduce manual work.. It satisfies the user requirements and it is user friendly. This web-based
application can be used by common people.This project has a login page where in the user is required to enter
their Aadhar number and register to the server. This project has a crime page where registered police stations
are given respective username and password using those details, they can login and enter data. </p>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p align="right"></p>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p>&nbsp;</p>
</div>
</div>
</section>
<script src="//ajax.googleapis.com/ajax/libs/jquery/1.11.2/jquery.min.js"></script>
<script>window.jQuery || document.write('<script src="js/vendor/jquery-1.11.2.min.js"></script>')</script>

<script src="js/vendor/bootstrap.min.js"></script>

<script src="js/plugins.js"></script>
<script src="js/main.js"></script>

<script src="http://ajax.googleapis.com/ajax/libs/jquery/1.10.2/jquery.min.js" type="text/javascript"></script>
<script type="text/javascript">
$(document).ready(function() {
// navigation click actions
$('.scroll-link').on('click', function(event){
event.preventDefault();
var sectionID = $(this).attr("data-id");
scrollToID('#' + sectionID, 750);
});
// scroll to top action
$('.scroll-top').on('click', function(event) {
event.preventDefault();
$('html, body').animate({scrollTop:0}, 'slow');
});
// mobile nav toggle
$('#nav-toggle').on('click', function (event) {
event.preventDefault();
$('#main-nav').toggleClass("open");
});
});
// scroll function

```

```

function scrollToID(id, speed){
var offSet = 0;
var targetOffset = $(id).offset().top - offSet;
var mainNav = $('#main-nav');
$('html,body').animate({scrollTop:targetOffset}, speed);
if (mainNav.hasClass("open")) {
mainNav.css("height", "1px").removeClass("in").addClass("collapse");
mainNav.removeClass("open");
}
}
if (typeof console === "undefined") {
console = {
log: function() { }
};
}
}
</script>
</body>
</html>

```

### Add crimedata.jsp

```

<% @ page contentType="text/html; charset=utf-8" language="java" import="java.sql.*" errorPage="" %>
<!DOCTYPE html>
<html>
<head>
<meta charset="utf-8">
<meta http-equiv="X-UA-Compatible" content="IE=edge,chrome=1">
<!--
Victory Template
http://www.templatemo.com/tm-507-victory
-->
<title>CRIME PAGE</title>
<meta name="description" content="">
<meta name="viewport" content="width=device-width, initial-scale=1">
<link rel="apple-touch-icon" href="apple-touch-icon.png">

<link rel="stylesheet" href="css/bootstrap.min.css">
<link rel="stylesheet" href="css/bootstrap-theme.min.css">
<link rel="stylesheet" href="css/fontAwesome.css">
<link rel="stylesheet" href="css/hero-slider.css">
<link rel="stylesheet" href="css/owl-carousel.css">
<link rel="stylesheet" href="css/templatemo-style.css">

<link
href="https://fonts.googleapis.com/css?family=Spectral:200,200i,300,300i,400,400i,500,500i,600,600i,700,700i,800,800i" rel="stylesheet">
<link href="https://fonts.googleapis.com/css?family=Roboto:100,300,400,500,700,900" rel="stylesheet">

<script src="js/vendor/modernizr-2.8.3-respond-1.4.2.min.js"></script>
<style type="text/css">
<!--
.style1 {
font-size: 36px;
color: #000000;
font-weight: bold;
font-style: italic;
font-family: 'Spectral', serif;
}
.style2 {font-family: 'Spectral', serif}
body {

```

```

}
.style3 {color: #FFFFFF}
.style4 {font-size: 36px; color: #FFFFFF; font-weight: bold; font-style: italic; font-family: 'Spectral', serif; }
body,td,th {
font-size: 14px;
}
-->
</style>
<meta http-equiv="Content-Type" content="text/html; charset=utf-8"></head>

<body>
<div class="header">
<div class="container"><a href="#" class="navbar-brand scroll-top">PRISON SYSTEM </a>
<nav class="navbar navbar-inverse" role="navigation">
<div class="navbar-header">
<button type="button" id="nav-toggle" class="navbar-toggle" data-toggle="collapse" data-target="#main-nav">
<span class="sr-only">Toggle navigation</span>
<span class="icon-bar"></span>
<span class="icon-bar"></span>
<span class="icon-bar"></span>
</button>
</div>
<!--/.navbar-header-->
<div id="main-nav" class="collapse navbar-collapse">
<ul class="nav navbar-nav">
<li><a href="epwc.jsp"> profile</a></li>
<li><a href="wantedreg.jsp">Wanted </a></li>
<li><a href="missingperson.jsp">Missing Person </a></li>
<!-- <li><a href="convictedfile.jsp">Convicted </a></li>-->
<li><a href="firreg.jsp">FIR </a></li>

<!--<li><a href="adminsearch.jsp">Search</a></li>-->
<li><a href="addcrimedata.jsp">ADD CRIME DATA</a></li>
<li><a href="updatestatus.jsp">Update Status</a></li>
<li><a href="index.jsp">Signout</a></li>
</ul>
</div>
<!--/.navbar-collapse-->
</nav>
<!--/.navbar-->
</div>
<!--/.container-->
</div>
<!--/.header-->
<section class="blog-page">
<div class="container">
<div class="row">

</div>
</div>
</section>
<p>
<script src="//ajax.googleapis.com/ajax/libs/jquery/1.11.2/jquery.min.js"></script></p>
<form name="form1" method="post" action="addcrimedata1.jsp">
<table width="93%" border="0" cellspacing="5" cellpadding="0">
<tr>
<td colspan="3"><h1 align="center">ADD CRIME DATA STATISTICS</h1></td>
</tr>
<tr>
<td colspan="3">&nbsp;</td>

```

```

</tr>
<tr>
<td width="25%"><div align="center">Category of Crime</div></td>
<td width="20%"><select name="select" id="select">
<option value="ACCIDENTS">ACCIDENTS</option>
<option value="MURDERS">MURDERS</option>
<option value="THEFTS">THEFTS</option>
</select> </td>
<td width="38%" rowspan="8"><div align="right"></div></td>
</tr>
<tr>
<td><div align="center">City</div></td>
<td><select name="select2" id="select2">
<option value="BENGALURU URBAN">BENGALURU URBAN</option>
<option value="BENGALURU RURAL">BENGALURU RURAL</option>
<option value="TUMKUR">TUMKUR</option>
<option value="MYSORE">MYSORE</option>
</select></td>
</tr>
<tr>
<td><div align="center">Area</div></td>
<td><select name="select3" id="select3">
<option value="VIJAYANAGAR">VIJAYANAGAR</option>
<option value="KRISHNARAJAPURAM">KRISHNARAJAPURAM</option>
<option value="RAJAJINAGAR">RAJAJINAGAR</option>
</select></td>
</tr>
<tr>
<td><div align="center">Date</div></td>
<td><input type="date" name="textfield" id="textfield" required></td>
</tr>
<tr>
<td><div align="center">Time</div></td>
<td><input type="time" name="textfield2" id="textfield2" required></td>
</tr>
<tr>
<td><div align="center">Reasons or Remarks</div></td>
<td><textarea name="textarea" id="textarea" cols="45" rows="5"></textarea></td>
</tr>
<tr>
<td><div align="center">Total Number</div></td>
<td><input name="textfield3" type="text" id="textfield3" value="0" required></td>
</tr>
<tr>
<td colspan="2"><div align="center">
<input type="submit" name="button" id="button" value="Submit">
</div></td>
</tr>
</table>
</form>
<p align="center">&nbsp;</p>
<p align="center" class="style3">

</p>
<p>
<script>window.jQuery || document.write('<script src="js/vendor/jquery-1.11.2.min.js"></script>')</script>

<script src="js/vendor/bootstrap.min.js"></script>

```

```

<script src="js/plugins.js"></script>
<script src="js/main.js"></script>

<script src="http://ajax.googleapis.com/ajax/libs/jquery/1.10.2/jquery.min.js" type="text/javascript"></script>
<script type="text/javascript">
$(document).ready(function() {
// navigation click actions
$('.scroll-link').on('click', function(event){
event.preventDefault();
var sectionID = $(this).attr("data-id");
scrollToID('#' + sectionID, 750);
});
// scroll to top action
$('.scroll-top').on('click', function(event) {
event.preventDefault();
$('html, body').animate({ scrollTop:0}, 'slow');
});
// mobile nav toggle
$('#nav-toggle').on('click', function (event) {
event.preventDefault();
$('#main-nav').toggleClass("open");
});
});
// scroll function
function scrollToID(id, speed){
var offSet = 0;
var targetOffset = $(id).offset().top - offSet;
var mainNav = $('#main-nav');
$('html,body').animate({ scrollTop:targetOffset}, speed);
if (mainNav.hasClass("open")) {
mainNav.css("height", "1px").removeClass("in").addClass("collapse");
mainNav.removeClass("open");
}
}
if (typeof console === "undefined") {
console = {
log: function() { }
};
}
}
</script>
</p>
</body>
</html>

```

### Admin index.jsp

```

<!DOCTYPE html>
<html>
<head>
<meta charset="utf-8">
<meta http-equiv="X-UA-Compatible" content="IE=edge,chrome=1">
<!--
Victory Template
http://www.templatemo.com/tm-507-victory
-->
<title>SIGNIN</title>
<meta name="description" content="">
<meta name="viewport" content="width=device-width, initial-scale=1">
<link rel="apple-touch-icon" href="apple-touch-icon.png">

<link rel="stylesheet" href="css/bootstrap.min.css">

```

```
<link rel="stylesheet" href="css/bootstrap-theme.min.css">
<link rel="stylesheet" href="css/fontAwesome.css">
<link rel="stylesheet" href="css/hero-slider.css">
<link rel="stylesheet" href="css/owl-carousel.css">
<link rel="stylesheet" href="css/templatemo-style.css">
<script src="https://ajax.googleapis.com/ajax/libs/jquery/3.5.1/jquery.min.js"></script>
<script src="https://maxcdn.bootstrapcdn.com/bootstrap/3.4.1/js/bootstrap.min.js"></script>
```

```
<script src="js/vendor/modernizr-2.8.3-respond-1.4.2.min.js"></script>
</head>
```

```
<body>
<div class="header">
<div class="container">
<a href="#" class="navbar-brand scroll-top">PRISON SYSTEM</a>
```

```
<!--/.navbar-header-->
```

```
<div id="main-nav" class="collapse navbar-collapse">
<ul class="nav navbar-nav">
<li><a href="about.jsp" class="btn btn-info" role="button">About Us</a> </li>
<li><a href="signin.jsp" class="btn btn-info" role="button">SIGNIN</a> </li>
<li><a href="asignin.jsp" class="btn btn-info" role="button">ADMIN SIGNIN</a> </li>
<li><a href="bangaloremap.jsp" class="btn btn-info" role="button">MAP</a> </li>
<li><a href="citizen.jsp" class="btn btn-info" role="button">CITIZEN REGISTRATION</a> </li>
<!-- <li><a href="faq.jsp">FAQ</a></li>
<li><a href="signin.jsp">Signin</a></li>
<li><a href="asignin.jsp">Admin Signin</a></li>
<li><a href="bangaloremap.jsp">Bangalore Map</a></li>
<li><a href="citizen.jsp">Citizen Signup</a></li>
--> </ul>
</div>
<!--/.navbar-collapse-->
</nav>
<!--/.navbar-->
</div>
<!--/.container-->
</div>
<!--/.header-->
```

```
<section class="blog-page">
<div class="container">
<div class="row">
<form name="form1" method="post" action="">
<table width="100%" border="0" align="left" cellpadding="0" cellspacing="0">

<tr>
<td width="26%" height="35"><div align="right"><strong>User Name</strong></div></td>
<td width="2%" height="35">&nbsp;</td>
<td width="32%">
<div align="left">
<input name="u" type="text" id="u">
</div></td>
<td width="32%" rowspan="3"></td>
<th width="40%" rowspan="3" scope="col">&nbsp;</th>
</tr>
```

```

<tr>
<td height="37"><div align="right"><strong>Password</strong></div></td>
<td height="37">&nbsp;</td>
<td>
<div align="left">
<input name="p" type="password" id="p">
</div></td>
</tr>
<tr>
<td>&nbsp;</td>
<td>&nbsp;</td>
<td><label>
<input type="submit" name="Submit" value="Signin">
<input type="reset" name="Submit2">
<div align="left">
<p><a href="forgotpass.jsp">Forgot password ? </a></p>
</div>
</label></td>
</tr>
</table>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p>&nbsp;</p>
</form>

```

```

<% @page import="java.sql.*"%>
<% @page import="java.util.*,java.io.*,javax.servlet.http.Cookie"%>
<%
if(request.getParameter("Submit")!= null)
{

try
{
Class.forName("com.mysql.jdbc.Driver");
Connection con=DriverManager.getConnection("jdbc:mysql://localhost:3306/cbs","root","mysql");
Statement stmt=con.createStatement();
ResultSet rs,rs1;

// String type=request.getParameter("select").trim();

String u=request.getParameter("u").trim();
String p=request.getParameter("p").trim();
// out.println(type);
// out.println(u); out.println(p);

rs=stmt.executeQuery("select * from admin where u='"+u+"' and pwd='"+p+"'");
String s="",s1="";
int found=0;
String a="";
while(rs.next())
{
//a=rs.getString(2);
found++;

}

}

```



```

out.println(found);
if(found==1)
{

session.setAttribute("Admin",u);

response.sendRedirect("adminpage.jsp");
}
else
{
out.println("<h1>Invalid User</h1>");

//response.sendRedirect("invaliduser.jsp");
}
rs.close();

stmt.close();
con.close();

}

catch(Exception e)
{

out.println("Exception occured" +e);
}
}
%>
<h4>&nbsp;  </h4>
</div>
<%-- <div class="span3">
<a class="btn btn-success btn-large pull-right" href="http://shapebootstrap.net">Free Download Nova</a>
</div>--%>

</div>
</div>
</section>
<footer>
<div class="container">
<div class="row"></div>
</div>
</footer>

<script src="//ajax.googleapis.com/ajax/libs/jquery/1.11.2/jquery.min.js"></script>
<script>window.jQuery || document.write('<script src="js/vendor/jquery-1.11.2.min.js"></script>')</script>

<script src="js/vendor/bootstrap.min.js"></script>

<script src="js/plugins.js"></script>
<script src="js/main.js"></script>

<script src="http://ajax.googleapis.com/ajax/libs/jquery/1.10.2/jquery.min.js" type="text/javascript"></script>
<script type="text/javascript">
$(document).ready(function() {
// navigation click actions

```

```

$('.scroll-link').on('click', function(event){
event.preventDefault();
var sectionID = $(this).attr("data-id");
scrollToID('#' + sectionID, 750);
});
// scroll to top action
$('.scroll-top').on('click', function(event) {
event.preventDefault();
$('html, body').animate({ scrollTop:0}, 'slow');
});
// mobile nav toggle
$('#nav-toggle').on('click', function (event) {
event.preventDefault();
$('#main-nav').toggleClass("open");
});
});
// scroll function
function scrollToID(id, speed){
var offSet = 0;
var targetOffset = $(id).offset().top - offSet;
var mainNav = $('#main-nav');
$('html,body').animate({ scrollTop:targetOffset }, speed);
if (mainNav.hasClass("open")) {
mainNav.css("height", "1px").removeClass("in").addClass("collapse");
mainNav.removeClass("open");
}
}
if (typeof console === "undefined") {
console = {
log: function() { }
};
}
}
</script>
</body>
</html>

```

Admin page.jsp

```

<%@ page contentType="text/html; charset=utf-8" language="java" import="java.sql.*" errorPage="" %>
<!DOCTYPE html>
<html>
<head>
<meta charset="utf-8">
<meta http-equiv="X-UA-Compatible" content="IE=edge,chrome=1">
<!--
Victory Template
http://www.templatemo.com/tm-507-victory
-->
<title>ADMIN PAGE</title>
<meta name="description" content="">
<meta name="viewport" content="width=device-width, initial-scale=1">
<link rel="apple-touch-icon" href="apple-touch-icon.png">

<link rel="stylesheet" href="css/bootstrap.min.css">
<link rel="stylesheet" href="css/bootstrap-theme.min.css">
<link rel="stylesheet" href="css/fontAwesome.css">
<link rel="stylesheet" href="css/hero-slider.css">
<link rel="stylesheet" href="css/owl-carousel.css">
<link rel="stylesheet" href="css/templatemo-style.css">

```

```

<link
href="https://fonts.googleapis.com/css?family=Spectral:200,200i,300,300i,400,400i,500,500i,600,600i,700,700i,800,800i" rel="stylesheet">
<link href="https://fonts.googleapis.com/css?family=Roboto:100,300,400,500,700,900" rel="stylesheet">

<script src="js/vendor/modernizr-2.8.3-respond-1.4.2.min.js"></script>
<style type="text/css">
<!--
.style1 { font-size: 36px }
.style3 { font-size: 36px; font-family: Geneva, Arial, Helvetica, sans-serif; }
.style5 {
font-size: 36px;
font-style: italic;
font-family: 'Spectral', serif;
}
.style8 {
font-size: xx-large;
font-style: italic;
}
.style9 { font-size: 36px; color: #000000; }
body {
background-image: url(img/istock-901609212datasecurity.jpg);
}
.style11 { color: #FFFFFF }
.style14 {
font-size: 36px;
font-family: Geneva, Arial, Helvetica, sans-serif;
font-style: italic;
color: #FFFFFF;
}
-->
</style>
<meta http-equiv="Content-Type" content="text/html; charset=utf-8"></head>

<body>
<div class="header">
<div class="container">
<a href="#" class="navbar-brand scroll-top">CRIME RATE PREDICTION </a>
<nav class="navbar navbar-inverse" role="navigation">
<div class="navbar-header">
<button type="button" id="nav-toggle" class="navbar-toggle" data-toggle="collapse" data-target="#main-nav">
<span class="sr-only">Toggle navigation</span>
<span class="icon-bar"></span>
<span class="icon-bar"></span>
<span class="icon-bar"></span> </button>
</div>
<!--/.navbar-header-->
<div id="main-nav" class="collapse navbar-collapse">
<ul class="nav navbar-nav">
<li><a href="userreg.jsp">User Registration</a></li>
<li><a href="epwa.jsp">Profile</a></li>
<li><a href="analysedata.jsp">Analyze Data </a></li>

<!-- <li><a href="updatestatus.jsp">Update Status</a></li>-->
<li><a href="adminindex.jsp">Signout</a></li>
</ul>
</div>
<!--/.navbar-collapse-->
</nav>
<!--/.navbar-->

```

```

</div>
<div align="center">
<!--/.container-->
</div>
</div>
<section class="blog-page">
<div class="header">
<div align="center"> </div>
</div>
<div align="center" class="style1">
<!--/.header-->
</div>

<span class="style3">
<section class="blog-page"> </section>
</span>
<section class="blog-page">
<div align="center"></div>
</section>

<span class="style1">
<section class="blog-page">

<section>
<div align="center"></div>
</section>

<section></section>
</section>
</span>
<section class="blog-page"><section><div align="center" class="style11"></div>
</section>
<span class="style1">
<section></section>
</span></section>

<section class="blog-page">
<section>
<div align="center" class="style8">
<p class="style9">&nbsp;</p>
</div>
</section>
</section>
<span class="style3">
<section class="blog-page"> </section>
</span><span class="style1">
<section class="blog-page"></section>
</span>
<section class="blog-page">
<div align="center" class="style5"></div>
</section>
</section>

<section class="blog-page"><div class="container">
<div class="row">
<form name="form1" method="post" action="">
<p align="center" class="style1">&nbsp;</p>
<p align="center" class="style1">&nbsp;</p>
<p>&nbsp;</p>

```

```

<p>&nbsp;</p>
<p>&nbsp;</p>
</form>
</div>
</div>
</section>
<script src="//ajax.googleapis.com/ajax/libs/jquery/1.11.2/jquery.min.js"></script>
<script>window.jQuery || document.write('<script src="js/vendor/jquery-1.11.2.min.js"></script>')</script>

<script src="js/vendor/bootstrap.min.js"></script>

<script src="js/plugins.js"></script>
<script src="js/main.js"></script>

<script src="http://ajax.googleapis.com/ajax/libs/jquery/1.10.2/jquery.min.js" type="text/javascript"></script>
<script type="text/javascript">
$(document).ready(function() {
// navigation click actions
$('.scroll-link').on('click', function(event){
event.preventDefault();
var sectionID = $(this).attr("data-id");
scrollToID('#' + sectionID, 750);
});
// scroll to top action
$('.scroll-top').on('click', function(event) {
event.preventDefault();
$('html, body').animate({ scrollTop:0}, 'slow');
});
// mobile nav toggle
$('#nav-toggle').on('click', function (event) {
event.preventDefault();
$('#main-nav').toggleClass("open");
});
});
// scroll function
function scrollToID(id, speed){
var offSet = 0;
var targetOffset = $(id).offset().top - offSet;
var mainNav = $('#main-nav');
$('html,body').animate({ scrollTop:targetOffset}, speed);
if (mainNav.hasClass("open")) {
mainNav.css("height", "1px").removeClass("in").addClass("collapse");
mainNav.removeClass("open");
}
}
if (typeof console === "undefined") {
console = {
log: function() { }
};
}
}
</script>
</body>
</html>

```

Assign.jsp

```

<% @ page contentType="text/html; charset=utf-8" language="java" import="java.sql.*" errorPage="" %>
<!DOCTYPE html>
<html>
<head>

```

```

<meta charset="utf-8">
<meta http-equiv="X-UA-Compatible" content="IE=edge,chrome=1">
<!--
Victory Template
http://www.templatemo.com/tm-507-victory
-->
<title>SIGNIN</title>
<meta name="description" content="">
<meta name="viewport" content="width=device-width, initial-scale=1">
<link rel="apple-touch-icon" href="apple-touch-icon.png">

<link rel="stylesheet" href="css/bootstrap.min.css">
<link rel="stylesheet" href="css/bootstrap-theme.min.css">
<link rel="stylesheet" href="css/fontAwesome.css">
<link rel="stylesheet" href="css/hero-slider.css">
<link rel="stylesheet" href="css/owl-carousel.css">
<link rel="stylesheet" href="css/templatemo-style.css">

<link
href="https://fonts.googleapis.com/css?family=Spectral:200,200i,300,300i,400,400i,500,500i,600,600i,700,700i,800,800i" rel="stylesheet">
<link href="https://fonts.googleapis.com/css?family=Roboto:100,300,400,500,700,900" rel="stylesheet">

<script src="js/vendor/modernizr-2.8.3-responsd-1.4.2.min.js"></script>
</head>

<body>
<div class="header">
<div class="container">
<a href="#" class="navbar-brand scroll-top">PRISON SYSTEM</a>

<!--/.navbar-header-->
<div id="main-nav" class="collapse navbar-collapse">
<ul class="nav navbar-nav">
<li><a href="about.jsp">Aboutus</a></li>
<li><a href="faq.jsp">FAQ</a></li>
<li><a href="signin.jsp">Signin</a></li>
<li><a href="asignin.jsp">Admin Signin</a></li>
<li><a href="bangaloremap.jsp">Bangalore Map</a></li>
<li><a href="citizen.jsp">Citizen Signup</a></li>
</ul>
</div>
<!--/.navbar-collapse-->
</nav>
<!--/.navbar-->
</div>
<!--/.container-->
</div>
<!--/.header-->

<section class="blog-page">
<div class="container">
<div class="row">
<form name="form1" method="post" action="">
<table width="100%" border="0" align="left" cellpadding="0" cellspacing="0">

<tr>

```

```

<td width="26%" height="35"><div align="right"><strong>User Name</strong></div></td>
<td width="2%" height="35">&nbsp;</td>
<td width="32%">
<div align="left">
<input name="u" type="text" id="u">
</div></td>
<td width="32%" rowspan="3"></td>
<th width="40%" rowspan="3" scope="col">&nbsp;</th>
</tr>
<tr>
<td height="37"><div align="right"><strong>Password</strong></div></td>
<td height="37">&nbsp;</td>
<td>
<div align="left">
<input name="p" type="password" id="p">
</div></td>
</tr>
<tr>
<td>&nbsp;</td>
<td>&nbsp;</td>
<td><label>
<input type="submit" name="Submit" value="Signin">
<input type="reset" name="Submit2">
<div align="left">
<p><a href="forgotpass.jsp">Forgot password ? </a></p>
</div>
</label></td>
</tr>
</table>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p>&nbsp;</p>
</form>
<% @page import = "java.sql.*"%>
<% @page import="java.util.*,java.io.*,javax.servlet.http.Cookie"%>
<%
if(request.getParameter("Submit")!= null)
{

try
{
Class.forName("com.mysql.jdbc.Driver");
Connection con=DriverManager.getConnection("jdbc:mysql://localhost:3306/cbs","root","root");
Statement stmt=con.createStatement();
ResultSet rs,rs1;

// String type=request.getParameter("select").trim();

String u=request.getParameter("u").trim();
String p=request.getParameter("p").trim();
// out.println(type);
// out.println(u); out.println(p);

rs=stmt.executeQuery("select * from admin where u='"+u+"' and pwd='"+p+"'");
String s="",s1="";
int found=0;

```

```

String a="";
while(rs.next())
{
//a=rs.getString(2);
found++;

}
out.println(found);
if(found==1)
{

session.setAttribute("Admin",u);

response.sendRedirect("adminpage.jsp");
}
else
{
out.println("<h1>Invalid User</h1>");

//response.sendRedirect("invaliduser.jsp");
}
rs.close();

stmt.close();
con.close();

}

catch(Exception e)
{

out.println("Exception occured" +e);
}
}
%>
<h4>&nbsp;  </h4>
</div>
<%-- <div class="span3">
<a class="btn btn-success btn-large pull-right" href="http://shapebootstrap.net">Free Download Nova</a>
</div>--%>

</div>
</div>
</section>
<footer>
<div class="container">
<div class="row"></div>
</div>
</footer>

<script src="//ajax.googleapis.com/ajax/libs/jquery/1.11.2/jquery.min.js"></script>
<script>window.jQuery || document.write('<script src="js/vendor/jquery-1.11.2.min.js"></script>')</script>

<script src="js/vendor/bootstrap.min.js"></script>

```



```

<script src="js/plugins.js"></script>
<script src="js/main.js"></script>

<script src="http://ajax.googleapis.com/ajax/libs/jquery/1.10.2/jquery.min.js" type="text/javascript"></script>
<script type="text/javascript">
$(document).ready(function() {
// navigation click actions
$('.scroll-link').on('click', function(event){
event.preventDefault();
var sectionID = $(this).attr("data-id");
scrollToID('#' + sectionID, 750);
});
// scroll to top action
$('.scroll-top').on('click', function(event) {
event.preventDefault();
$('html, body').animate({scrollTop:0}, 'slow');
});
// mobile nav toggle
$('#nav-toggle').on('click', function (event) {
event.preventDefault();
$('#main-nav').toggleClass("open");
});
});
// scroll function
function scrollToID(id, speed){
var offSet = 0;
var targetOffset = $(id).offset().top - offSet;
var mainNav = $('#main-nav');
$('html,body').animate({scrollTop:targetOffset}, speed);
if (mainNav.hasClass("open")) {
mainNav.css("height", "1px").removeClass("in").addClass("collapse");
mainNav.removeClass("open");
}
}
if (typeof console === "undefined") {
console = {
log: function() { }
};
}
}
</script>
</body>
</html>

```

Bangalore map.jsp

```

<% @ page contentType="text/html; charset=utf-8" language="java" import="java.sql.*" errorPage="" %>
<!DOCTYPE html>
<html>
<head>
<meta charset="utf-8">
<meta http-equiv="X-UA-Compatible" content="IE=edge,chrome=1">
<!--
Victory Template
http://www.templatemo.com/tm-507-victory
-->
<title>BANGALORE MAP</title>
<meta name="description" content="">
<meta name="viewport" content="width=device-width, initial-scale=1">
<link rel="apple-touch-icon" href="apple-touch-icon.png">

```

```

<link rel="stylesheet" href="css/bootstrap.min.css">
<link rel="stylesheet" href="css/bootstrap-theme.min.css">
<link rel="stylesheet" href="css/fontAwesome.css">
<link rel="stylesheet" href="css/hero-slider.css">
<link rel="stylesheet" href="css/owl-carousel.css">
<link rel="stylesheet" href="css/templatemo-style.css">

<link
href="https://fonts.googleapis.com/css?family=Spectral:200,200i,300,300i,400,400i,500,500i,600,600i,700,700i,800,800i" rel="stylesheet">
<link href="https://fonts.googleapis.com/css?family=Roboto:100,300,400,500,700,900" rel="stylesheet">

<script src="js/vendor/modernizr-2.8.3-respond-1.4.2.min.js"></script>
</head>

<body>
<div class="header">
<div class="container">
<a href="#" class="navbar-brand scroll-top">PRISON SYSTEM </a>

<div id="main-nav" class="collapse navbar-collapse">
<ul class="nav navbar-nav">
<li><a href="about.jsp">Aboutus</a></li>
<li><a href="faq.jsp">FAQ</a></li>
<li><a href="signin.jsp">Signin</a></li>
<li><a href="bangaloremap.jsp">Bangalore Map</a></li>
<li><a href="citizen.jsp">Citizen Signup</a></li>
</ul>
</div>
<!--/.navbar-collapse-->
</nav>
<!--/.navbar-->
</div>
<!--/.container-->
</div>
<!--/.header-->


<section class="blog-page">
<div class="container">
<div class="row">
<form name="form1" method="post" action="">
<p>&nbsp;</p>
<p align="center" class="h3">Bangalore Map</p>
<p align="center"></p>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p>&nbsp;</p>
</form>
<h4>&nbsp;</h4>
</div>
</div>
</div>
</section>

```

```

<script src="//ajax.googleapis.com/ajax/libs/jquery/1.11.2/jquery.min.js"></script>
<script>window.jQuery || document.write('<script src="js/vendor/jquery-1.11.2.min.js"></script>')</script>

<script src="js/vendor/bootstrap.min.js"></script>

<script src="js/plugins.js"></script>
<script src="js/main.js"></script>

<script src="http://ajax.googleapis.com/ajax/libs/jquery/1.10.2/jquery.min.js" type="text/javascript"></script>
<script type="text/javascript">
$(document).ready(function() {
// navigation click actions
$('.scroll-link').on('click', function(event){
event.preventDefault();
var sectionID = $(this).attr("data-id");
scrollToID('#' + sectionID, 750);
});
// scroll to top action
$('.scroll-top').on('click', function(event) {
event.preventDefault();
$('html, body').animate({ scrollTop:0}, 'slow');
});
// mobile nav toggle
$('#nav-toggle').on('click', function (event) {
event.preventDefault();
$('#main-nav').toggleClass("open");
});
});
// scroll function
function scrollToID(id, speed){
var offSet = 0;
var targetOffset = $(id).offset().top - offSet;
var mainNav = $('#main-nav');
$('html,body').animate({ scrollTop:targetOffset}, speed);
if (mainNav.hasClass("open")) {
mainNav.css("height", "1px").removeClass("in").addClass("collapse");
mainNav.removeClass("open");
}
}
if (typeof console === "undefined") {
console = {
log: function() { }
};
}
}
</script>
</body>
</html>

```

Citizen.jsp:

```

<% @ page contentType="text/html; charset=utf-8" language="java" import="java.sql.*" errorPage="" %>
<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN"
"http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">
<!DOCTYPE html>
<html>
<head>
<meta charset="utf-8">
<meta http-equiv="X-UA-Compatible" content="IE=edge,chrome=1">
<!--
Victory Template

```

http://www.templatemo.com/tm-507-victory

-->

<title>CITIZEN SIGNUP</title>

<meta name="description" content="">

<meta name="viewport" content="width=device-width, initial-scale=1">

<link rel="apple-touch-icon" href="apple-touch-icon.png">

<link rel="stylesheet" href="css/bootstrap.min.css">

<link rel="stylesheet" href="css/bootstrap-theme.min.css">

<link rel="stylesheet" href="css/fontAwesome.css">

<link rel="stylesheet" href="css/hero-slider.css">

<link rel="stylesheet" href="css/owl-carousel.css">

<link rel="stylesheet" href="css/templatemo-style.css">

<link

href="https://fonts.googleapis.com/css?family=Spectral:200,200i,300,300i,400,400i,500,500i,600,600i,700,700i,800,800i" rel="stylesheet">

<link href="https://fonts.googleapis.com/css?family=Roboto:100,300,400,500,700,900" rel="stylesheet">

<script src="js/vendor/modernizr-2.8.3-respond-1.4.2.min.js"></script>

</head>

<body>

<div class="header">

<div class="container">

<a href="#" class="navbar-brand scroll-top">PRISON SYSTEM </a>

<nav class="navbar navbar-inverse" role="navigation">

<div class="navbar-header">

<button type="button" id="nav-toggle" class="navbar-toggle" data-toggle="collapse" data-target="#main-nav">

<span class="sr-only">Toggle navigation</span>

<span class="icon-bar"></span>

<span class="icon-bar"></span>

<span class="icon-bar"></span> </button>

</div>

<!--/.navbar-header-->

<div id="main-nav" class="collapse navbar-collapse">

<ul class="nav navbar-nav">

<li><a href="about.jsp">Aboutus</a></li>

<li><a href="faq.jsp">FAQ</a></li>

<li><a href="signin.jsp">Signin</a></li>

<!-- <li><a href="asignin.jsp">Admin Signin</a></li>-->

<li><a href="bangaloremap.jsp">Bangalore Map</a></li>

<li><a href="citizen.jsp">Citizen Signup</a></li>

</ul>

</div>

<!--/.navbar-collapse-->

</nav>

<!--/.navbar-->

</div>

<!--/.container-->

</div>

<!--/.header-->

<section class="blog-page">

<div class="container">

<div class="row">

<form id="form1" name="form1" method="post" action="">

<table width="612" border="0" align="center">

```

<caption>
Citizen Signup or Register
</caption>
<tr>
<td width="148">Aadhar Card no </td>
<td width="245"><input name="textfield" type="text" maxlength="12" minlength="12" required /></td>
<td width="197" rowspan="8"><div align="left"></div></td>
</tr>
<tr>
<td>Full Name </td>
<td><input type="text" name="textfield2" required title="letters only" pattern="[A-Za-z]+" /></td>
</tr>
<tr>
<td>Address</td>
<td><textarea name="textfield3"></textarea></td>
</tr>
<tr>
<td>Gender </td>
<td><label>
<input name="radiobutton" type="radio" value="Male" />
M
<input name="radiobutton" type="radio" value="Female" />
F</label></td>
</tr>
<tr>
<td>Mobile No</td>
<td><input name="textfield4" type="text" maxlength="10" minlength="10" pattern="^\d{10}$" title="only nos
should be 10 digits" required/></td>
</tr>
<tr>
<td>Email id </td>
<td><input type="email" name="textfield5" required /></td>
</tr>
<tr>
<td>Password</td>
<td><input type="password" name="textfield6" required pattern="(?!.*\d)(?!.*[a-z])(?!.*[A-Z]).{8,}"
title="Must contain at least one number and one uppercase and lowercase letter, and at least 8 or more
characters"/></td>
</tr>
<tr>
<td><input type="submit" name="Submit" value="Register" /></td>
<td><input type="reset" name="Submit2" value="Reset" /></td>
</tr>
</table>
</form>

```

```

<div align="center">
<% @ page import = "java.io.*,java.sql.*,java.util.*"%>
<%
if(request.getParameter("Submit")!= null)
{
try

{

String a=request.getParameter("textfield");
String fn=request.getParameter("textfield2");

```

```

String add=request.getParameter("textfield3");
String ge=request.getParameter("radiobutton");
String m=request.getParameter("textfield4");
String e=request.getParameter("textfield5");
String pw=request.getParameter("textfield6");

Class.forName("com.mysql.jdbc.Driver");
Connection conn=DriverManager.getConnection("jdbc:mysql://localhost:3306/cbs","root","root");

ResultSet rs;

Statement st=conn.createStatement();

String sql="select * from citizenreg where email='"+e+"'";
rs=st.executeQuery(sql);
//int found1=0;
int count=0;
while(rs.next())
{
count++;
}

if (count==1)
{
out.println("<h1 align=center>Email id already Registered</>");
}
else
{

PreparedStatement pstmt;

pstmt=conn.prepareStatement("insert into citizenreg values(?,?,?,?,?,?)");

pstmt.setString(1,a);
pstmt.setString(2,fn);
pstmt.setString(3,add);
pstmt.setString(4,ge);
pstmt.setString(5,m);
pstmt.setString(6,e);
pstmt.setString(7,pw);

pstmt.executeUpdate();
//      out.println("<h1>Registered Successfully</h1>");

String msg="Successful Signup";
out.println( "<script type='text/javascript'> window.alert ('"+msg+"');</script>");

}

}
catch(Exception e)
{

```

```

out.print(e);

}
}
%>
</p>

<script>window.jQuery || document.write('<script src="js/vendor/jquery-1.11.2.min.js"></script>')</script>

<script src="js/vendor/bootstrap.min.js"></script>

<script src="js/plugins.js"></script>
<script src="js/main.js"></script>

<script src="http://ajax.googleapis.com/ajax/libs/jquery/1.10.2/jquery.min.js" type="text/javascript"></script>
<script type="text/javascript">
$(document).ready(function() {
// navigation click actions
$('.scroll-link').on('click', function(event){
event.preventDefault();
var sectionID = $(this).attr("data-id");
scrollToID('#' + sectionID, 750);
});
// scroll to top action
$('.scroll-top').on('click', function(event) {
event.preventDefault();
$('html, body').animate({ scrollTop:0}, 'slow');
});
// mobile nav toggle
$('#nav-toggle').on('click', function (event) {
event.preventDefault();
$('#main-nav').toggleClass("open");
});
});
// scroll function
function scrollToID(id, speed){
var offSet = 0;
var targetOffset = $(id).offset().top - offSet;
var mainNav = $('#main-nav');
$('html,body').animate({ scrollTop:targetOffset}, speed);
if (mainNav.hasClass("open")) {
mainNav.css("height", "1px").removeClass("in").addClass("collapse");
mainNav.removeClass("open");
}
}
if (typeof console === "undefined") {
console = {
log: function() { }
};
}
}
</script>
</div>
</body>
</html>

```

Citizen homepage.jsp

```

<% @ page contentType="text/html; charset=utf-8" language="java" import="java.sql.*" errorPage="" %>
<!DOCTYPE html>
<html>
<head>

```

```

<meta charset="utf-8">
<meta http-equiv="X-UA-Compatible" content="IE=edge,chrome=1">
<!--
Victory Template
http://www.templatemo.com/tm-507-victory
-->
<title>CITIZEN PAGE</title>
<meta name="description" content="">
<meta name="viewport" content="width=device-width, initial-scale=1">
<link rel="apple-touch-icon" href="apple-touch-icon.png">

<link rel="stylesheet" href="css/bootstrap.min.css">
<link rel="stylesheet" href="css/bootstrap-theme.min.css">
<link rel="stylesheet" href="css/fontAwesome.css">
<link rel="stylesheet" href="css/hero-slider.css">
<link rel="stylesheet" href="css/owl-carousel.css">
<link rel="stylesheet" href="css/templatemo-style.css">

<link
href="https://fonts.googleapis.com/css?family=Spectral:200,200i,300,300i,400,400i,500,500i,600,600i,700,700i,800,800i" rel="stylesheet">
<link href="https://fonts.googleapis.com/css?family=Roboto:100,300,400,500,700,900" rel="stylesheet">

<script src="js/vendor/modernizr-2.8.3-respond-1.4.2.min.js"></script>
<style type="text/css">
<!--
.style10 {
font-size: 36px;
font-style: italic;
font-family: 'Spectral', serif;
font-weight: bold;
}
body {
background-image: url(img/What-Are-the-Most-Common-Types-of-Computer-Crimes.jpg);
}
-->
</style>
<meta http-equiv="Content-Type" content="text/html; charset=utf-8"></head>

<body>
<div class="header">
<div class="container">
<a href="#" class="navbar-brand scroll-top">PRISON SYSTEM </a>
<nav class="navbar navbar-inverse" role="navigation">
<div class="navbar-header">
<button type="button" id="nav-toggle" class="navbar-toggle" data-toggle="collapse" data-target="#main-nav">
<span class="sr-only">Toggle navigation</span>
<span class="icon-bar"></span>
<span class="icon-bar"></span>
<span class="icon-bar"></span>
</button>
</div>
<!--/.navbar-header-->
<div id="main-nav" class="collapse navbar-collapse">
<ul class="nav navbar-nav">
<li><a href="cfirreg.jsp">File Complaint</a></li>
<li><a href="cfirregview.jsp">View Filed Complaints</a></li>

<li><a href="index.jsp">Signout</a></li>

```



```

</ul>
</div>
<!--/.navbar-collapse-->
</nav>
<!--/.navbar-->
</div>
<!--/.container-->
</div>
<!--/.header-->
<section class="blog-page">
<div class="container">
<div class="row">
<form name="form1" method="post" action="">
<div align="center" class="style10"></div>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p>&nbsp;</p>
</form>
</div>
</div>
</section>
<script src="//ajax.googleapis.com/ajax/libs/jquery/1.11.2/jquery.min.js"></script>
<script>window.jQuery || document.write('<script src="js/vendor/jquery-1.11.2.min.js"></script>')</script>

<script src="js/vendor/bootstrap.min.js"></script>

<script src="js/plugins.js"></script>
<script src="js/main.js"></script>

<script src="http://ajax.googleapis.com/ajax/libs/jquery/1.10.2/jquery.min.js" type="text/javascript"></script>
<script type="text/javascript">
$(document).ready(function() {
// navigation click actions
$('.scroll-link').on('click', function(event){
event.preventDefault();
var sectionID = $(this).attr("data-id");
scrollToID('#' + sectionID, 750);
});
// scroll to top action
$('.scroll-top').on('click', function(event) {
event.preventDefault();
$('html, body').animate({ scrollTop:0}, 'slow');
});
// mobile nav toggle
$('#nav-toggle').on('click', function (event) {
event.preventDefault();
$('#main-nav').toggleClass("open");
});
});
// scroll function
function scrollToID(id, speed){
var offSet = 0;
var targetOffset = $(id).offset().top - offSet;
var mainNav = $('#main-nav');
$('html,body').animate({ scrollTop:targetOffset}, speed);
if (mainNav.hasClass("open")) {
mainNav.css("height", "1px").removeClass("in").addClass("collapse");
mainNav.removeClass("open");
}
}

```

```
}
if (typeof console === "undefined") {
  console = {
    log: function() { }
  };
}
</script>
</body>
</html>
```

Convicted file.jsp

```
<% @ page contentType="text/html; charset=utf-8" language="java" import="java.sql.*" errorPage="" %>
<!DOCTYPE html>
```

```
<html>
```

```
<head>
```

```
<meta charset="utf-8">
```

```
<meta http-equiv="X-UA-Compatible" content="IE=edge,chrome=1">
```

```
<!--
```

Victory Template

```
http://www.templatemo.com/tm-507-victory
```

```
-->
```

```
<title>CONVICTED</title>
```

```
<meta name="description" content="">
```

```
<meta name="viewport" content="width=device-width, initial-scale=1">
```

```
<link rel="apple-touch-icon" href="apple-touch-icon.png">
```

```
<link rel="stylesheet" href="css/bootstrap.min.css">
```

```
<link rel="stylesheet" href="css/bootstrap-theme.min.css">
```

```
<link rel="stylesheet" href="css/fontAwesome.css">
```

```
<link rel="stylesheet" href="css/hero-slider.css">
```

```
<link rel="stylesheet" href="css/owl-carousel.css">
```

```
<link rel="stylesheet" href="css/templatemo-style.css">
```

```
<link
```

```
href="https://fonts.googleapis.com/css?family=Spectral:200,200i,300,300i,400,400i,500,500i,600,600i,700,700i,800,800i" rel="stylesheet">
```

```
<link href="https://fonts.googleapis.com/css?family=Roboto:100,300,400,500,700,900" rel="stylesheet">
```

```
<script src="js/vendor/modernizr-2.8.3-respond-1.4.2.min.js"></script>
```

```
<style type="text/css">
```

```
<!--
```

```
.style13 {font-size: 24px; color: #000000; }
```

```
-->
```

```
</style>
```

```
</head>
```

```
<body>
```

```
<div class="header">
```

```
<div class="container"><a href="#" class="navbar-brand scroll-top">PRISON SYSTEM </a>
```

```
<nav class="navbar navbar-inverse" role="navigation">
```

```
<div class="navbar-header">
```

```
<button type="button" id="nav-toggle" class="navbar-toggle" data-toggle="collapse" data-target="#main-nav">
```

```
<span class="sr-only">Toggle navigation</span>
```

```
<span class="icon-bar"></span>
```

```
<span class="icon-bar"></span>
```

```
<span class="icon-bar"></span>
```

```
</button>
```

```
</div>
```

```
<!--/.navbar-header-->
```

```
<div id="main-nav" class="collapse navbar-collapse">
```

```

<ul class="nav navbar-nav">
<li><a href="epwc.jsp"> profile</a></li>
<li><a href="wantedreg.jsp">Wanted </a></li>
<li><a href="missingperson.jsp">Missing Person </a></li>
<li><a href="convictedfile.jsp">Convicted </a></li>
<li><a href="firreg.jsp">FIR </a></li>
<li><a href="adminsearch.jsp">Search</a></li>
<!-- <li><a href="search3.jsp">Match Photos</a></li>-->
<li><a href="updatestatus.jsp">Update Status</a></li>
<li><a href="index.jsp">Signout</a></li>
</ul>
</div>
<!--/.navbar-collapse-->
</nav>
<!--/.navbar-->
</div>
<!--/.container-->
</div>
<!--/.header-->

```

```

<section class="blog-page">
<div class="container">
<div class="row">
<form name="form1" method="post" action="">
<table width="463" border="1" align="left" bgcolor="#B6B6B6">
<tr>
<td width="237"><span class="style13">FIR Id </span></td>
<td width="210"><div align="center">
<input name="firid" type="text" id="firid"

required="required" />
</div></td>
</tr>
<tr>
<td><span class="style13">Name</span></td>
<td><div align="center">
<input name="name" type="text" id="name"

required="required" />
</div></td>
</tr>
<tr>
<td><span class="style13">Alias Name </span></td>
<td><div align="center">
<input name="aname" id="aname" list="browsers" />
</div>
<datalist id="browsers">
<div align="center">                </div>
</datalist>                </td>
</tr>
<tr>
<td><span class="style13">Booked for</span> </td>
<td><div align="center">
<input name="bookedfor" type="text" id="bookedfor" required="required"/>
</div></td>
</tr>
<tr>
<td><span class="style13">Date of Booking </span></td>

```

```

<td><div align="center">
<input name="bookingdate" type="date" id="bookingdate" required="required"/>
</div></td>
</tr>
<tr>
<td><span class="style13">Case booked by </span></td>
<td><div align="center">
<input name="casebooked" type="text" id="casebooked" required="required"/>
</div></td>
</tr>
<tr>
<td><span class="style13">Case Register at </span></td>
<td><div align="center">
<label>
<select name="select" size="1">
<option value="rajajinagar" selected>rajajinagar</option>
<option value="vijaynagar">vijaynagar</option>
</select>
</label>
</div></td>
</tr>
<tr>
<td><span class="style13">Gender</span></td>
<td><div align="center">
<input name="gender" id="gender" list="browsers">
</div>
<datalist id="browsers">
<div align="center">
<option value="Male">
<option value="Female">
</div>
</datalist>
</td>
</tr>
<td><span class="style13">Convicted Charge</span> </td>
<td><div align="center">
<input name="ccharge" type="text" id="ccharge" required="required"/>
</div></td>
</tr>
<tr>
<td><span class="style13">Prision</span></td>
<td><div align="center">
<input name="prision" type="text" id="prision" required="required"/>
</div></td>
</tr>
<tr>
<td><span class="style13">Convicted for </span></td>
<td><div align="center">
<input name="convfor" type="text" id="convfor" required="required"/>
</div></td>
</tr>
<tr>
<td><span class="style13">Photo</span></td>
<td><input name="photo" type="file" required="required"/></td>
</tr>
<tr>
<td><span class="style13">CELL NO</span></td>
<td><input name="cell" type="text" required="required"/></td>
</tr>
<tr>
<td colspan="2" height="28" colspan="2"><div align="center">
<input type="submit" name="Submit" value="Submit" />

```

```

<input type="reset" name="Submit2" value="Reset" />
</div></td>
</tr>
</table>
</form>
<div align="center">
<%@ page import ="java.io.*,java.sql.*,java.util.*"%>
<%

```

```

if(request.getParameter("Submit")!= null)
{
try

{
out.println("t1");
String firid=request.getParameter("firid");
String name=request.getParameter("name");
String aliasname=request.getParameter("aname");
String bookedfor=request.getParameter("bookedfor");
String bookdate=request.getParameter("bookingdate");
String casebooked=request.getParameter("casebooked");
String casereg=request.getParameter("select");
String gender=request.getParameter("gender");
// out.println("t1");
String ccharge=request.getParameter("ccharge");
String pri=request.getParameter("prision");
String confor=request.getParameter("convfor");
String photo=request.getParameter("photo");
String cell=request.getParameter("cell");

```

```

firid.trim();
name.trim();
aliasname.trim();
bookedfor.trim();
bookdate.trim();
casebooked.trim();
casereg.trim();
gender.trim();
ccharge.trim();
pri.trim();
confor.trim();

```

```

Class.forName("com.mysql.jdbc.Driver");
Connection conn=DriverManager.getConnection("jdbc:mysql://localhost:3306/cbs","root","root");

```

```

ResultSet rs;

```

```

Statement st=conn.createStatement();

```

```

String sql="select * from Convictedfile";
rs=st.executeQuery(sql);
int found1=0;
int count=100;
while(rs.next())
{
count++;
}

```

```
//          out.println(found1);
```

```
PreparedStatement pstmt;
```

```
pstmt=conn.prepareStatement("insert into Convictedfile values(?,?,?,?,?,?,?,?,?,?,?)");
```

```
pstmt.setString(1,firid);  
pstmt.setString(2,name);  
pstmt.setString(3,aliasname);  
pstmt.setString(4,bookedfor);  
pstmt.setString(5,bookdate);  
pstmt.setString(6,casebooked);  
pstmt.setString(7,casereg);  
pstmt.setString(8,gender);  
pstmt.setString(9,ccharge);  
pstmt.setString(10,pri);  
pstmt.setString(11,confor);  
pstmt.setString(12,photo);  
pstmt.setString(13,cell);
```

```
pstmt.executeUpdate();  
//out.println("Sumbited");  
out.println("<H1>Registered</h1>");
```

```
//response.sendRedirect("http://localhost:8080/Education/studenthome.html");
```

```
//out.println("<html><body bgcolor=cyan><h1 align=center>vlcgs Devlopers and //Builders <Br> student  
Registration Completed successfully..<br> <a href=http://localhost:8080/cp/product.html><br>Home  
Page</a></h1>");
```

```
//          out.println("</body></html>");
```

```
}  
catch(Exception e)  
{  
//out.print(e);  
  
}  
}
```

```

%>
</div>
<div align="center"></div>
<p align="center"></p>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p align="center">&nbsp;</p>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p>&nbsp;</p>
</div>
</div>
</section>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p></p>
<script src="//ajax.googleapis.com/ajax/libs/jquery/1.11.2/jquery.min.js"></script>
<script>window.jQuery || document.write('<script src="js/vendor/jquery-1.11.2.min.js"></script>')</script>

<script src="js/vendor/bootstrap.min.js"></script>

<script src="js/plugins.js"></script>
<script src="js/main.js"></script>

<script src="http://ajax.googleapis.com/ajax/libs/jquery/1.10.2/jquery.min.js" type="text/javascript"></script>
<script type="text/javascript">
$(document).ready(function() {
// navigation click actions
$('.scroll-link').on('click', function(event){
event.preventDefault();
var sectionID = $(this).attr("data-id");
scrollToID('#' + sectionID, 750);
});
// scroll to top action
$('.scroll-top').on('click', function(event) {
event.preventDefault();
$('html, body').animate({scrollTop:0}, 'slow');
});
// mobile nav toggle
$('#nav-toggle').on('click', function (event) {
event.preventDefault();
$('#main-nav').toggleClass("open");
});
});

```

```
// scroll function
function scrollToID(id, speed){
var offSet = 0;
var targetOffset = $(id).offset().top - offSet;
var mainNav = $('#main-nav');
$('html,body').animate({scrollTop:targetOffset}, speed);
if (mainNav.hasClass("open")) {
mainNav.css("height", "1px").removeClass("in").addClass("collapse");
mainNav.removeClass("open");
}
}
if (typeof console === "undefined") {
console = {
log: function() { }
};
}
}
</script>
</p>
</body>
</html>
```

Crime page.jsp:

```
<% @ page contentType="text/html; charset=utf-8" language="java" import="java.sql.*" errorPage="" %>
<!DOCTYPE html>
<html>
<head>
<meta charset="utf-8">
<meta http-equiv="X-UA-Compatible" content="IE=edge,chrome=1">
<!--
Victory Template
http://www.templatemo.com/tm-507-victory
-->
<title>CRIME PAGE</title>
<meta name="description" content="">
<meta name="viewport" content="width=device-width, initial-scale=1">
<link rel="apple-touch-icon" href="apple-touch-icon.png">

<link rel="stylesheet" href="css/bootstrap.min.css">
<link rel="stylesheet" href="css/bootstrap-theme.min.css">
<link rel="stylesheet" href="css/fontAwesome.css">
<link rel="stylesheet" href="css/hero-slider.css">
<link rel="stylesheet" href="css/owl-carousel.css">
<link rel="stylesheet" href="css/templatemo-style.css">

<link
href="https://fonts.googleapis.com/css?family=Spectral:200,200i,300,300i,400,400i,500,500i,600,600i,700,700i,800,800i" rel="stylesheet">
<link href="https://fonts.googleapis.com/css?family=Roboto:100,300,400,500,700,900" rel="stylesheet">

<script src="js/vendor/modernizr-2.8.3-respond-1.4.2.min.js"></script>
<style type="text/css">
<!--
.style1 {
font-size: 36px;
color: #000000;
font-weight: bold;
font-style: italic;
font-family: 'Spectral', serif;
}
.style2 {font-family: 'Spectral', serif}
```



```

body {
background-image: url(img/Arrest-Crime-Handcuffs.jpg);
background-repeat: repeat;
}
.style3 {color: #FFFFFF}
.style4 {font-size: 36px; color: #FFFFFF; font-weight: bold; font-style: italic; font-family: 'Spectral', serif; }
body,td,th {
font-size: 14px;
}
-->
</style>
<meta http-equiv="Content-Type" content="text/html; charset=utf-8"></head>

<body>
<div class="header">
<div class="container"><a href="#" class="navbar-brand scroll-top">PRISON SYSTEM </a>
<nav class="navbar navbar-inverse" role="navigation">
<div class="navbar-header">
<button type="button" id="nav-toggle" class="navbar-toggle" data-toggle="collapse" data-target="#main-nav">
<span class="sr-only">Toggle navigation</span>
<span class="icon-bar"></span>
<span class="icon-bar"></span>
<span class="icon-bar"></span>
</button>
</div>
<!--/.navbar-header-->
<div id="main-nav" class="collapse navbar-collapse">
<ul class="nav navbar-nav">
<li><a href="epwc.jsp"> profile</a></li>
<li><a href="wantedreg.jsp">Wanted </a></li>
<li><a href="missingperson.jsp">Missing Person </a></li>
<!-- <li><a href="convictedfile.jsp">Convicted </a></li>-->
<li><a href="firreg.jsp">FIR </a></li>

<!--<li><a href="adminsearch.jsp">Search</a></li>-->
<li><a href="addcrimedata.jsp">ADD CRIME DATA</a></li>
<li><a href="updatestatus.jsp">Update Status</a></li>
<li><a href="index.jsp">Signout</a></li>
</ul>
</div>
<!--/.navbar-collapse-->
</nav>
<!--/.navbar-->
</div>
<!--/.container-->
</div>
<!--/.header-->
<section class="blog-page">
<div class="container">
<div class="row">
<form name="form1" method="post" action="">
<p align="center">&nbsp;</p>
<p align="center">&nbsp;</p>
<p align="center" class="style1">&nbsp;</p>
<p class="style2">&nbsp;</p>
</form>
</div>
</div>
</section>
<p>

```

```

<script src="//ajax.googleapis.com/ajax/libs/jquery/1.11.2/jquery.min.js"></script>
</p>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p align="center">&nbsp;</p>
<p class="style3"></p>
<p>
<script>window.jQuery || document.write('<script src="js/vendor/jquery-1.11.2.min.js"></script>')</script>

<script src="js/vendor/bootstrap.min.js"></script>

<script src="js/plugins.js"></script>
<script src="js/main.js"></script>

<script src="http://ajax.googleapis.com/ajax/libs/jquery/1.10.2/jquery.min.js" type="text/javascript"></script>
<script type="text/javascript">
$(document).ready(function() {
// navigation click actions
$('.scroll-link').on('click', function(event){
event.preventDefault();
var sectionID = $(this).attr("data-id");
scrollToID('#' + sectionID, 750);
});
// scroll to top action
$('.scroll-top').on('click', function(event) {
event.preventDefault();
$('html, body').animate({ scrollTop:0}, 'slow');
});
// mobile nav toggle
$('#nav-toggle').on('click', function (event) {
event.preventDefault();
$('#main-nav').toggleClass("open");
});
});
// scroll function
function scrollToID(id, speed){
var offSet = 0;
var targetOffset = $(id).offset().top - offSet;
var mainNav = $('#main-nav');
$('html,body').animate({ scrollTop:targetOffset}, speed);
if (mainNav.hasClass("open")) {
mainNav.css("height", "1px").removeClass("in").addClass("collapse");
mainNav.removeClass("open");
}
}
if (typeof console === "undefined") {
console = {
log: function() { }
};
}
}
</script>
</p>
</body>
</html>

```

Faq.jsp

```

<% @ page contentType="text/html; charset=utf-8" language="java" import="java.sql.*" errorPage="" %>
<!DOCTYPE html>
<html>
<head>

```

```

<meta charset="utf-8">
<meta http-equiv="X-UA-Compatible" content="IE=edge,chrome=1">
<!--
Victory Template
http://www.templatemo.com/tm-507-victory
-->
<title>FAQ</title>
<meta name="description" content="">
<meta name="viewport" content="width=device-width, initial-scale=1">
<link rel="apple-touch-icon" href="apple-touch-icon.png">

<link rel="stylesheet" href="css/bootstrap.min.css">
<link rel="stylesheet" href="css/bootstrap-theme.min.css">
<link rel="stylesheet" href="css/fontAwesome.css">
<link rel="stylesheet" href="css/hero-slider.css">
<link rel="stylesheet" href="css/owl-carousel.css">
<link rel="stylesheet" href="css/templatemo-style.css">

<link
href="https://fonts.googleapis.com/css?family=Spectral:200,200i,300,300i,400,400i,500,500i,600,600i,700,700i,800,800i" rel="stylesheet">
<link href="https://fonts.googleapis.com/css?family=Roboto:100,300,400,500,700,900" rel="stylesheet">

<script src="js/vendor/modernizr-2.8.3-respond-1.4.2.min.js"></script>
<style type="text/css">
<!--
.style1 {font-weight: bold}
-->
</style>
</head>

<body>
<div class="header">
<div class="container"><a href="#" class="navbar-brand scroll-top">PRISON SYSTEM </a>
<nav class="navbar navbar-inverse" role="navigation">
<div class="navbar-header">
<button type="button" id="nav-toggle" class="navbar-toggle" data-toggle="collapse" data-target="#main-nav">
<span class="sr-only">Toggle navigation</span>
<span class="icon-bar"></span>
<span class="icon-bar"></span>
<span class="icon-bar"></span>
</button>
</div>
<!--/.navbar-header-->
<div id="main-nav" class="collapse navbar-collapse">
<ul class="nav navbar-nav">
<li><a href="about.jsp">Aboutus</a></li>
<li><a href="faq.jsp">FAQ</a></li>
<li><a href="signin.jsp">Signin</a></li>
<li><a href="bangaloremap.jsp">Bangalore Map</a></li>
<li><a href="citizen.jsp">Citizen Signup</a></li>
</ul>
</div>
<!--/.navbar-collapse-->
</nav>
<!--/.navbar-->
</div>
<!--/.container-->
</div>
<!--/.header-->

```

<section class="blog-page">

<div class="container">

<div class="row">

<p>&nbsp;</p>

<div align="center" class="style1">

<p>PRISON SYSTEM</p>

<p><strong>FAQ's</strong></p>

<table width="67%" height="248" border="1" align="left" cellspacing="5">

<tr>

<td width="390"><div align="center">What is Change Password ? </div></td>

<td width="444"><div align="center">To Change user's password </div></td>

</tr>

<tr>

<td><div align="center">What is Category ? </div></td>

<td><div align="center">Type of User such as Crime or Administrator </div></td>

</tr>

<tr>

<td><div align="center">What is user registration ? </div></td>

<td><div align="center">To login into desired page. </div></td>

</tr>

<tr>

<td><div align="center">What is FIR registration ? </div></td>

<td><div align="center">To register any case. </div></td>

</tr>

<tr>

<td><div align="center">What is close wanted /missing person details ? </div></td>

<td><div align="center">To close wanted / missing file. </div></td>

</tr>

</table>

<p>&nbsp;</p>

<p align="left"></p>

<p>&nbsp;</p>

<p>&nbsp;</p>

<p>&nbsp;</p>

<p>&nbsp;</p>

<p>&nbsp;</p>

<p>&nbsp;</p>

<p>&nbsp;</p>

<p>&nbsp;</p>

<p>&nbsp;</p>

<p>&nbsp;</p>

<p>&nbsp;</p>

<p>&nbsp;</p>

<p>&nbsp;</p>

</div>

</div>

</div>

</section>

<script src="//ajax.googleapis.com/ajax/libs/jquery/1.11.2/jquery.min.js"></script>

<script>window.jQuery || document.write('<script src="js/vendor/jquery-1.11.2.min.js"></script>')</script>

```

<script src="js/vendor/bootstrap.min.js"></script>

<script src="js/plugins.js"></script>
<script src="js/main.js"></script>

<script src="http://ajax.googleapis.com/ajax/libs/jquery/1.10.2/jquery.min.js" type="text/javascript"></script>
<script type="text/javascript">
$(document).ready(function() {
// navigation click actions
$('.scroll-link').on('click', function(event){
event.preventDefault();
var sectionID = $(this).attr("data-id");
scrollToID('#' + sectionID, 750);
});
// scroll to top action
$('.scroll-top').on('click', function(event) {
event.preventDefault();
$('html, body').animate({scrollTop:0}, 'slow');
});
// mobile nav toggle
$('#nav-toggle').on('click', function (event) {
event.preventDefault();
$('#main-nav').toggleClass("open");
});
});
// scroll function
function scrollToID(id, speed){
var offSet = 0;
var targetOffset = $(id).offset().top - offSet;
var mainNav = $('#main-nav');
$('html,body').animate({scrollTop:targetOffset}, speed);
if (mainNav.hasClass("open")) {
mainNav.css("height", "1px").removeClass("in").addClass("collapse");
mainNav.removeClass("open");
}
}
if (typeof console === "undefined") {
console = {
log: function() { }
};
}
}
</script>
</body>
</html>

```

Firreg.jsp

```

<% @ page contentType="text/html; charset=utf-8" language="java" import="java.sql.*" errorPage="" %>
<!DOCTYPE html>
<html>
<head>
<meta charset="utf-8">
<meta http-equiv="X-UA-Compatible" content="IE=edge,chrome=1">
<!--
Victory Template
http://www.templatemo.com/tm-507-victory
-->
<title>FIR</title>
<meta name="description" content="">
<meta name="viewport" content="width=device-width, initial-scale=1">

```

```

<link rel="apple-touch-icon" href="apple-touch-icon.png">

<link rel="stylesheet" href="css/bootstrap.min.css">
<link rel="stylesheet" href="css/bootstrap-theme.min.css">
<link rel="stylesheet" href="css/fontAwesome.css">
<link rel="stylesheet" href="css/hero-slider.css">
<link rel="stylesheet" href="css/owl-carousel.css">
<link rel="stylesheet" href="css/templatemo-style.css">

<link
href="https://fonts.googleapis.com/css?family=Spectral:200,200i,300,300i,400,400i,500,500i,600,600i,700,700i,800,800i" rel="stylesheet">
<link href="https://fonts.googleapis.com/css?family=Roboto:100,300,400,500,700,900" rel="stylesheet">

<script src="js/vendor/modernizr-2.8.3-respond-1.4.2.min.js"></script>
<style type="text/css">
<!--
.style12 {font-size: 24px; color: #000000; }
.style13 {color: #000000}
-->
</style>
</head>

<body>
<div class="header">
<div class="container"><a href="#" class="navbar-brand scroll-top">PRISON SYSTEM </a>
<nav class="navbar navbar-inverse" role="navigation">
<div class="navbar-header">
<button type="button" id="nav-toggle" class="navbar-toggle" data-toggle="collapse" data-target="#main-nav">
<span class="sr-only">Toggle navigation</span>
<span class="icon-bar"></span>
<span class="icon-bar"></span>
<span class="icon-bar"></span>
</button>
</div>
<!--/.navbar-header-->
<div id="main-nav" class="collapse navbar-collapse">
<ul class="nav navbar-nav">
<li><a href="epwc.jsp"> profile</a></li>
<li><a href="wantedreg.jsp">Wanted </a></li>
<li><a href="missingperson.jsp">Missing Person </a></li>
<!-- <li><a href="convictedfile.jsp">Convicted </a></li>-->
<li><a href="firreg.jsp">FIR </a></li>

<!--<li><a href="adminsearch.jsp">Search</a></li>-->
<li><a href="addcrimedata.jsp">ADD CRIME DATA</a></li>
<li><a href="updatestatus.jsp">Update Status</a></li>
<li><a href="index.jsp">Signout</a></li>
</ul>
</div>
<!--/.navbar-collapse-->
</nav>
<!--/.navbar-->
</div>
<!--/.container-->
</div>
<!--/.header-->

```

```

<section class="blog-page">
<div class="container">
<div class="row">
<form name="form1" method="post" action="">
<table width="444" border="1" align="left" bgcolor="#99FFCC">
<tr>
<td width="205"><span class="style12"> Name</span></td>
<td width="223"><div align="center">
<input name="name" type="text" id="name"

required="required" />
</div></td>
</tr>
<tr>
<td><span class="style12">Alias Name</span></td>
<td><div align="center">
<input name="aliasname" type="text" id="aliasname"

required="required" />
</div></td>
</tr>
<tr>
<td><span class="style12">Gender</span></td>
<td><div align="center">
<input name="gender" id="gender" list="browsers">
</div>
<datalist id="browsers">
<option value="Male">
<option value="Female"> </datalist></td>
</tr>
<tr>
<td><span class="style12">Booked for </span></td>
<td><div align="center">
<input name="bookedfor" type="text" id="bookedfor" required="required"/>
</div></td>
</tr>
<tr>
<td><span class="style12">Date of Booking </span></td>
<td><div align="center">
<input name="bookingdate" type="date" id="bookingdate" required="required"/>
</div></td>
</tr>
<tr>
<td><span class="style12">Case booked by </span></td>
<td><div align="center">
<input name="casebooked" type="text" id="casebooked" required="required"/>
</div></td>
</tr>
<tr>
<td><span class="style12">Case Reg at </span></td>
<td><div align="center">
<input name="regdate" type="text" id="regdate" required="required"/>
</div></td>
</tr>
<tr>
<td><span class="style12">Photo</span></td>
<td><input name="photo" type="file" required="required"/></td>
</tr>
</tr>

```

```

<td colspan="2"><div align="center" class="style13">
<input type="submit" name="Submit" value="Submit" />
<input type="reset" name="Submit2" value="Reset" />
</div></td>
</tr>
</table>
<p align="center">&nbsp;</p>
<p align="center"></p>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p align="center">&nbsp;</p>
<p>&nbsp;</p>
</form>

```

```

<div align="center">
<% @ page import ="java.io.*,java.sql.*,java.util.*"%>
<%
if(request.getParameter("Submit")!= null)
{
try
{

```

```

String fullname=request.getParameter("name");
String alias=request.getParameter("aliasname");
String gen=request.getParameter("gender");
String bookedfor=request.getParameter("bookedfor");
String bookdate=request.getParameter("bookingdate");
String casebooked=request.getParameter("casebooked");
String regdate=request.getParameter("regdate");
String photo=request.getParameter("photo");

```

```

fullname.trim();
alias.trim();
gen.trim();
bookedfor.trim();
bookdate.trim();
casebooked.trim();
regdate.trim();

```

```

Class.forName("com.mysql.jdbc.Driver");
Connection conn=DriverManager.getConnection("jdbc:mysql://localhost:3306/cbs","root","root");

```

```

ResultSet rs;

```

```

Statement st=conn.createStatement();

```

```

String sql="select * from fir";
rs=st.executeQuery(sql);
int found1=0;
int count=0;
while(rs.next())
{
count++;
}

```

```

//          out.println(found1);

```



```
if (count==0)
{
count =1000;
}
else
{
count =count+1000;
}

String ttid="";
ttid=ttid.valueOf(count);
```

```
PreparedStatement pstmt;
```

```
pstmt=conn.prepareStatement("insert into fir values(?,?,?,?,?,?,?,?,?)");
```

```
pstmt.setString(1,ttid);
pstmt.setString(2,fullname);
pstmt.setString(3,alias);
pstmt.setString(4,gen);
pstmt.setString(5,bookedfor);
pstmt.setString(6,bookdate);
pstmt.setString(7,casebooked);
pstmt.setString(8,regdate);
pstmt.setString(9,photo);
pstmt.setString(10,"");
pstmt.setString(11,"Pending");
```

```
pstmt.executeUpdate();
out.println("<h1>Registered</h1>");
```

```
//response.sendRedirect("http://localhost:8080/Education/sregack.html");
```

```
//response.sendRedirect("http://localhost:8080/cbs/uploadimageack.html");
```

```
//out.println("<html><body bgcolor=cyan><h1 align=center>vlcgs Developers and //Builders <Br> student  
Registration Completed successfully..<br> <a href=http://localhost:8080/cp/product.html><br>Home  
Page</a></h1>");
```

```
// out.println("</body></html>");
```

```
}
catch(Exception e)
{
out.print(e);
```

```

    }
    }
    %>
</div>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p>&nbsp;</p>

</div>
</div>
</section>
<footer>
<div class="container">
<div class="row"></div>
</div>
</footer>

<script src="//ajax.googleapis.com/ajax/libs/jquery/1.11.2/jquery.min.js"></script>
<script>window.jQuery || document.write('<script src="js/vendor/jquery-1.11.2.min.js"></script>')</script>

<script src="js/vendor/bootstrap.min.js"></script>

<script src="js/plugins.js"></script>
<script src="js/main.js"></script>

<script src="http://ajax.googleapis.com/ajax/libs/jquery/1.10.2/jquery.min.js" type="text/javascript"></script>
<script type="text/javascript">
$(document).ready(function() {
// navigation click actions
$('.scroll-link').on('click', function(event){
event.preventDefault();
var sectionID = $(this).attr("data-id");
scrollToID('#' + sectionID, 750);
});
// scroll to top action
$('.scroll-top').on('click', function(event) {
event.preventDefault();
$('html, body').animate({scrollTop:0}, 'slow');
});
// mobile nav toggle
$('#nav-toggle').on('click', function (event) {
event.preventDefault();
$('#main-nav').toggleClass("open");
});
});
// scroll function
function scrollToID(id, speed){
var offSet = 0;
var targetOffset = $(id).offset().top - offSet;
var mainNav = $('#main-nav');
$('html,body').animate({scrollTop:targetOffset}, speed);
if (mainNav.hasClass("open")) {
mainNav.css("height", "1px").removeClass("in").addClass("collapse");
mainNav.removeClass("open");
}
}
}

```

```

if (typeof console === "undefined") {
console = {
log: function() { }
};
}
</script>
</body>
</html>

```

Forgotpass.jsp:

```

<% @ page contentType="text/html; charset=utf-8" language="java" import="java.sql.*" errorPage="" %>
<!DOCTYPE html>
<html>
<head>
<meta charset="utf-8">
<meta http-equiv="X-UA-Compatible" content="IE=edge,chrome=1">
<!--
Victory Template
http://www.templatemo.com/tm-507-victory
-->
<title>Victory - Blog page</title>
<meta name="description" content="">
<meta name="viewport" content="width=device-width, initial-scale=1">
<link rel="apple-touch-icon" href="apple-touch-icon.png">

<link rel="stylesheet" href="css/bootstrap.min.css">
<link rel="stylesheet" href="css/bootstrap-theme.min.css">
<link rel="stylesheet" href="css/fontAwesome.css">
<link rel="stylesheet" href="css/hero-slider.css">
<link rel="stylesheet" href="css/owl-carousel.css">
<link rel="stylesheet" href="css/templatemo-style.css">

<link
href="https://fonts.googleapis.com/css?family=Spectral:200,200i,300,300i,400,400i,500,500i,600,600i,700,700i,800,800i" rel="stylesheet">
<link href="https://fonts.googleapis.com/css?family=Roboto:100,300,400,500,700,900" rel="stylesheet">

<script src="js/vendor/modernizr-2.8.3-respond-1.4.2.min.js"></script>
</head>

<body>
<div class="header">
<div class="container">
<a href="#" class="navbar-brand scroll-top">PRISON SYSTEM</a>
<nav class="navbar navbar-inverse" role="navigation">
<div class="navbar-header">
<button type="button" id="nav-toggle" class="navbar-toggle" data-toggle="collapse" data-target="#main-nav">
<span class="sr-only">Toggle navigation</span>
<span class="icon-bar"></span>
<span class="icon-bar"></span>
<span class="icon-bar"></span>
</button>
</div>
<!--/.navbar-header-->
<div id="main-nav" class="collapse navbar-collapse">
<ul class="nav navbar-nav">

<li><a href="index.jsp">Home</a></li>
</ul>

```

```

</div>
<!--/.navbar-collapse-->
</nav>
<!--/.navbar-->
</div>
<!--/.container-->
</div>
<!--/.header-->
<section class="blog-page">
<div class="container">
<div class="row">
<form action="" method="post"><div align="center">
<p>User Type
<select name="select">
<option value="Admin">Admin</option>
<option value="citizen" selected>citizen</option>
<option value="Crime">Crime</option>
</select>
<br>
Email id :
<input type="text" name="textfield" placeholder="Email id">
<br>
<input type="submit" name="Submit" value="Reset Password">
</p>
<p>&nbsp;</p>
<p></p>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p>&nbsp;</p>
</div></form>

```

```

<div align="center">
<p>
<% @page import="javax.mail.*"%>
<% @page import="javax.mail.internet.*"%>
<% @page import="javax.activation.*"%>
<% @page import="java.util.Random"%>
<% @page import="javax.swing.JOptionPane"%>
<% @page import="java.util.Properties"%>
<% @page import="java.util.* , java.io.*"%>
<% @page import="java.sql.*"%>
<%
if(request.getParameter("Submit")!= null)
{
try {

String mailid = request.getParameter("textfield");

String group = request.getParameter("select");

```

```

Calendar calendar = null;
calendar = Calendar.getInstance();
java.util.Date trialTime = new java.util.Date();
calendar.setTime(trialTime);

int year = calendar.get(Calendar.YEAR);
int month = 1 + calendar.get(Calendar.MONTH);

int dayofmonth = calendar.get(Calendar.DAY_OF_MONTH);

String date = month + "/" + dayofmonth + "/" + year;

int hour = calendar.get(Calendar.HOUR_OF_DAY);
int min = calendar.get(Calendar.MINUTE);
int sec = calendar.get(Calendar.SECOND);
String dot1 = date + " " + hour + ":" + min ;

//      out.println(dot1);

Class.forName("com.mysql.jdbc.Driver");
//      Connection con = DriverManager.getConnection("JDBC:ODBC:DON","", "");
Connection con=DriverManager.getConnection(
"jdbc:mysql://localhost:3306/cbs","root","root");

Statement stmt=con.createStatement();

ResultSet rs;
if(group.equals("Admin"))
{
rs=stmt.executeQuery("select * from admin where u='"+mailid+"'");
int found=0;
while(rs.next())
{

found++;
}

if(found==0)
{
out.println("Sorry, invalid login");

}
else
{

String str="Update admin set pwd=? where u=?";
//      out.println(str);
PreparedStatement psmt =con.prepareStatement(str);
psmt.setString(1,dot1);
psmt.setString(2,mailid);
psmt.executeUpdate();
//out.println(s1+" "+s3);
psmt.close();
rs.close();

out.println("<h1>done</h1>");

```

```

    }
    }
    else if(group.equals("citizen"))
    {
        String sql="select * from CITIZENREG where EMAIL='"+mailid+"'";
        //out.println(sql);
        rs=stmt.executeQuery(sql);
        int found=0;
        while(rs.next())
        {

            found++;
        }

        if(found==0)
        {
            out.println("Sorry, invalid login");

        }
        else
        {

            String str="Update CITIZENREG set PWD=? where EMAIL=?";
            //        out.println(str);
            PreparedStatement psmt =con.prepareStatement(str);
            psmt.setString(1,dot1);
            psmt.setString(2,mailid);
            psmt.executeUpdate();
            //out.println(s1+" "+s3);
            psmt.close();
            rs.close();

            out.println("<h1>done</h1>");

        }

    }

    else if(group.equals("Crime"))
    {
        String sql="select * from stationreg where user='"+mailid+"'";
        //out.println(sql);
        rs=stmt.executeQuery(sql);
        int found=0;
        while(rs.next())
        {

            found++;
        }

        if(found==0)
        {
            out.println("Sorry, invalid login");

        }
    }

```

```

else
{

String str="Update stationreg set pwd=? where user=?";
//      out.println(str);
PreparedStatement psmt =con.prepareStatement(str);
psmt.setString(1,dot1);
psmt.setString(2,mailid);
psmt.executeUpdate();
//out.println(s1+" "+s3);
psmt.close();
rs.close();

out.println("<h1>done</h1>");

}

}
////////////////////

/*      String email = "surendrarao.mba@gmail.com",
//String email = "sathish@fabsys.in",
//      String email = "sridharjoshi1603@gmail.com",
//      out.println(RandomStringUtils.random(12));

password1="",password2="AV73a2#Gio",password3 = "sathish@1234", host = "smtp.gmail.com", port =
"465", subject = "Your Password is"+dot1, to = "sridharjoshi1603@gmail.com".trim();/, text = pk.trim();

Properties props = new Properties();
props.put("mail.smtp.user", email);
props.put("mail.smtp.host", host);
props.put("mail.smtp.port", port);
props.put("mail.smtp.starttls.enable", "true");
props.put("mail.smtp.auth", "true");
props.put("mail.smtp.socketFactory.port", port);
props.put("mail.smtp.socketFactory.class",
"javax.net.ssl.SSLSocketFactory");
props.put("mail.smtp.socketFactory.fallback", "false");

SecurityManager security = System.getSecurityManager();

try {
class SMTPAuthenticator extends javax.mail.Authenticator {
public PasswordAuthentication getPasswordAuthentication() {
//String email = "sathish@fabsys.in", password = "sathish@1234";
String email = "surendrarao.mba@gmail.com", password = "AV73a2#Gio";
//String email = "sridharjoshi1603@gmail.com", password = "";
return new PasswordAuthentication(email, password);
}
}
SMTPAuthenticator auth = new SMTPAuthenticator();
Session sessions = Session.getInstance(props, auth);
sessions.setDebug(true);

MimeMessage msg = new MimeMessage(sessions);
msg.setText("test");
msg.setSubject(subject);

```

```

msg.setFrom(new InternetAddress(email));
msg.addRecipient(Message.RecipientType.TO,
//                                new InternetAddress(to));
new InternetAddress(mailid));

Transport.send(msg);
System.out.println("Email sent successfully");

JOptionPane.showMessageDialog(null,
"Your Verification Key is send to ur mail");
response.sendRedirect("forgotpassack.jsp");
} catch (Exception ex) {
JOptionPane.showMessageDialog(null, "Send Failed");
//                                response.sendRedirect("index.html");
}
*/
}

catch (Exception ex) {
out.println(ex);
}
}
%>
&nbsp;      </p>
<p>&nbsp;</p>
</div>
</div>
</div>
</section>
<script src="//ajax.googleapis.com/ajax/libs/jquery/1.11.2/jquery.min.js"></script>
<script>window.jQuery || document.write('<script src="js/vendor/jquery-1.11.2.min.js"></script>')</script>

<script src="js/vendor/bootstrap.min.js"></script>

<script src="js/plugins.js"></script>
<script src="js/main.js"></script>

<script src="http://ajax.googleapis.com/ajax/libs/jquery/1.10.2/jquery.min.js" type="text/javascript"></script>
<script type="text/javascript">
$(document).ready(function() {
// navigation click actions
$('.scroll-link').on('click', function(event){
event.preventDefault();
var sectionID = $(this).attr("data-id");
scrollToID('#' + sectionID, 750);
});
// scroll to top action
$('.scroll-top').on('click', function(event) {
event.preventDefault();
$('html, body').animate({ scrollTop:0}, 'slow');
});
// mobile nav toggle
$('#nav-toggle').on('click', function (event) {
event.preventDefault();
$('#main-nav').toggleClass("open");
});
});
// scroll function
function scrollToID(id, speed){
var offSet = 0;

```



```

var targetOffset = $(id).offset().top - offSet;
var mainNav = $('#main-nav');
$('html,body').animate({ scrollTop:targetOffset}, speed);
if (mainNav.hasClass("open")) {
mainNav.css("height", "1px").removeClass("in").addClass("collapse");
mainNav.removeClass("open");
}
}
if (typeof console === "undefined") {
console = {
log: function() { }
};
}
</script>
</body>
</html>

```

Index.jsp

```

<% @ page contentType="text/html; charset=utf-8" language="java" import="java.sql.*" errorPage="" %>
<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN"
"http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">
<!DOCTYPE html>
<html>
<head>
<meta charset="utf-8">
<meta http-equiv="X-UA-Compatible" content="IE=edge,chrome=1">
<!--

-->
<title>CRIME RATE PREDICTION</title>
<meta name="description" content="">
<meta name="viewport" content="width=device-width, initial-scale=1">
<link rel="apple-touch-icon" href="apple-touch-icon.png">

<link rel="stylesheet" href="css/bootstrap.min.css">
<link rel="stylesheet" href="css/bootstrap-theme.min.css">
<link rel="stylesheet" href="css/fontAwesome.css">
<link rel="stylesheet" href="css/hero-slider.css">
<link rel="stylesheet" href="css/owl-carousel.css">
<link rel="stylesheet" href="css/templatemo-style.css">

<link
href="https://fonts.googleapis.com/css?family=Spectral:200,200i,300,300i,400,400i,500,500i,600,600i,700,700i,800,800i" rel="stylesheet">
<link href="https://fonts.googleapis.com/css?family=Roboto:100,300,400,500,700,900" rel="stylesheet">

<script src="js/vendor/modernizr-2.8.3-respond-1.4.2.min.js"></script>
<meta http-equiv="Content-Type" content="text/html; charset=utf-8" /><style type="text/css">
<!--
body {
background-image: url(img/prison.jpg);
}
-->
</style></head>

<body>
<div class="header">
<div class="container">
<a href="#" class="navbar-brand scroll-top">PRISON SYSTEM</a>

```



```

<script src="//ajax.googleapis.com/ajax/libs/jquery/1.11.2/jquery.min.js"></script>
<script>window.jQuery || document.write('<script src="js/vendor/jquery-1.11.2.min.js"></script>')</script>

<script src="js/vendor/bootstrap.min.js"></script>

<script src="js/plugins.js"></script>
<script src="js/main.js"></script>

<script src="http://ajax.googleapis.com/ajax/libs/jquery/1.10.2/jquery.min.js" type="text/javascript"></script>
<script type="text/javascript">
$(document).ready(function() {
// navigation click actions
$('.scroll-link').on('click', function(event){
event.preventDefault();
var sectionID = $(this).attr("data-id");
scrollToID('#' + sectionID, 750);
});
// scroll to top action
$('.scroll-top').on('click', function(event) {
event.preventDefault();
$('html, body').animate({ scrollTop:0}, 'slow');
});
// mobile nav toggle
$('#nav-toggle').on('click', function (event) {
event.preventDefault();
$('#main-nav').toggleClass("open");
});
});
// scroll function
function scrollToID(id, speed){
var offSet = 0;
var targetOffset = $(id).offset().top - offSet;
var mainNav = $('#main-nav');
$('html,body').animate({ scrollTop:targetOffset}, speed);
if (mainNav.hasClass("open")) {
mainNav.css("height", "1px").removeClass("in").addClass("collapse");
mainNav.removeClass("open");
}
}
if (typeof console === "undefined") {
console = {
log: function() { }
};
}
}
</script>
</body>
</html>

```

Missingperson.jsp

```

<%@ page contentType="text/html; charset=utf-8" language="java" import="java.sql.*" errorPage="" %>
<!DOCTYPE html>
<html>
<head>
<meta charset="utf-8">
<meta http-equiv="X-UA-Compatible" content="IE=edge,chrome=1">
<!--
Victory Template
http://www.templatemo.com/tm-507-victory

```

```
-->
<title>MISSING PERSON</title>
<meta name="description" content="">
<meta name="viewport" content="width=device-width, initial-scale=1">
<link rel="apple-touch-icon" href="apple-touch-icon.png">

<link rel="stylesheet" href="css/bootstrap.min.css">
<link rel="stylesheet" href="css/bootstrap-theme.min.css">
<link rel="stylesheet" href="css/fontAwesome.css">
<link rel="stylesheet" href="css/hero-slider.css">
<link rel="stylesheet" href="css/owl-carousel.css">
<link rel="stylesheet" href="css/templatemo-style.css">

<link
href="https://fonts.googleapis.com/css?family=Spectral:200,200i,300,300i,400,400i,500,500i,600,600i,700,700i,800,800i" rel="stylesheet">
<link href="https://fonts.googleapis.com/css?family=Roboto:100,300,400,500,700,900" rel="stylesheet">

<script src="js/vendor/modernizr-2.8.3-respond-1.4.2.min.js"></script>
<style type="text/css">
<!--
.style12 {font-size: 24px; color: #000000; }
-->
</style>
</head>

<body>
<div class="header">
<div class="container"><a href="#" class="navbar-brand scroll-top">PRISON SYSTEM </a>
<nav class="navbar navbar-inverse" role="navigation">
<div class="navbar-header">
<button type="button" id="nav-toggle" class="navbar-toggle" data-toggle="collapse" data-target="#main-nav">
<span class="sr-only">Toggle navigation</span>
<span class="icon-bar"></span>
<span class="icon-bar"></span>
<span class="icon-bar"></span>
</button>
</div>
<div id="main-nav" class="collapse navbar-collapse">
<ul class="nav navbar-nav">
<li><a href="epwc.jsp"> profile</a></li>
<li><a href="wantedreg.jsp">Wanted </a></li>
<li><a href="missingperson.jsp">Missing Person </a></li>
<!-- <li><a href="convictedfile.jsp">Convicted </a></li>-->
<li><a href="firreg.jsp">FIR </a></li>

<!--<li><a href="adminsearch.jsp">Search</a></li>-->
<li><a href="addcrimedata.jsp">ADD CRIME DATA</a></li>
<li><a href="updatestatus.jsp">Update Status</a></li>
<li><a href="index.jsp">Signout</a></li>
</ul>
</div>
<!--/.navbar-collapse-->
</nav>
<!--/.navbar-->
</div>
<!--/.container-->
</div>
<!--/.header-->
```

```
<section class="blog-page">
<div class="container">
<div class="row">
<form name="form1" method="post" action="">
<table width="428" border="1" align="left" bgcolor="#CCCC33">
<tr>
<td width="195"><span class="style12">Name</span></td>
<td width="217"><div align="center">
<input name="name" type="text" id="name" required />
</div></td>
</tr>
<tr>
<td><span class="style12">Age</span></td>
<td><div align="center">
<input name="age" type="text" id="age" required/>
</div></td>
</tr>
<tr>
<td><span class="style12">Gender</span></td>
<td><div align="center">
<select name="gender" size="1" id="gender">
<option value="Male">Male</option>
<option value="Female">Female</option>
</select>
</div></td>
</tr>
<tr>
<td><span class="style12">Date of Birth</span></td>
<td><div align="center">
<input name="dob" type="date" id="dob" required/>
</div></td>
</tr>
<tr>
<td><span class="style12">Date Of Missing </span></td>
<td><div align="center">
<input name="dom" type="date" id="dom" required/>
</div></td>
</tr>
<tr>
<td><span class="style12">Location</span></td>
<td><div align="center">
<input name="loc" type="text" id="loc" required/>
</div></td>
</tr>
<tr>
<td><span class="style12">Height</span></td>
<td><div align="center">
<input name="height" type="text" id="height" required/>
</div></td>
</tr>
<tr>
<td><span class="style12">Weight</span></td>
<td><div align="center">
<input name="weight" type="text" id="weight" required/>
</div></td>
</tr>
</tr>
</div>
</div>
</section>
```

```

<td><span class="style12">Colour</span></td>
<td><div align="center">
<input name="color" type="text" id="color" required/>
</div></td>
</tr>
<tr>
<td><span class="style12">Identification</span></td>
<td><div align="center">
<input name="identification" type="text" id="identification" required/>
</div></td>
</tr>
<tr>
<td><span class="style12">Photo</span></td>
<td><input name="photo" type="file" id="photo" required/></td>
</tr>
<tr>
<td height="35"><input type="submit" name="Submit" value="Submit" /></td>
<td><input type="reset" name="Submit2" value="Reset" /></td>
</tr>
</table>
<div align="left"></div>
<p>&nbsp;</p>
<p align="center"></p>
<p>&nbsp;</p>
<p align="center">&nbsp;</p>
<p align="center">&nbsp;</p>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p align="center">&nbsp;</p>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p>&nbsp;</p>
</form>
<div align="center">
<% @ page import ="java.io.*,java.sql.*,java.util.*"%>
<%

```

```

if(request.getParameter("Submit")!= null)
{
try

{

String Name=request.getParameter("name");
String Age=request.getParameter("age");
String Gender=request.getParameter("gender");
String DOB=request.getParameter("dob");
String DateOfMissing=request.getParameter("dom");
String Location=request.getParameter("loc");
String Height=request.getParameter("height");
String Weight=request.getParameter("weight");
String Color=request.getParameter("color");
String Identification=request.getParameter("identification");
String photo=request.getParameter("photo");

/*Name.trim();
Age.trim();
Gender.trim();
DOB.trim();
DateOfMissing.trim();

```

```

Location.trim();
Height.trim();
Weight.trim();
Color.trim();
Identification.trim();*/
{
Class.forName("com.mysql.jdbc.Driver");
Connection conn=DriverManager.getConnection("jdbc:mysql://localhost:3306/cbs","root","root");

ResultSet rs;

Statement st=conn.createStatement();

String sql="select * from missing";
rs=st.executeQuery(sql);
int found1=0;
int count=0;
while(rs.next())
{
count++;
}

//                out.println(found1);

if (count==0)
{
count =1000;
}
else
{
count =count+1000;
}

String ttid="";
ttid=ttid.valueOf(count);

PreparedStatement pstmt;

pstmt=conn.prepareStatement("insert into missing values(?,?,?,?,?,?,?,?,?,?)");

pstmt.setString(1,ttid);
pstmt.setString(2,Name);
pstmt.setString(3,Age);
pstmt.setString(4,Gender);
pstmt.setString(5,DOB);
pstmt.setString(6,DateOfMissing);
pstmt.setString(7,Location);
pstmt.setString(8,Height);
pstmt.setString(9,Weight);
pstmt.setString(10,Color);
pstmt.setString(11,Identification);
pstmt.setString(12,photo);

pstmt.executeUpdate();

```

```

out.println("Sumbited");
out.println("Missing registered ,refno is "+ttid);

//*****
//out.println("<a href=http://localhost:8080/cbs/uploadimage.jsp?id="+fird+">Click //here to Upload
Image</a>");
//*****
//response.sendRedirect("http://localhost:8080/Education/sregack.html");

//response.sendRedirect("http://localhost:8080/Education/studenthome.html");


//out.println("<html><body bgcolor=cyan><h1 align=center>vlcgs Devlopers and //Builders <Br> student
Registration Completed successfully..<br> <a //href=http://localhost:8080/cp/product.html><br>Home
Page</a></h1>");


//      out.println("</body></html>");
}

}
catch(Exception e)
{
out.print(e);

}
}
%></div>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p>&nbsp;</p>

</div>
</div>
</section>
<footer>
<div class="container">
<div class="row"></div>
</div>
</footer>

<script src="//ajax.googleapis.com/ajax/libs/jquery/1.11.2/jquery.min.js"></script>
<script>window.jQuery || document.write('<script src="js/vendor/jquery-1.11.2.min.js"></script>')</script>

<script src="js/vendor/bootstrap.min.js"></script>

<script src="js/plugins.js"></script>
<script src="js/main.js"></script>

<script src="http://ajax.googleapis.com/ajax/libs/jquery/1.10.2/jquery.min.js" type="text/javascript"></script>
<script type="text/javascript">

```



```

$(document).ready(function() {
// navigation click actions
$('.scroll-link').on('click', function(event){
event.preventDefault();
var sectionID = $(this).attr("data-id");
scrollToID('#' + sectionID, 750);
});
// scroll to top action
$('.scroll-top').on('click', function(event) {
event.preventDefault();
$('html, body').animate({ scrollTop:0}, 'slow');
});
// mobile nav toggle
$('#nav-toggle').on('click', function (event) {
event.preventDefault();
$('#main-nav').toggleClass("open");
});
});
// scroll function
function scrollToID(id, speed){
var offSet = 0;
var targetOffset = $(id).offset().top - offSet;
var mainNav = $('#main-nav');
$('html,body').animate({ scrollTop:targetOffset}, speed);
if (mainNav.hasClass("open")) {
mainNav.css("height", "1px").removeClass("in").addClass("collapse");
mainNav.removeClass("open");
}
}
if (typeof console === "undefined") {
console = {
log: function() { }
};
}
}
</script>
</body>
</html>

```

## Signin.jsp

```

<%@ page contentType="text/html; charset=utf-8" language="java" import="java.sql.*" errorPage="" %>
<!DOCTYPE html>
<html>
<head>
<meta charset="utf-8">
<meta http-equiv="X-UA-Compatible" content="IE=edge,chrome=1">
<!--
Victory Template
http://www.templatemo.com/tm-507-victory
-->
<title>SIGNIN</title>
<meta name="description" content="">
<meta name="viewport" content="width=device-width, initial-scale=1">
<link rel="apple-touch-icon" href="apple-touch-icon.png">

<link rel="stylesheet" href="css/bootstrap.min.css">
<link rel="stylesheet" href="css/bootstrap-theme.min.css">
<link rel="stylesheet" href="css/fontAwesome.css">
<link rel="stylesheet" href="css/hero-slider.css">
<link rel="stylesheet" href="css/owl-carousel.css">

```

```

<link rel="stylesheet" href="css/templatemo-style.css">

<link
href="https://fonts.googleapis.com/css?family=Spectral:200,200i,300,300i,400,400i,500,500i,600,600i,700,700i
,800,800i" rel="stylesheet">
<link href="https://fonts.googleapis.com/css?family=Roboto:100,300,400,500,700,900" rel="stylesheet">

<script src="js/vendor/modernizr-2.8.3-respond-1.4.2.min.js"></script>
</head>

<body>
<div class="header">
<div class="container">
<a href="#" class="navbar-brand scroll-top">PRISON SYSTEM</a>

<!--/.navbar-header-->
<div id="main-nav" class="collapse navbar-collapse">
<ul class="nav navbar-nav">
<li><a href="about.jsp">Aboutus</a></li>
<li><a href="faq.jsp">FAQ</a></li>
<li><a href="signin.jsp">Signin</a></li>
<!-- <li><a href="asignin.jsp">Admin Signin</a></li>-->
<li><a href="bangaloremap.jsp">Bangalore Map</a></li>
<li><a href="citizen.jsp">Citizen Signup</a></li>
</ul>
</div>
<!--/.navbar-collapse-->
</nav>
<!--/.navbar-->
</div>
<!--/.container-->
</div>
<!--/.header-->

<section class="blog-page">
<div class="container">
<div class="row">
<form name="form1" method="post" action="">
<table width="100%" border="0" align="left" cellpadding="0" cellspacing="0">
<tr>
<td width="26%" height="78"><div align="right"><strong> Sign In</strong></div></td>
<td width="2%">&nbsp;</td>
<td width="32%"><label>
<label>

<div align="left">
<select name="select" id="select">

<option value="Crime">Crime</option>
<option value="Citizen">Citizen</option>
</select>
</label>

</label>
</div></td>
<td width="32%" rowspan="4"></td>
<th width="40%" rowspan="4" scope="col">&nbsp;</th>

```

```

</tr>
<tr>
<td height="35"><div align="right"><strong> Email Id </strong></div></td>
<td height="35">&nbsp;</td>
<td>
<div align="left">
<input name="u" type="text" id="u">
</div></td>
</tr>
<tr>
<td height="37"><div align="right"><strong>Password</strong></div></td>
<td height="37">&nbsp;</td>
<td>
<div align="left">
<input name="p" type="password" id="p">
</div></td>
</tr>
<tr>
<td>&nbsp;</td>
<td>&nbsp;</td>
<td><label>
<input type="submit" name="Submit" value="Signin">
<input type="reset" name="Submit2">
<div align="left">
<p><a href="forgotpass.jsp">Forgot password ? </a></p>
</div>
</label></td>
</tr>
</table>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p>&nbsp;</p>
</form>
<% @page import = "java.sql.*"%>
<% @page import="java.util.*,java.io.*,javax.servlet.http.Cookie"%>
<%
if(request.getParameter("Submit")!= null)
{

try
{
Class.forName("com.mysql.jdbc.Driver");
Connection con=DriverManager.getConnection("jdbc:mysql://localhost:3306/cbs","root","root");
Statement stmt=con.createStatement();
ResultSet rs,rs1;

String type=request.getParameter("select").trim();

String u=request.getParameter("u").trim();
String p=request.getParameter("p").trim();
// out.println(type);
// out.println(u); out.println(p);

if(type.equals("admin"))
{
rs=stmt.executeQuery("select * from admin where u='"+u+"' and pwd='"+p+"'");
String s="",s1="";

```

```

int found=0;
String a="";
while(rs.next())
{
//a=rs.getString(2);
found++;

}
out.println(found);
if(found==1)
{

session.setAttribute("Admin",u);

response.sendRedirect("adminpage.jsp");
}
else
{
out.println("<h1>Invalid User</h1>");

//response.sendRedirect("invaliduser.jsp");
}
rs.close();

stmt.close();
con.close();

}
else if(type.equals("Traffic"))
{

rs=stmt.executeQuery("select * from userreg where user='"+u+"' and pwd='"+p+"'");
String s="",s1="";
int found=0;
//String learner="";

while(rs.next())
{

found++;

}

if(found==1)
{

session.setAttribute("traffic",u);
response.sendRedirect("trafficpage.jsp");
}
else
{
out.println("<h1>Invalid User</h1>");
}
}

```

```

//response.sendRedirect("invaliduser.jsp");
}

}
else if(type.equals("Crime"))
{

rs=stmt.executeQuery("select * from userreg where user='"+u+"' and pwd='"+p+"'");
String s="",s1="";
int found=0;
//String mob="";
while(rs.next())
{
//mob=rs.getString(2);
found++;

}

if(found==1)
{

session.setAttribute("crime",u);
response.sendRedirect("crimepage.jsp");
}
else
{

out.println("<h1> Invalid User</>");
}
}
else if(type.equals("Citizen"))
{
// out.println("Test");
rs=stmt.executeQuery("select * from citizenreg where email='"+u+"' and pwd='"+p+"'");
// String s="",s1="";
int found=0;
//String mob="";
while(rs.next())
{
//mob=rs.getString(2);
found++;

}

if(found==1)
{

session.setAttribute("citizen",u);
response.sendRedirect("citizenhomepage.jsp");
}

else
{

out.println("<h1> Invalid User</>");
}
}
}

```

```

    }

    }
}

catch(Exception e)
{

    out.println("Exception occurred" +e);
}
}
%>
<h4>&nbsp;</h4>
</div>
<%-- <div class="span3">
<a class="btn btn-success btn-large pull-right" href="http://shapebootstrap.net">Free Download Nova</a>
</div>--%>

</div>
</div>
</section>
<footer>
<div class="container">
<div class="row"></div>
</div>
</footer>

<script src="//ajax.googleapis.com/ajax/libs/jquery/1.11.2/jquery.min.js"></script>
<script>window.jQuery || document.write('<script src="js/vendor/jquery-1.11.2.min.js"></script>')</script>

<script src="js/vendor/bootstrap.min.js"></script>

<script src="js/plugins.js"></script>
<script src="js/main.js"></script>

<script src="http://ajax.googleapis.com/ajax/libs/jquery/1.10.2/jquery.min.js" type="text/javascript"></script>
<script type="text/javascript">
$(document).ready(function() {
// navigation click actions
$('.scroll-link').on('click', function(event){
event.preventDefault();
var sectionID = $(this).attr("data-id");
scrollToID('#' + sectionID, 750);
});
// scroll to top action
$('.scroll-top').on('click', function(event) {
event.preventDefault();
$('html, body').animate({ scrollTop:0}, 'slow');
});
// mobile nav toggle
$('#nav-toggle').on('click', function (event) {
event.preventDefault();
$('#main-nav').toggleClass("open");
});
});
// scroll function
function scrollToID(id, speed){
var offSet = 0;
var targetOffset = $(id).offset().top - offSet;

```

```

var mainNav = $('#main-nav');
$('html,body').animate({scrollTop:targetOffset}, speed);
if (mainNav.hasClass("open")) {
mainNav.css("height", "1px").removeClass("in").addClass("collapse");
mainNav.removeClass("open");
}
}
if (typeof console === "undefined") {
console = {
log: function() { }
};
}
</script>
</body>
</html>

```

Updatereg.jsp

```

<%@ page contentType="text/html; charset=utf-8" language="java" import="java.sql.*" errorPage="" %>
<!DOCTYPE html>

```

```

<html>

```

```

<head>

```

```

<meta charset="utf-8">

```

```

<meta http-equiv="X-UA-Compatible" content="IE=edge,chrome=1">

```

```

<!--

```

Victory Template

```

http://www.templatemo.com/tm-507-victory

```

```

-->

```

```

<title>CRIME PAGE</title>

```

```

<meta name="description" content="">

```

```

<meta name="viewport" content="width=device-width, initial-scale=1">

```

```

<link rel="apple-touch-icon" href="apple-touch-icon.png">

```

```

<link rel="stylesheet" href="css/bootstrap.min.css">

```

```

<link rel="stylesheet" href="css/bootstrap-theme.min.css">

```

```

<link rel="stylesheet" href="css/fontAwesome.css">

```

```

<link rel="stylesheet" href="css/hero-slider.css">

```

```

<link rel="stylesheet" href="css/owl-carousel.css">

```

```

<link rel="stylesheet" href="css/templatemo-style.css">

```

```

<link

```

```

href="https://fonts.googleapis.com/css?family=Spectral:200,200i,300,300i,400,400i,500,500i,600,600i,700,700i,800,800i" rel="stylesheet">

```

```

<link href="https://fonts.googleapis.com/css?family=Roboto:100,300,400,500,700,900" rel="stylesheet">

```

```

<script src="js/vendor/modernizr-2.8.3-respond-1.4.2.min.js"></script>

```

```

<style type="text/css">

```

```

<!--

```

```

.style1 {

```

```

font-size: 36px;

```

```

color: #000000;

```

```

font-weight: bold;

```

```

font-style: italic;

```

```

font-family: 'Spectral', serif;

```

```

}

```

```

.style2 { font-family: 'Spectral', serif}

```

```

body {

```

```

background-image: url();

```

```

background-repeat: repeat;

```

```

}

```

```

.style3 {color: #FFFFFF}

```

```

.style4 {font-size: 36px; color: #FFFFFF; font-weight: bold; font-style: italic; font-family: 'Spectral', serif; }
body,td,th {
font-size: 14px;
}
-->
</style>
<meta http-equiv="Content-Type" content="text/html; charset=utf-8"></head>

<body>
<div class="header">
<div class="container"><a href="#" class="navbar-brand scroll-top">PRISON SYSTEM </a>
<nav class="navbar navbar-inverse" role="navigation">
<div class="navbar-header">
<button type="button" id="nav-toggle" class="navbar-toggle" data-toggle="collapse" data-target="#main-nav">
<span class="sr-only">Toggle navigation</span>
<span class="icon-bar"></span>
<span class="icon-bar"></span>
<span class="icon-bar"></span>
</button>
</div>
<!--/.navbar-header-->
<div id="main-nav" class="collapse navbar-collapse">
<ul class="nav navbar-nav">
<li><a href="epwc.jsp"> profile</a></li>
<li><a href="wantedreg.jsp">Wanted </a></li>
<li><a href="missingperson.jsp">Missing Person </a></li>
<!-- <li><a href="convictedfile.jsp">Convicted </a></li>-->
<li><a href="firreg.jsp">FIR </a></li>

<!--<li><a href="adminsearch.jsp">Search</a></li>-->
<li><a href="addcrimedata.jsp">ADD CRIME DATA</a></li>
<li><a href="updatestatus.jsp">Update Status</a></li>
<li><a href="index.jsp">Signout</a></li>
</ul>
</div>
<!--/.navbar-collapse-->
</nav>
<!--/.navbar-->
</div>
<!--/.container-->
</div>
<!--/.header-->
<section class="blog-page">
<div class="container">
<div class="row">
<form name="form1" method="post" action="">
<p align="center">&nbsp;</p>
<p align="center">&nbsp;</p>
<table width="570" border="1" align="center">
<tr>
<td width="248">FIR NO
<input type="text" name="textfield"></td>
<td width="306">STATUS
<select name="select">
<option value="PENDING">PENDING</option>
<option value="PROGRESS">PROGRESS</option>
<option value="COMPLETED">COMPLETED</option>
</select>
</td>
</tr>
<tr>

```



```

<td colspan="2"><div align="center">
<input type="submit" name="Submit" value="Submit">
</div></td>
</tr>
</table>
<p align="center" class="style1">&nbsp;</p>
<p class="style2">&nbsp;</p>
</form>
</div>
</div>
</section>
<p>
<script src="//ajax.googleapis.com/ajax/libs/jquery/1.11.2/jquery.min.js"></script>
</p>
<p align="center">
<% @ page import ="java.io.*,java.sql.*,java.util.*"%>
<%
if(request.getParameter("Submit")!= null)
{
try

{

String fno=request.getParameter("textfield");
String sta=request.getParameter("select");

Class.forName("com.mysql.jdbc.Driver");
Connection conn=DriverManager.getConnection("jdbc:mysql://localhost:3306/cbs","root","root");

ResultSet rs;

Statement st=conn.createStatement();

String sql="select * from fir where id='"+fno+"'";
rs=st.executeQuery(sql);
int found1=0;
int count=0;
while(rs.next())
{
count++;
}

if (count==1)
{

PreparedStatement pstmt;

pstmt=conn.prepareStatement("UPDATE fir SET STATUS=? WHERE ID=?");

pstmt.setString(1,sta);
pstmt.setString(2,fno);

```

```

pstmt.executeUpdate();
pstmt.close();
out.println("<h1>Registered</h1>");
}
else
{
out.println("<h1>FIR NO NOT FOUND.....</h1>");
}

}
catch(Exception e)
{
out.print(e);

}
}
%>
</p>
<p>&nbsp;</p>
<p align="center">&nbsp;</p>
<p class="style3"></p>
<p>
<script>window.jQuery || document.write('<script src="js/vendor/jquery-1.11.2.min.js"></script>')</script>

<script src="js/vendor/bootstrap.min.js"></script>

<script src="js/plugins.js"></script>
<script src="js/main.js"></script>

<script src="http://ajax.googleapis.com/ajax/libs/jquery/1.10.2/jquery.min.js" type="text/javascript"></script>
<script type="text/javascript">
$(document).ready(function() {
// navigation click actions
$('.scroll-link').on('click', function(event){
event.preventDefault();
var sectionID = $(this).attr("data-id");
scrollToID('#' + sectionID, 750);
});
// scroll to top action
$('.scroll-top').on('click', function(event) {
event.preventDefault();
$('html, body').animate({ scrollTop:0}, 'slow');
});
// mobile nav toggle
$('#nav-toggle').on('click', function (event) {
event.preventDefault();
$('#main-nav').toggleClass("open");
});
});
// scroll function
function scrollToID(id, speed){
var offSet = 0;
var targetOffset = $(id).offset().top - offSet;
var mainNav = $('#main-nav');
$('html,body').animate({ scrollTop:targetOffset}, speed);
if (mainNav.hasClass("open")) {

```

```

mainNav.css("height", "1px").removeClass("in").addClass("collapse");
mainNav.removeClass("open");
}
}
if (typeof console === "undefined") {
console = {
log: function() { }
};
}
</script>
</p>
</body>
</html>

```

Wantedreg.jsp

```

<% @ page contentType="text/html; charset=utf-8" language="java" import="java.sql.*" errorPage="" %>
<!DOCTYPE html>
<html>
<head>
<meta charset="utf-8">
<meta http-equiv="X-UA-Compatible" content="IE=edge,chrome=1">
<!--
Victory Template
http://www.templatemo.com/tm-507-victory
-->
<title>WANTED</title>
<meta name="description" content="">
<meta name="viewport" content="width=device-width, initial-scale=1">
<link rel="apple-touch-icon" href="apple-touch-icon.png">

<link rel="stylesheet" href="css/bootstrap.min.css">
<link rel="stylesheet" href="css/bootstrap-theme.min.css">
<link rel="stylesheet" href="css/fontAwesome.css">
<link rel="stylesheet" href="css/hero-slider.css">
<link rel="stylesheet" href="css/owl-carousel.css">
<link rel="stylesheet" href="css/templatemo-style.css">

<link
href="https://fonts.googleapis.com/css?family=Spectral:200,200i,300,300i,400,400i,500,500i,600,600i,700,700i,800,800i" rel="stylesheet">
<link href="https://fonts.googleapis.com/css?family=Roboto:100,300,400,500,700,900" rel="stylesheet">

<script src="js/vendor/modernizr-2.8.3-respond-1.4.2.min.js"></script>
<style type="text/css">
<!--
.style8 {color: #333366}
.style12 {font-size: 24px; color: #000000; }
-->
</style>
</head>

<body>
<div class="header">
<div class="container"><a href="#" class="navbar-brand scroll-top">PRISON SYSTEM </a>
<nav class="navbar navbar-inverse" role="navigation">
<div class="navbar-header">
<button type="button" id="nav-toggle" class="navbar-toggle" data-toggle="collapse" data-target="#main-nav">
<span class="sr-only">Toggle navigation</span>
<span class="icon-bar"></span>
<span class="icon-bar"></span>

```

```

<span class="icon-bar"></span>
</button>
</div>
<!--/.navbar-header-->
<div id="main-nav" class="collapse navbar-collapse">
<ul class="nav navbar-nav">
<li><a href="epwc.jsp"> profile</a></li>
<li><a href="wantedreg.jsp">Wanted </a></li>
<li><a href="missingperson.jsp">Missing Person </a></li>
<li><a href="convictedfile.jsp">Convicted </a></li>
<li><a href="firreg.jsp">FIR </a></li>

<!-- <li><a href="search3.jsp">Match Photos</a></li>-->
<li><a href="updatestatus.jsp">Update Status</a></li>
<li><a href="index.jsp">Signout</a></li>
</ul>
</div>
<!--/.navbar-collapse-->
</nav>
<!--/.navbar-->
</div>
<!--/.container-->
</div>
<!--/.header-->

```

```

<section class="blog-page">
<div class="container">
<div class="row">
<form name="form1" method="post" action="">
<p>&nbsp;</p>
<table width="638" border="1" align="left" bgcolor="#000000">
<tr>
<td width="316" height="38"><div align="left"><span class="style12">Full Name</span></div></td>
<td width="306"><div align="center">
<input name="fullname" type="text" id="fullname"

required>
</div></td>
</tr>
<tr>
<td height="40"><div align="left"><span class="style12">Alias Name</span></div></td>
<td><div align="center">
<input name="aliasname" type="text" id="aliasname"

required>
</div></td>
</tr>
<tr>
<td height="50"><div align="left"><span class="style12">Wanted For</span></div></td>
<td><div align="center">
<input name="wantedfor" type="text" id="wantedfor" required/>
</div></td>
</tr>
<tr>
<td height="41"><div align="left"><span class="style12">Gender</span></div></td>
<td><div align="center">
<select name="gender" id="gender">

```

[illegible]

```

<div align="center">
<p>&nbsp;</p>
<p>
<% @ page import ="java.io.*,java.sql.*,java.util.*"%>
<%

if(request.getParameter("Login")!= null)
{
try

{

String fullname=request.getParameter("fullname");
String alias=request.getParameter("aliasname");
String wfor=request.getParameter("wantedfor");
String gender=request.getParameter("gender");
String precase=request.getParameter("precase");
String agan=request.getParameter("against");
String regdate=request.getParameter("regdate");
String ph=request.getParameter("photo");
String fin=request.getParameter("finger");

/*fullname.trim();
alias.trim();
wfor.trim();
gender.trim();
precase.trim();
agan.trim();
regdate.trim();*/

Class.forName("com.mysql.jdbc.Driver");
Connection conn=DriverManager.getConnection("jdbc:mysql://localhost:3306/cbs","root","root");

ResultSet rs;

Statement st=conn.createStatement();

String sql="select * from wantedfile";
rs=st.executeQuery(sql);
int found1=0;
int count=0;
while(rs.next())
{
count++;
}

//                out.println(found1);

if (count==0)
{
count =1000;
}
else
{
count =count+1000;
}
}

```

```
String ttid="";
ttid=ttid.valueOf(count);
```

```
PreparedStatement pstmt;
```

```
pstmt=conn.prepareStatement("insert into Wantedfile values(?,?,?,?,?,?,?,?,?)");
```

```
pstmt.setString(1,ttid);
pstmt.setString(2,fullname);
pstmt.setString(3,alias);
pstmt.setString(4,wfor);
pstmt.setString(5,gender);
pstmt.setString(6,precase);
pstmt.setString(7,agan);
pstmt.setString(8,regdate);
pstmt.setString(9,ph);
pstmt.setString(10,fin);
```

```
pstmt.executeUpdate();
//out.println("Sumbited");
```

```
//out.println("Wanted registered ,refno is "+ttid);
```

```
//*****
```

```
out.println("<h1>Registered</h1>");
```

```
//*****
```

```
//response.sendRedirect("http://localhost:8080/Education/sregack.html");
```

```
//response.sendRedirect("http://localhost:8080/Education/studenthome.html");
```

```
}
catch(Exception e)
{
out.print(e);
```

```
}
}
```

```
%>
```

```
</p>
```

```
</div>
```

```
<p>&nbsp;</p>
```

```
<p>&nbsp;</p>
```

```
<p>&nbsp;</p>
```

```
<p>&nbsp;</p>
```

```
<p>&nbsp;</p>
```

```
</div>
```

```
</div>
```

```
</section>
```

```
<script src="//ajax.googleapis.com/ajax/libs/jquery/1.11.2/jquery.min.js"></script>
```

```
<script>window.jQuery || document.write('<script src="js/vendor/jquery-1.11.2.min.js"></script>')</script>
```

```
<script src="js/vendor/bootstrap.min.js"></script>
```

```

<script src="js/plugins.js"></script>
<script src="js/main.js"></script>

<script src="http://ajax.googleapis.com/ajax/libs/jquery/1.10.2/jquery.min.js" type="text/javascript"></script>
<script type="text/javascript">
$(document).ready(function() {
// navigation click actions
$('.scroll-link').on('click', function(event){
event.preventDefault();
var sectionID = $(this).attr("data-id");
scrollToID('#' + sectionID, 750);
});
// scroll to top action
$('.scroll-top').on('click', function(event) {
event.preventDefault();
$('html, body').animate({scrollTop:0}, 'slow');
});
// mobile nav toggle
$('#nav-toggle').on('click', function (event) {
event.preventDefault();
$('#main-nav').toggleClass("open");
});
});
// scroll function
function scrollToID(id, speed){
var offSet = 0;
var targetOffset = $(id).offset().top - offSet;
var mainNav = $('#main-nav');
$('html,body').animate({scrollTop:targetOffset}, speed);
if (mainNav.hasClass("open")) {
mainNav.css("height", "1px").removeClass("in").addClass("collapse");
mainNav.removeClass("open");
}
}
if (typeof console === "undefined") {
console = {
log: function() { }
};
}
}
</script>
</body>
</html>

```

Wanted qry.jsp

```

<% @ page contentType="text/html; charset=utf-8" language="java" import="java.sql.*" errorPage="" %>

<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN"
"http://www.w3.org/TR/xhtml1/DTD/xhtml1-transitional.dtd">

<html xmlns="http://www.w3.org/1999/xhtml">

<head>

<meta http-equiv="Content-Type" content="text/html; charset=iso-8859-1" />

<title>Untitled Document</title>

```



```

<style type="text/css">
<!--
.style1 { font-size: xx-large}
-->
</style>
</head>

<body>
<form id="form1" name="form1" method="get" action="wantedqry.jsp">
  <p align="center" class="style1">Wanted Query </p>
  <table width="200" border="1" align="center">
    <tr>
      <td>Query On </td>
      <td><select name="select" size="1">
        <option value="All">All</option>
        <option value="Recent">Recent</option>
      </select> </td>
    </tr>
    <tr>
      <td><input type="submit" name="Submit" value="Submit" /></td>
      <td><input type="reset" name="Submit2" value="Reset" /></td>
    </tr>
  </table>
  <p>&nbsp;</p>
  <p>&nbsp;</p>
  <p>&nbsp;</p>
  <p>&nbsp;</p>
  <p>&nbsp;</p>
  <p>&nbsp;</p>
  <p>&nbsp;</p>
  <p>&nbsp;</p>
  <p>&nbsp;</p>
</form>
</body>
</html>

```

Signincopy.jsp

```

<% @ page contentType="text/html; charset=utf-8" language="java" import="java.sql.*" errorPage="" %>
<!DOCTYPE html>
<html>
  <head>
    <meta charset="utf-8">
    <meta http-equiv="X-UA-Compatible" content="IE=edge,chrome=1">
  <!--
  Victory Template
  http://www.templatemo.com/tm-507-victory
  -->
  <title>SIGNIN</title>
  <meta name="description" content="">
  <meta name="viewport" content="width=device-width, initial-scale=1">
  <link rel="apple-touch-icon" href="apple-touch-icon.png">

```

```

<link rel="stylesheet" href="css/bootstrap.min.css">
<link rel="stylesheet" href="css/bootstrap-theme.min.css">
<link rel="stylesheet" href="css/fontAwesome.css">
<link rel="stylesheet" href="css/hero-slider.css">
<link rel="stylesheet" href="css/owl-carousel.css">
<link rel="stylesheet" href="css/templatemo-style.css">

<link
href="https://fonts.googleapis.com/css?family=Spectral:200,200i,300,300i,400,400i,500,500i,600,600i,700,700i
,800,800i" rel="stylesheet">
<link href="https://fonts.googleapis.com/css?family=Roboto:100,300,400,500,700,900" rel="stylesheet">

<script src="js/vendor/modernizr-2.8.3-respond-1.4.2.min.js"></script>
</head>

<body>
<%
StringBuffer sb=new StringBuffer();
for(int i=1;i<=5;i++)
{
    sb.append((char)(int)(Math.random()*79+23+7));
}
String cap=new String(sb);
%>
<div style="background-color: skyblue">
<center>
<h1>&nbsp;  </h1>
<script type="text/javascript">
function validation(){
    var c = document.forms ["f1"]["cap1"].value;
        alert (c);
    if(c==null||c=="")
    {
        alert ("Please Enter Captcha");
        return false;
    }
        else
        {
            alert ("Invalid Captcha Code");
            return false;
        }
    }
</script>
<div class="header">
<div class="container">
    <a href="#" class="navbar-brand scroll-top">PRISON SYSTEM</a>

    <!--/.navbar-header-->
    <div id="main-nav" class="collapse navbar-collapse">
        <ul class="nav navbar-nav">
            <li><a href="about.jsp">Aboutus</a></li>

```

```

        <li><a href="faq.jsp">FAQ</a></li>
        <li><a href="signin.jsp">Signin</a></li>
        <!-- <li><a href="assignin.jsp">Admin Signin</a></li>-->
        <li><a href="bangaloremap.jsp">Bangalore Map</a></li>
        <li><a href="citizen.jsp">Citizen Signup</a></li>

    </ul>
</div>
<!--/.navbar-collapse-->
</nav>
<!--/.navbar-->
</div>
<!--/.container-->
</div>
<!--/.header-->

```

```

<section class="blog-page">
    <div class="container">
        <div class="row">
            <form name="form1" method="post" action="" onsubmit="return validation()">
                <table width="100%" border="0" align="left" cellpadding="0" cellspacing="0">
                    <tr>
                        <td width="26%" height="78"><div align="right"><strong> Sign In</strong></div></td>
                        <td width="2%">&nbsp;</td>
                        <td width="32%"><label>
                            <div align="left">
                                <select name="select" id="select">
                                    <option value="Crime">Crime</option>
                                    <option value="Citizen">Citizen</option>
                                </select>
                            </div>
                        </td>
                    </tr>
                    <tr>
                        <td width="32%" rowspan="4"></td>
                        <th width="40%" rowspan="4" scope="col">&nbsp;</th>
                    </tr>
                    <tr>
                        <td height="35"><div align="right"><strong>User Name or Email Id </strong></div></td>
                    </tr>
                    <tr>
                        <td height="35">&nbsp;</td>
                    </tr>
                    <tr>
                        <div align="left">
                            <input name="u" type="text" id="u" required>
                        </div></td>
                    </tr>
                    <tr>
                        <td height="37"><div align="right"><strong>Password</strong></div></td>
                    </tr>
                </table>
            </form>
        </div>
    </div>

```

```

        <td height="37">&nbsp;</td>
        <td>
            <div align="left">
                <input name="p" type="password" id="p" required>
            </div></td>
    </tr>
    <tr>
        <td>
            <div style="background-color: aqua"><h2><s><i><font
face="casteller"><%=cap%></font></i></s></h2></div>
        </td>
        <td><input type="text" name="cap1" value="" /></td>
        <td><input type="hidden" name="cap2" value='<%=cap%>' readonly="readonly" /></td>
    </tr>
    <tr>
        <td>&nbsp;</td>
        <td>&nbsp;</td>
        <td><label>
            <input type="submit" name="Submit" value="Signin">
            <input type="reset" name="Submit2">
            <div align="left">
                <p><a href="forgotpass.jsp">Forgot password ? </a></p>
            </div>
        </label></td>
    </tr>
</table>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p>&nbsp;</p>
</form>
<% @page import = "java.sql.*"%>
<% @page import="java.util.*,java.io.*,javax.servlet.http.Cookie"%>
<%
if(request.getParameter("Submit")!= null)
{

try
{
    Class.forName("com.mysql.jdbc.Driver");
    Connection con=DriverManager.getConnection("jdbc:mysql://localhost:3306/cbs","root","root");
    Statement stmt=con.createStatement();
    ResultSet rs,rs1;

    String type=request.getParameter("select").trim();

    String u=request.getParameter("u").trim();
    String p=request.getParameter("p").trim();
    String c1=request.getParameter("cap1").trim();
    String c2=request.getParameter("cap2").trim();

```

```

        out.println(c1+","+c2);
        // out.println(u); out.println(p);
        if (!c1.equals(c2))
        {
            out.println( "<script>alert('Invalid
Captcha');window.location='signincopy.jsp';</script>");
        }
        else
        {

            if(type.equals("Crime"))
            {

                rs=stmt.executeQuery("select * from userreg where user='"+u+"'"+" and
pwd='"+p+"'"+"");
                String s="",s1="";
                int found=0;

                while(rs.next())
                {

                    //mob=rs.getString(2);
                    found++;

                }

                if(found==1)
                {
                    session.setAttribute("crime",u);
                    response.sendRedirect("crimepage.jsp");
                }
                else
                {

                    out.println("<h1> Invalid User</>");
                }
            }
            else if(type.equals("Citizen"))
            {
                // out.println("Test");
                rs=stmt.executeQuery("select * from citizenreg where email='"+u+"'"+" and pwd='"+p+"'"+"");
                // String s="",s1="";
                int found=0;
                //String mob="";
                while(rs.next())
                {

                    //mob=rs.getString(2);
                    found++;

                }

                if(found==1)

```

```

        {

            session.setAttribute("citizen",u);
            response.sendRedirect("citizenhomepage.jsp");
        }

        else
        {

            out.println("<h1> Invalid User</>");
        }

    }

}

}
catch(Exception e)
{

    out.println("Exception occured" +e);
}
}
%>
    <h4>&nbsp;</h4>
</div>
<%-- <div class="span3">
    <a class="btn btn-success btn-large pull-right" href="http://shapebootstrap.net">Free Download
Nova</a>
</div>--%>

</div>
</div>
</section>
<footer>
    <div class="container">
        <div class="row"></div>
    </div>
</footer>

<script src="//ajax.googleapis.com/ajax/libs/jquery/1.11.2/jquery.min.js"></script>
<script>window.jQuery || document.write('<script src="js/vendor/jquery-1.11.2.min.js"></script>')</script>

<script src="js/vendor/bootstrap.min.js"></script>

<script src="js/plugins.js"></script>
<script src="js/main.js"></script>

```

```

<script src="http://ajax.googleapis.com/ajax/libs/jquery/1.10.2/jquery.min.js"
type="text/javascript"></script>
<script type="text/javascript">
$(document).ready(function() {
    // navigation click actions
    $('.scroll-link').on('click', function(event){
        event.preventDefault();
        var sectionID = $(this).attr("data-id");
        scrollToID('#' + sectionID, 750);
    });
    // scroll to top action
    $('.scroll-top').on('click', function(event) {
        event.preventDefault();
        $('html, body').animate({ scrollTop:0}, 'slow');
    });
    // mobile nav toggle
    $('#nav-toggle').on('click', function (event) {
        event.preventDefault();
        $('#main-nav').toggleClass("open");
    });
});
// scroll function
function scrollToID(id, speed){
    var offSet = 0;
    var targetOffset = $(id).offset().top - offSet;
    var mainNav = $('#main-nav');
    $('html,body').animate({ scrollTop:targetOffset}, speed);
    if (mainNav.hasClass("open")) {
        mainNav.css("height", "1px").removeClass("in").addClass("collapse");
        mainNav.removeClass("open");
    }
}
if (typeof console === "undefined") {
    console = {
        log: function() { }
    };
}
</script>
</body>
</html>

```

Search1.jsp

```

<%@ page contentType="text/html; charset=utf-8" language="java" import="java.sql.*" errorPage="" %>
<!DOCTYPE html>
<html>
<head>
    <meta charset="utf-8">
    <meta http-equiv="X-UA-Compatible" content="IE=edge,chrome=1">
<!--

```

Victory Template

http://www.templatemo.com/tm-507-victory

-->

```
<title>Victory - Blog page</title>
<meta name="description" content="">
<meta name="viewport" content="width=device-width, initial-scale=1">
<link rel="apple-touch-icon" href="apple-touch-icon.png">
```

```
<link rel="stylesheet" href="css/bootstrap.min.css">
<link rel="stylesheet" href="css/bootstrap-theme.min.css">
<link rel="stylesheet" href="css/fontAwesome.css">
<link rel="stylesheet" href="css/hero-slider.css">
<link rel="stylesheet" href="css/owl-carousel.css">
<link rel="stylesheet" href="css/templatemo-style.css">
```

```
<link
href="https://fonts.googleapis.com/css?family=Spectral:200,200i,300,300i,400,400i,500,500i,600,600i,700,700i,800,800i" rel="stylesheet">
<link href="https://fonts.googleapis.com/css?family=Roboto:100,300,400,500,700,900" rel="stylesheet">
```

```
<script src="js/vendor/modernizr-2.8.3-respond-1.4.2.min.js"></script>
<style type="text/css">
```

<!--

```
.style10 {font-size: 24px; color: #333366; }
```

```
.style8 {color: #333366}
```

-->

```
</style>
```

</head>

<body>

```
<div class="header">
```

```
<div class="container"><a href="#" class="navbar-brand scroll-top">CRIME BUSTERS </a>
```

```
<nav class="navbar navbar-inverse" role="navigation">
```

```
<div class="navbar-header">
```

```
<button type="button" id="nav-toggle" class="navbar-toggle" data-toggle="collapse" data-target="#main-nav">
```

```
<span class="sr-only">Toggle navigation</span>
```

```
<span class="icon-bar"></span>
```

```
<span class="icon-bar"></span>
```

```
<span class="icon-bar"></span>
```

```
</button>
```

```
</div>
```

```
<!--/.navbar-header-->
```

```
<div id="main-nav" class="collapse navbar-collapse">
```

```
<ul class="nav navbar-nav">
```

```
<li><a href="userreg.jsp">User Registration</a></li>
```

```
<li><a href="epwa.jsp">Profile</a></li>
```

```
<li><a href="convictedqry.jsp">Convicted </a></li>
```

```
<li><a href="adminsearch.jsp">Search</a></li>
```

```
<li><a href="search1.jsp">Match Photos </a></li>
```

```
<li><a href="searchfp1.jsp">Match Finger Print </a></li>
```

```
<li><a href="index.jsp">Signout</a></li>
```



```

        </ul>
    </div>
    <!--/.navbar-collapse-->
</nav>
<!--/.navbar-->
</div>
<!--/.container-->
</div>
<!--/.header-->

```

```

<section class="blog-page">
    <div class="container">
        <div class="row">
            <div align="center">
                <p><strong><span class="style1">Crime Buster's Surveillance </span></strong></p>
                <form name="form1" method="post" action="search2.jsp">
                    <label>Upload Photo </label>
                    <input type="file" name="textfield" id="textfield">
                    <input type="submit" name="button" id="button" value="Submit">
                </form>
                <p>&nbsp;</p>
                <p class="style2"></p>
                <p class="style2">&nbsp;</p>
                <p class="style2">&nbsp;</p>
            </div>
            <div align="center">
                </div>
                <p>&nbsp;</p>
                <p>&nbsp;</p>
                <p>&nbsp;</p>
                <p>&nbsp;</p>
                <p>&nbsp;</p>
            </div>
        </div>
    </div>
</section>
<footer>
    <div class="container">
        <div class="row">
            <div class="col-md-4">
                <p>

                Copyright &copy; 20120</p>
            </div>
            <div class="col-md-4">
                <ul class="social-icons">
                    <li><a rel="nofollow" href="http://www.facebook.com/templatemo" target="_parent"><i
class="fa fa-facebook"></i></a></li>
                    <li><a href="#"><i class="fa fa-twitter"></i></a></li>

```

```

        <li><a href="#"><i class="fa fa-linkedin"></i></a></li>
        <li><a href="#"><i class="fa fa-rss"></i></a></li>
        <li><a href="#"><i class="fa fa-dribbble"></i></a></li>
    </ul>
</div>
<div class="col-md-4">
    <p>Designed by <em>templatemo</em></p>
</div>
</div>
</div>
</footer>

```

```

<script src="//ajax.googleapis.com/ajax/libs/jquery/1.11.2/jquery.min.js"></script>
<script>window.jQuery || document.write('<script src="js/vendor/jquery-1.11.2.min.js"></script>')</script>

```

```

<script src="js/vendor/bootstrap.min.js"></script>

```

```

<script src="js/plugins.js"></script>
<script src="js/main.js"></script>

```

```

<script src="http://ajax.googleapis.com/ajax/libs/jquery/1.10.2/jquery.min.js"
type="text/javascript"></script>
<script type="text/javascript">
$(document).ready(function() {
    // navigation click actions
    $('.scroll-link').on('click', function(event){
        event.preventDefault();
        var sectionID = $(this).attr("data-id");
        scrollToID('#' + sectionID, 750);
    });
    // scroll to top action
    $('.scroll-top').on('click', function(event) {
        event.preventDefault();
        $('html, body').animate({ scrollTop:0 }, 'slow');
    });
    // mobile nav toggle
    $('#nav-toggle').on('click', function (event) {
        event.preventDefault();
        $('#main-nav').toggleClass("open");
    });
});
// scroll function
function scrollToID(id, speed){
    var offSet = 0;
    var targetOffset = $(id).offset().top - offSet;
    var mainNav = $('#main-nav');
    $('html,body').animate({ scrollTop:targetOffset }, speed);
    if (mainNav.hasClass("open")) {
        mainNav.css("height", "1px").removeClass("in").addClass("collapse");
        mainNav.removeClass("open");
    }
}

```

```

    }
    if (typeof console === "undefined") {
        console = {
            log: function() { }
        };
    }
</script>
</body>
</html>

```

Search2.jsp

```

<% @ page import ="java.io.*,java.sql.*,java.util.*,java.awt.Image,java.awt.*,java.awt.image.PixelGrabber"%>
<%

```

```

try
{
String ph=request.getParameter("ph");
out.println("<h1><p align=center>Crime Buster's Surveillance <br>Search /Compare Images");

```

```

int flag=0;
out.println("<table border=5><tr><td><img src=http://localhost:8080/cbs/images/"+ph+" width=250
height=250></img></td><td>");
String dname="C:\\Program Files\\Apache Software Foundation\\Tomcat 5.0\\webapps\\cbs\\srcimages";
File f1=new File(dname);
String s[ ]=f1.list();
for(int i=0;i<s.length;i++)
{

```

```

    String file1 = "C:\\Program Files\\Apache Software Foundation\\Tomcat
5.0\\webapps\\cbs\\images\\"+ph;
    String file2 = "C:\\Program Files\\Apache Software Foundation\\Tomcat
5.0\\webapps\\cbs\\srcimages\\"+s[i];
        //out.println(file1+"<br>");
        //out.println(file2+"<br>");

```

```

//String file1 = "C:\\Documents and Settings\\Administrator\\Desktop\\pic\\"+myfp+".jpeg";
//String file2 = "C:\\Documents and Settings\\Administrator\\Desktop\\pic\\fp2.jpeg";

```

```

Image image1 = Toolkit.getDefaultToolkit().getImage(file1);
Image image2 = Toolkit.getDefaultToolkit().getImage(file2);

```

```

PixelGrabber grab1 =new PixelGrabber(image1, 0, 0, -1, -1, false);
PixelGrabber grab2 =new PixelGrabber(image2, 0, 0, -1, -1, false);

```

```

int[] data1 = null;

```

```

if (grab1.grabPixels())
{
    int width = grab1.getWidth();
    int height = grab1.getHeight();
    data1 = new int[width * height];
    data1 = (int[]) grab1.getPixels();
}

```

```

        int[] data2 = null;

        if (grab2.grabPixels())
        {
            int width = grab2.getWidth();
            int height = grab2.getHeight();
            data2 = new int[width * height];
            data2 = (int[]) grab2.getPixels();
        }

        //out.println(data1+", "+data2);

        //out.println("Pixels equal: " + java.util.Arrays.equals(data1, data2));
        if( java.util.Arrays.equals(data1, data2))
        {
            flag=1;
            break;
        }

        out.println("<font color=red>Match not found "+i+ " Files used for
Comparision</font><br>");

    }

    if(flag==1)
    {
        out.println("<h1>Match found..</h1></td></tr></table>");
        out.println(s.length+ " Total Files used for Comparision");

    }
    else
    {
        out.println("<h1>Match not found..</h1></td></tr></table>");
        out.println(s.length+ " Total Files used for Comparision");
    }

}
catch(Exception e)
{
    out.println(e);
}

//

//out.println("<table border=5><tr><td><img          src=http://localhost:8080/cbs/scrimages/"+ph+"
width=250 height=250></img></td><td>Match not found..</td></tr></p></h1>");

```

%>

Search3.jsp

<% @ page contentType="text/html; charset=utf-8" language="java" import="java.sql.\*" errorPage="" %>

<!DOCTYPE html>

<html>

<head>

<meta charset="utf-8">

<meta http-equiv="X-UA-Compatible" content="IE=edge,chrome=1">

<!--

Victory Template

<http://www.templatemo.com/tm-507-victory>

-->

<title>Victory - Blog page</title>

<meta name="description" content="">

<meta name="viewport" content="width=device-width, initial-scale=1">

<link rel="apple-touch-icon" href="apple-touch-icon.png">

<link rel="stylesheet" href="css/bootstrap.min.css">

<link rel="stylesheet" href="css/bootstrap-theme.min.css">

<link rel="stylesheet" href="css/fontAwesome.css">

<link rel="stylesheet" href="css/hero-slider.css">

<link rel="stylesheet" href="css/owl-carousel.css">

<link rel="stylesheet" href="css/templatemo-style.css">

<link

href="https://fonts.googleapis.com/css?family=Spectral:200,200i,300,300i,400,400i,500,500i,600,600i,700,700i,800,800i" rel="stylesheet">

<link href="https://fonts.googleapis.com/css?family=Roboto:100,300,400,500,700,900" rel="stylesheet">

<script src="js/vendor/modernizr-2.8.3-respond-1.4.2.min.js"></script>

<style type="text/css">

<!--

.style10 {font-size: 24px; color: #333366; }

.style8 {color: #333366}

-->

</style>

</head>

<body>

<div class="header">

<div class="container"><a href="#" class="navbar-brand scroll-top">CRIME BUSTERS </a>

<nav class="navbar navbar-inverse" role="navigation">

<div class="navbar-header">

<button type="button" id="nav-toggle" class="navbar-toggle" data-toggle="collapse" data-target="#main-nav">

<span class="sr-only">Toggle navigation</span>

<span class="icon-bar"></span>

<span class="icon-bar"></span>

<span class="icon-bar"></span>

</button>

</div>

```

<!--/.navbar-header-->
<div id="main-nav" class="collapse navbar-collapse">
  <ul class="nav navbar-nav">
    <li><a href="epwc.jsp"> profile</a></li>
    <li><a href="wantedreg.jsp">Wanted </a></li>
    <li><a href="missingperson.jsp">Missing Person </a></li>
    <li><a href="convictedfile.jsp">Convicted </a></li>
    <li><a href="firreg.jsp">FIR </a></li>
    <li><a href="adminsearch.jsp">Search</a></li>
    <li><a href="search3.jsp">Match Photos</a></li>
    <li><a href="index.jsp">Signout</a></li>
  </ul>
</div>
<!--/.navbar-collapse-->
</nav>
<!--/.navbar-->
</div>
<!--/.container-->
</div>
<!--/.header-->

```

```

<section class="blog-page">
  <div class="container">
    <div class="row">
      <div align="center">
        <p><strong><span class="style1">Crime Buster's Surveillance </span></strong></p>
        <p class="style2"><a href="search4.jsp">Please click here to load image for searching </a></p>
        <p class="style2">&nbsp;</p>
        <p class="style2">&nbsp;</p>
      </div>
      <div align="center">
        </div>
        <p>&nbsp;</p>
        <p>&nbsp;</p>
        <p>&nbsp;</p>
        <p>&nbsp;</p>
        <p>&nbsp;</p>
      </div>
    </div>
  </div>
</section>
<footer>
  <div class="container">
    <div class="row">
      <div class="col-md-4">
        <p>
          Copyright &copy; 20120</p>
      </div>
    </div>
  </div>

```

```

<div class="col-md-4">
  <ul class="social-icons">
    <li><a rel="nofollow" href="http://www.facebook.com/templatemo" target="_parent"><i
class="fa fa-facebook"></i></a></li>
    <li><a href="#"><i class="fa fa-twitter"></i></a></li>
    <li><a href="#"><i class="fa fa-linkedin"></i></a></li>
    <li><a href="#"><i class="fa fa-rss"></i></a></li>
    <li><a href="#"><i class="fa fa-dribbble"></i></a></li>
  </ul>
</div>
<div class="col-md-4">
  <p>Designed by <em>templatemo</em></p>
</div>
</div>
</div>
</footer>

```

```

<script src="//ajax.googleapis.com/ajax/libs/jquery/1.11.2/jquery.min.js"></script>
<script>window.jQuery || document.write('<script src="js/vendor/jquery-1.11.2.min.js"></script>')</script>

```

```

<script src="js/vendor/bootstrap.min.js"></script>

```

```

<script src="js/plugins.js"></script>
<script src="js/main.js"></script>

```

```

<script src="http://ajax.googleapis.com/ajax/libs/jquery/1.10.2/jquery.min.js"
type="text/javascript"></script>
<script type="text/javascript">
$(document).ready(function() {
  // navigation click actions
  $('.scroll-link').on('click', function(event){
    event.preventDefault();
    var sectionID = $(this).attr("data-id");
    scrollToID('#' + sectionID, 750);
  });
  // scroll to top action
  $('.scroll-top').on('click', function(event) {
    event.preventDefault();
    $('html, body').animate({ scrollTop:0}, 'slow');
  });
  // mobile nav toggle
  $('#nav-toggle').on('click', function (event) {
    event.preventDefault();
    $('#main-nav').toggleClass("open");
  });
});
// scroll function
function scrollToID(id, speed){
  var offSet = 0;
  var targetOffset = $(id).offset().top - offSet;
  var mainNav = $('#main-nav');

```

```

    $('html,body').animate({ scrollTop:targetOffset}, speed);
    if (mainNav.hasClass("open")) {
        mainNav.css("height", "1px").removeClass("in").addClass("collapse");
        mainNav.removeClass("open");
    }
}
if (typeof console === "undefined") {
    console = {
        log: function() { }
    };
}
</script>
</body>
</html>

```

Predictdata.jsp

```

<% @ page contentType="text/html; charset=utf-8" language="java" import="java.sql.*" errorPage="" %>
<!DOCTYPE html>

```

```

<html>
<head>
<meta charset="utf-8">
<meta http-equiv="X-UA-Compatible" content="IE=edge,chrome=1">
<!--

```

Victory Template

<http://www.templatemo.com/tm-507-victory>

```

-->
<title>ADMIN PAGE</title>
<meta name="description" content="">
<meta name="viewport" content="width=device-width, initial-scale=1">
<link rel="apple-touch-icon" href="apple-touch-icon.png">

<link rel="stylesheet" href="css/bootstrap.min.css">
<link rel="stylesheet" href="css/bootstrap-theme.min.css">
<link rel="stylesheet" href="css/fontAwesome.css">
<link rel="stylesheet" href="css/hero-slider.css">
<link rel="stylesheet" href="css/owl-carousel.css">
<link rel="stylesheet" href="css/templatemo-style.css">

<link
href="https://fonts.googleapis.com/css?family=Spectral:200,200i,300,300i,400,400i,500,500i,600,600i,700,700i,800,800i" rel="stylesheet">
<link href="https://fonts.googleapis.com/css?family=Roboto:100,300,400,500,700,900" rel="stylesheet">

<script src="js/vendor/modernizr-2.8.3-respond-1.4.2.min.js"></script>
<style type="text/css">
<!--
.style1 { font-size: 36px }
.style3 { font-size: 36px; font-family: Geneva, Arial, Helvetica, sans-serif; }
.style5 {
    font-size: 36px;
    font-style: italic;
    font-family: 'Spectral', serif;

```



```

}
.style8 {
    font-size: xx-large;
    font-style: italic;
}
.style9 {font-size: 36px; color: #000000; }
body {
    background-image: url(img/istock-901609212datasecurity.jpg);
}
.style11 {color: #FFFFFF}
.style14 {
    font-size: 36px;
    font-family: Geneva, Arial, Helvetica, sans-serif;
    font-style: italic;
    color: #FFFFFF;
}
-->
</style>
<meta http-equiv="Content-Type" content="text/html; charset=utf-8"></head>

<body>
<div class="header">
    <div class="container">
        <a href="#" class="navbar-brand scroll-top">PRISON SYSTEM </a>
        <nav class="navbar navbar-inverse" role="navigation">
            <div class="navbar-header">
                <button type="button" id="nav-toggle" class="navbar-toggle" data-toggle="collapse" data-
target="#main-nav">
                    <span class="sr-only">Toggle navigation</span>
                    <span class="icon-bar"></span>
                    <span class="icon-bar"></span>
                    <span class="icon-bar"></span> </button>
            </div>
            <!--/.navbar-header-->
            <div id="main-nav" class="collapse navbar-collapse">
                <ul class="nav navbar-nav">
                    <li><a href="userreg.jsp">User Registration</a></li>
                    <li><a href="epwa.jsp">Profile</a></li>
                    <li><a href="analysedata.jsp">Analyze Data </a></li>
                    <li><a href="predictdata.jsp">Prediction on various Theory</a></li>

                    <!-- <li><a href="updatestatus.jsp">Update Status</a></li>-->
                    <li><a href="adminindex.jsp">Signout</a></li>
                </ul>
            </div>
            <!--/.navbar-collapse-->
        </nav>
        <!--/.navbar-->
    </div>
    <div align="center">
        <!--/.container-->
    </div>

```

```

</div>
<section class="blog-page">
  <div class="header">
    <div align="center"> </div>
  </div>
  <div align="center" class="style1">
    <!--/.header-->
  </div>

  <span class="style3">
    <section class="blog-page">    </section>
  </span>
  <section class="blog-page">
    <div align="center"></div>
  </section>

  <span class="style1">
    <section class="blog-page">

      <section>
        <div align="center"></div>
      </section>

      <section></section>
    </section>
  </span>
  <section class="blog-page"><section><div align="center" class="style11"></div>
  </section>
  <span class="style1">
    <section></section>
  </span></section>

  <section class="blog-page">
    <section>
      <div align="center" class="style8">
        <p class="style9">&nbsp;</p>
      </div>
    </section>
  </section>
  <span class="style3">
    <section class="blog-page"> </section>
  </span><span class="style1">
    <section class="blog-page"></section>
  </span>
  <section class="blog-page">
    <div align="center" class="style5"></div>
  </section>
</section>

<section class="blog-page"><div class="container">
  <div class="row">

```

```

        <form name="form1" method="post" action="">
            <p align="center" class="style1">&nbsp;</p>
            <p align="center" class="style1">&nbsp;</p>
            <p>&nbsp;</p>
            <p>&nbsp;</p>
            <p>&nbsp;</p>
        </form>
    </div>
</div>
</section>
<script src="//ajax.googleapis.com/ajax/libs/jquery/1.11.2/jquery.min.js"></script>
<script>window.jQuery || document.write('<script src="js/vendor/jquery-1.11.2.min.js"></script>')</script>

<script src="js/vendor/bootstrap.min.js"></script>

<script src="js/plugins.js"></script>
<script src="js/main.js"></script>

<script src="http://ajax.googleapis.com/ajax/libs/jquery/1.10.2/jquery.min.js"
type="text/javascript"></script>
<script type="text/javascript">
$(document).ready(function() {
    // navigation click actions
    $('.scroll-link').on('click', function(event){
        event.preventDefault();
        var sectionID = $(this).attr("data-id");
        scrollToID('#' + sectionID, 750);
    });
    // scroll to top action
    $('.scroll-top').on('click', function(event) {
        event.preventDefault();
        $('html, body').animate({ scrollTop:0 }, 'slow');
    });
    // mobile nav toggle
    $('#nav-toggle').on('click', function (event) {
        event.preventDefault();
        $('#main-nav').toggleClass("open");
    });
});
// scroll function
function scrollToID(id, speed){
    var offSet = 0;
    var targetOffset = $(id).offset().top - offSet;
    var mainNav = $('#main-nav');
    $('html,body').animate({ scrollTop:targetOffset }, speed);
    if (mainNav.hasClass("open")) {
        mainNav.css("height", "1px").removeClass("in").addClass("collapse");
        mainNav.removeClass("open");
    }
}
if (typeof console === "undefined") {
    console = {

```

```

        log: function() { }
    };
}
</script>
</body>
</html>

```

Epwa.jsp

```

<%@ page contentType="text/html; charset=utf-8" language="java" import="java.sql.*" errorPage="" %>
<!DOCTYPE html>
<html>
    <head>
        <meta charset="utf-8">
        <meta http-equiv="X-UA-Compatible" content="IE=edge,chrome=1">
    <!--
Victory Template
http://www.templatemo.com/tm-507-victory
-->
    <title>PROFILE</title>
    <meta name="description" content="">
    <meta name="viewport" content="width=device-width, initial-scale=1">
    <link rel="apple-touch-icon" href="apple-touch-icon.png">

    <link rel="stylesheet" href="css/bootstrap.min.css">
    <link rel="stylesheet" href="css/bootstrap-theme.min.css">
    <link rel="stylesheet" href="css/fontAwesome.css">
    <link rel="stylesheet" href="css/hero-slider.css">
    <link rel="stylesheet" href="css/owl-carousel.css">
    <link rel="stylesheet" href="css/templatemo-style.css">

    <link
href="https://fonts.googleapis.com/css?family=Spectral:200,200i,300,300i,400,400i,500,500i,600,600i,700,700i,800,800i" rel="stylesheet">
    <link href="https://fonts.googleapis.com/css?family=Roboto:100,300,400,500,700,900" rel="stylesheet">

    <script src="js/vendor/modernizr-2.8.3-respond-1.4.2.min.js"></script>
</head>

<body>
    <div class="header">
        <div class="container"><a href="#" class="navbar-brand scroll-top">PRISON SYSTEM </a>
        <nav class="navbar navbar-inverse" role="navigation">
            <div class="navbar-header">
                <button type="button" id="nav-toggle" class="navbar-toggle" data-toggle="collapse" data-
target="#main-nav">
                    <span class="sr-only">Toggle navigation</span>
                    <span class="icon-bar"></span>
                    <span class="icon-bar"></span>
                    <span class="icon-bar"></span>
                </button>
            </div>

```

```

<!--/.navbar-header-->
<div id="main-nav" class="collapse navbar-collapse">
  <ul class="nav navbar-nav">
    <li><a href="userreg.jsp">User Registration</a></li>
    <li><a href="epwa.jsp">Profile</a></li>
    <li><a href="analysedata.jsp">Analyze Data </a></li>

    <!-- <li><a href="updatestatus.jsp">Update Status</a></li>-->
    <li><a href="adminindex.jsp">Signout</a></li>
  </ul>
</div>
<!--/.navbar-collapse-->
</nav>
<!--/.navbar-->
</div>
<!--/.container-->
</div>
<!--/.header-->

```

```

<section class="blog-page">
  <div class="container">
    <div class="row">
      <form id="form1" name="form1" method="post" action="#">
<table width="93%" border="0" cellspacing="5" cellpadding="0">
  <tr>
    <td colspan="4"><h1>Reset Password </h1></td>
  </tr>
  <tr>
    <td colspan="4">&nbsp;</td>
  </tr>
  <tr>
    <td width="20%">Old Password :</td>
    <td width="2%">&nbsp;</td>
    <td width="24%"><input type="password" name="textfield" id="textfield" required="required" /></td>
    <td width="54%" rowspan="4"></td>
  </tr>
  <tr>
    <td>New Password :</td>
    <td>&nbsp;</td>
    <td><input type="password" name="textfield2" id="textfield2" required="required" /></td>
  </tr>
  <tr>
    <td>Confirm Password :</td>
    <td>&nbsp;</td>
    <td><input type="password" name="textfield3" id="textfield3" required="required"/></td>
  </tr>
  <tr>
    <td height="115">&nbsp;</td>

```

```

        <td>&nbsp;</td>
        <td valign="top"><input type="submit" name="Login" id="Login" value="Submit" />
        <input type="reset" name="Login2" id="Login2" value="Reset" /></td>
    </tr>
</table>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p>&nbsp;</p>
</form>
<p>
    <% @page import ="java.sql.*"%>
    <% @page import="java.util.*,java.io.*,javax.servlet.http.Cookie"%>
    <%

        if(request.getParameter("Login")!= null)
            {
                try
                {
                    String b=request.getParameter("Login");

                    Class.forName("com.mysql.jdbc.Driver");
                    Connection
con=DriverManager.getConnection("jdbc:mysql://localhost:3306/cbs","root","root");
                    Statement stmt=con.createStatement();
                    ResultSet rs,rs1,rs2;

                    String s=request.getParameter("textfield").trim();//old
                    String s1=request.getParameter("textfield2").trim();//new
                    String s3=request.getParameter("textfield3").trim();//confirm
                    String email =(String)session.getAttribute("Admin");

                    rs=stmt.executeQuery("select * from admin where u='"+email+"'");
                    //String v1="",v2="";
                    int found=0;
                    while (rs.next())
                    {
                        found=1;
                        break;
                    }

                    if(found==1)
                    {
                        String str="Update admin set pwd=? where u=?";
                        // out.println(str);
                        PreparedStatement psmt =con.prepareStatement(str);

```

```

        psmt.setString(1,s1);
        psmt.setString(2,email);
        psmt.executeUpdate();
        //out.println(s1+","+s3);
        psmt.close();
        rs.close();
        //response.sendRedirect("adepwsaveack.jsp");

        con.close();

        out.println("<h1 align=center ><b>Updated successfully</b></h1>");
        // response.sendRedirect("donerregsaveack.jsp");
    }

    else
    {

        out.println("<h1 align=center >Some thing has gone wrong ...Pls
chk</h1>");

    }
}

catch(Exception e)
{
    out.println("Exception occured" +e);

}
}

%>
</p>
<p>&nbsp; </p>
</div>
</div>
</section>
<script src="//ajax.googleapis.com/ajax/libs/jquery/1.11.2/jquery.min.js"></script>
<script>window.jQuery || document.write('<script src="js/vendor/jquery-1.11.2.min.js"></script>')</script>

<script src="js/vendor/bootstrap.min.js"></script>

<script src="js/plugins.js"></script>
<script src="js/main.js"></script>

<script src="http://ajax.googleapis.com/ajax/libs/jquery/1.10.2/jquery.min.js"
type="text/javascript"></script>
<script type="text/javascript">
$(document).ready(function() {
    // navigation click actions
    $('<div>
</div>
</div>
</section>
<script src="//ajax.googleapis.com/ajax/libs/jquery/1.11.2/jquery.min.js"></script>
<script>window.jQuery || document.write('<script src="js/vendor/jquery-1.11.2.min.js"></script>')</script>

<script src="js/vendor/bootstrap.min.js"></script>

<script src="js/plugins.js"></script>
<script src="js/main.js"></script>

<script src="http://ajax.googleapis.com/ajax/libs/jquery/1.10.2/jquery.min.js"
type="text/javascript"></script>
<script type="text/javascript">
$(document).ready(function() {
    // navigation click actions
    $('

```

```

    });
    // scroll to top action
    $('.scroll-top').on('click', function(event) {
        event.preventDefault();
        $('html, body').animate({ scrollTop:0}, 'slow');
    });
    // mobile nav toggle
    $('#nav-toggle').on('click', function (event) {
        event.preventDefault();
        $('#main-nav').toggleClass("open");
    });
});
// scroll function
function scrollToID(id, speed){
    var offSet = 0;
    var targetOffset = $(id).offset().top - offSet;
    var mainNav = $('#main-nav');
    $('html,body').animate({ scrollTop:targetOffset}, speed);
    if (mainNav.hasClass("open")) {
        mainNav.css("height", "1px").removeClass("in").addClass("collapse");
        mainNav.removeClass("open");
    }
}
if (typeof console === "undefined") {
    console = {
        log: function() { }
    };
}
</script>
</body>
</html>

```

Epwc.jsp

```

<%@ page contentType="text/html; charset=utf-8" language="java" import="java.sql.*" errorPage="" %>
<!DOCTYPE html>
<html>

```

```

<head>

```

```

    <meta charset="utf-8">

```

```

    <meta http-equiv="X-UA-Compatible" content="IE=edge,chrome=1">

```

```

<!--

```

Victory Template

<http://www.templatemo.com/tm-507-victory>

```

-->

```

```

<title>PROFILE</title>

```

```

<meta name="description" content="">

```

```

<meta name="viewport" content="width=device-width, initial-scale=1">

```

```

<link rel="apple-touch-icon" href="apple-touch-icon.png">

```

```

<link rel="stylesheet" href="css/bootstrap.min.css">

```

```

<link rel="stylesheet" href="css/bootstrap-theme.min.css">

```

```

<link rel="stylesheet" href="css/fontAwesome.css">

```

```

<link rel="stylesheet" href="css/hero-slider.css">

```



```

<link rel="stylesheet" href="css/owl-carousel.css">
<link rel="stylesheet" href="css/templatemo-style.css">

<link
href="https://fonts.googleapis.com/css?family=Spectral:200,200i,300,300i,400,400i,500,500i,600,600i,700,700i
,800,800i" rel="stylesheet">
<link href="https://fonts.googleapis.com/css?family=Roboto:100,300,400,500,700,900" rel="stylesheet">

<script src="js/vendor/modernizr-2.8.3-respond-1.4.2.min.js"></script>
</head>

<body>
<div class="header">
<div class="container"><a href="#" class="navbar-brand scroll-top">PRISON SYSTEM </a>
<nav class="navbar navbar-inverse" role="navigation">
<div class="navbar-header">
<button type="button" id="nav-toggle" class="navbar-toggle" data-toggle="collapse" data-
target="#main-nav">
<span class="sr-only">Toggle navigation</span>
<span class="icon-bar"></span>
<span class="icon-bar"></span>
<span class="icon-bar"></span>
</button>
</div>
<!--/.navbar-header-->
<div id="main-nav" class="collapse navbar-collapse">
<ul class="nav navbar-nav">
<li><a href="epwc.jsp"> profile</a></li>
<li><a href="wantedreg.jsp">Wanted </a></li>
<li><a href="missingperson.jsp">Missing Person </a></li>
<li><a href="convictedfile.jsp">Convicted </a></li>
<!-- <li><a href="convictedfile.jsp">Convicted </a></li>-->
<li><a href="firreg.jsp">FIR </a></li>

<!--<li><a href="adminsearch.jsp">Search</a></li>-->
<li><a href="addcrimedata.jsp">ADD CRIME DATA</a></li>
<li><a href="updatestatus.jsp">Update Status</a></li>
<li><a href="index.jsp">Signout</a></li>
</ul>
</div>
<!--/.navbar-collapse-->
</nav>
<!--/.navbar-->
</div>
<!--/.container-->
</div>
<!--/.header-->
<section class="blog-page">
<div class="container">
<div class="row">
<form id="form1" name="form1" method="post" action="#">
<table width="93%" border="0" cellspacing="5" cellpadding="0">

```

```

<tr>
  <td colspan="4"><h1>Reset Password </h1></td>
</tr>
<tr>
  <td colspan="4">&nbsp;</td>
</tr>
<tr>
  <td width="20%">Old Password :</td>
  <td width="2%">&nbsp;</td>
  <td width="24%"><input type="password" name="textfield" id="textfield" required="required"
/></td>
  <td width="54%" rowspan="4"></td>

```

```

</tr>
<tr>
  <td>New Password :</td>
  <td>&nbsp;</td>
  <td><input type="password" name="textfield2" id="textfield2" required="required" /></td>
</tr>
<tr>
  <td>Confirm Password :</td>
  <td>&nbsp;</td>
  <td><input type="password" name="textfield3" id="textfield3" required="required"/></td>
</tr>
<tr>
  <td>&nbsp;</td>
  <td>&nbsp;</td>
  <td valign="top"><input type="submit" name="Login" id="Login" value="Submit" />
    <input type="reset" name="Login2" id="Login2" value="Reset" /></td>
</tr>

```

```

</table>
</form>
<p align="center">
  <% @page import = "java.sql.*"%>
  <% @page import="java.util.* , java.io.* , javax.servlet.http.Cookie"%>
  <%
    if(request.getParameter("Login")!= null)
    {
      try
      {
        String b=request.getParameter("Login");

        Class.forName("com.mysql.jdbc.Driver");
        Connection
con=DriverManager.getConnection("jdbc:mysql://localhost:3306/cbs","root","root");
        Statement stmt=con.createStatement();
        ResultSet rs,rs1,rs2;

        String s=request.getParameter("textfield").trim();//old
        String s1=request.getParameter("textfield2").trim();//new
        String s3=request.getParameter("textfield3").trim();//confirm

```

```

String email =(String)session.getAttribute("crime");

rs=stmt.executeQuery("select * from userreg where user='"+""+email+""");
//String v1="",v2="";
int found=0;
while (rs.next())
{
    found=1;
    break;
}

if(found==1)
{
String str="Update userreg set pwd=? where user=?";
// out.println(str);
        PreparedStatement psmt =con.prepareStatement(str);
        psmt.setString(1,s1);
        psmt.setString(2,email);
        psmt.executeUpdate();
//out.println(s1+" "+s3);
        psmt.close();
        rs.close();
        //response.sendRedirect("adepwsaveack.jsp");

        con.close();

        out.println("<h1 align=center ><b>Updated successfully</b></h1>");
// response.sendRedirect("donerregsaveack.jsp");
    }

    else
    {

        out.println("<h1 align=center >Some thing has gone wrong ...Pls
chk</h1>");

    }

}

catch(Exception e)
{
    out.println("Exception occured" +e);
}

}

%>
</p>
<p>&nbsp;</p>
<p>&nbsp;</p>
<p align="center">&nbsp;</p>

```



```

        log: function() { }
    };
}
</script>
</body>
</html>

```

Epwt.jsp

```

<%@ page contentType="text/html; charset=utf-8" language="java" import="java.sql.*" errorPage="" %>
<!DOCTYPE html>
<html>
    <head>
        <meta charset="utf-8">
        <meta http-equiv="X-UA-Compatible" content="IE=edge,chrome=1">
    <!--
    Victory Template
    http://www.templatemo.com/tm-507-victory
    -->
    <title>Victory - Blog page</title>
    <meta name="description" content="">
    <meta name="viewport" content="width=device-width, initial-scale=1">
    <link rel="apple-touch-icon" href="apple-touch-icon.png">

    <link rel="stylesheet" href="css/bootstrap.min.css">
    <link rel="stylesheet" href="css/bootstrap-theme.min.css">
    <link rel="stylesheet" href="css/fontAwesome.css">
    <link rel="stylesheet" href="css/hero-slider.css">
    <link rel="stylesheet" href="css/owl-carousel.css">
    <link rel="stylesheet" href="css/templatemo-style.css">

    <link
href="https://fonts.googleapis.com/css?family=Spectral:200,200i,300,300i,400,400i,500,500i,600,600i,700,700i,800,800i" rel="stylesheet">
    <link href="https://fonts.googleapis.com/css?family=Roboto:100,300,400,500,700,900" rel="stylesheet">

    <script src="js/vendor/modernizr-2.8.3-respond-1.4.2.min.js"></script>
</head>

<body>
    <div class="header">
        <div class="container"><a href="#" class="navbar-brand scroll-top">CRIME BUSTERS </a>
        <nav class="navbar navbar-inverse" role="navigation">
            <div class="navbar-header">
                <button type="button" id="nav-toggle" class="navbar-toggle" data-toggle="collapse" data-
target="#main-nav">
                    <span class="sr-only">Toggle navigation</span>
                    <span class="icon-bar"></span>
                    <span class="icon-bar"></span>
                    <span class="icon-bar"></span>
                </button>
            </div>

```

```

<!--/.navbar-header-->
<div id="main-nav" class="collapse navbar-collapse">
  <ul class="nav navbar-nav">
    <li><a href="epwt.jsp">Profile</a></li>
    <li><a href="missingvehiclereg.jsp">Missing Vehicle </a></li>
    <li><a href="TrafficOffencereg.jsp"> Offence Registration </a></li>
    <li><a href="searchvehmain.jsp">Search Missing Vehicle </a></li>
    <li><a href="searchtrafficoffencebyvehno.jsp"> Search Offence </a></li>
    <li><a href="index.jsp">Signout</a></li>
  </ul>
</div>
<!--/.navbar-collapse-->
</nav>
<!--/.navbar-->
</div>
<!--/.container-->
</div>
<!--/.header-->

```

```

<section class="blog-page">
  <div class="container">
    <div class="row">
      <form id="form1" name="form1" method="post" action="#">
<table width="93%" border="0" cellspacing="5" cellpadding="0">
  <tr>
    <td colspan="4"><h1>Reset PassWord </h1></td>
  </tr>
  <tr>
    <td colspan="4">&nbsp;</td>
  </tr>
  <tr>
    <td width="20%">Old Password :</td>
    <td width="2%">&nbsp;</td>
    <td width="24%"><input type="text" name="textfield" id="textfield" required="required" /></td>
    <td width="54%" rowspan="4">&nbsp;</td>
  </tr>
  <tr>
    <td>New Password :</td>
    <td>&nbsp;</td>
    <td><input type="text" name="textfield2" id="textfield2" required="required" /></td>
  </tr>
  <tr>
    <td>Confirm Password :</td>
    <td>&nbsp;</td>
    <td><input type="text" name="textfield3" id="textfield3" required="required" /></td>
  </tr>
  <tr>
    <td>&nbsp;</td>
    <td>&nbsp;</td>
    <td>&nbsp;</td>
  </tr>
</table>
      </form>
    </div>
  </div>

```

```

        <td valign="top"><input type="submit" name="Login" id="Login" value="Submit" />
        <input type="reset" name="Login2" id="Login2" value="Reset" /></td>
    </tr>
</table>
</form>

<p align="center">
    <% @page import = "java.sql.*"%>
    <% @page import="java.util.*,java.io.*,javax.servlet.http.Cookie"%>
    <%
        try
        {
            String b=request.getParameter("Login");
            if(request.getParameter("Login")!= null)
            {
                Class.forName("com.mysql.jdbc.Driver");
                Connection
con=DriverManager.getConnection("jdbc:mysql://localhost:3306/cbs","root","root");
                Statement stmt=con.createStatement();
                ResultSet rs,rs1,rs2;

                String s=request.getParameter("textfield").trim();//old
                String s1=request.getParameter("textfield2").trim();//new
                String s3=request.getParameter("textfield3").trim();//confirm
                String email =(String)session.getAttribute("traffic");

                rs=stmt.executeQuery("select * from stationreg where user='"+email+"'");
                //String v1="",v2="";
                int found=0;
                while (rs.next())
                {
                    found=1;
                    break;
                }

                if(found==1)
                {
                    String str="Update stationreg set pwd=? where user=?";
                    // out.println(str);
                    PreparedStatement psmt =con.prepareStatement(str);
                    psmt.setString(1,s1);
                    psmt.setString(2,email);
                    psmt.executeUpdate();
                    //out.println(s1+", "+s3);
                    psmt.close();
                    rs.close();
                    //response.sendRedirect("adepwsaveack.jsp");

                    con.close();
                }
            }
        }
    <%
    >
    </p>

```

```

        out.println("<h1 align=center ><b>Updated successfully</b></h1>");
        // response.sendRedirect("donerregsaveack.jsp");
    }

    else
    {

        out.println("<h1 align=center >Some thing has gone wrong ...Pls
chk</h1>");

    }
}

catch(Exception e)
{
    out.println("Exception occured" +e);

}

%>

</p>
<p>&nbsp;</p>
<p>&nbsp;</p>
</div>
</div>
</section>
<footer>
<div class="container">
<div class="row">
<div class="col-md-4">
<p>

Copyright &copy; 20120</p>
</div>
<div class="col-md-4">
<ul class="social-icons">
<li><a rel="nofollow" href="http://www.facebook.com/templatemo" target="_parent"><i
class="fa fa-facebook"></i></a></li>
<li><a href="#"><i class="fa fa-twitter"></i></a></li>
<li><a href="#"><i class="fa fa-linkedin"></i></a></li>
<li><a href="#"><i class="fa fa-rss"></i></a></li>
<li><a href="#"><i class="fa fa-dribbble"></i></a></li>
</ul>
</div>
<div class="col-md-4">
<p>Designed by <em>templatemo</em></p>
</div>
</div>
</div>
</footer>

```



```

<script src="//ajax.googleapis.com/ajax/libs/jquery/1.11.2/jquery.min.js"></script>
<script>window.jQuery || document.write('<script src="js/vendor/jquery-1.11.2.min.js"></script>')</script>

<script src="js/vendor/bootstrap.min.js"></script>

<script src="js/plugins.js"></script>
<script src="js/main.js"></script>

<script src="http://ajax.googleapis.com/ajax/libs/jquery/1.10.2/jquery.min.js"
type="text/javascript"></script>
<script type="text/javascript">
$(document).ready(function() {
    // navigation click actions
    $('.scroll-link').on('click', function(event){
        event.preventDefault();
        var sectionID = $(this).attr("data-id");
        scrollToID('#' + sectionID, 750);
    });
    // scroll to top action
    $('.scroll-top').on('click', function(event) {
        event.preventDefault();
        $('html, body').animate({ scrollTop:0}, 'slow');
    });
    // mobile nav toggle
    $('#nav-toggle').on('click', function (event) {
        event.preventDefault();
        $('#main-nav').toggleClass("open");
    });
});
// scroll function
function scrollToID(id, speed){
    var offSet = 0;
    var targetOffset = $(id).offset().top - offSet;
    var mainNav = $('#main-nav');
    $('html,body').animate({ scrollTop:targetOffset}, speed);
    if (mainNav.hasClass("open")) {
        mainNav.css("height", "1px").removeClass("in").addClass("collapse");
        mainNav.removeClass("open");
    }
}
if (typeof console === "undefined") {
    console = {
        log: function() { }
    };
}
</script>
</body>
</html>

```

Analysis.jsp

```

<% @ page contentType="text/html; charset=utf-8" language="java" import="java.sql.*" errorPage="" %>
<!DOCTYPE html>

```

```

<html>
  <head>
    <meta charset="utf-8">
    <meta http-equiv="X-UA-Compatible" content="IE=edge,chrome=1">
  <!--
  Victory Template
  http://www.templatemo.com/tm-507-victory
  -->
    <title>ADMIN PAGE</title>
    <meta name="description" content="">
    <meta name="viewport" content="width=device-width, initial-scale=1">
    <link rel="apple-touch-icon" href="apple-touch-icon.png">

    <link rel="stylesheet" href="css/bootstrap.min.css">
    <link rel="stylesheet" href="css/bootstrap-theme.min.css">
    <link rel="stylesheet" href="css/fontAwesome.css">
    <link rel="stylesheet" href="css/hero-slider.css">
    <link rel="stylesheet" href="css/owl-carousel.css">
    <link rel="stylesheet" href="css/templatemo-style.css">

    <link
href="https://fonts.googleapis.com/css?family=Spectral:200,200i,300,300i,400,400i,500,500i,600,600i,700,700i,800,800i" rel="stylesheet">
    <link href="https://fonts.googleapis.com/css?family=Roboto:100,300,400,500,700,900" rel="stylesheet">

    <script src="js/vendor/modernizr-2.8.3-respond-1.4.2.min.js"></script>
    <style type="text/css">
  <!--
.style1 {color: #000000}
-->
#customers {
  font-family: "Trebuchet MS", Arial, Helvetica, sans-serif;
  border-collapse: collapse;
  width: 100%;
}

#customers td, #customers th {
  border: 1px solid #BEEDFC;
  padding: 8px;
}

#customers tr:nth-child(even){background-color:#fff;}

#customers tr:hover {background-color:#BEEDFC;}

#customers th {
  padding-top: 12px;
  padding-bottom: 12px;
  text-align: left;
  background-color: #4CAF50;
  color: black;
}

```

```

        </style>
        <style type="text/css">
<!--
.style1 {font-size: 36px}
.style3 {font-size: 36px; font-family: Geneva, Arial, Helvetica, sans-serif; }
.style5 {
    font-size: 36px;
    font-style: italic;
    font-family: 'Spectral', serif;
}
.style8 {
    font-size: xx-large;
    font-style: italic;
}
.style9 {font-size: 36px; color: #000000; }
body {
    background-image: url();
}
.style11 {color: #FFFFFF}
.style12 {
    font-size: x-large;
    font-weight: bold;
}
-->
</style>
<meta http-equiv="Content-Type" content="text/html; charset=utf-8"></head>

<body>
<div class="header">
    <div class="container">
        <a href="#" class="navbar-brand scroll-top">PRISON SYSTEM </a>
        <nav class="navbar navbar-inverse" role="navigation">
            <div class="navbar-header">
                <button type="button" id="nav-toggle" class="navbar-toggle" data-toggle="collapse" data-
target="#main-nav">
                    <span class="sr-only">Toggle navigation</span>
                    <span class="icon-.jsp">Analyze Data </a></li>
                    <li><a href="predictdata.jsp">Prediction on various Theory</a></li>

                    <!-- <li><a href="updatestatus.jsp">Update Status</a></li>-->
                    <li><a href="adminindex.jsp">Signout</a></li>
                </ul>
            </div>
            <!--/.navbar-collapse-->bar"></span>
                <span class="icon-bar"></span>
                <span class="icon-bar"></span>                </button>
            </div>
            <!--/.navbar-header-->
            <div id="main-nav" class="collapse navbar-collapse">
                <ul class="nav navbar-nav">
                    <li><a href="userreg.jsp">User Registration</a></li>
                    <li><a href="epwa.jsp">Profile</a></li>

```

```

        <li><a href="analysedata
    </nav>
    <!--/.navbar-->
</div>
<div align="center">
    <!--/.container-->
</div>
</div>
<section class="blog-page">
    <div class="header">
        <div align="center"> </div>
    </div>
    <div align="center" class="style1">
        <!--/.header-->
    </div>

    <span class="style3">    </span>
    <form name="form1" method="post" action="">
        <p>&nbsp;</p>
        <table width="93%" border="0" cellspacing="5" cellpadding="0">
            <tr>
                <td colspan="4"><h1 align="center">ANALYZE CRIME DATA STATISTICS</h1></td>
            </tr>

            <tr>
                <td width="25%" height="148"><div align="center">Category of Crime</div></td>
                <td width="20%"><select name="select" id="select">
                    <option value="ACCIDENTS">ACCIDENTS</option>
                    <option value="MURDERS">MURDERS</option>
                    <option value="THEFTS">THEFTS</option>
                </select>
                <input type="submit" name="Submit" id="Submit" value="Search"></td>
                <td width="38%"><div align="center" class="style12"><a href="adminpagegencharts.jsp">Analyze
Through Graph</a></div></td>
                <td width="38%"></td>
            </tr>
        </table>
        <p>&nbsp;</p>
    </form>
    <div align="center">
        <p>
            <% @ page import ="java.io.*,java.sql.*,java.util.*"%>

            <%

                                if(request.getParameter("Submit")!= null)

                                {

                                    try

                                    {

```

```

        Class.forName("com.mysql.jdbc.Driver");
        Connection
conn=DriverManager.getConnection("jdbc:mysql://localhost:3306/cbs","root","root");
        String qry=request.getParameter("select");

        int count=0;

        ResultSet rs;
        ResultSetMetaData rmd;

        Statement st=conn.createStatement();
        rs=st.executeQuery("select * from ACCIDENTS");

        if (qry.equals("ACCIDENTS"))
        {
            rs=st.executeQuery("select * from ACCIDENTS");

        }
        else if (qry.equals("MURDERS"))
        {
            rs=st.executeQuery("select * from MURDERS o");

        }

        else if (qry.equals("THEFTS"))
        {
            String dtqry=request.getParameter("regdate");
            rs=st.executeQuery("select * from THEFTS ");

        }


        out.println("<p align=center>Your Request Details</p>");

        out.println("<table border=2 align=center width=50% id=customers align=center bordercolor=grey
cellpadding =10><tr></p>");

        rmd=rs.getMetaData();
        int n=rmd.getColumnCount();

        for(int i=1;i<=n;i++)
        {
            out.print("<td><b>" +rmd.getColumnName(i)+"</b></td>");
        }

        while(rs.next())
        {

```

```

        out.println("<tr>");
        for(int x=1;x<=n;x++)
        {
                                if (x==6)
                                {
                                        count=count+Integer.parseInt(rs.getString(x));
                                }
        }

        out.print("<td><b>" +rs.getString(x)+"</b></td>");
        //                                out.print("<td><b><img
        src=http://localhost:8080/cbs/images/" +rs.getString(x)+" width=50 height=50></img></b></td>");
                                }
                                else
                                {
                                        out.print("<td><b>" +rs.getString(x)+"</b></td>");
                                }
        }

        out.print("</tr>");
    }

        out.println("</table><br><h1 align=center> Total Overall cases Reported is "+count);
        out.println("</body></html>");

    }

    catch(Exception e)
    {
        out.print(e);
    }

    }
    %>
</p>
<p><a href="adminpagegencharts1.jsp?id1=3&id2=4&id3=77"></a></p>
</div>
<span class="style3">
<section class="blog-page"></section>
</span>
<section class="blog-page">
    <div align="center"></div>
</section>

<span class="style1">
<section class="blog-page">

<section>
</section>
</section>

```

```

</span>
<section class="blog-page"><section><div align="center"></div>
</section>

<span class="style1">
<section></section>
</span></section>

<section class="blog-page"><section><div align="center" class="style11"></div>
</section>
<span class="style1">
<section></section>
</span></section>

<section class="blog-page">
<section>
<div align="center" class="style8">
<p class="style9">&nbsp;</p>
</div>
</section>
</section>
<span class="style3">
<section class="blog-page"> </section>
</span><span class="style1">
<section class="blog-page"></section>
</span>
<section class="blog-page">
<div align="center" class="style5"></div>
</section>
</section>

<section class="blog-page"><div class="container">
<div class="row">

</div>
</div>
</section>
<script src="//ajax.googleapis.com/ajax/libs/jquery/1.11.2/jquery.min.js"></script>
<script>window.jQuery || document.write('<script src="js/vendor/jquery-1.11.2.min.js"></script>')</script>

<script src="js/vendor/bootstrap.min.js"></script>

<script src="js/plugins.js"></script>
<script src="js/main.js"></script>

<script src="http://ajax.googleapis.com/ajax/libs/jquery/1.10.2/jquery.min.js"
type="text/javascript"></script>
<script type="text/javascript">
$(document).ready(function() {
// navigation click actions
$('.scroll-link').on('click', function(event){
event.preventDefault();

```

```
        var sectionID = $(this).attr("data-id");
        scrollToID('#' + sectionID, 750);
    });
    // scroll to top action
    $('.scroll-top').on('click', function(event) {
        event.preventDefault();
        $('html, body').animate({ scrollTop:0}, 'slow');
    });
    // mobile nav toggle
    $('#nav-toggle').on('click', function (event) {
        event.preventDefault();
        $('#main-nav').toggleClass("open");
    });
});
// scroll function
function scrollToID(id, speed){
    var offSet = 0;
    var targetOffset = $(id).offset().top - offSet;
    var mainNav = $('#main-nav');
    $('html,body').animate({ scrollTop:targetOffset}, speed);
    if (mainNav.hasClass("open")) {
        mainNav.css("height", "1px").removeClass("in").addClass("collapse");
        mainNav.removeClass("open");
    }
}
if (typeof console === "undefined") {
    console = {
        log: function() { }
    };
}
</script>
</body>
</html>
```



## **SNAPSHOTS**

# PRISON SYSTEM

[ABOUTUS](#)[FAQ](#)[SIGNIN](#)[BANGALORE MAP](#)[CITIZEN SIGNUP](#)

HERE YOU CAN FIND CRIME REPORTING PORTAL

THIS PORTAL IS TO FACILITATE VICTIMS/COMPLAINANT TO REPORT CRIME COMPLAINTS ONLINE

## PRISON SYSTEM

### FAQ's

What is Change Password ?	To Change user's password
What is Category ?	Type of User such as Crime or Administrator
What is user registration ?	To login into desired page.
What is FIR registration ?	To register any case.
What is close wanted /missing person details ?	To close wanted / missing file.



# PRISON SYSTEM

[ABOUTUS](#)[FAQ](#)[SIGNIN](#)[BANGALORE MAP](#)[CITIZEN SIGNUP](#)

Sign In Crime ▾

Email Id

Password

[Signin](#) [Reset](#)

[Forgot password ?](#)



# PRISON SYSTEM

[ABOUTUS](#)[FAQ](#)[SIGNIN](#)[BANGALORE MAP](#)[CITIZEN SIGNUP](#)

Citizen Signup or Register

Aadhar Card no

Full Name

Address

Gender

☐ M ☐ F

Mobile No

Email id

SURYA@GMAIL.COM

Password




# PRISON SYSTEM

[PROFILE](#)[WANTED](#)[MISSING PERSON](#)[FIR](#)[ADD CRIME DATA](#)[UPDATE STATUS](#)[SIGNOUT](#)

# PRISON SYSTEM

[FILE COMPLAINT](#)[VIEW FILED COMPLAINTS](#)[SIGNOUT](#)


Name	<input type="text"/>
Alias Name	<input type="text"/>
Gender	<input type="text"/>
Booked for	<input type="text"/>
Date of Booking	<input type="text" value="dd-mm-yyyy"/> 
Case booked by	<input type="text"/>
Case Reg at	<input type="text"/>
Photo	<input type="button" value="Choose File"/> No file chosen
Email id	<input type="text" value="SURYA@GMAIL.COM"/>
<input type="button" value="Submit"/> <input type="button" value="Reset"/>	



### Complaints Filed DETAILS

Id	CName	AliasName	Gender	Bookedfor	dateofBooking	Casebookedby	Caseregat	Photo	email	status
1003	jay	s	Male	murder	2022-08-30	surya	kr puram	book_left_image.jpg	SURYA@GMAIL.COM	PROGRESS

[Home](#)

FIR Id	<input type="text"/>
Name	<input type="text"/>
Alias Name	<input type="text"/>
Booked for	<input type="text"/>
Date of Booking	<input type="text" value="dd-mm-yyyy"/> 
Case booked by	<input type="text"/>
Case Register at	<input type="text" value="rajajinagar"/>
Gender	<input type="text"/>
Convicted Charge	<input type="text"/>
Prision	<input type="text"/>
Convicted for	<input type="text"/>
Photo	<input type="button" value="Choose File"/> No file chosen
CELL NO	<input type="text"/>
<input type="button" value="Submit"/> <input type="button" value="Reset"/>	



© CanStockPhoto.com - csp44387065

## TEST CASES

**Admin Module Test cases:**

Case number	Test case	Given input	Expected Output	Actual Outut	Remarks
1	Admin Login	Enter Valid details	Admin Login should be successful	Admin Login is successful	Pass
2	Admin login	Enter invalid details	Error message should be displayed	Error message displayed	pass

**Citizen Module Test cases:**

Case number	Test case	Given input	Expected Output	Actual Outut	Remarks
1	Citizen Login	Enter Valid details	User Login should be successful	User Login is successful	Pass
2	Citizen login	User invalid details	Error message should be displayed	Error message displayed	pass

## **Conclusion & Future Enhancements**

The Software developed is found to be working efficiently and effectively. It results irregular and timely action against crime reported. It can be observed that the information can be obtained easily and accurately. The Software is made user friendly to the maximum so that any lay man can run the software provided he could access to the system via the login password. It believes that partnership work is highly beneficial to the organization and that partnership work is the way forward to reduce crime and disorder. Hence, we wish to remind that its culture should fully endorse partnership work; we urge to ensure the attention they require.

In future we can use photo reorganization instead of using heterogeneous database more over High speed, accuracy and non-redundant data are the main advantages of the proposed system. In the proposed system the user is provided with a choice of data screen, which are similar in formats to the source documents. Data entry errors can be minimized through validity checks. After the verification only the data are placed the permanent database. The software can be developed further to include a lot of modules because the proposed system is developed on the view of future, for example we should develop the system as a database independent using so we can connect it to any other database, Now the proposed system is based on PC and intranet but in the future if we need to convert it into internet then we need to change the front end only because we are developing this on the basis of OOP technology and most of the business logic's are bounded in the class files and module like reusable components.

In future we can use photo reorganization instead of using heterogeneous database more over High speed, accuracy and non-redundant data are the main advantages of the proposed system. In the proposed system the user is provided with a choice of data screen, which are similar in formats to the source documents. Data entry errors can be minimized through validity checks. After the verification only the data are placed the permanent database. The software can be developed further to include a lot of modules because the proposed system is developed on the view of future, for example we should develop the system as a database independent using so we can connect it to any other database, Now the proposed system is based on PC and intranet but in the future if we need to convert it into internet then we need to change the front end only because we are developing this on the basis of OOP technology and most of the business logic's are bounded in the class files and module like reusable components.



## **Bibliography**

- Gediminas Adomavicius and Alexander Tuzhilin. Toward the next generation of recommender systems: A survey of the state-of-the-art and possible extensions. Knowledge and Data Engineering, IEEE Transactions on, 17(6):734–749, 2005.
- Ricardo Baeza-Yates, Berthier Ribeiro-Neto, et al. Modern information retrieval, volume 463. ACM press New York, 1999.
- Suvir Bhargava. Efficient features for movie recommendation systems. 2014.
- Robin Burke. Hybrid recommender systems: Survey and experiments. User modeling and user-adapted interaction, 12(4):331–370, 2002.
- Xu Hailing, Wu xiao, Li Xiaodong, and Yan Baoping. Comparison study of internet recommendation system. Journal of Software, 20(2):350–362, 2009.
- Thomas Hofmann and Jan Puzicha. Latent class models for collaborative filtering. In IJCAI, volume 99, pages 688–693, 1999.

#### **web refernces:**

- 1. [www.mysql.com](http://www.mysql.com)
- 2. [www.programmingknowlwdge.com](http://www.programmingknowlwdge.com)
- 3. [www.softwareconcepts/testing/](http://www.softwareconcepts/testing/)
- 4. [www.wikipedia.com](http://www.wikipedia.com)
- 5. [www.google.com](http://www.google.com)