

**A DISSERTATION REPORT ON**

**SENTIMENT ANALYSIS USING ORIGINAL AND  
REVERSED REVIEWS**

SUBMITTED TO THE SAVITRIBAI PHULE PUNE UNIVERSITY, PUNE  
IN PARTIAL FULFILLMENT OF THE REQUIREMENTS  
FOR THE AWARD OF THE DEGREE OF

**MASTER OF ENGINEERING (Computer Engineering)**

**BY**

Kaushik S. Hande

Exam No:

**Under The Guidance of**

Prof. A. G. Phakatkar



**DEPARTMENT OF COMPUTER ENGINEERING  
PUNE INSTITUTE OF COMPUTER TECHNOLOGY  
Sr. No. 27, Pune Satara Road, Dhankawadi  
Pune 411043**

**PUNE INSTITUTE OF COMPUTER TECHNOLOGY**



## **DEPARTMENT OF COMPUTER ENGINEERING**

### **CERTIFICATE**

This is to certify that the dissertation entitled

#### **“SENTIMENT ANALYSIS USING ORIGINAL AND REVERSED REVIEWS”**

Submitted by

Kaushik S. Hande

Exam No:

is a bonafide work carried out by him under the supervision of Prof. A. G. Phakatkar and it is submitted towards the partial fulfillment of the requirement of Savitribai Phule Pune University, for the award of the degree of Master of Engineering (Computer Engineering)

Prof. A. G. Phakatkar  
Internal Guide  
Dept. of Computer Engg.  
PICT, Pune-43

Dr. Rajesh Ingle  
H.O.D  
Dept. of Computer Engg.  
PICT, Pune-43

Dr. P. T. Kulkarni  
Principal  
PICT, Pune-43

## ACKNOWLEDGEMENT

*It gives me great pleasure in presenting the dissertation report for my dissertation on “**SENTIMENT ANALYSIS USING ORIGINAL AND REVERSED REVIEWS**”.*

*I would like to take this opportunity to thank my internal guide **Dr. A. S. Ghotkar** for giving me all the help and guidance I needed. I am really grateful to them for their kind support throughout the analysis and design phase. Their valuable criticism and suggestions were very helpful.*

*I am grateful to **Dr. Rajesh B. Ingle**, Head of Computer Engineering Department, Pune Institute of Computer Technology for his indispensable support, priceless suggestions and for most valuable time lent as and when required.*

*In the end my special thanks to **Mr. Hrushikesh Kasar** for providing various resources such as well-equipped lab with all needed software platforms, continuous Internet connection, for my dissertation work.*

Kaushik S. Hande

(M.E. Computer Engg.)

# List of Figures

6.1	Task Network . . . . .	23
6.2	Timeline Chart . . . . .	24
7.1	Use Case : Candidate Registration . . . . .	32
7.2	Use Case : Candidate Data Download . . . . .	32
7.3	Use Case : Candidate Comparison . . . . .	33
7.4	Use Case : Candidate Profiling . . . . .	33
7.5	Use Case : Overall System . . . . .	34
7.6	Activity Diagram . . . . .	36
7.7	Level 0 DFD . . . . .	37
7.8	Level 1 DFD . . . . .	37
7.9	Level 2 DFD . . . . .	38
7.10	Sequence Diagram . . . . .	38
8.1	Proposed System Architecture . . . . .	42
8.2	Class Diagram . . . . .	43
8.3	Component Diagram . . . . .	44
8.4	Deployment Diagram . . . . .	45
9.1	Sample matrix creation with word counts . . . . .	52
9.2	Sample matrix creation with tf-idf . . . . .	52
9.3	Review classification with negative and positive percentages . . . . .	53
11.1	Classifiers accuracy score comparison . . . . .	57
A.1	IJIRCCE Certificate . . . . .	66

A.2 cPGCON Certificate . . . . .	67
----------------------------------	----

# List of Tables

4.1	Literature Survey . . . . .	12
4.2	Literature Survey . . . . .	13
6.1	Risk Table . . . . .	19
6.2	Risk Probability Definitions . . . . .	20
6.3	Risk Impact Definitions . . . . .	20
6.4	Risk 1 . . . . .	20
6.5	Risk 2 . . . . .	21
6.6	Risk 3 . . . . .	21
7.1	Use Cases . . . . .	31
9.1	Polarity Training Dataset . . . . .	51
11.1	Unigram Features Results . . . . .	56
11.2	Bigram Features Results . . . . .	56
11.3	Trigram Features Results . . . . .	56
B.1	Dissertation Task Set . . . . .	70

## **ABSTRACT**

Bag of words is used for modeling in machine learning algorithms. However, BOW is not able to handle negation well because of its fundamental deficiencies . Many ways are used to handle the problem of negation which results into polarity shift . They require either knowledge about language constructs or extra human interventions which eventually increases the complexity. In this paper, a data expansion technique, called dual sentiment analysis (DSA), is used to address the polarity shift problem due to negation in sentiment classification. Original and reversed training reviews are used for learning in a sentiment classifier and prediction is done on test reviews.

# INDEX

<b>1</b>	<b>SYNOPSIS</b>	<b>1</b>
1.1	Dissertation Title . . . . .	2
1.2	Internal Guide . . . . .	2
1.3	Problem Statement . . . . .	2
1.4	Objectives . . . . .	2
1.5	Hypothesis . . . . .	2
1.6	Relevant Mathematics Associated with Dissertation . . . . .	2
1.6.1	Mathematical Model . . . . .	2
1.6.2	Metrics for Performance Evaluation . . . . .	3
<b>2</b>	<b>TECHNICAL KEYWORDS</b>	<b>5</b>
2.1	Area of Dissertation . . . . .	6
2.2	ACM Keywords . . . . .	6
<b>3</b>	<b>INTRODUCTION</b>	<b>7</b>
3.1	Dissertation Idea . . . . .	8
3.2	Motivation of Dissertation . . . . .	9
<b>4</b>	<b>LITERATURE SURVEY</b>	<b>10</b>
4.1	Sentiment Analysis and Polarity Shift . . . . .	11
4.2	Gap Identification Through Literature Survey . . . . .	11
<b>5</b>	<b>PROBLEM DEFINITION AND SCOPE</b>	<b>14</b>
5.1	Goals . . . . .	15
5.2	Objectives . . . . .	15



5.3	Statement of Scope . . . . .	15
5.4	Software Context . . . . .	15
5.4.1	Scikit-learn . . . . .	15
5.4.2	NumPY . . . . .	16
5.4.3	Natural language toolkit . . . . .	16
5.4.4	Matplotlib . . . . .	16
<b>6</b>	<b>DISSERTATION PLAN</b>	<b>17</b>
6.1	Purpose of the Document . . . . .	18
6.2	Technical Constraints . . . . .	18
6.3	Dissertation Estimates . . . . .	18
6.3.1	Reconciled Estimates . . . . .	18
6.4	Risk Management . . . . .	18
6.4.1	Risk Identification . . . . .	19
6.4.2	Risk Analysis . . . . .	19
6.4.3	Overview of Risk Mitigation, Monitoring and Management	20
6.5	Staff Organization . . . . .	21
6.5.1	Team Structure . . . . .	21
6.5.2	Management Reporting and Communication . . . . .	21
6.5.3	Dissertation Task Set . . . . .	22
6.5.4	Task Network . . . . .	22
6.5.5	Timeline Chart . . . . .	23
<b>7</b>	<b>SOFTWARE REQUIREMENT SPECIFICATION</b>	<b>25</b>
7.1	Introduction . . . . .	26
7.2	Purpose and Scope of the Document . . . . .	26
7.3	Overview of Responsibilities of Developer . . . . .	26
7.4	Product Overview . . . . .	26
7.5	Hardware Resources Used . . . . .	27
7.5.1	Software Requirements . . . . .	27
7.5.2	Hardware Requirements . . . . .	27
7.6	Functionality . . . . .	28

7.7	Input . . . . .	28
7.8	Output . . . . .	28
7.9	Major Constraints . . . . .	28
7.10	Applications . . . . .	28
7.11	Usage Scenario . . . . .	29
7.11.1	User Profiles . . . . .	29
7.11.2	Use Cases . . . . .	31
7.11.3	Use Case Views . . . . .	32
7.12	Model and Description . . . . .	35
7.12.1	Activity Diagram . . . . .	35
7.13	Functional Model and Description . . . . .	36
7.13.1	Data Flow Diagram . . . . .	37
7.13.2	Sequence Diagram . . . . .	38
7.14	Non-Functional Requirements . . . . .	39
7.14.1	Availability . . . . .	39
7.14.2	Scalability . . . . .	39
7.14.3	Performance . . . . .	39
7.14.4	Usability . . . . .	39
7.14.5	Reliability . . . . .	39
7.14.6	Maintainability and Changeability . . . . .	39
<b>8</b>	<b>DETAILED DESIGN DOCUMENT</b>	<b>40</b>
8.1	Introduction . . . . .	41
8.2	Architectural Design . . . . .	42
8.3	Class Design . . . . .	43
8.4	Component Design . . . . .	44
8.5	Deployment Design . . . . .	45
<b>9</b>	<b>IMPLEMENTATION DETAILS</b>	<b>46</b>
9.1	Introduction . . . . .	47
9.2	Algorithm . . . . .	47
9.2.1	Document Classification . . . . .	47

9.2.2	Candidate Profiling . . . . .	47
9.3	Modules . . . . .	49
9.3.1	Candidate's Tweets Fetched From Twitter . . . . .	49
9.3.2	Document Classification . . . . .	50
9.3.3	Web Application . . . . .	50
9.4	Dataset . . . . .	51
9.5	Snapshots . . . . .	52
<b>10</b>	<b>TEST SPECIFICATION</b>	<b>54</b>
<b>11</b>	<b>DATA TABLES AND DISCUSSIONS</b>	<b>55</b>
<b>12</b>	<b>CONCLUSION</b>	<b>58</b>
<b>13</b>	<b>FUTURE ENHANCEMENTS</b>	<b>60</b>
<b>14</b>	<b>REFERENCES</b>	<b>62</b>
<b>A</b>	<b>PAPERS PUBLISHED</b>	<b>65</b>
A.1	Paper Title . . . . .	66
A.1.1	IJIRCCE Certification . . . . .	66
A.2	Paper Title . . . . .	66
A.2.1	cPGCON Certificate . . . . .	67
A.2.2	cPGCON Review . . . . .	68
<b>B</b>	<b>DISSERTATION PLANNER</b>	<b>69</b>

# **CHAPTER 1**

## **SYNOPSIS**

## **1.1 DISSERTATION TITLE**

SENTIMENT ANALYSIS USING ORIGINAL AND REVERSED REVIEWS

## **1.2 INTERNAL GUIDE**

Prof. A. G. Phakatkar

## **1.3 PROBLEM STATEMENT**

”To make use of the original and reversed review samples in pairs for training a statistical classifier and make predictions.”

## **1.4 OBJECTIVES**

- To obtain reversed reviews from each corresponding original reviews.
- To train the classifiers using these reviews.
- To obtain the predictions of labels(positive review or negative review) for test data.

## **1.5 HYPOTHESIS**

Polarity shift causes accuracy of classifier to decrease. We assume that original review and corresponding opposite review can be used together to increase the accuracy of review class label prediction and to avoid the problem caused due to polarity shift.

## **1.6 RELEVANT MATHEMATICS ASSOCIATED WITH DISSERTATION**

### **1.6.1 Mathematical Model**

$$S = \{s, e, I, O, f_{main} | \phi\}$$

where,

s = start state

e = end state

I = Inputs to the system

$$I = \{x, x', y, y', D, D'\}$$

where,

x = original sample

x' = reversed sample

$y \in \{0, 1\}$  = The class label of the original sample

$y' = 1 - y$  = The class label of the reversed sample

$D = (x_i, y_i)_{i=1}^n$  = original training set

$D' = (x'_i, y'_i)_{i=1}^n$  = The reversed training set

O = Output

$$O = \{p(x), p(x'), p(x, x')\}$$

where

$p(x)$  = Prediction for the original sample

$p(x')$  = Prediction for the reversed sample

$p(x, x')$  = Dual prediction based on a pair of sample

$$f_{main} = \{f_{reverse}, f_{classifier}\}$$

$f_{reverse}$  = function for reversing the corresponding each review

$f_{classifier}$  = classifier for the prediction of class of review

### 1.6.2 Metrics for Performance Evaluation

Several statistical measures are used for performance evaluation -

- Accuracy-is the proximity of measurement results to the true value.

$$\frac{TP + TN}{TP + TN + FP + FN} \quad (1.1)$$

- Sensitivity- measures the proportion of positives that are correctly identified

$$\frac{TP}{TP + FN} \quad (1.2)$$

- Specificity- measures the proportion of negatives that are correctly identified

$$\frac{TN}{TN + FP} \quad (1.3)$$

- Positive predictive value- are the proportions of positive results in statistics and diagnostic tests

$$\frac{TP}{TP + FP} \quad (1.4)$$

- Negative predictive value- are the proportions of negative results in statistics and diagnostic tests

$$\frac{TN}{TN + FN} \quad (1.5)$$

## **CHAPTER 2**

### **TECHNICAL KEYWORDS**



## **2.1 AREA OF DISSERTATION**

Natural language processing, machine learning, sentiment analysis, opinion mining.

## **2.2 ACM KEYWORDS**

### **A Information Systems**

#### **A.1 Information Retrievals**

##### **A.1.1 Retrieval tasks and goals**

###### **A.1.1.1 Sentiment analysis**

###### **A.1.1.2 Clustering and classification**

### **B Computing methodologies**

#### **B.1 Machine learning**

##### **B.1.1 Supervised learning by classification**

###### **B.1.1.1 Multinomial Naive Bayes**

###### **B.1.1.2 Random Forest**

###### **B.1.1.3 Support Vector Machines**

## **CHAPTER 3**

### **INTRODUCTION**

### 3.1 DISSERTATION IDEA

Sentiment is an attitude, thought, or judgement prompted by feeling. Sentiment analysis is also known as opinion mining, it involves studying of people's sentiments towards certain entities. Internet is a resourceful place with respect to sentiment information. From a perspective of a user, people are able to express their views through various social media, such as forums, micro-blogs, or online social networking sites.

With the advent of Web 2.0 techniques, users started preferring to share their opinions on the Web. These user-generated and sentiment-rich data are valuable to many applications like credibility analysis of news sites on the Web, recommendation system, business and government intelligence etc. At the same time, it brings urgent need for detecting overall sentiment inclinations of documents generated by users, which can be treated as a classification problem. Sentiment analysis includes several subtasks which have seen a great deal of attention in recent years:

1. To detect whether a given document is subjective or objective.
2. To Identify whether given subjective document express a positive opinion or a negative opinion.
3. To determine the sentiment strength of a document, such as strongly negative, weakly negative, neutral, weakly positive and strongly positive.

In this work we are focusing on second subtask.

Besides individuals on social media marketers also need to monitor all media for information related to their brands whether its for public relations activities, fraud violations, or competitive intelligence. Thus, aside from individuals, sentiment analysis is also the need of companies which are anxious to understand how their products and services are perceived by the public.

The dominating text representation method in both supervised and semi supervised sentiment classification is known as the bag-of-words (BOW) model, which is difficult to meet the requirements for understanding the review text and dealing with complex linguistic structures such as negation. For example, the BOW representations of two opposite reviews "It works well" and "It doesn't work well" are considered to be very similar by most statistical learning algorithms. The two sentiment

opposite texts are considered to be very similar by the BOW representation. This is exactly why standard machine learning algorithms often fail under the circumstance of polarity shift due to negation in the sentences of the review text.

Several approaches have been proposed in the literature to address the polarity shift problem. They require either knowledge about language constructs or extra human interventions which eventually increases the complexity in classification of sentiment. Such high-level dependency on external resources makes the systems difficult to be widely used in practice. There were also some efforts to address the polarity shift problem with the absence of extra annotations and linguistic knowledge. However, results are still far from satisfactory.

### **3.2 MOTIVATION OF DISSERTATION**

Polarity shift is a kind of linguistic phenomenon which can reverse the sentiment polarity of the text. Negation is the most important type of polarity shift. For example, by adding a negation word *don't* to a positive text *I like this book* in front of the word *like*, the sentiment of the *this book* in front of the word *like*, the sentiment of the text will be reversed from positive to negative. However, the two sentiment-opposite texts are considered to be very similar by the BOW representation. This is the main reason why standard machine learning algorithms often fail under the circumstance of polarity shift.

**CHAPTER 4**

**LITERATURE SURVEY**

We studied the related work on sentiment analysis and polarity shift.

#### **4.1 SENTIMENT ANALYSIS AND POLARITY SHIFT**

According to the levels of granularity, tasks in sentiment analysis can be divided into four categorizations: document-level, sentence-level, phrase-level, and aspect-level sentiment analysis.

For document and sentence-level sentiment classification, there are two main types of methods in the literature: term-counting and machine learning methods. In term-counting methods, the overall orientation of a text is obtained by summing up the orientation scores of content words in the text, based on manually-collected or external lexical resources [38], [39]. In machine learning methods, sentiment classification is regarded as a statistical classification problem, where a text is represented by a bag-of-words; then, the supervised machine learning algorithms are applied as classifier [35]. Accordingly, the way to handle polarity shift also differs in the two types of methods.

The term-counting methods can be easily modified to include polarity shift. One common way is to directly reverse the sentiment of polarity-shifted words, and then sum up the sentiment score word by word [4], [16], [17], [37]. Compared with term counting methods, the machine learning methods are more widely discussed in the sentiment classification literatures. However, it is relatively hard to integrate the polarity shift information into the BOW model in such methods. For example, Das and Chen [6] proposed a method by simply attaching NOT to words in the scope of negation, so that in the text I dont like book, the word like becomes a new word like-NOT. Yet Pang et al. [35] reported that this method only has slightly negligible effects on improving the sentiment classification accuracy.

#### **4.2 GAP IDENTIFICATION THROUGH LITERATURE SURVEY**

The following table shows the literature survey about different techniques of sentiment analysis used for classification.

Table 4.1: Literature Survey

No.	Reference	Techniques	Description
1	Dual Sentiment Analysis: Considering Two sides of one review	Support vector machine (SVM), Naive bayes, Logistic Regression	Dual training and Dual Prediction technique is used.
2	Thumbs up?Sentiment Classification using Machine learning algorithms	Learning algorithms and n-gram model	Classify the dataset using different machine.
3	Classification of sentiment reviews using N-gram machine learning approach	Support Vector Machine Naive Bayes	Converting text reviews into numeric matrices using countvectorizer and TF-IDF
4	Thumbs up or thumbs down? Semantic orientation applied to unsupervised classification of reviews	Unsupervised learning algorithm for classifying a review	A specific unsupervised learning technique based on the mutual information
5	Automatic Opinion polarity Classification of movie	Naive Bayes And Markov Model (MM)	Accessed overall opinion polarity(OvOp) concept using machine learning algorithm
6	Dual Training and dual prediction for polarity classification	SVM and Naive Bayes	Dual training and dual prediction (DTDP)
7	A 3D Hand Tracking Design for Gesture Control in Complex Environments	3D hand tracking design	It segments hands out of entire image and also facilitates depth estimation of tracked hands in real-time by dual camera systems.
8	Hand tracking and Gesture Recognition	Kalman filter and derived Scale Invariant Feature Transform (SIFT).	It presents a method for tracking and recognizing hand gestures by extracting unique invariant features from gestures.

No.	Reference	Techniques	Description
9	Hand Position Tracking Using a Depth Image from a RGB-d Camera	RGB image based on the skin color Hand Tracking	The algorithms can be used for natural user interfaces, the guidance of the end effector of an industrial robot and hand segmentation.
10	Indian Sign Language Recognition: Database Creation, Hand Tracking and Segmentation	YcbCr based skin color model	This algorithm works on motion tracking, edge detection and skin color detection.

Table 4.2: Literature Survey



## **CHAPTER 5**

### **PROBLEM DEFINITION AND SCOPE**

## **5.1 GOALS**

- Understanding existing sentiment analysis approaches.
- Study corpus based, lexical based and semantic based techniques.
- Understanding unigram, bigram, trigram and combination of them for modeling purpose.
- Training the model with naive bayes, support vector machine, maximum entropy.
- Applying this learned model to the test dataset.
- Evaluating the results generated by classifiers.

## **5.2 OBJECTIVES**

Please refer Chapter 1, Section 1.7 on Page 2

## **5.3 STATEMENT OF SCOPE**

- Preprocessing the reviews
- Classify reviews into two polarities.
- Evaluate the classification accuracy by each classifier.

## **5.4 SOFTWARE CONTEXT**

### **5.4.1 Scikit-learn**

Scikit-learn (formerly scikits.learn) is a free software machine learning library for the Python programming language. It features various classification, regression and clustering algorithms including support vector machines, random forests, gradient boosting, k-means and DBSCAN, and is designed to interoperate with the Python numerical and scientific libraries NumPy and SciPy.

### **5.4.2 NumPY**

NumPy is the fundamental package for scientific computing with Python. It contains among other things:

- A powerful N-dimensional array object
- Sophisticated (broadcasting) functions
- Tools for integrating C/C++ and Fortran code
- Useful linear algebra, Fourier transform, and random number capabilities

Besides its obvious scientific uses, NumPy can also be used as an efficient multi-dimensional container of generic data. Arbitrary data-types can be defined. This allows NumPy to seamlessly and speedily integrate with a wide variety of databases.

### **5.4.3 Natural language toolkit**

NLTK is a leading platform for building Python programs to work with human language data. It provides easy-to-use interfaces to over 50 corpora and lexical resources such as WordNet, along with a suite of text processing libraries for classification, tokenization, stemming, tagging, parsing, and semantic reasoning, wrappers for industrial-strength NLP libraries, and an active discussion forum.

### **5.4.4 Matplotlib**

Matplotlib is a Python 2D plotting library which produces publication quality figures in a variety of hardcopy formats and interactive environments across platforms. Matplotlib can be used in Python scripts, the Python and IPython shell, the jupyter notebook, web application servers, and four graphical user interface toolkits. You can generate plots, histograms, power spectra, bar charts, errorcharts, scatterplots, etc., with just a few lines of code.

**CHAPTER 6**

**DISSERTATION PLAN**

## **6.1 PURPOSE OF THE DOCUMENT**

This document specifies and estimates various risks associated with this project and states how they are handled. It also states the project plan in terms of task and their dependency.

## **6.2 TECHNICAL CONSTRAINTS**

- To build a classification module that distributes data and execution among spark executors.
- To fetch candidate's tweets in a CSV format and store it in Alluxio.

## **6.3 DISSERTATION ESTIMATES**

### **6.3.1 Reconciled Estimates**

#### **6.3.1.1 Cost Estimates**

No cost is required for tools and software as open source softwares are used.

#### **6.3.1.2 Time Estimates**

Calendar time required: 11 months.

#### **6.3.1.3 Dissertation Resources**

- People : Single Person
- Hardware resources used are mentioned in Chapter 6, Section 6.5 on Page XX
- Software resources used are mentioned in Chapter 6, Section 6.6 on Page XX

## **6.4 RISK MANAGEMENT**

This section discusses dissertation risks and the approach to managing them.

### 6.4.1 Risk Identification

For risks identification, review of scope document, requirement specifications and schedule is done. Answers to questionnaire revealed some risks. Following risk identification questionnaire has been referred.

- Are requirements fully understood by the software engineering team and its customers?
- Have customers been involved fully in the definition of requirements?
- Do end-users have realistic expectations?
- Does the software engineering team have the right mix of skills?
- Are project requirements stable?
- Is the number of people on the project team adequate to do the job?
- Do all customer/user constituencies agree on the importance of the project and on the requirements for the system/product to be built?

### 6.4.2 Risk Analysis

The risks for the dissertation are analyzed within the constraints of time and quality. Risk can be as follows:

- Out of memory error, while creating model and training the model.
- Review text contains unrecognized characters.
- Out of memory error, while predicting on the test dataset.

Please refer Table 6.1, 6.2 and 6.3 for detail description.

Table 6.1: Risk Table

ID	Risk Description	Probability	Impact		
			Schedule	Quality	Overall
1	Out of Memory	High	Low	High	High
2	Unrecognized characters	Low	Medium	High	Medium
3	Out of Memory	Low	Medium	High	High

Table 6.2: Risk Probability Definitions

Probability	Value	Description
High	Probability of the occurrence is	>75%
Medium	Probability of the occurrence is	26% - 74%
Low	Probability of the occurrence is	25%

Table 6.3: Risk Impact Definitions

Impact	Value	Description
Very High	>10%	Schedule impact or Unacceptable quality
High	5%-10%	Schedule impact or Some parts of the project have low quality
Low	<5%	Schedule impact or Barely noticeable degradation in quality Low Impact on schedule or Quality can be incorporated

#### 6.4.3 Overview of Risk Mitigation, Monitoring and Management

Please refer Table 6.4, 6.5 and 6.6 for detail description.

Table 6.4: Risk 1

<b>Risk ID</b>	1
<b>Risk Description</b>	Out of memory error, when training Model
<b>Category</b>	Configuration
<b>Source</b>	Software Requirement Specification Document
<b>Probability</b>	High
<b>Impact</b>	High
<b>Response</b>	Mitigate
<b>Strategy</b>	Changing number of features resolves this issue.
<b>Risk Status</b>	Occurred and Resolved

Table 6.5: Risk 2

<b>Risk ID</b>	2
<b>Risk Description</b>	Unreconized characters
<b>Category</b>	Configuration
<b>Source</b>	Software Requirement Specification Document
<b>Probability</b>	Low
<b>Impact</b>	Low
<b>Response</b>	Mitigate
<b>Strategy</b>	Convert all characters into unicode format
<b>Risk Status</b>	Occurred and Resolved

Table 6.6: Risk 3

<b>Risk ID</b>	3
<b>Risk Description</b>	Out of memory error, when predicting
<b>Category</b>	Development Environment
<b>Source</b>	Software Requirement Specification Document
<b>Probability</b>	Low
<b>Impact</b>	Low
<b>Response</b>	Mitigate
<b>Strategy</b>	Using sparse matrix to represent text
<b>Risk Status</b>	Occurred and Resolved

## 6.5 STAFF ORGANIZATION

### 6.5.1 Team Structure

- Internal Guide : Prof. A. G. Phakatkar
- Student : Kaushik S. Hande

### 6.5.2 Management Reporting and Communication

The progress of dissertation is reported once in a month.



### **6.5.3 Dissertation Task Set**

Major tasks in the Dissertation stages are -

Task 1 : Requirement

1. Define problem statement
2. Identify scope, requirements
3. Related mathematical model

Task 2 : Design

1. Identifying of key objects, functional relation
2. UML diagrams and functional dependency graph
3. System design

Task 3 : Implementation

1. Import dataset
2. Classifier implementation
3. Comparison using graphs

Task 4 : Testing

1. Unit testing
2. Integration testing
3. System testing

Task 5 : Integration and Maintenance

1. Integration
2. Maintenance

Please refer figure 6.1 Task Network.

### **6.5.4 Task Network**

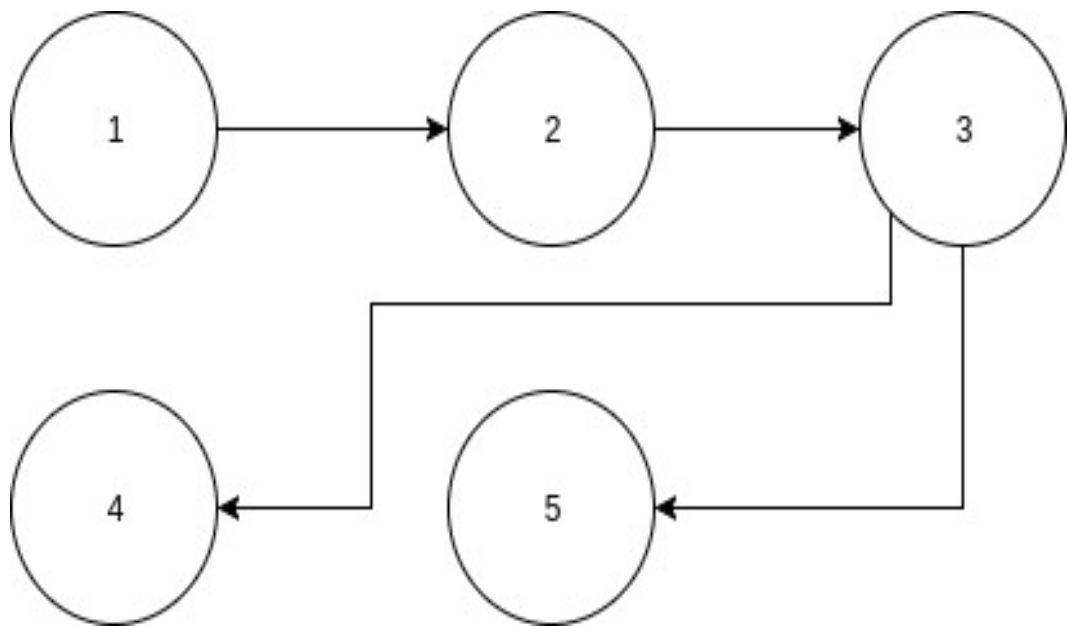


Figure 6.1: Task Network

#### 6.5.5 Timeline Chart

Please refer Annexure B, Table B.1 on Page 66 for all Dissertation Tasks.

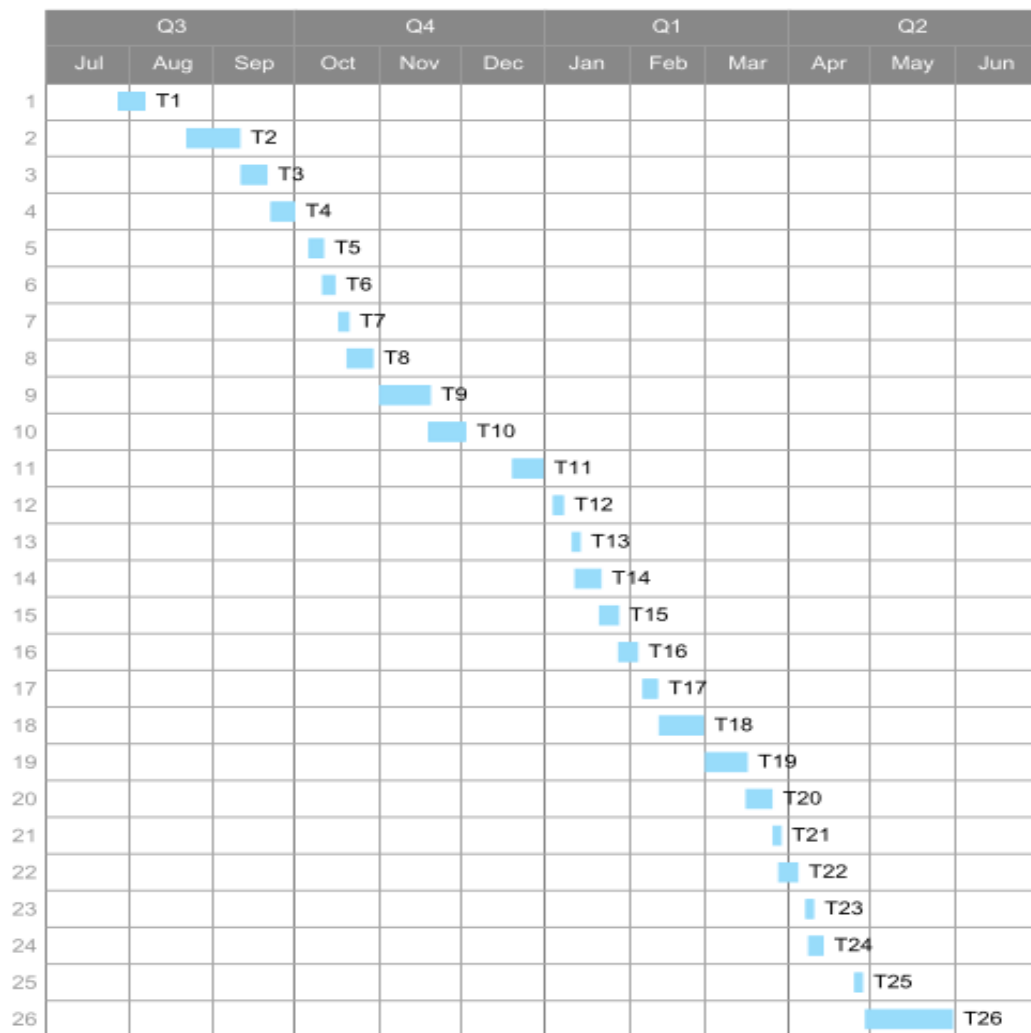


Figure 6.2: Timeline Chart

**CHAPTER 7**

**SOFTWARE REQUIREMENT**

**SPECIFICATION**

## **7.1 INTRODUCTION**

The aim of this document is to specify the software requirements for classification of movie reviews.

## **7.2 PURPOSE AND SCOPE OF THE DOCUMENT**

The purpose of the document is to enlist various software requirements to build the system. This document has functional and non-functional requirements for the software being developed.

## **7.3 OVERVIEW OF RESPONSIBILITIES OF DEVELOPER**

The responsibilities of a developer includes gathering of information about the classification libraries, that can be used to design and develop the system to categorize movie reviews. The developers responsibilities include:

- Planning for dissertation (Scheduling)
- Designing of system (High Level Design Document)
- Coding of system (Implementation)
- Testing of system (Test Cases)

## **7.4 PRODUCT OVERVIEW**

System builds classifier models for classification of reviews. Different functionality of the system are :

- Review loader : It loads the reviews into python environment.
- Stopwords remover : It removes the stopwords like the words is, a, an, the, was, were etc.
- Vectorizer : It converts the reviews into matrix of rows and columns where columns represents the words and rows represents each reviews. Presence of particular word in a review is shown by the values in the columns.
- Classifier : It classifies the reviews into positive and negative review.

## **7.5 HARDWARE RESOURCES USED**

### **7.5.1 Software Requirements**

- Python 2.7.6
- Rstudio Version 0.99.893
- R version 3.3.2
- Operating Systems:
  - Windows XP, 7, 8, 10
  - Linux(Any flavor)
  - Mac OS

### **7.5.2 Hardware Requirements**

- Intel(R) Core(TM) i3 CPU @ 2.90GHz or later, width : 64 bits
- Memory : 4 GB DDR3 or more
- Capacity : 1697MHz or more
- Cores : 4 or more
- PCI Express Gigabit Ethernet Controller, Size: 100Mbit/s, Capacity: 1Gbit/s, Width: 64 bits
- Hard Disk : 500 GB (EXT4 Primary/Logical Partition)

## **7.6 FUNCTIONALITY**

- Download movie reviews from imDb dataset.
- Import the moview review dataset into python environment using csv package.
- Convert the text reviews into matrix form.
- Remove the stopwords from reviews.
- Show positive and negative polarity score for test reviews.
- Compare classifiers for accuracy of classification.

## **7.7 INPUT**

- Dataset that consists of movie reviews and their corresponding labels.
- List of stopwords which play no role in classification.

## **7.8 OUTPUT**

- Classification of each test review into positive or negative.
- Percentage of accuracy achieved in classification.
- Comparison of accuracies obtained by each classifier.

## **7.9 MAJOR CONSTRAINTS**

- To store movie reviews as input in csv file format.
- To execute classifiers in configured environment.
- To train the model for polarity classification.

## **7.10 APPLICATIONS**

- Businesses and organisations which require consumer opinions to do with products they market and services they produce.

- Individuals who make decisions to purchase products or services based upon word of mouth or on-line reviews, or to find public opinion, e.g. concerning politics or local issues.
- On-line advertising where in social media, an organisation may place an advertisement in response to a favourable review of a product, or a rival product could be advertised upon receipt of a bad review
- Opinion retrieval for general searches of opinions
- HR Analytics.

## 7.11 USAGE SCENARIO

A use case represents a particular functionality of a system. Hence, use case diagram is used to describe the relationships among the functionalities and their internal/external actors. This section provides various usage scenarios for the system to be developed.

### 7.11.1 User Profiles

Actors of the system are Candidate, Product Administrator, Storage System, Database System and Web Interface.

- **Candidate** : Actor registers for a specific organization giving twitter URL and other details to Database using Web Interface.
- **Product Administrator** : Actor manages registers candidates, downloads tweets of a candidate, manages several behavioral assessment tests, profiles and compares candidates.
- **Storage System** : Actor stores tweets of candidates downloaded by Product Administrator.
- **Database System** : Actor stores emotional, polarity scores and other details of candidates.
- **Web Interface** : Actor displays candidate's emotional and polarity graphs according to year, month and day. It also allows Product Admin to download



candidate's data and manage behavioral assessment tests.

### 7.11.2 Use Cases

Table 7.1 gives Use Cases for system to be developed.

Table 7.1: Use Cases

Sr. No.	Use Case	Descriptions	Actors	Assumptions
1	Candidate Registration	Candidate has to registers for a specific organization giving necessary details and saved to Database.	Candidate, Database System	Provided details are correct
2	Candidate Data Download	Product Admin fetches candidate's details from database, Extract screen name from Twitter URL, downloads candidate's data and store it in storage system.	Candidate, Database System, Storage System, Product Admin	Data is downloaded properly.
3	Candidate Comparison	Product Admin chooses two candidates for comparison based on emotional and polarity values.	Candidate, Database System, Product Admin, Web Interface	Comparison between two candidates are shown in the form of graph.
4	Candidate Profiling	Candidate are profiled based on set of rules defined by Product Admin.	Candidate, Database System, Product Admin, Web Interface	Profile results are displayed in the form of column graph.
5	System	Overall system description	Candidate, Product Admin, Database System, Web Interface, Storage System	System is functional

### 7.11.3 Use Case Views

#### 7.11.3.1 Candidate Registration

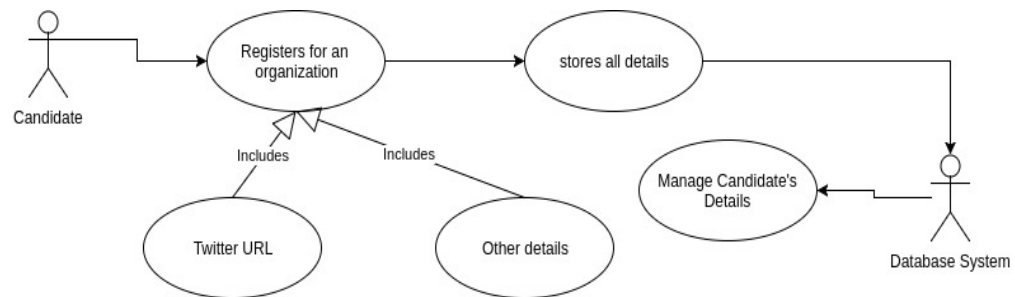


Figure 7.1: Use Case : Candidate Registration

#### 7.11.3.2 Candidate Data Download

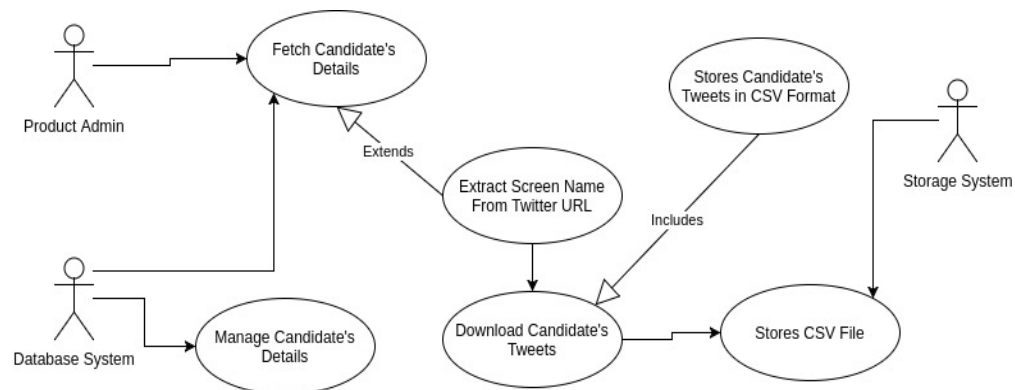


Figure 7.2: Use Case : Candidate Data Download

### 7.11.3.3 Candidate Comparison

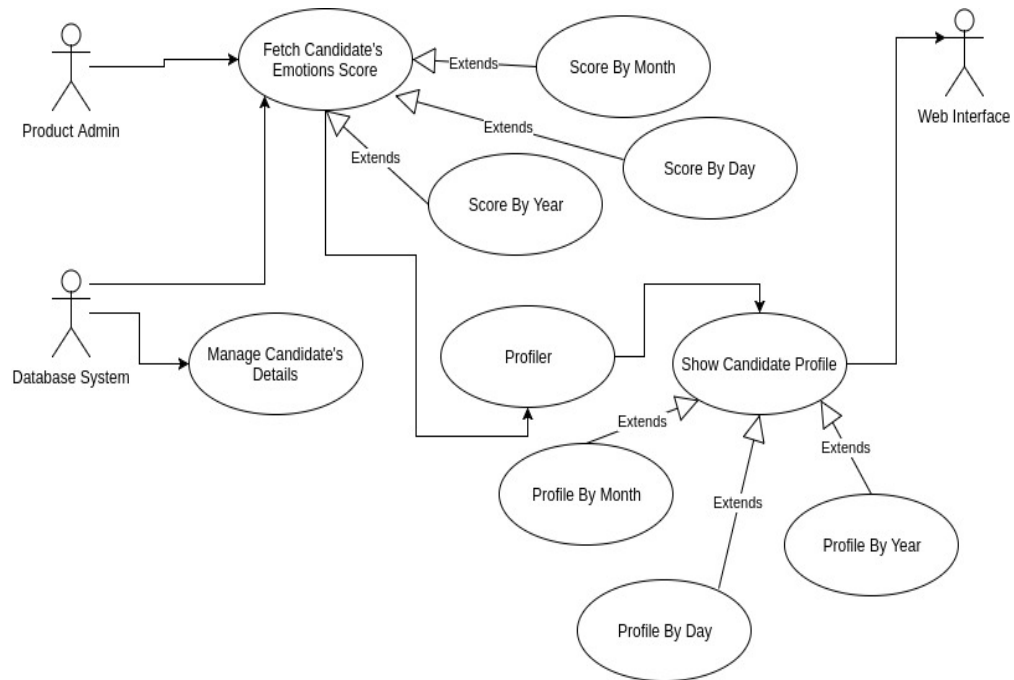


Figure 7.3: Use Case : Candidate Comparison

### 7.11.3.4 Candidate Profiling

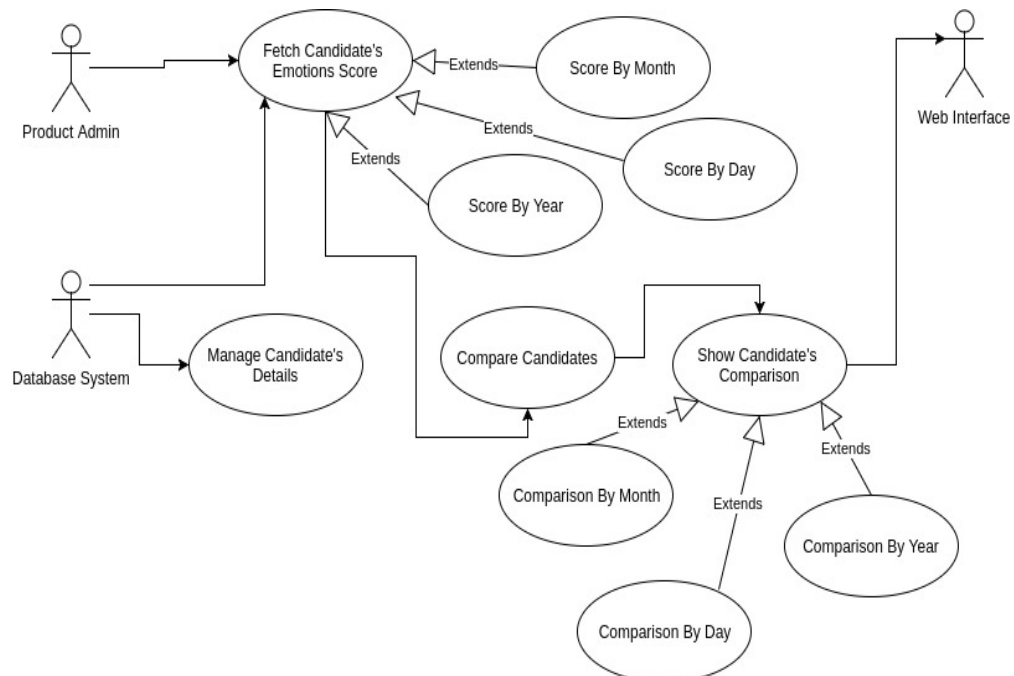


Figure 7.4: Use Case : Candidate Profiling

### 7.11.3.5 System Use Case

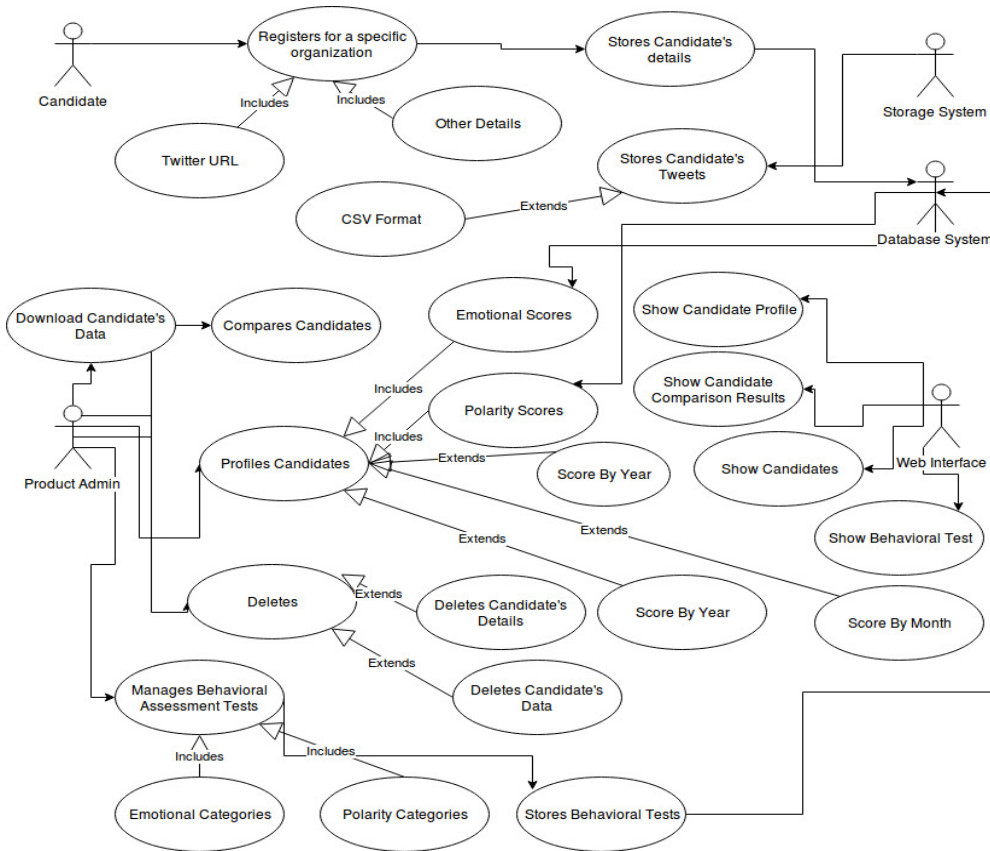


Figure 7.5: Use Case : Overall System

## 7.12 MODEL AND DESCRIPTION

This section contains details about events and associated behaviour of the system which is shown using diagram below.

### 7.12.1 Activity Diagram

Activity diagram is a flow chart to represent the flow from one activity to another activity. The activity can be described as an operation of the system. The control flow is drawn from one operation to another. This flow can be sequential, branched or concurrent. The purpose of activity diagrams is to capture the dynamic behaviour of the system.

**Description :** As shown in figure 8.6, User downloads movie dataset. This dataset is added for processing using csv import library. Documents are preprocessed to remove stopwords and reviews are converted into matrix. Classifiers are trained after feature extraction. This trained classifiers are used on test dataset to classify.

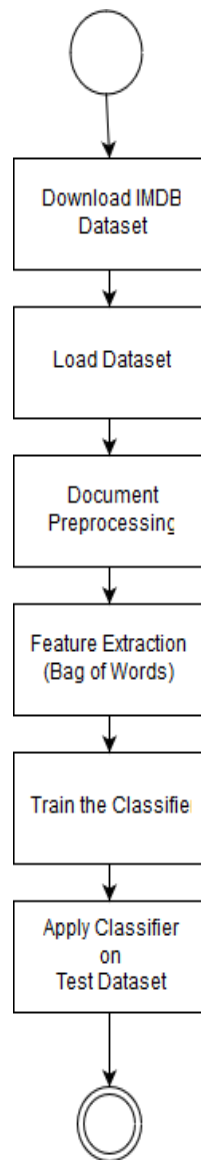


Figure 7.6: Activity Diagram

### 7.13 FUNCTIONAL MODEL AND DESCRIPTION

This section describes data flow diagrams (DFD) of the proposed system. There are three types of DFDs explained in the section. These diagrams explain the system in brief.

### 7.13.1 Data Flow Diagram

#### 7.13.1.1 Level 0 Data Flow Diagram

In the level 0 DFD as shown in figure 7.7, Downloaded reviews are loaded in sentiment analysis system. The system analyzes and presents report through charts to user




Figure 7.7: Level 0 DFD

#### 7.13.1.2 Level 1 Data Flow Diagram

In the level 1 DFD as shown in figure 7.8, Reviews are loaded through csv file loader. Data is preprocessed and model is created. Analysis done by the system is given to the user.

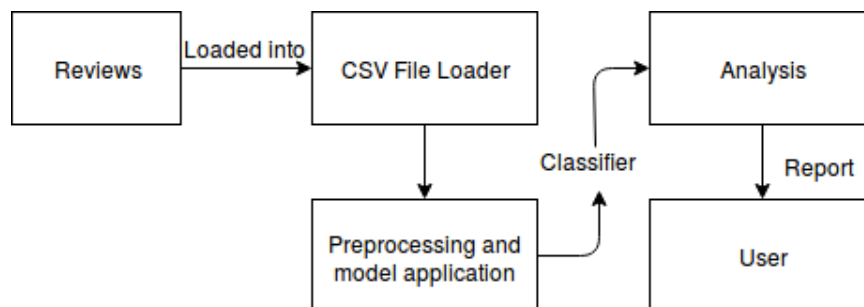


Figure 7.8: Level 1 DFD

#### 7.13.1.3 Level 2 Data Flow Diagram

In the level 2 DFD as shown in figure 7.9, Reviews are preprocessed to give bag of words features. Classifiers are trained using this model. Classification is performed on the test dataset. Detailed analysis of results obtained by classifiers is done. It is provided to the user.



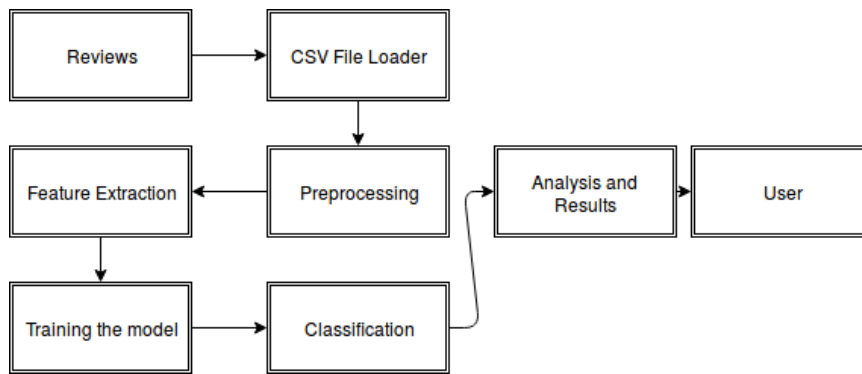


Figure 7.9: Level 2 DFD

### 7.13.2 Sequence Diagram

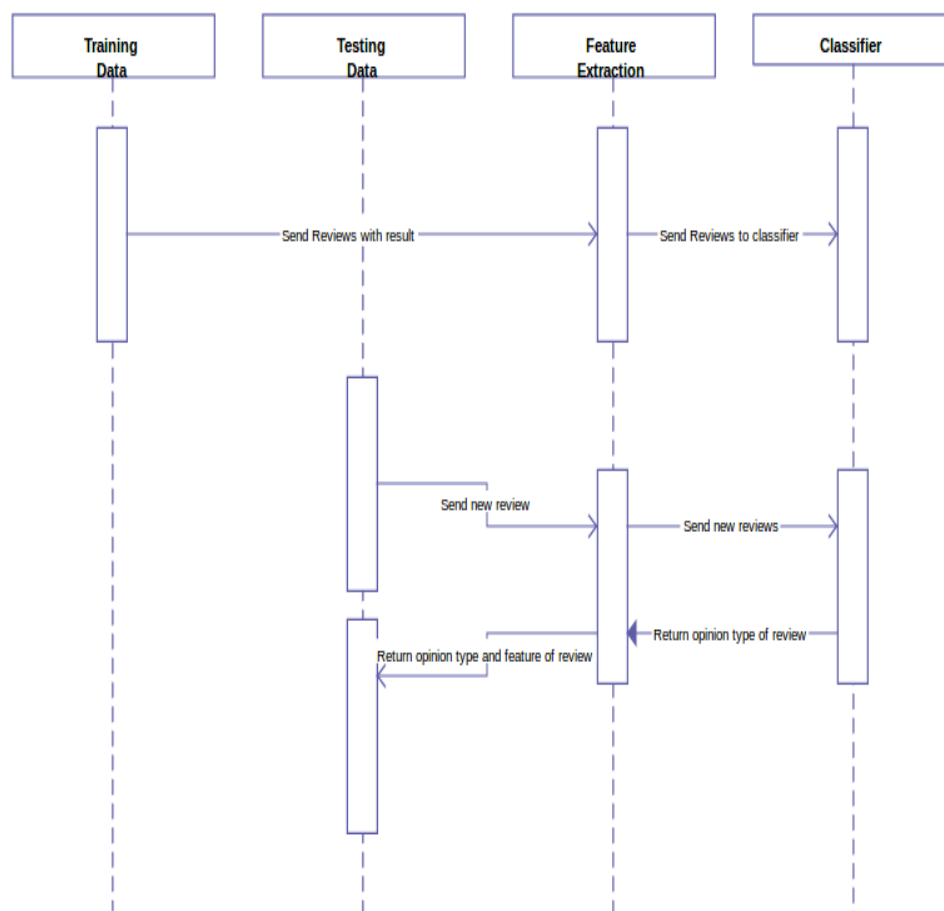


Figure 7.10: Sequence Diagram

## **7.14 NON-FUNCTIONAL REQUIREMENTS**

### **7.14.1 Availability**

Required libraries must be installed and loaded in the python environment with the required configurations. Dataset must be downloaded from specified url [17].

### **7.14.2 Scalability**

The system should be scalable to classify reviews even if the training and test data are increased. System can comfortably handle reviews dataset upto 25000 reviews.

### **7.14.3 Performance**

The system must be interactive and delays involved must be less. There should be no immediate delays for every action and response of the system. Training time increases as the training data increases. It takes 4 to 5 seconds in training the dataset. Training increases further when bigram and trigram models are used.

### **7.14.4 Usability**

The system should be easy to handle and process requests efficiently. System's functions are designed to use with ease and provide results. Results are presented in the form of graphs and are easy to comprehend.

### **7.14.5 Reliability**

The system should efficiently analyze movie reviews entirely and give correct classification result. It should be reliable to perform classification effectively on any review dataset.

### **7.14.6 Maintainability and Changeability**

The system is made up of different independent modules that can be modified to correct faults, improve performance or other attributes, or adapt to a changed environment. System can be improved for new features and will be able to include new requirements.

## **CHAPTER 8**

### **DETAILED DESIGN DOCUMENT**

## 8.1 INTRODUCTION

This document specifies the design that is used to fetch movie reviews in CSV format, classifies individual movie review into polarity categories.

- **Polarity Categories**

- Positive
- Negative

Candidate's tweets are collected and classified based on these categories. They are profiled and compared based on emotional and polarity categories.

## 8.2 ARCHITECTURAL DESIGN

Figure 8.1 shows architectural design of proposed system. Following are important components in the system :

- Movie reviews data : It contains 1,000 positive and 1,000 negative movie reviews from IMDB.
- Preprocessing : It has stopwords removal and vectorizer.
- Training data and Test Data : Data is divided into training data and test data. Training data consists of 75 % of data and test data consists of 25 % of total data. Both are mutually exclusive.
- Classifier : Training data is given as a input to one of the classifier.
- Prediction system : It takes test data and applies trained model to it .
- Sentiment : It gives the end output of polarity into positive and negative classification.

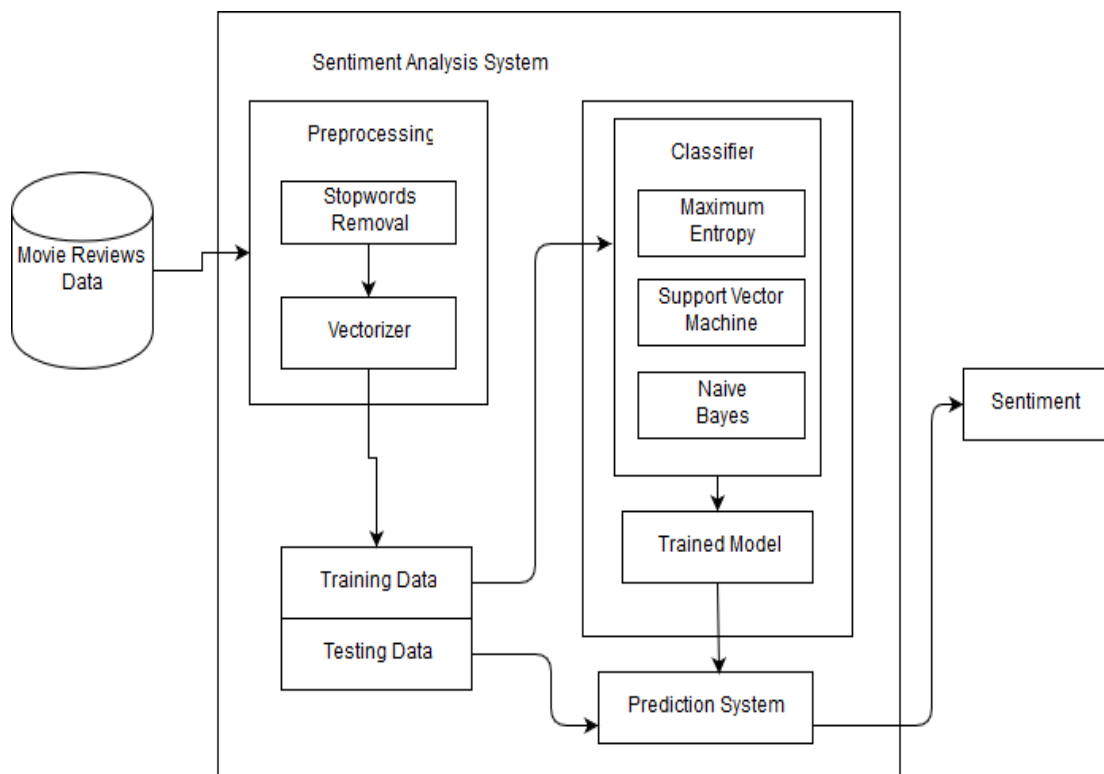


Figure 8.1: Proposed System Architecture

### 8.3 CLASS DESIGN

It is a static diagram that represents the static view of an application. It is not only used for visualizing, describing, and documenting different aspects of a system but also for constructing executable code of the software application. It describes the attributes and operations of a class and also the constraints imposed on the system.

**Description :** In figure 9.2, modules and their relationships are shown. Document classifier used for classifying SentimentClassification class has ClassifyReview method which predicts the polarity of review.

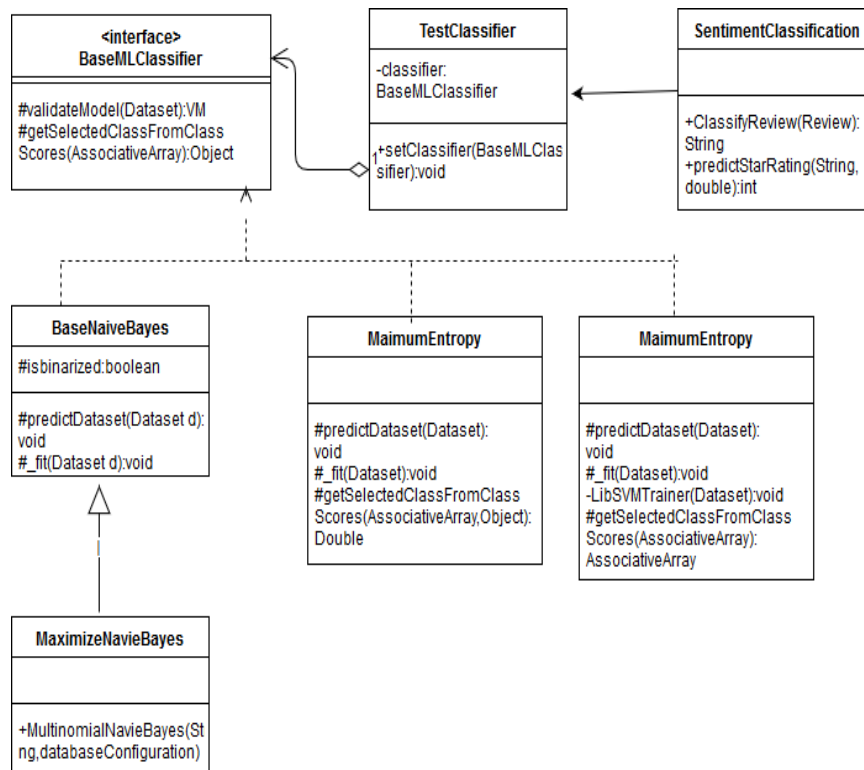


Figure 8.2: Class Diagram

## 8.4 COMPONENT DESIGN

It is used to model the physical aspects of a system. It is also used to visualize the organization and relationships among components in a system. It does not describe the functionality of the system but it describes the components used to make those functionalities.

**Description :** Figure 8.3 describes primary components of the system. A web application provides candidate's tweets to be fetched and candidates are profiled and compared functionality to Product Administrator. Product Admins are authenticated first before using any of the functionality. To download tweets of a specific candidate, he/she must register for that organization. Tweets are stored in Alluxio data storage in CSV format. Data storage is accessed by Spark application for fetching candidate's tweets for preprocessing and document classification.

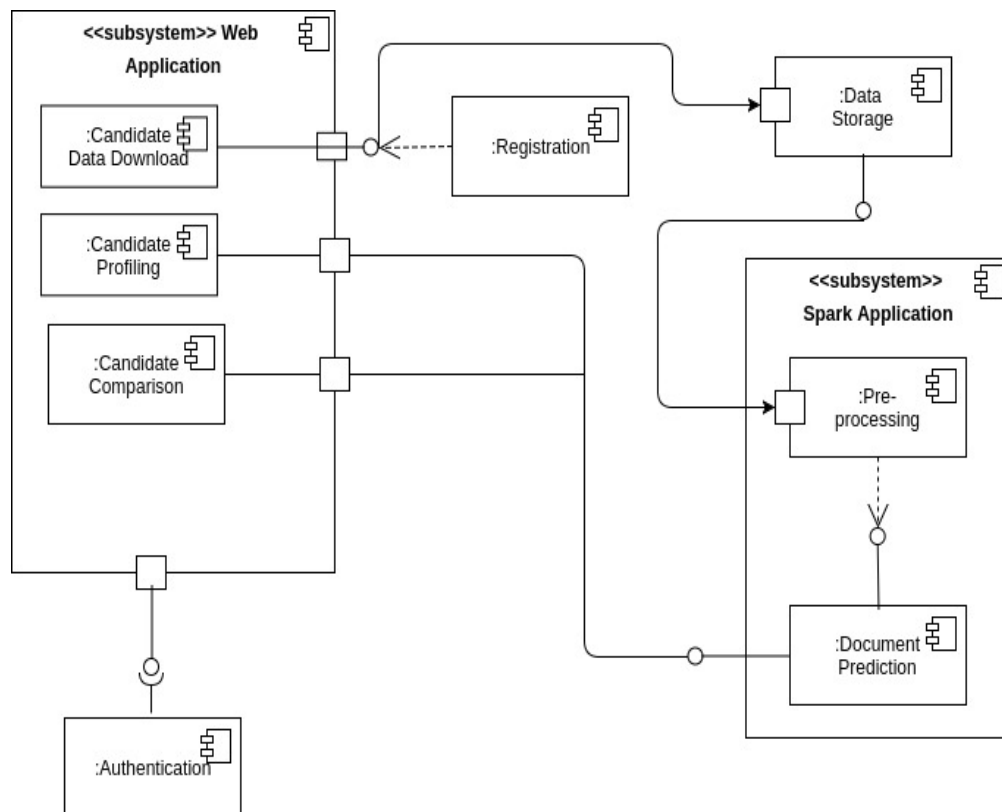


Figure 8.3: Component Diagram

## 8.5 DEPLOYMENT DESIGN

It is used visualize the topology of the physical components of a system, where the software components are deployed. It describes the static deployment view of a system, consisting of nodes and their relationships.

**Description :** In figure 8.4, Web application designed in Laravel PHP runs on Apache Tomcat Server. Process component of Symphony is used to run spark application. 4-Node cluster is formed for spark application execution. It requires data from Alluxio data storage system. Alluxio is specifically compiled for Spark for data access. Web application retrieves candidate's emotional and polarity scores from database.

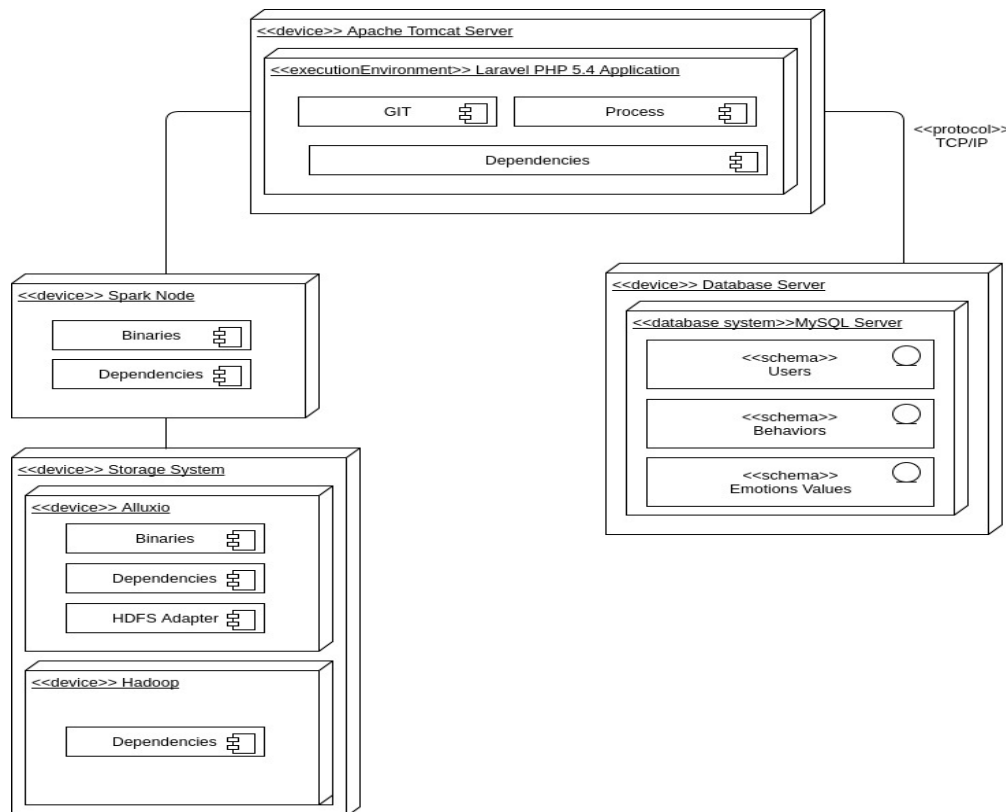


Figure 8.4: Deployment Diagram



## **CHAPTER 9**

### **IMPLEMENTATION DETAILS**

## 9.1 INTRODUCTION

This section describes implementation of the system, required libraries and dependencies needed for components of the system and use of implementation strategy.

## 9.2 ALGORITHM

### 9.2.1 Document Classification

**Input :** Movie review dataset in .csv file format

**Output :** Polarity classification

1. Initialize review\_data list to empty
2. Initialize review\_label list to empty
3. Read csv file
4. Put first column of each row in csv in review\_data
5. Put second column of each row in csv in review\_label
6. Specify ngram range i.e. unigram, bigram or trigram
7. Fit the review\_data into matrix form using countvectorizer which stores counts of each word in a review.
8. Transform review\_data to tfidf using tfidftransformer.
9. Split review\_data and review\_label into review\_train, label\_train, review\_test and label\_test
10. Give review\_train and label\_train as input to the classifier and store learned model in classifier variable.
11. Apply review\_test on classifier model with predict method and take predicted labels output in predicted variable
12. Compare label\_test with predicted variable label values
13. Print the confusion matrix

### 9.3 DATASET

Pang and Lee's Movie Review Data was one of the first widely-available sentiment analysis datasets. It contains 1,000 positive and 1,000 negative movie reviews from IMDB, so it is now considered too small for serious research and development purposes. However, the text is similar to movies reviews on IMDB today.

The file movie-pang02.zip contains a copy of Pang and Lee's Movie Review Data in a csv format that can be imported directly in python. It has two categories: Pos (reviews that express a positive or favorable sentiment) and Neg (reviews that express a negative or unfavorable sentiment). For this assignment, we will assume that all reviews are either positive or negative; there are no neutral reviews.

For document classification, a training and testing dataset is required. Training records for polarity categories are mentioned in Table 9.1

Table 9.1: Polarity Training Dataset

<b>Polarity</b>	<b>Training Records</b>
Positive	1000
Negative	1000
<b>Total</b>	<b>2000</b>

### 9.4 SNAPSHOTS

```

raphael@raphael-Inspiron-N4010: ~/Documents/6107/Dissertation/pychennai-sentiment-al
ction module into which all the refactored classes and functions are moved. Also
note that the interface of the new CV iterators are different from that of this
module. This module will be removed in 0.20.
    "This module will be removed in 0.20.", DeprecationWarning)
/usr/lib/python2.7/dist-packages/scipy/sparse/compressed.py:130: VisibleDeprecat
ionWarning: `rank` is deprecated; use the `ndim` attribute or function instead.
To find the rank of a matrix see `numpy.linalg.matrix_rank`.
    if np.rank(self.data) != 1 or np.rank(self.indices) != 1 or np.rank(self.indpt
r) != 1:
/usr/lib/python2.7/dist-packages/scipy/sparse/coo.py:200: VisibleDeprecationWarn
ing: `rank` is deprecated; use the `ndim` attribute or function instead. To find
the rank of a matrix see `numpy.linalg.matrix_rank`.
    if np.rank(self.data) != 1 or np.rank(self.row) != 1 or np.rank(self.col) != 1
:
(0, 3)      2
(0, 0)      1
(0, 2)      1
(0, 4)      1
(0, 5)      1
(1, 1)      1
(1, 6)      1
(1, 3)      1
(1, 4)      1
>

```

Figure 9.1: Sample matrix creation with word counts

```

raphael@raphael-Inspiron-N4010: ~/Documents/6107/Dissertation/pychennai-sentiment-al
ing: `rank` is deprecated; use the `ndim` attribute or function instead. To find
the rank of a matrix see `numpy.linalg.matrix_rank`.
    if np.rank(self.data) != 1 or np.rank(self.row) != 1 or np.rank(self.col) != 1
:
(0, 3)      2
(0, 0)      1
(0, 2)      1
(0, 4)      1
(0, 5)      1
(1, 1)      1
(1, 6)      1
(1, 3)      1
(1, 4)      1
>
(0, 3)      0.707106781187
(0, 0)      0.353553390593
(0, 2)      0.353553390593
(0, 4)      0.353553390593
(0, 5)      0.353553390593
(1, 1)      0.5
(1, 6)      0.5
(1, 3)      0.5
(1, 4)      0.5
>

```

Figure 9.2: Sample matrix creation with tf-idf

```
raphael@raphael-Inspiron-N4010: ~/Documents/6107/Dissertation/pychennai-sentiment-analyzer
=====
A great movie. Lansbury and Tomlinson are perfect, the songs are wonderful, the dances, with a particular mention for the "Portobello Ballet" are gorgeous. As for the animated section, the match between animals has become an instant classic; the climax with the attack of the armatures is chilling and fascinating. I recommend to see the restored 134 minutes version or at least the 112 minutes video. Here in Italy we have only the 98 minutes version, although the film was presented in its original release at the running of 117 minutes. If possible, watch also the German videocassette: it was generated from the 98 minutes running but it's missing of every refer to World War II and of all the scenes between English people and their Nazi invaders! positive positive
[ 0.00411253  0.99588747]
=====
Why oh why don't blockbuster movies simply stick to their selling point? Everyone in the cinema, young and old, was there to see talking animals make jokes, and whilst they did that we were all happy... And then, as with Lost In Space, came the two killer blows - plot and sentiment. Who really cared what happened to the tiger or whether Eddie Murphy made up with his daughter? Not me, that's for sure. negative negative
[ 9.99933065e-01  6.69352950e-05]
=====
What happened? What we have here is basically a solid and plausible premise and with a decent and talented cast, but somewhere the movie loses it. Actually, it never really got going. There was a little excitement when we find out that Angi
```

Figure 9.3: Review classification with negative and positive percentages

## **CHAPTER 10**

### **TEST SPECIFICATION**

## **CHAPTER 11**

### **DATA TABLES AND DISCUSSIONS**

Table 11.1: Unigram Features Results

<b>Classifier</b>	<b>Accuracy</b>	<b>Precision</b>	<b>Recall</b>	<b>F-measure</b>
Naive Bayes	80.04	80.11	80.09	80.03
Support Vector Machine	79.02	79.24	78.91	78.93
Maximum Entropy	77.80	79.54	77.51	77.33

Table 11.2: Bigram Features Results

<b>Classifier</b>	<b>Accuracy</b>	<b>Precision</b>	<b>Recall</b>	<b>F-measure</b>
Naive Bayes	81.26	81.43	81.34	81.25
Support Vector Machine	80.44	80.49	80.39	80.41
Maximum Entropy	80.85	82.13	80.62	80.57

Table 11.3: Trigram Features Results

<b>Classifier</b>	<b>Accuracy</b>	<b>Precision</b>	<b>Recall</b>	<b>F-measure</b>
Naive Bayes	80.85	80.90	80.90	80.85
Support Vector Machine	80.04	80.34	79.92	79.93
Maximum Entropy	77.59	79.52	77.30	77.09

The above Table 11.1, Table 11.2, Table 11.3 shows accuracy, precision, recall and f-measure of three different classifiers. Three different features are used as features. First table shows results with unigram features i.e. each words is considered separate features. Second table shows results with bigram features i.e. 2 words together are considered as features. Third table shows results with trigram features i.e. 3 words combine are considered as features.



Below fig. 11.1 shows comparison of accuracy scores shown in Table 11.1, Table 11.2, Table 11.3 .

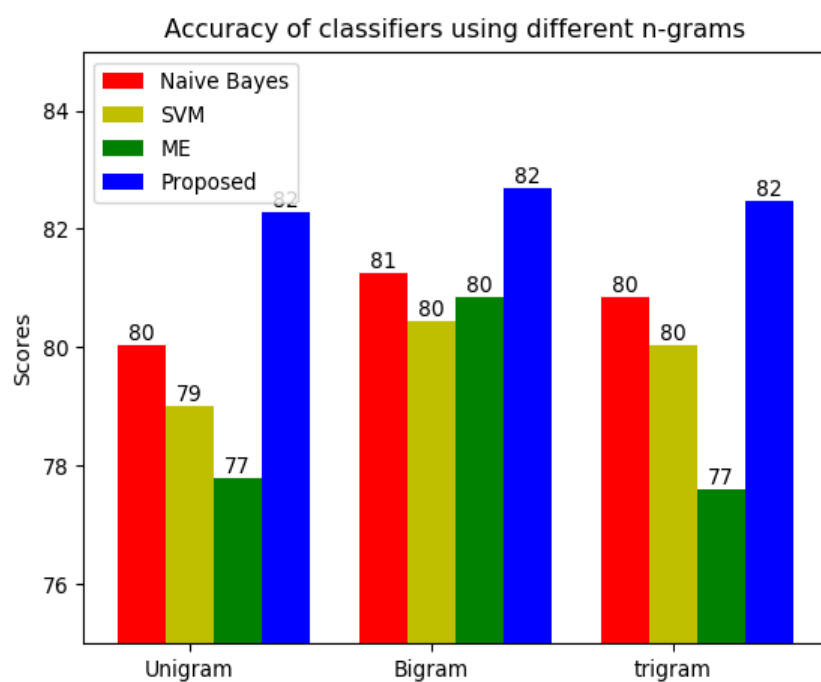


Figure 11.1: Classifiers accuracy score comparison

## **CHAPTER 12**

## **CONCLUSION**

We proposed a hand gesture based human computer interaction system that provides a natural way to interact with computer. The hand is first segmented by using skin color information and then tracked using 'Camshift' tracker with Kalman filter, then fingertips are located on the contour of the segmented hand and single gestures drawn from fingertips are recognized. For pointing, click, right click, zoom, drag and window closing various gestures have been allocated.

## **CHAPTER 13**

### **FUTURE ENHANCEMENTS**

The research can be extended to explore the relationship between behaviors and psychological theories to determine candidate's language style or social tendencies. The system only fetches 3200 tweets of a candidate for analysis. For more precise profile deviation, more tweets should be fetched for Behavioral Analytics.

## **CHAPTER 14**

## **REFERENCES**

- [1] R. Xia, F. Xu, C. Zong, Q. Li, Y. Qi and T. Li, “ Dual sentiment analysis: Considering two sides of one review, ” in *IEEE transactions on knowledge and data engineering*, vol. 27, no. 8, pp. 2120 - 2133, Aug. 2015.
- [2] S. Das and M. Chen, “ Yahoo! for Amazon: Sentiment extraction from small talk on the web, ” *Management science* , Vol.53, Issue no.9, pp.1375-1388, 2007.
- [3] Pang, L. Lee, and S. Vaithyanathan, “ Thumbs up?: Sentiment classification using machine learning techniques, ” *Proceedings of the ACL-02 conference on Empirical methods in natural language processing*, pp. 79-86, 2002.
- [4] B. Pang and L. Lee, “ Opinion mining and sentiment analysis, ” *Foundations and Trends in Information Retrieval*, vol. 2, no. 1-2, pp. 1-135, 2008.
- [5] R. Xia, T. Wang, X. Hu, S. Li, and C. Zong, “ Dual Training and Dual Prediction for Polarity Classification,” *Proceedings of the Annual Meeting of the Association for Computational Linguistics (ACL - 02)*, pp. 521-525, 2013.
- [6] P. Turney, “ Thumbs up or thumbs down? Semantic orientation applied to unsupervised classification of reviews, ” *Proceedings of the Annual Meeting of the Association for Computational Linguistics (ACL)*, pp. 417-424, 2002.
- [7] M. Li and C. Huang, “ Sentiment classification considering negation and contrast transition, ” *Proceedings of the Pacific Asia Conference on Language, Information and Computation (PACLIC)*, pp. 307-316, 2009.
- [8] Li, S. Lee, Y. Chen, C. Huang and G. Zhou, “ Sentiment Classification and Polarity Shifting, ” *Proceedings of the International Conference on Computational Linguistics (COLING)*, pp. 635-643, 2010.
- [9] D. Turney and Michael L. Littman, “ Un-supervised learning of semantic orientation from a hundred-billion-word corpus. ” *Technical Report EGB-1094, National Research Council Canada*, arXiv preprint cs/0212012, 2002.

- [10] Yuan Wang, Zhaohui Li, Jie Liu, Zhicheng He, Yalou Huang and Dong Li, “ Word Vector Modeling for Sentiment Analysis of Product Reviews ” *Natural Language Processing and Chinese Computing 2014*, pp. 168-180, 2014.
- [11] Xia, Rui and Wang, Cheng and Dai, Xinyu and Li, Tao, “ Co-training for Semi-supervised Sentiment Classification Based on Dual-view Bags-of-words Representation ” *Association for Computational Linguistics (ACL 1)*, pp. 10541063, 2015.
- [12] Na, J.C., Sui, H., Khoo, C., Chan, S., and Zhou, Y., “ Effectiveness of Simple Linguistic Processing in Automatic Sentiment Classification of Product Reviews ” *Proceedings of the Eighth International ISKO Conference* pp. 49-54, 2004.
- [13] Rui Xia, Feng Xu, Jianfei Yu, Yong Qi and Erik Cambria, “ Polarity shift detection, elimination and ensemble: A three-stage model for document-level sentiment analysis ” *Information Processing & Management* 52, no. 1, pp. 36 - 45, 2016
- [14] Rui Xia, Chengqing Zong and Shoushan Li, “ Ensemble of feature sets and classification algorithms for sentiment classification ” *Information Sciences* 181, no. 6 pp. 11381152, 2011
- [15] Anderson Uilian Kauer and Viviane P. Moreira, “ Information retrieval for sentiment polarity prediction, ” *Expert Systems With Applications* 61, pp. 282 - 289, 2016
- [16] Yuming Lin, Jingwei Zhang, Xiaoling Wang and Aoying Zhou, ” An Information Theoretic Approach to Sentiment Polarity Classification ” *Proceedings of the 2nd joint WICOW/AIRWeb workshop on web quality, ACM Lyon France* , pp. 35 - 40, 2012
- [17] <http://boston.lti.cs.cmu.edu/classes/95-865-K/HW/HW3/movie-pang02.zip>



**ANNEXURE A**

**PAPERS PUBLISHED**

## A.1 PAPER TITLE

Sentiment Analysis using Machine Learning Algorithms: A Survey

### A.1.1 IJIRCCE Certification



Figure A.1: IJIRCCE Certificate

## A.2 PAPER TITLE

Sentiment Analysis using Original and Reversed Reviews

### A.2.1 cPGCON Certificate



Figure A.2: cPGCON Certificate

### **A.2.2 cPGCON Review**

**ANNEXURE B**

**DISSERTATION PLANNER**

Table B.1: Dissertation Task Set

<b>Task Title</b>	<b>Dissertation Task</b>
T1	Study of Domain - Machine Learning and Natural Language Processing
T2	Identification of problem in existing systems
T3	Review of Literature
T4	Building Mathematical Model
T5	Report On Scheme of Implementation
T6	Identification of Prerequisites and Installation
T7	Configuring python and python package installer pip in the system
T8	Study of various machine learning algorithms and its implementation in python
T9	Studying libraries in python required for implementation
T10	Downloading and extracting reviews from IMDb movie datasets provided for research
T11	Removing stopwords, punctuation marks, numbers etc.
T12	Report Preparation
T13	Dissertation Project Stage I Presentation
T14	Document Preprocessing
T15	Creating Bag of words model from movie reviews.
T16	Splitting the dataset into training and test dataset
T17	Train machine learning classifiers using bag of words model.
T18	Create unigram, bigram, trigram variations of model
T19	Train machine learning classifiers using this model.
T20	Cpgcon Paper Presentation
T21	Predictive Model Construction
T22	Model Testing
T23	Experimental results, Analysis and Validation of results
T24	Project Review with Demonstration
T25	Report Validation and Submission, Report Submission