


# Stop next requests from executing

`postman.setNextRequest(null)`

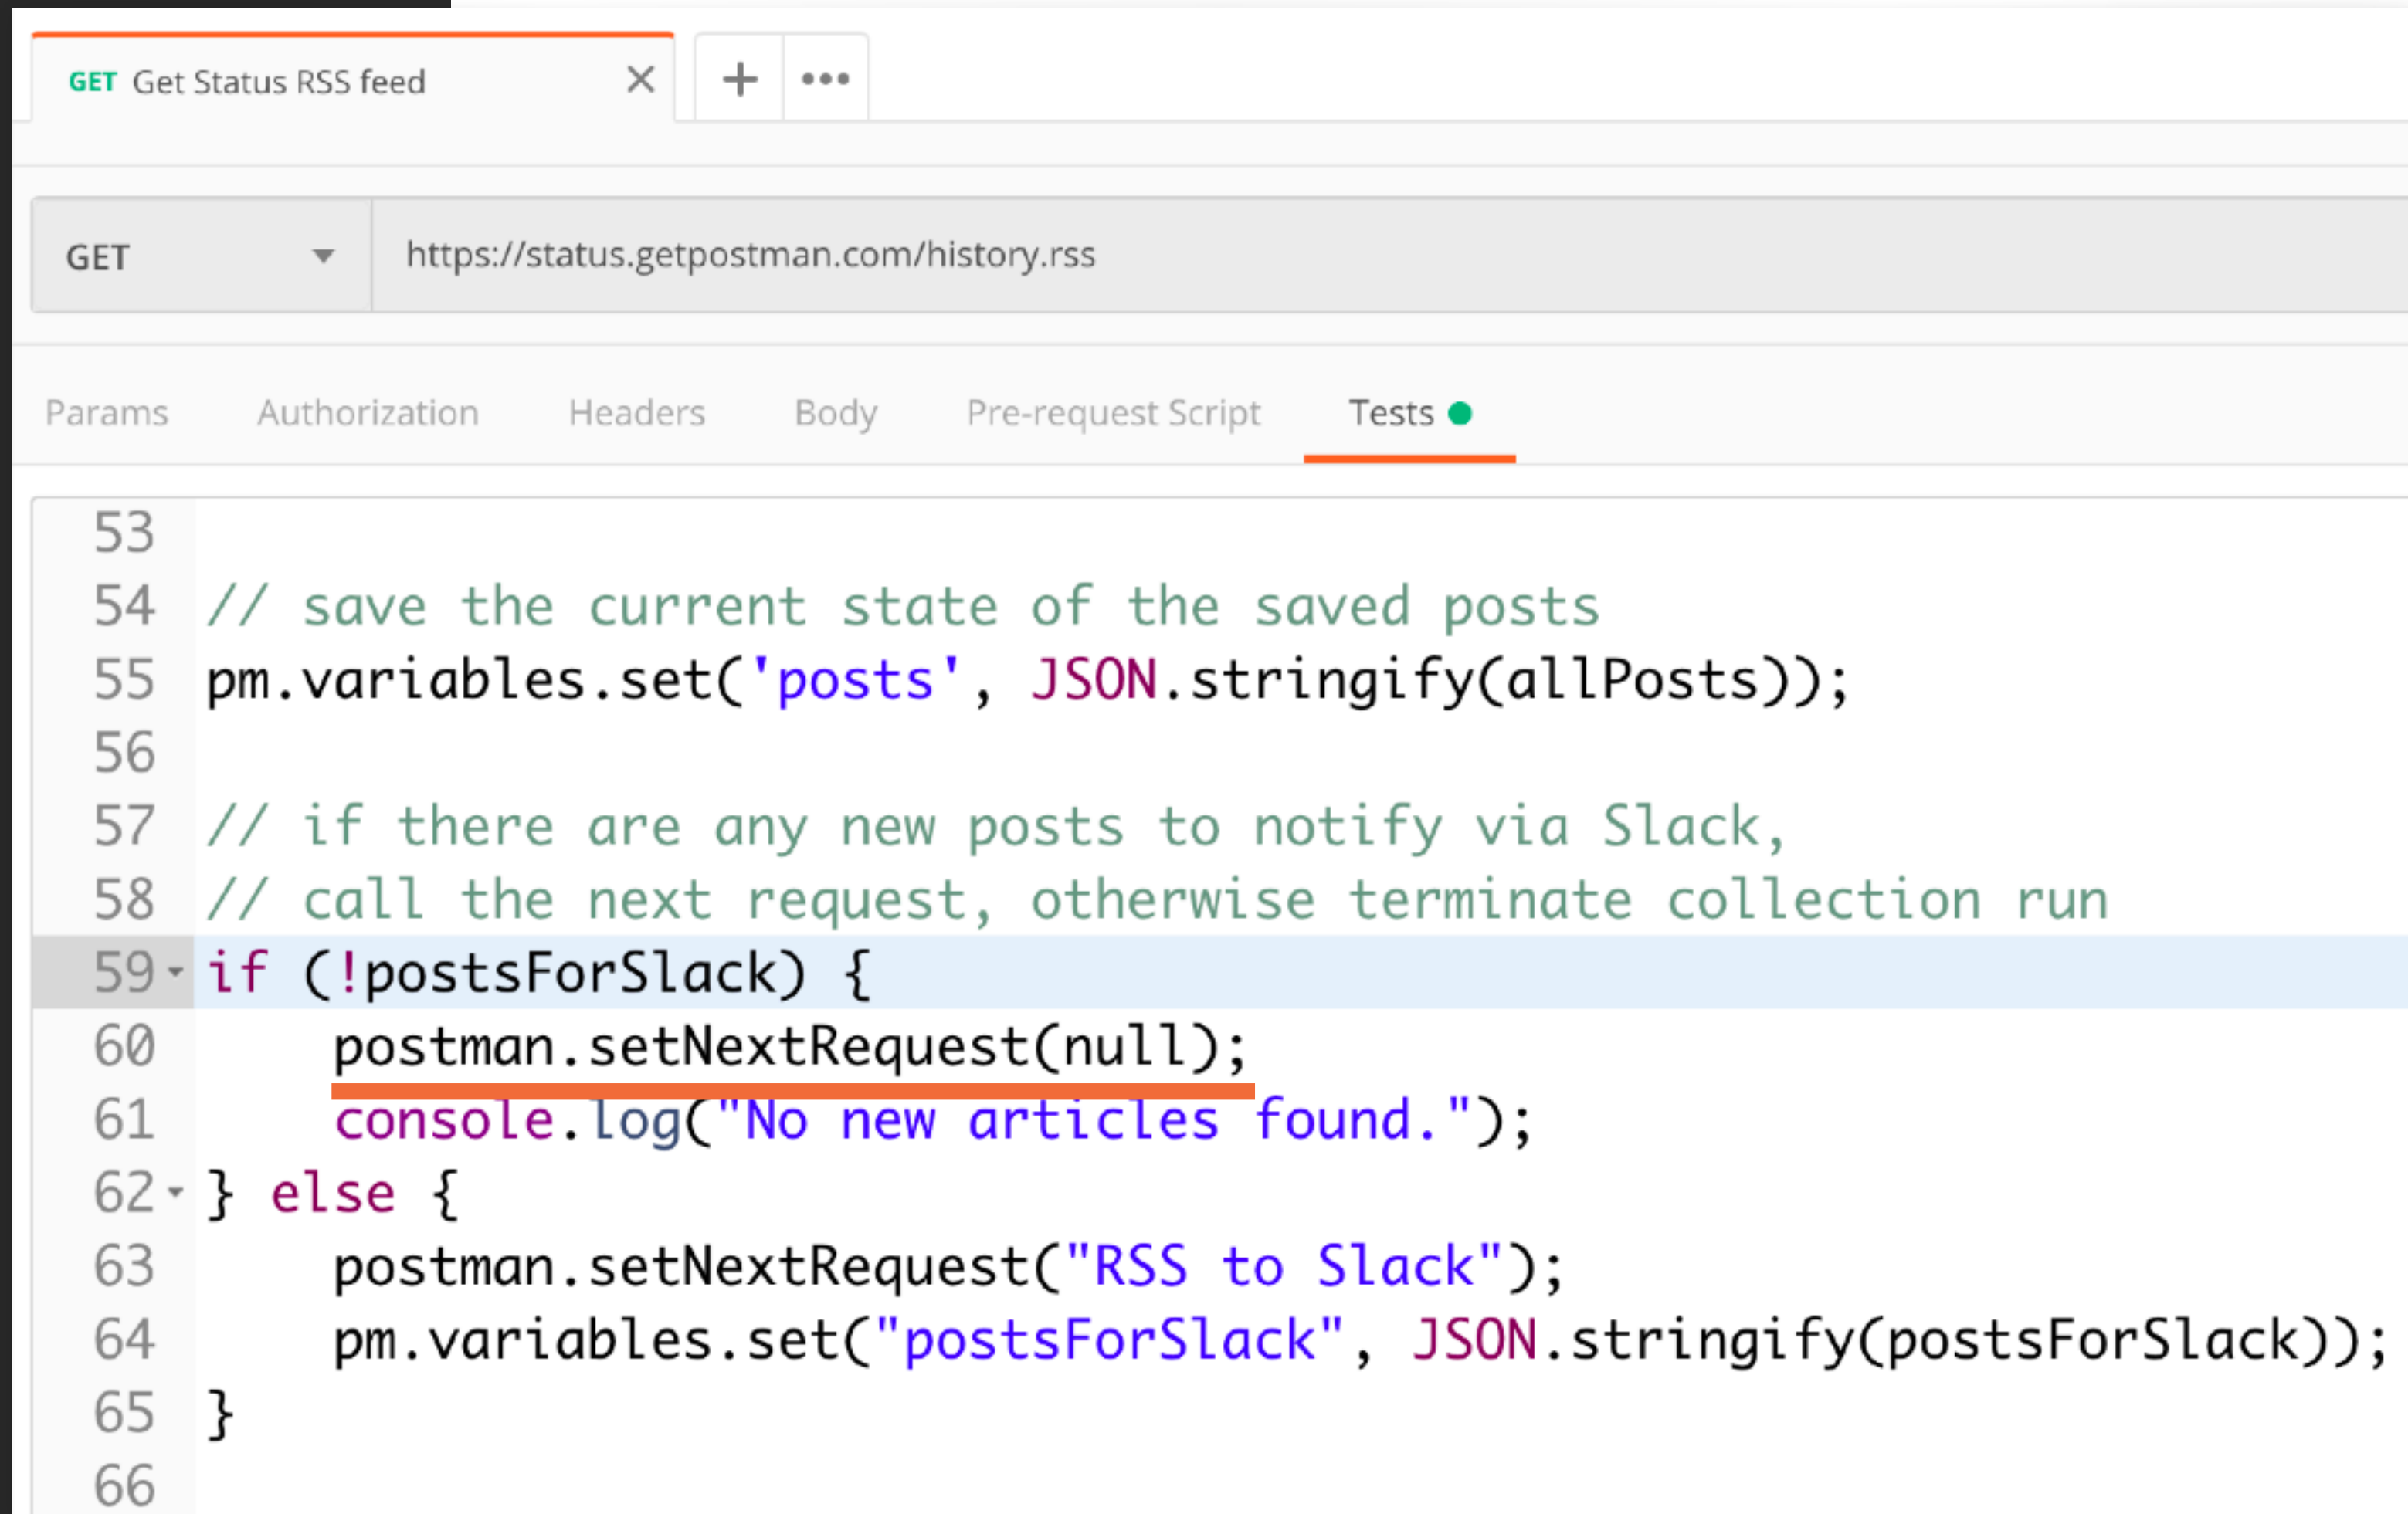

The screenshot shows the Postman interface for a REST client request. The request is a GET to `https://status.getpostman.com/history.rss`. The 'Tests' tab is active, displaying a JavaScript script. The script is as follows:

```
53
54 // save the current state of the saved posts
55 pm.variables.set('posts', JSON.stringify(allPosts));
56
57 // if there are any new posts to notify via Slack,
58 // call the next request, otherwise terminate collection run
59 if (!postsForSlack) {
60     postman.setNextRequest(null);
61     console.log("No new articles found.");
62 } else {
63     postman.setNextRequest("RSS to Slack");
64     pm.variables.set("postsForSlack", JSON.stringify(postsForSlack));
65 }
66
```

The line `postman.setNextRequest(null);` on line 60 is underlined in orange in the original image.

# Loop a request

Use the current request name as argument to  
`postman.setNextRequest()`

