


# Loop a request

Use the current request name as argument to  
`postman.setNextRequest()`

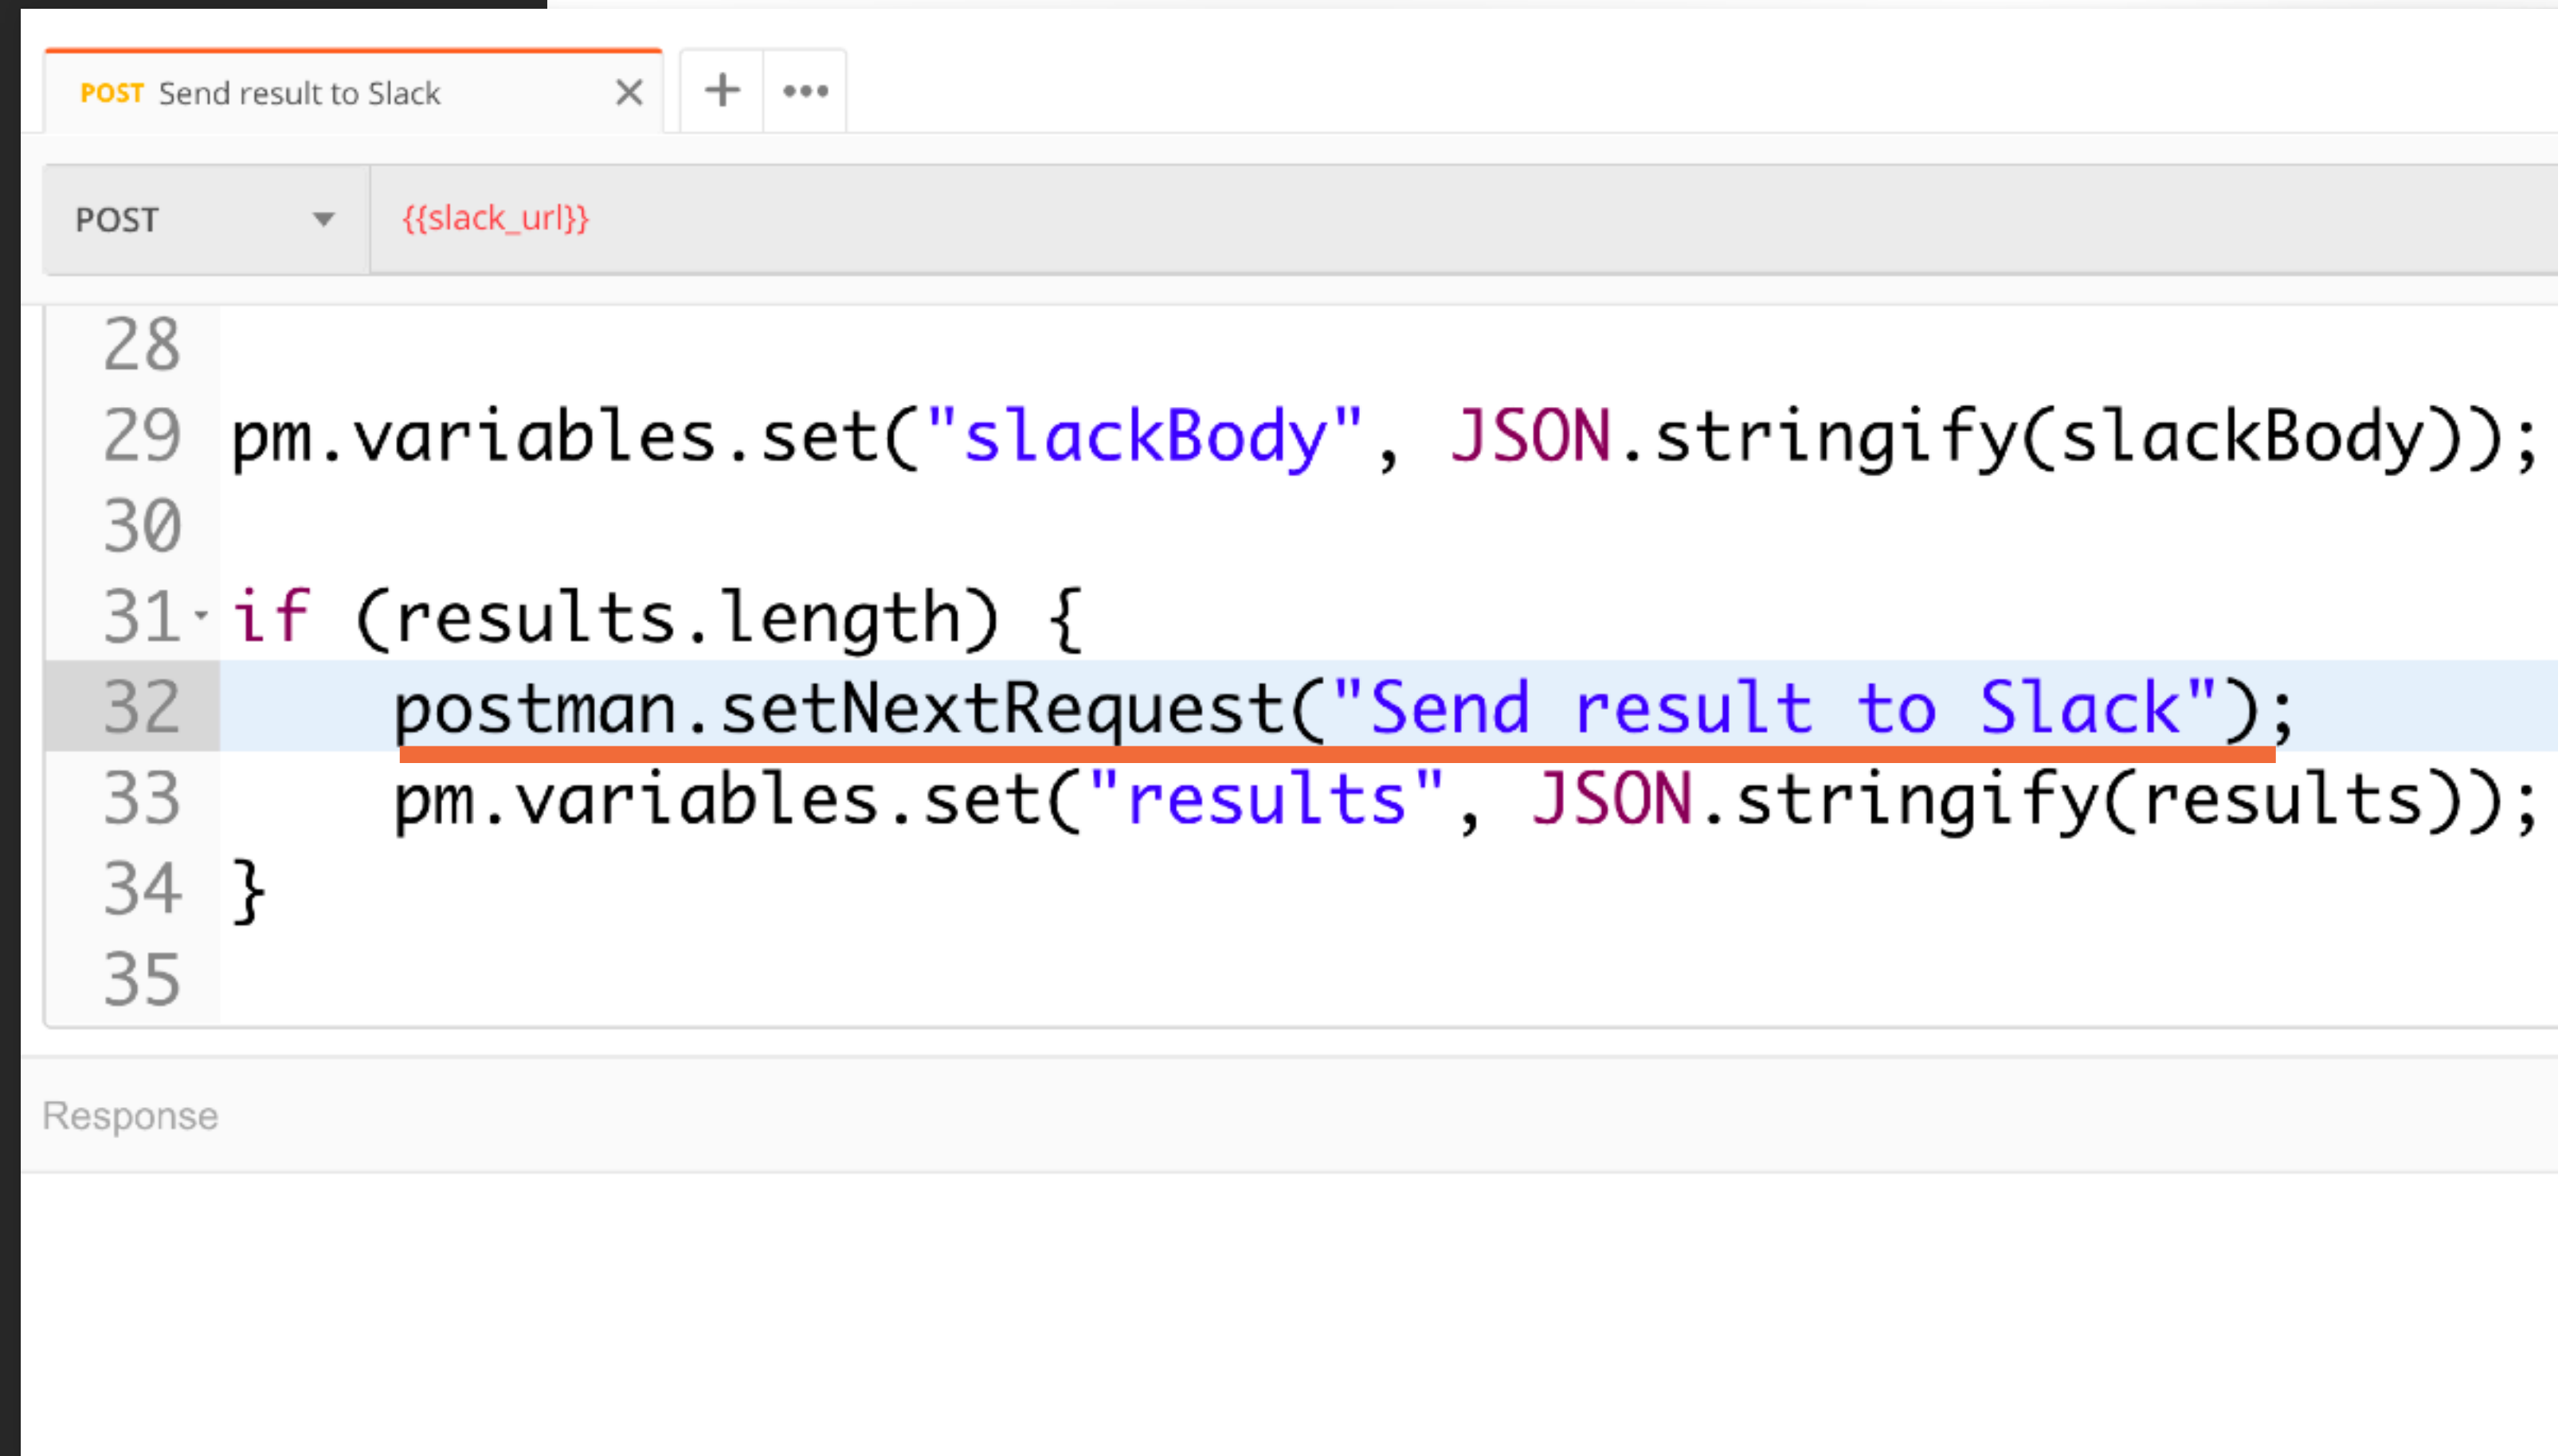

# Validate responses

Use `pm.expect()` in Tests

```
GET https://api.data.gov.in/resource/3b01bcb8-0b14-4abf-b6f2-c1bfd384ba69?api-key={{api-key}}&filters[state]={{state}}&filters[city]

Params Authorization Headers Body Pre-request Script Tests

10
11 let jsonData = pm.response.json();
12
13 pm.test("'records' property is an array with entries", function () {
14     pm.expect(jsonData.records).to.be.an("array").that.is.not.empty;
15 });
16
17 pm.test("total, limit and offset properties are present", function () {
18     pm.expect(jsonData.total).to.be.a("number");
19     pm.expect(jsonData.limit).to.be.a("string");
20     pm.expect(jsonData.offset).to.be.a("string");
21 })
22
```