



Lifecycle of a request

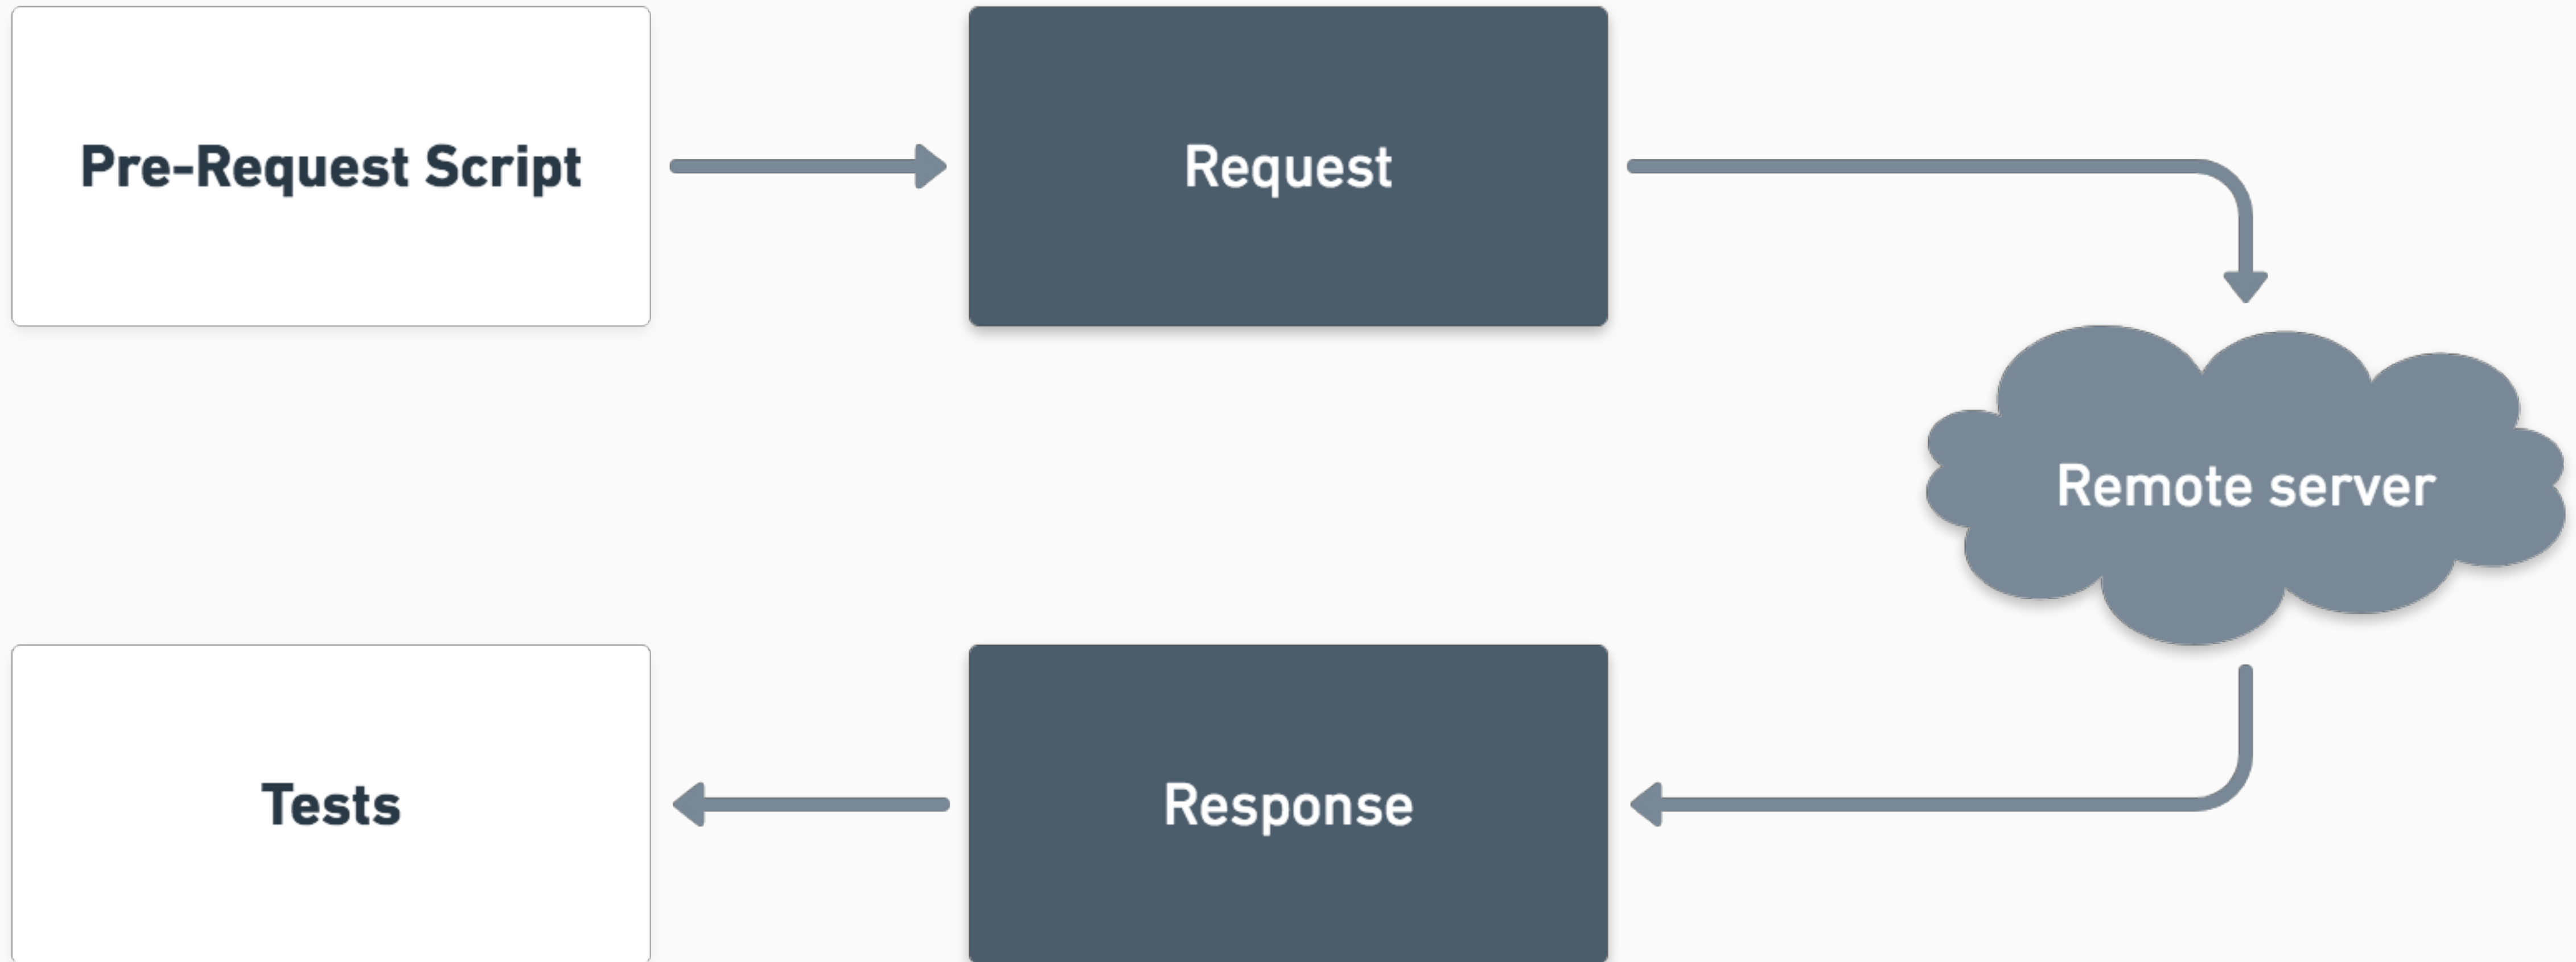

Environments

Use them to inject values.

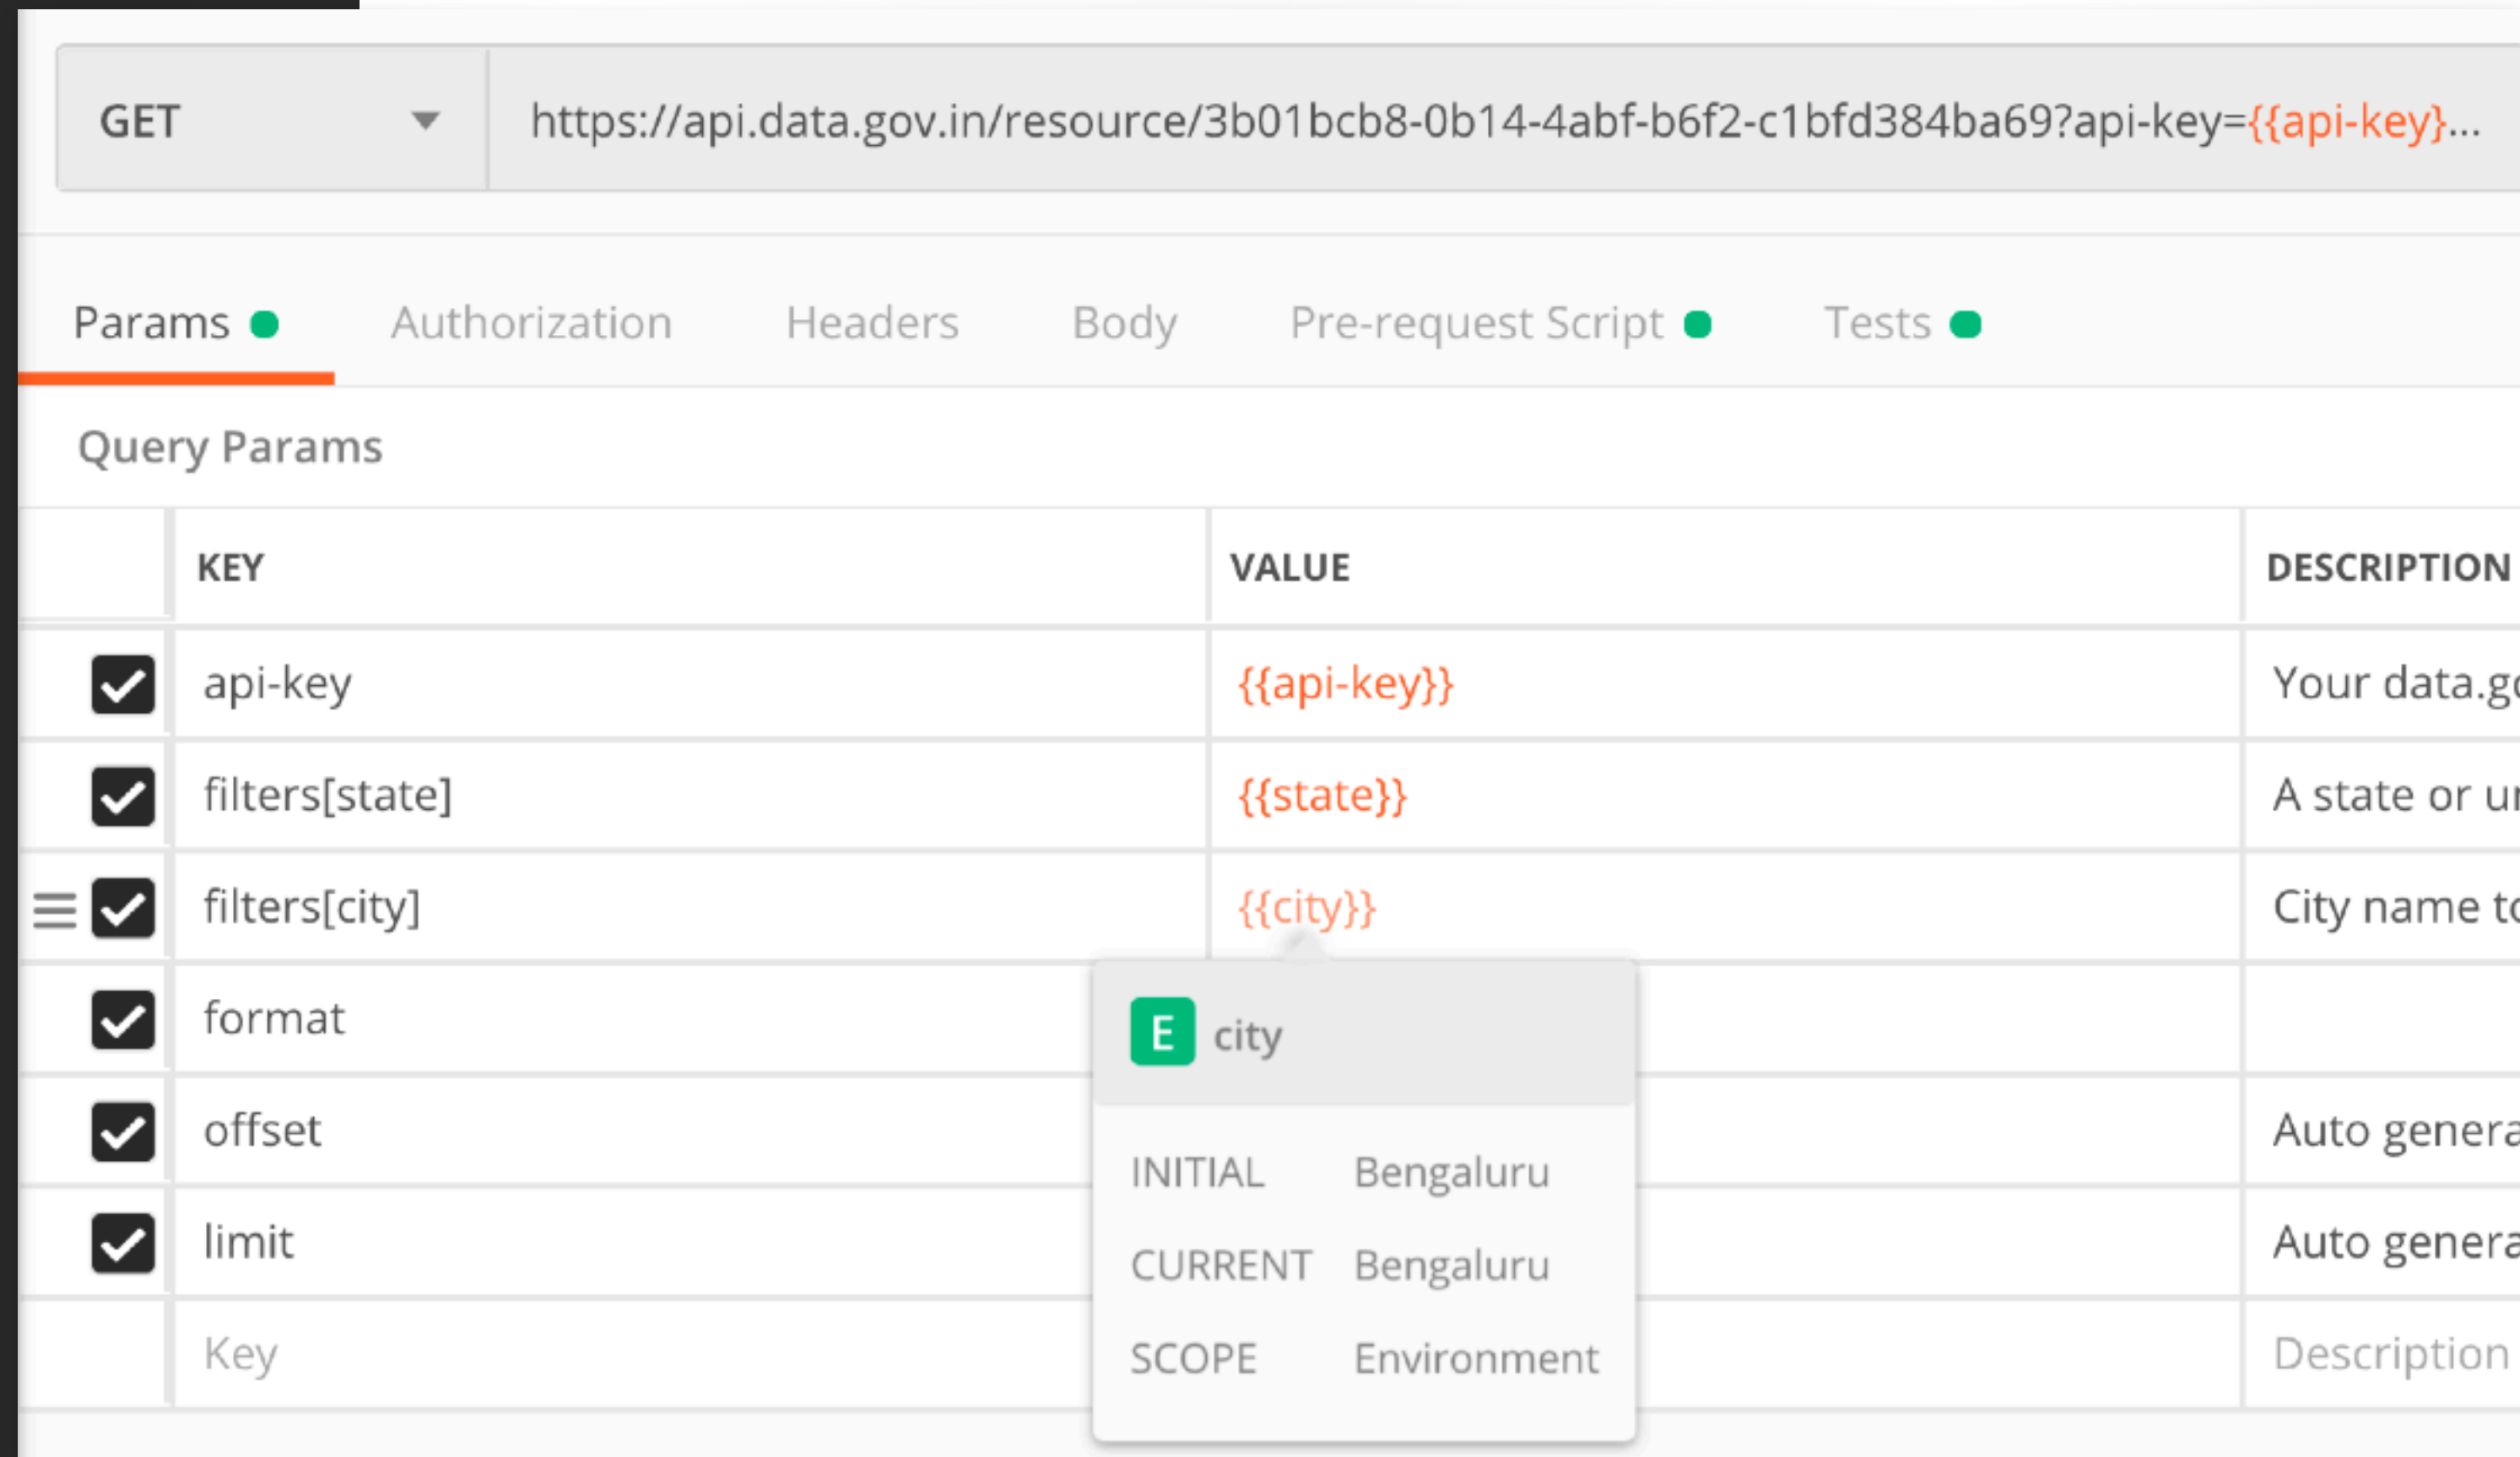

The screenshot shows the Postman interface for a GET request to `https://api.data.gov.in/resource/3b01bcb8-0b14-4abf-b6f2-c1bfd384ba69?api-key={{api-key}}...`. The 'Params' tab is active, displaying a table of query parameters. A dropdown menu is open for the 'filters[city]' parameter, showing the 'city' environment variable selected.

	KEY	VALUE	DESCRIPTION
<input checked="" type="checkbox"/>	api-key	{{api-key}}	Your data.g
<input checked="" type="checkbox"/>	filters[state]	{{state}}	A state or un
<input checked="" type="checkbox"/>	filters[city]	{{city}}	City name to
<input checked="" type="checkbox"/>	format		
<input checked="" type="checkbox"/>	offset		Auto genera
<input checked="" type="checkbox"/>	limit		Auto genera
	Key		Description

E

city

INITIAL Bengaluru

CURRENT Bengaluru

SCOPE Environment