
MoQT subscriber recovery across pause durations

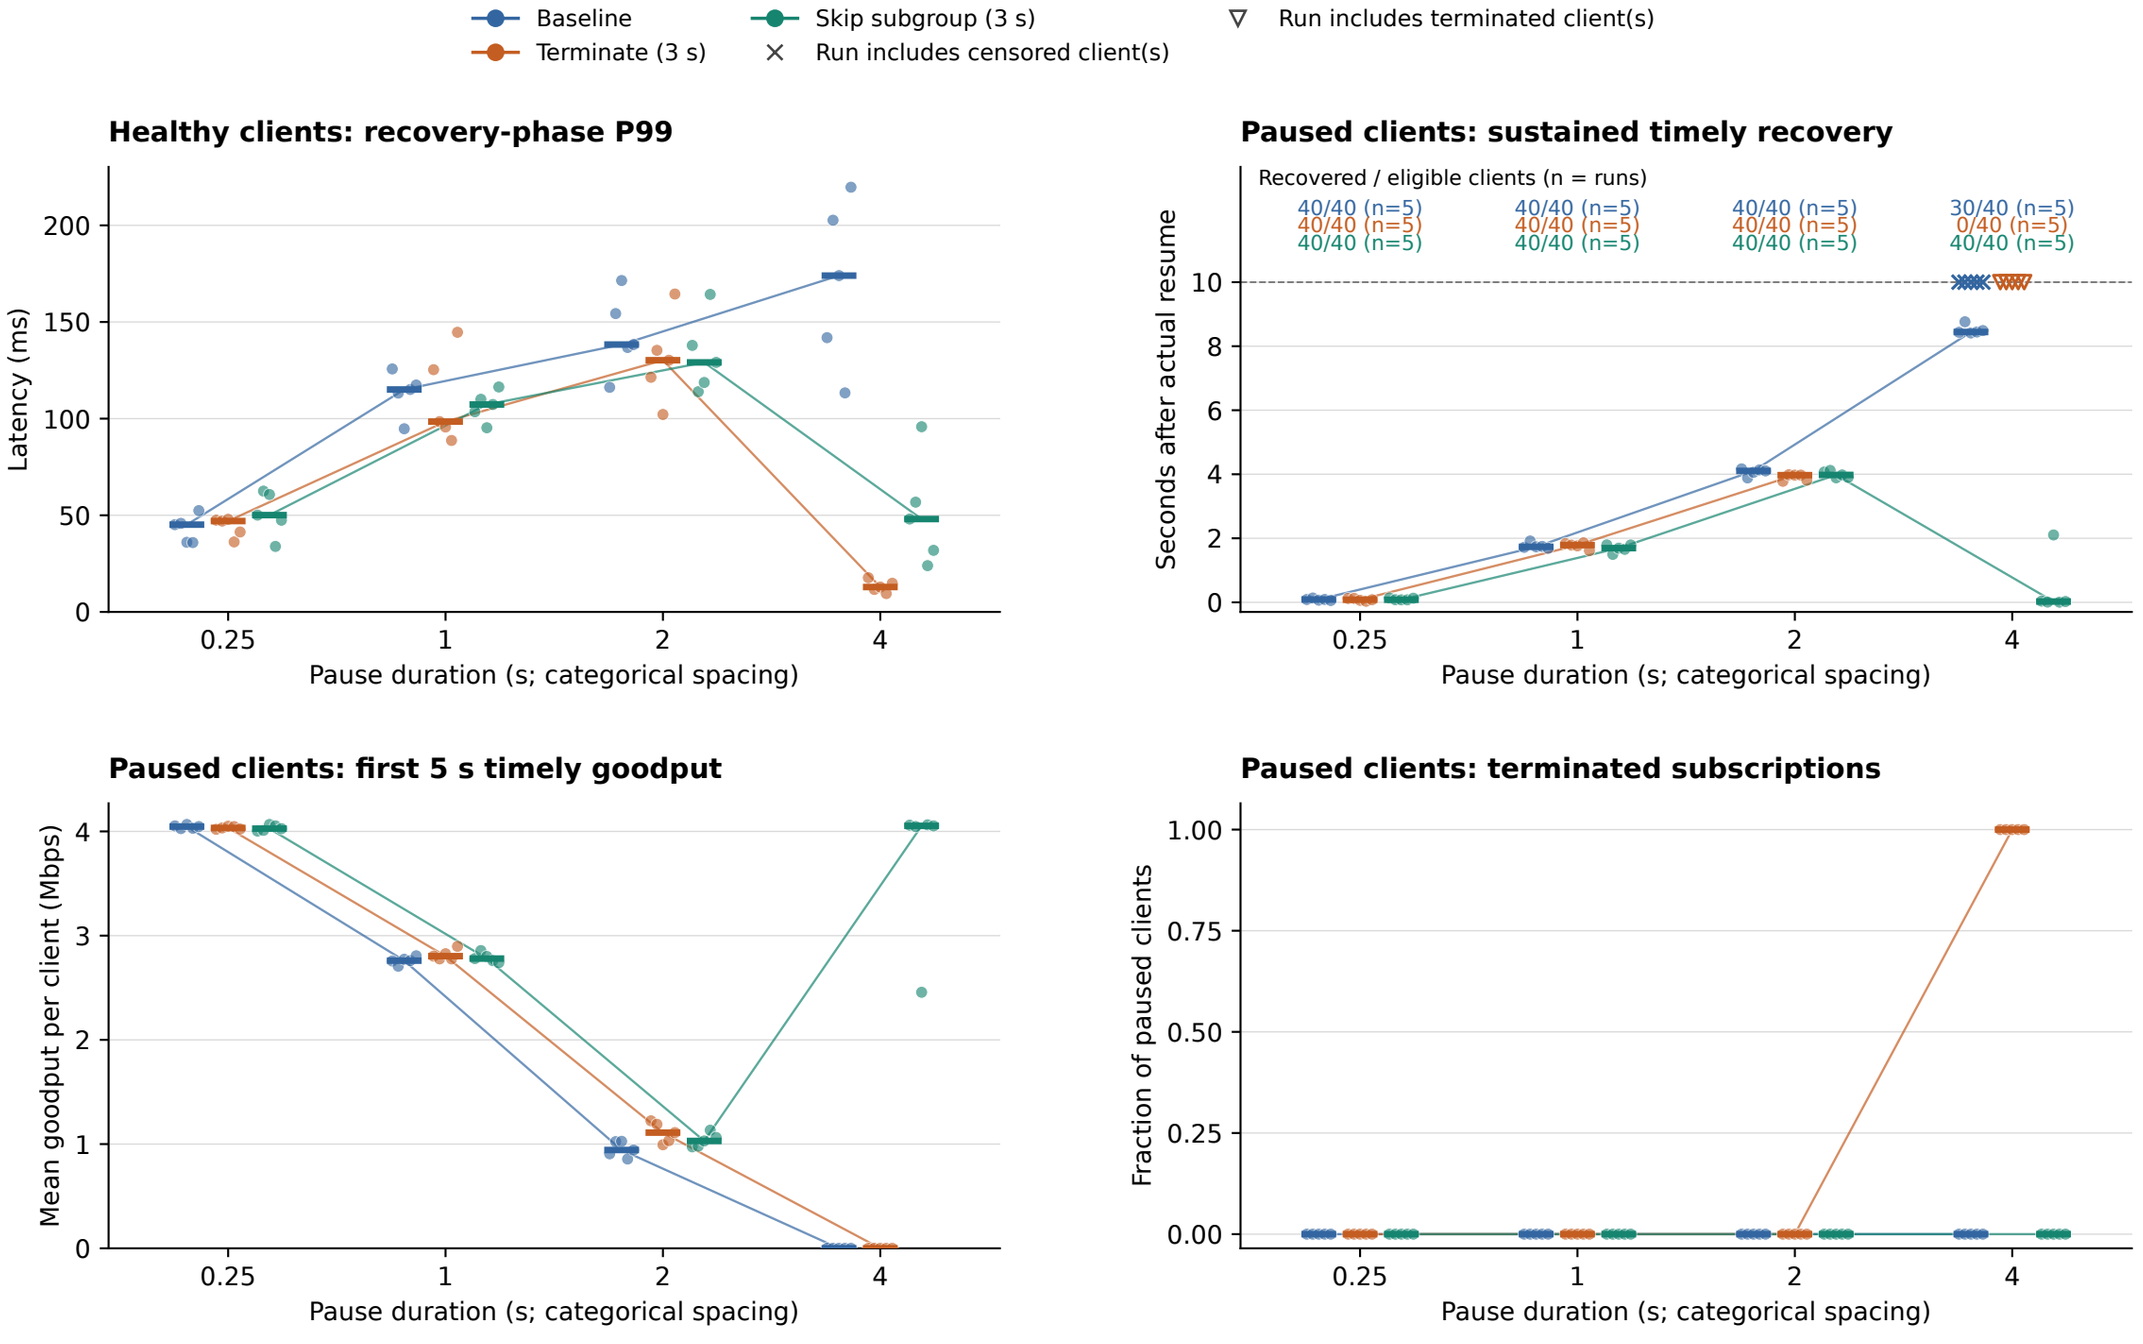

Timely: latency ≤150 ms. Sustained recovery starts a fully observed 1 s window with ≥80% expected Objects, all timely, and no gap >3/fps.
Dots: one run; bars/lines: median across runs. Goodput dots are client means, including zeros; P99 dots use the healthy cohort.
Recovery dots: median among recovered clients in each run; only defined run medians contribute to bars. Counts retain every eligible client.
× and ▽ at 10 s mark runs with censored or terminated clients, respectively; these are status markers, not recovery times.
No-pause controls (separate nominal window; median run P99): Baseline: n=5, P99 22.99 ms, terminated 0/80; Terminate (3 s): n=5, P99 22.86 ms, terminated 0/80; Skip subgroup (3 s): n=5, P99 22.98 ms, terminated 0/80