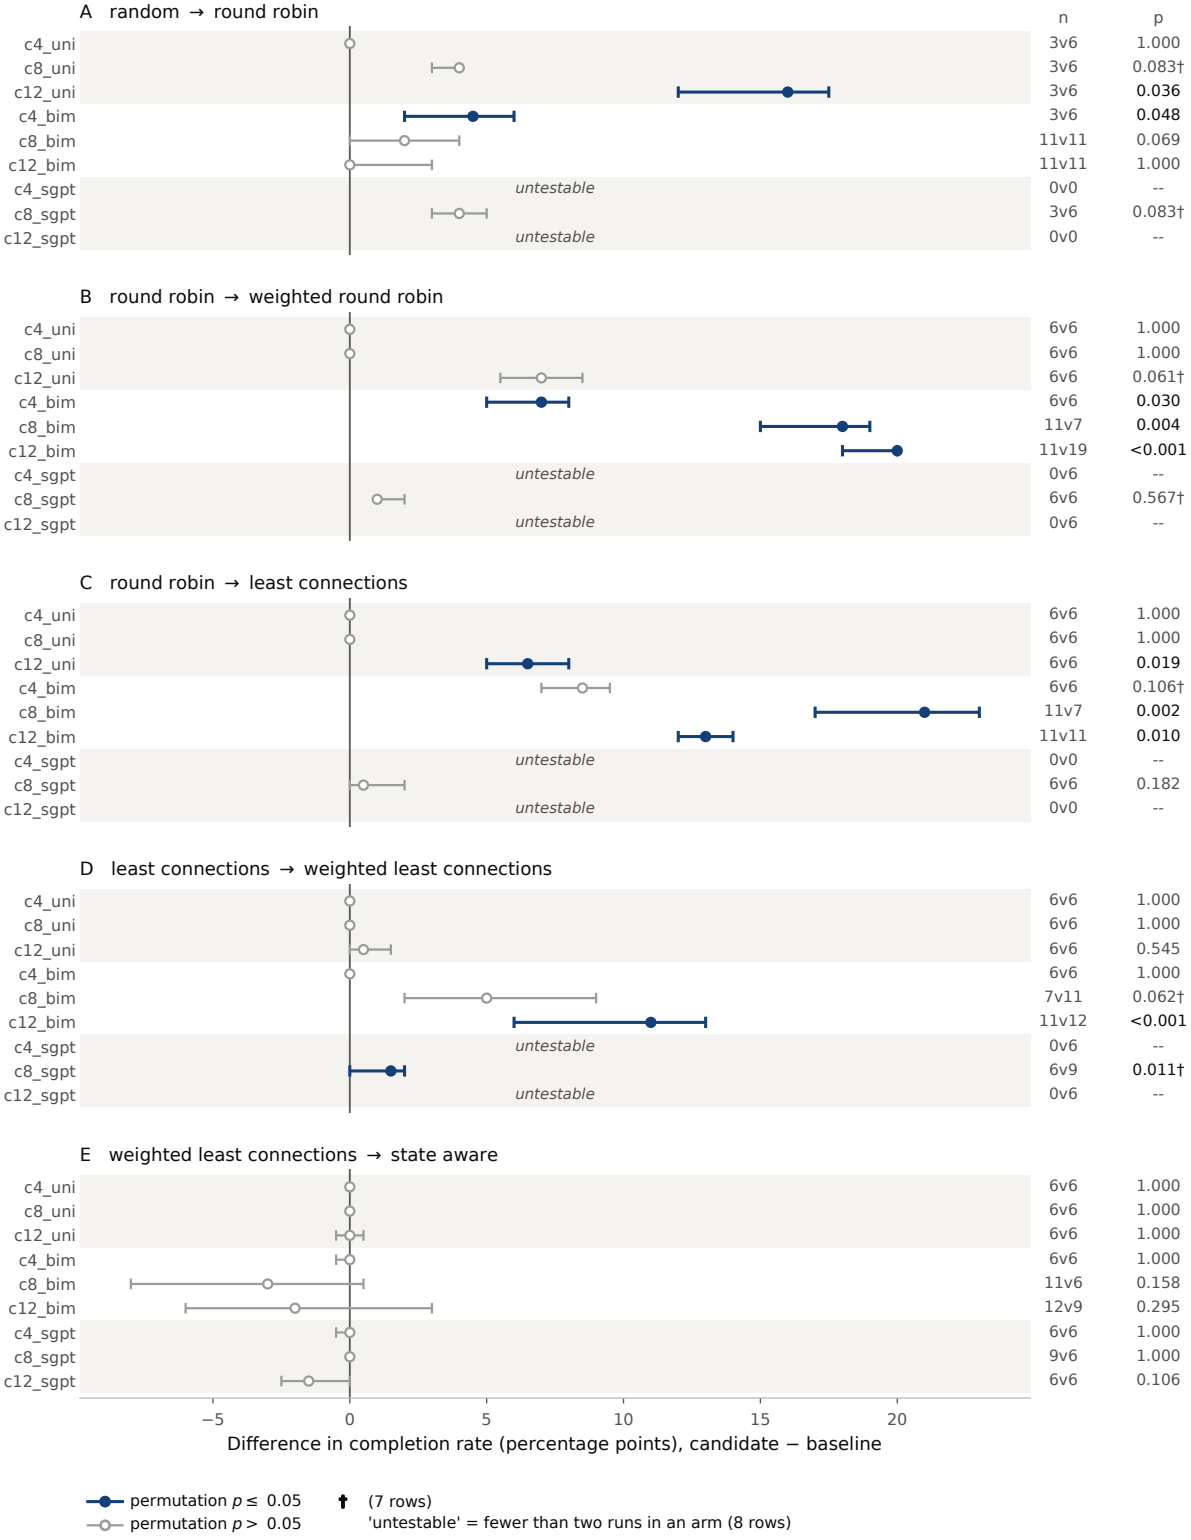
A random → round robin
n
p
c4_uni 3v6 1.000
c8_uni 3v6 0.083†
c12_uni 3v6 0.036
c4_bim 3v6 0.048
c8_bim 11v11 0.069
c12_bim 11v11 1.000
c4_sgpt untestable 0v0 --
c8_sgpt 3v6 0.083†
c12_sgpt untestable 0v0 --
B round robin → weighted round robin
c4_uni 6v6 1.000
c8_uni 6v6 1.000
c12_uni 6v6 0.061†
c4_bim 6v6 0.030
c8_bim 11v7 0.004
c12_bim 11v19 <0.001
c4_sgpt untestable 0v6 --
c8_sgpt 6v6 0.567†
c12_sgpt untestable 0v6 --
C round robin → least connections
c4_uni 6v6 1.000
c8_uni 6v6 1.000
c12_uni 6v6 0.019
c4_bim 6v6 0.106†
c8_bim 11v7 0.002
c12_bim 11v11 0.010
c4_sgpt untestable 0v0 --
c8_sgpt 6v6 0.182
c12_sgpt untestable 0v0 --
D least connections → weighted least connections
c4_uni 6v6 1.000
c8_uni 6v6 1.000
c12_uni 6v6 0.545
c4_bim 6v6 1.000
c8_bim 7v11 0.062†
c12_bim 11v12 <0.001
c4_sgpt untestable 0v6 --
c8_sgpt 6v9 0.011†
c12_sgpt untestable 0v6 --
E weighted least connections → state aware
c4_uni 6v6 1.000
c8_uni 6v6 1.000
c12_uni 6v6 1.000
c4_bim 6v6 1.000
c8_bim 11v6 0.158
c12_bim 12v9 0.295
c4_sgpt 6v6 1.000
c8_sgpt 9v6 1.000
c12_sgpt 6v6 0.106
−5
0
5
10
15
20
Difference in completion rate (percentage points), candidate − baseline
permutation p ≤ 0.05
permutation p > 0.05
(7 rows)
'untestable' = fewer than two runs in an arm (8 rows)