


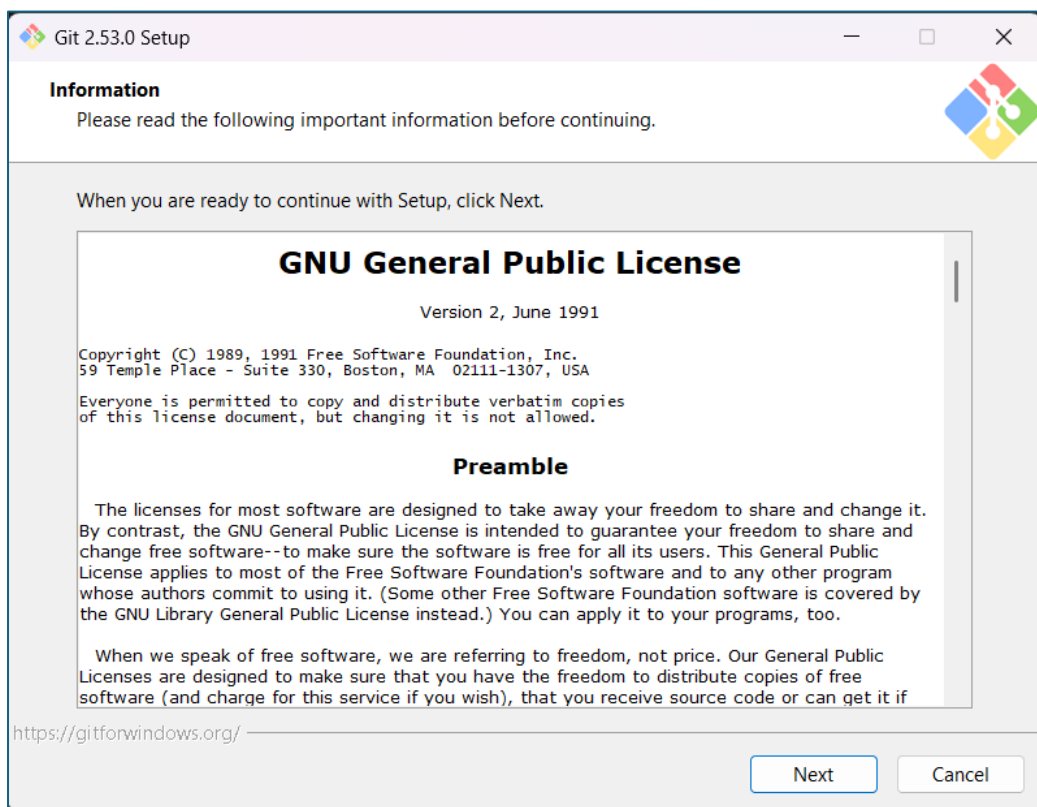
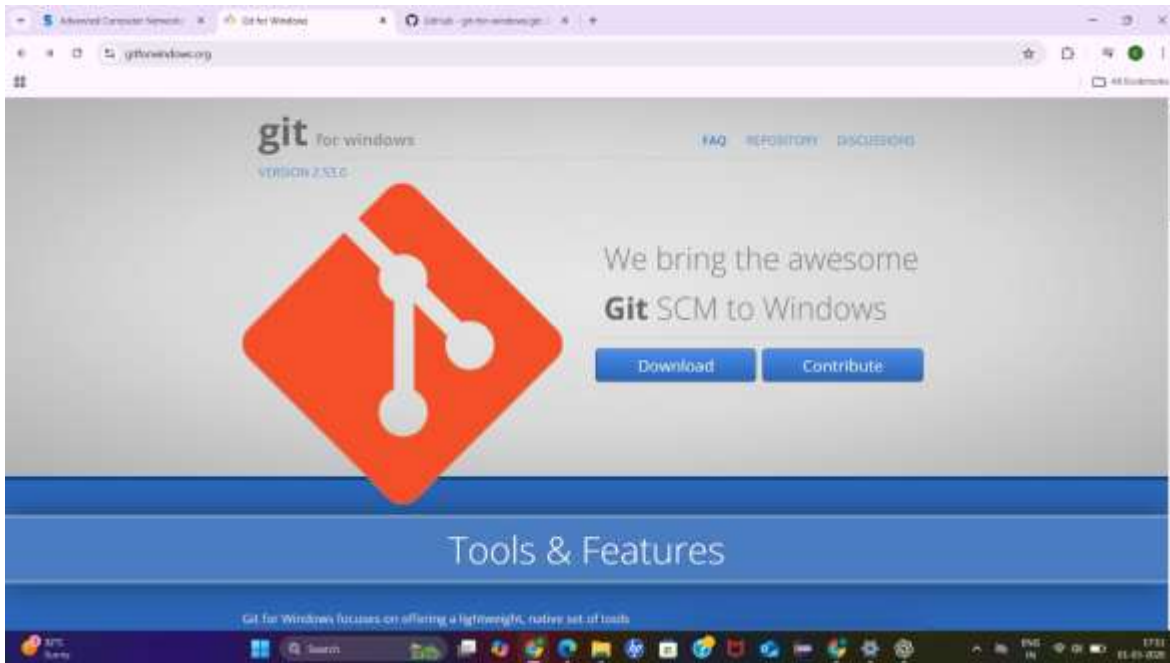
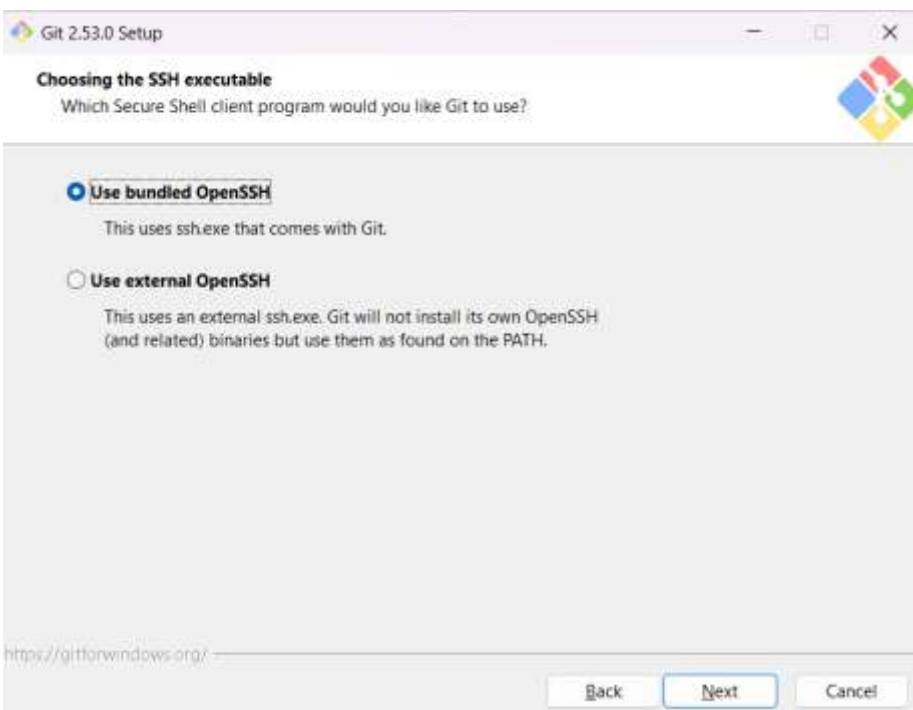
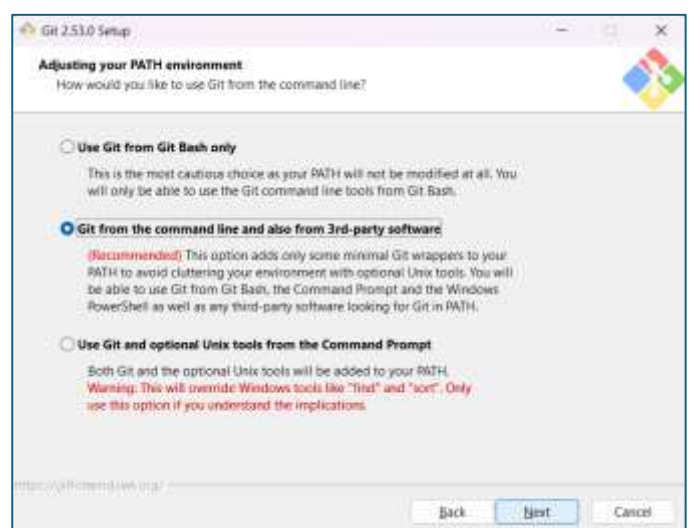
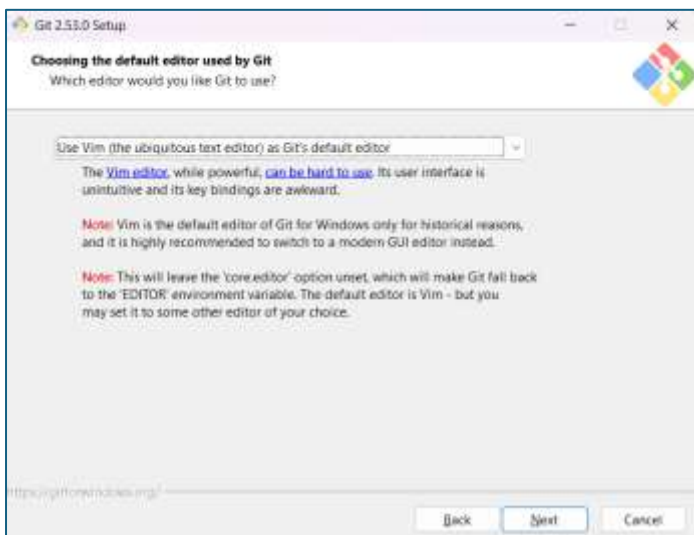


1. Team Setup: Form teams and assign roles (e.g., developer, tester, operations).

2. Git Installation: Download and Install git on your machine.

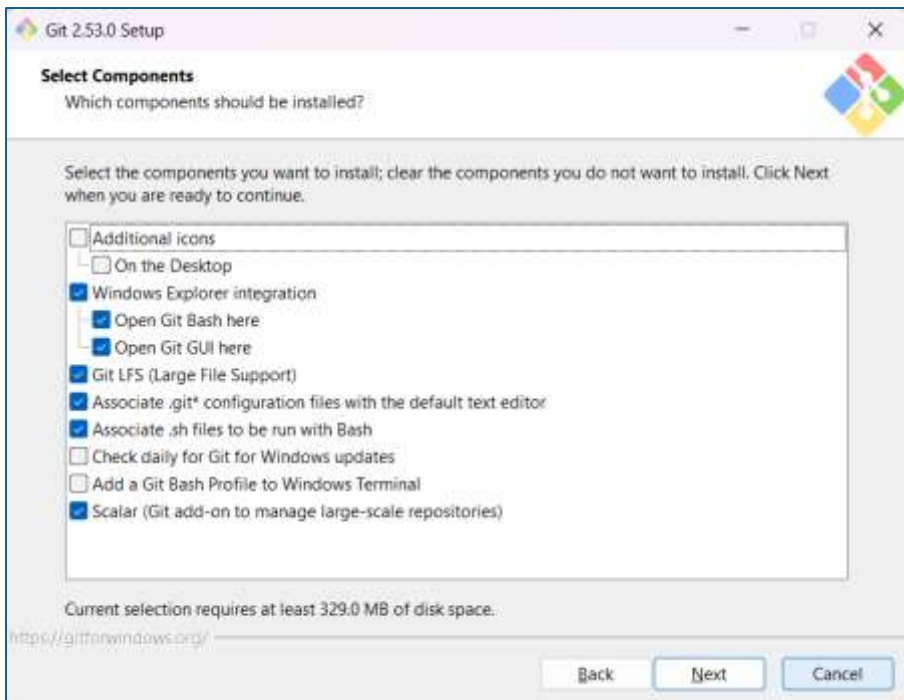

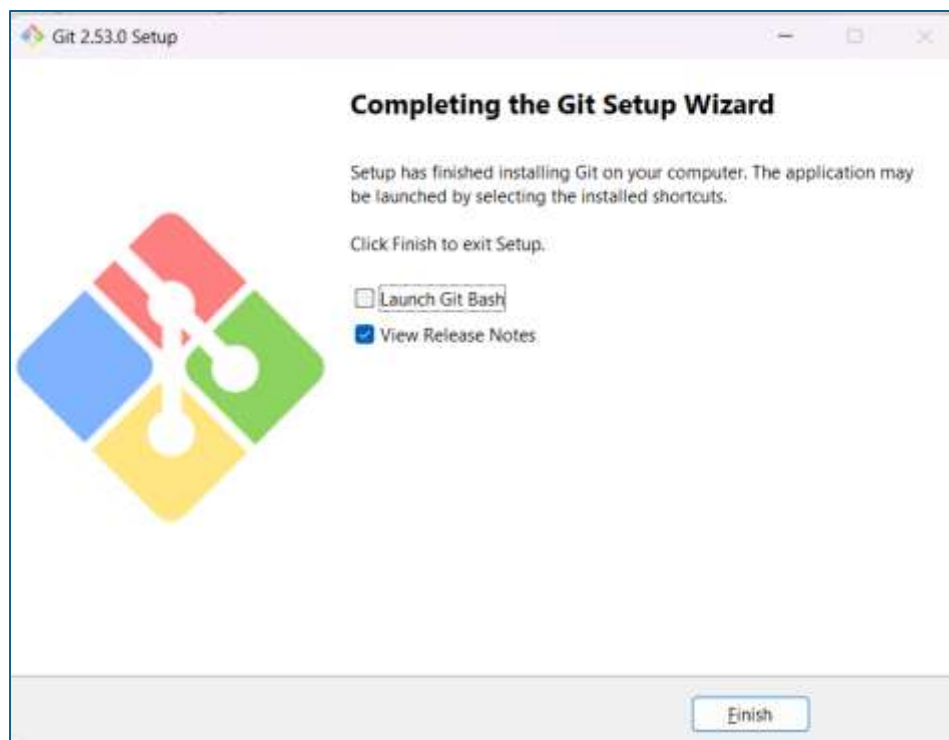

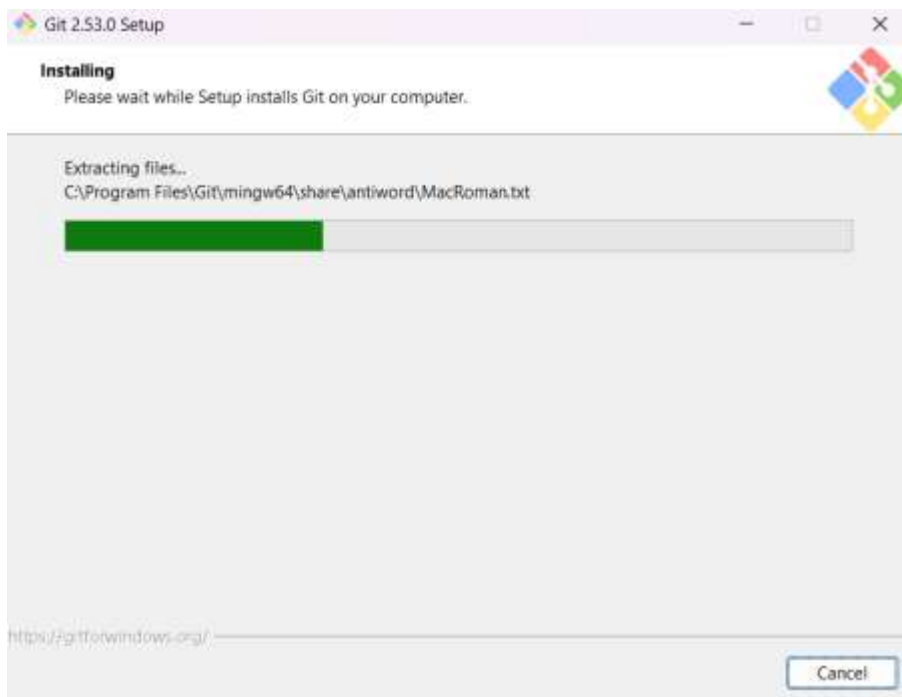

```
kaver@KAVERI MINGW64 ~  
$ git --version  
git version 2.53.0.windows.1
```

3. Configuration: Configure Git using your mail account and then verify it.



```
kaver@KAVERI MINGW64 ~  
$ git config --global user.name "Kaverikadam"  
  
kaver@KAVERI MINGW64 ~  
$ git config --global user.email "a250007@famt.ac.in"
```

```
kaver@KAVERI MINGW64 ~  
$ git config --get user.name  
Kaverikadam  
  
kaver@KAVERI MINGW64 ~  
$ git config --get user.email  
a250007@famt.ac.in  
  
kaver@KAVERI MINGW64 ~  
$ git config --list  
diff.astextplain.textconv=astextplain  
filter.lfs.clean=git-lfs clean -- %f  
filter.lfs.smudge=git-lfs smudge -- %f  
filter.lfs.process=git-lfs filter-process  
filter.lfs.required=true  
http.sslbackend=schannel  
core.autocrlf=true  
core.fscache=true  
core.symlinks=false  
pull.rebase=false  
credential.helper=manager  
credential.https://dev.azure.com.usehttppath=true  
init.defaultbranch=master  
user.name=Kaverikadam  
user.email=a250007@famt.ac.in
```

4. Initialization: Initialize or create a new Git repository and verify it.

```
kaver@KAVERI MINGW64 /  
$ cd D:  
  
kaver@KAVERI MINGW64 /d  
$ cd MCA/"Sem II"/"Devops Lab"  
  
kaver@KAVERI MINGW64 /d/MCA/Sem II/Devops Lab  
$ mkdir Kaverikadam  
  
kaver@KAVERI MINGW64 /d/MCA/Sem II/Devops Lab  
$ cd Kaverikadam  
  
kaver@KAVERI MINGW64 /d/MCA/Sem II/Devops Lab/Kaverikadam  
$ ls  
  
kaver@KAVERI MINGW64 /d/MCA/Sem II/Devops Lab/Kaverikadam  
$ ls -la  
./ ../  
  
kaver@KAVERI MINGW64 /d/MCA/Sem II/Devops Lab/Kaverikadam  
$ git init  
Initialized empty Git repository in D:/MCA/SEM II/DevOps Lab/Kaverikadam/.git/  
  
kaver@KAVERI MINGW64 /d/MCA/Sem II/Devops Lab/Kaverikadam (master)  
$ ls -la  
./ ../ .git/
```

5. Git Hub account: Sign in to www.github.com for an online repository which is available at anytime and anywhere.

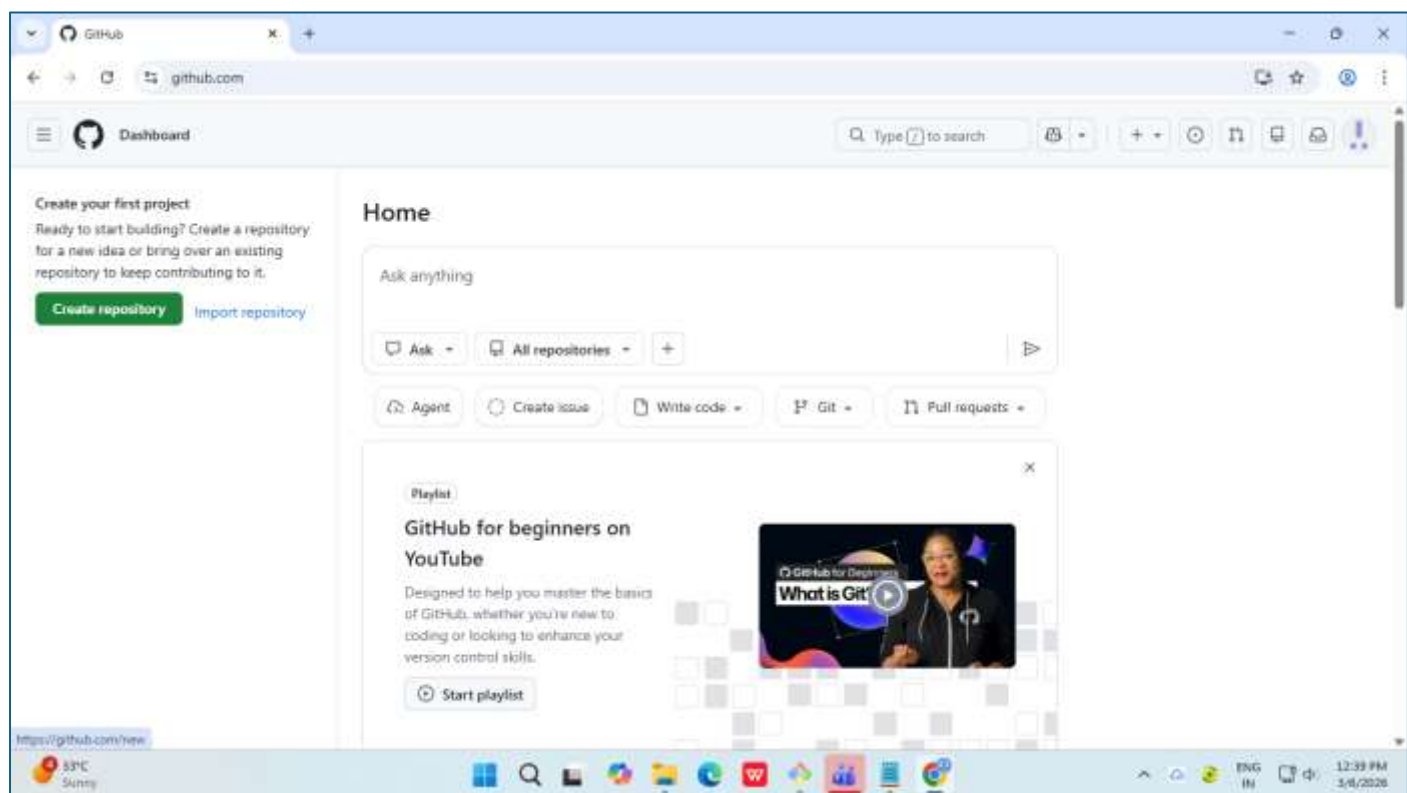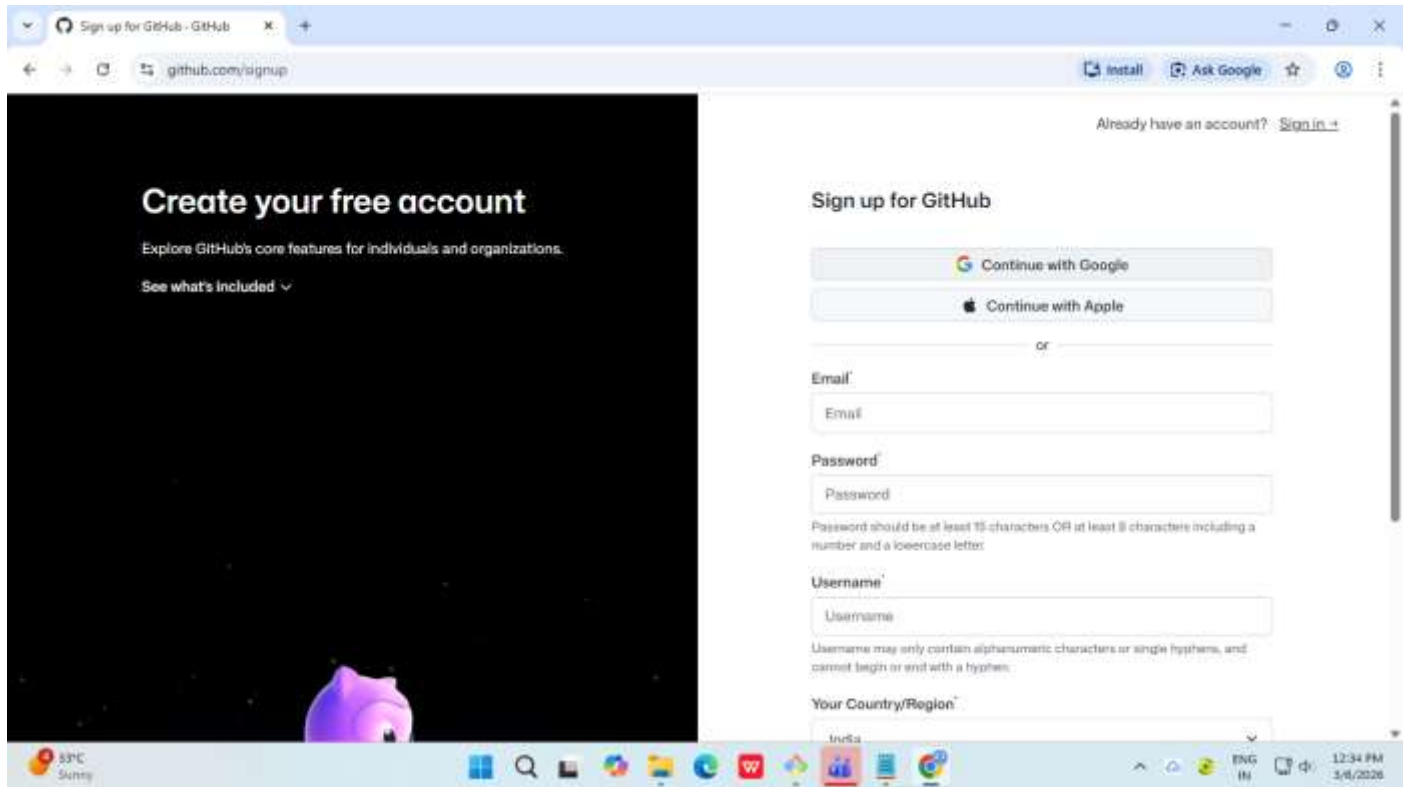

github.com/new

Ask Google

Create a new repository

Repositories contain a project's files and version history. Have a project elsewhere? [Import a repository](#).
Required fields are marked with an asterisk (*).

1

General

Owner *

kaverikadamm

Repository name *

try26

try26 is available.

Great repository names are short and memorable. How about [jubilant-goggles?](#)

Description

0 / 350 characters

2

Configuration

Choose visibility *

Choose who can see and commit to this repository

Private

Public

Private

Add README

READMEs can be used as longer descriptions. [About READMEs](#)

Add .gitignore

.gitignore tells git which files not to track. [About ignoring files](#)

kaverikadamm/try26

github.com/kaverikadamm/try26

Ask Google

kaverikadamm / try26

Type to search

Code Issues Pull requests Actions Projects Security Insights Settings

try26 Private

Watch Forks Stars

**Set up GitHub Copilot**
Use GitHub's AI pair programmer to autocomplete suggestions as you code.
[Get started with GitHub Copilot](#)

**Add collaborators to this repository**
Search for people using their GitHub username or email address.
[Invite collaborators](#)

Quick setup — if you've done this kind of thing before
[Set up in Desktop](#) or [HTTPS](#) [SSH](#) <https://github.com/kaverikadamm/try26.git>
Get started by [creating a new file](#) or [uploading an existing file](#). We recommend every repository include a [README](#), [LICENSE](#) and [.gitignore](#).

...or create a new repository on the command line

```
echo "# try26" >> README.md
git init
```

<https://github.com/kaverikadamm/try26/new/main>