

1. Run Ad-hoc Commands for the following tasks –

a. Execute an ad-hoc command to check the disk usage on remote hosts.

ansible local -m command -a "df -h"

```
kaveri@KAVERI:/$ ansible local -m command -a "df -h"
localhost | CHANGED | rc=0 >>
Filesystem      Size  Used Avail Use% Mounted on
/dev/sdd        1007G  2.5G  954G   1% /
rootfs          3.8G  2.7M  3.8G   1% /init
none            3.8G  136K  3.8G   1% /dev/shm
none            3.8G  528K  3.8G   1% /run
none            3.8G   0    3.8G   0% /run/lock
none            3.8G   80K  3.8G   1% /run/user
tmpfs           777M   20K  777M   1% /run/user/1000
drivers         330G  216G  114G  66% /usr/lib/wsl/drivers
none            3.8G   0    3.8G   0% /usr/lib/wsl/lib
none            3.8G  4.0K  3.8G   1% /mnt/wsl
none            3.8G   76K  3.8G   1% /mnt/wslg/versions.txt
none            3.8G   76K  3.8G   1% /mnt/wslg/doc
none            3.8G   0    3.8G   0% /usr/lib/modules/6.6.87.2-microsoft-standard-WSL2
C:\             330G  216G  114G  66% /mnt/c
D:\             147G   26G  121G  18% /mnt/d
```

b. Fetch system uptime using the command module.

ansible local -m command -a "uptime"

```
kaveri@KAVERI:/$ ansible local -m command -a "uptime"
localhost | CHANGED | rc=0 >>
11:33:36 up 29 min,  1 user,  load average: 0.05, 0.03, 0.00
```

c. Retrieve the hostname of managed nodes using the setup module.

ansible local -m setup -a "filter=ansible_hostname"

```
kaveri@KAVERI:/$ ansible local -m setup -a "filter=ansible_hostname"
localhost | SUCCESS => {
  "ansible_facts": {
    "ansible_hostname": "KAVERI",
    "discovered_interpreter_python": "/usr/bin/python3"
  },
  "changed": false
}
```

d. Create a directory /opt/myproject on remote hosts.

ansible local -m file -a "path=/opt/myproject state=directory" -b

```
kaveri@KAVERI:/$ ansible local -m file -a "path=/opt/myproject state=directory" -b
localhost | CHANGED => {
  "ansible_facts": {
    "discovered_interpreter_python": "/usr/bin/python3"
  },
  "changed": true,
  "gid": 0,
  "group": "root",
  "mode": "0755",
  "owner": "root",
  "path": "/opt/myproject",
  "size": 4096,
  "state": "directory",
  "uid": 0
}
```

e. Ensure a file /opt/myproject/readme.txt exists with specific permissions.

ansible local -m file -a "path=/opt/myproject/readme.txt state=touch mode=0644" -b

```
kaveri@KAVERI:/$ ansible local -m file -a "path=/opt/myproject/readme.txt state=touch mode=0644" -b
localhost | CHANGED => {
  "ansible_facts": {
    "discovered_interpreter_python": "/usr/bin/python3"
  },
  "changed": true,
  "dest": "/opt/myproject/readme.txt",
  "gid": 0,
  "group": "root",
  "mode": "0644",
  "owner": "root",
  "size": 0,
  "state": "file",
  "uid": 0
}
```

f. Create a new user *devops* with a home directory.

ansible local -m user -a "name=devops create_home=yes"

```
kaveri@KAVERI:/$ ansible local -m user -a "name=devops create_home=yes"
localhost | SUCCESS => {
  "ansible_facts": {
    "discovered_interpreter_python": "/usr/bin/python3"
  },
  "append": false,
  "changed": false,
  "comment": "",
  "group": 1002,
  "home": "/home/devops",
  "move_home": false,
  "name": "devops",
  "shell": "/bin/sh",
  "state": "present",
  "uid": 1001
}
```

g. Ensure *apache2* or *httpd* is installed and running.

Install Apache:

ansible local -m apt -a "name=apache2 state=present" -b

```
kaveri@KAVERI:/$ ansible local -m apt -a "name=apache2 state=present" -b
localhost | CHANGED => {
  "ansible_facts": {
    "discovered_interpreter_python": "/usr/bin/python3"
  },
  "cache_update_time": 1778395967,
  "cache_updated": false,
  "changed": true,
  "stderr": "",
  "stderr_lines": [],
  "stdout": "Reading package lists...\nBuilding dependency tree...\nReading state f
ng NEW packages will be installed:\n apache2\n0 upgraded, 1 newly installed, 0 to re
used.\nSelecting previously unselected package apache2.\n\n(Reading database ... \n(
. 25%\n(Reading database ... 30%\n(Reading database ... 35%\n(Reading database ... 40
se ... 65%\n(Reading database ... 70%\n(Reading database ... 75%\n(Reading database .
database ... 64704 files and directories currently installed.)\n\nPreparing to unpack
ntu8.12) ... \n\napache-htcacheclean.service is a disabled or a static unit not running
"stdout_lines": [
    "Reading package lists...",

```

Start Apache service:

ansible local -m service -a "name=apache2 state=started enabled=yes" -b

```
kaveri@KAVERI:/$ ansible local -m service -a "name=apache2 state=started enabled=yes" -b
localhost | SUCCESS => {
  "ansible_facts": {
    "discovered_interpreter_python": "/usr/bin/python3"
  },
  "changed": false,
  "enabled": true,
  "name": "apache2",
  "state": "started",
  "status": {
    "ActiveEnterTimestamp": "Wed 2026-05-13 14:23:39 UTC",
    "ActiveEnterTimestampMonotonic": "5281206537",
    "ActiveExitTimestamp": "Wed 2026-05-13 14:23:32 UTC",
    "ActiveExitTimestampMonotonic": "5273968369",
    "ActiveState": "active",
    "After": "network.target remote-fs.target systemd-tmpfiles-setup.service system.sli
    "AllowIsolate": "no",
    "AssertResult": "yes",
    "AssertTimestamp": "Wed 2026-05-13 14:23:39 UTC",
```

h. Install *nginx* on Ubuntu using the *apt* module.

If this error for any command:

```
kaveri@KAVERI:/$ ansible local -m apt -a "name=apache2 state=present" -b
localhost | FAILED! => {
  "ansible_facts": {
    "discovered_interpreter_python": "/usr/bin/python3"
  },
  "changed": false,
  "module_stderr": "sudo: a password is required\n",
  "module_stdout": "",
  "msg": "MODULE FAILURE\nSee stdout/stderr for the exact error",
  "rc": 1
```

So open `sudo visudo` >> at the end add **YOUR_USERNAME(kaveri) ALL=(ALL) NOPASSWD: ALL** >> press `Ctrl+X` >> `y` >> `enter`

```
%admin ALL=(ALL) ALL

# Allow members of group sudo to execute any command
%sudo ALL=(ALL:ALL) ALL

# See sudoers(5) for more information on "@include" directives:

@includedir /etc/sudoers.d
kaveri ALL=(ALL) NOPASSWD: ALL

^G Help      ^O Write Out  ^W Where Is   ^K Cut
^X Exit      ^R Read File  ^\ Replace    ^U Paste
```

`ansible local -m apt -a "name=nginx state=present" -b`


```
kaveri@KAVERI:/$ ansible local -m apt -a "name=nginx state=present" -b
localhost | SUCCESS => {
  "ansible_facts": {
    "discovered_interpreter_python": "/usr/bin/python3"
  },
  "cache_update_time": 1778395967,
  "cache_updated": false,
  "changed": false
}
```

i. Run a shell script located in `/home/devops/setup.sh`

```
kaveri@KAVERI:/$ echo -e '#!/bin/bash\nnecho "Setup Script Running"' | sudo tee /home/devops/setup.sh\n#!/bin/bash\necho "Setup Script Running"\nkaveri@KAVERI:/$ sudo chmod +x /home/devops/setup.sh\nkaveri@KAVERI:/$ ansible local -m shell -a "bash /home/devops/setup.sh" -b\nlocalhost | CHANGED | rc=0 >>\nSetup Script Running\nkaveri@KAVERI:/$
```

2. Create a Simple Playbook to Print "Hello World" using the pull model.

Create a repository as ansible pull. >> Create new file

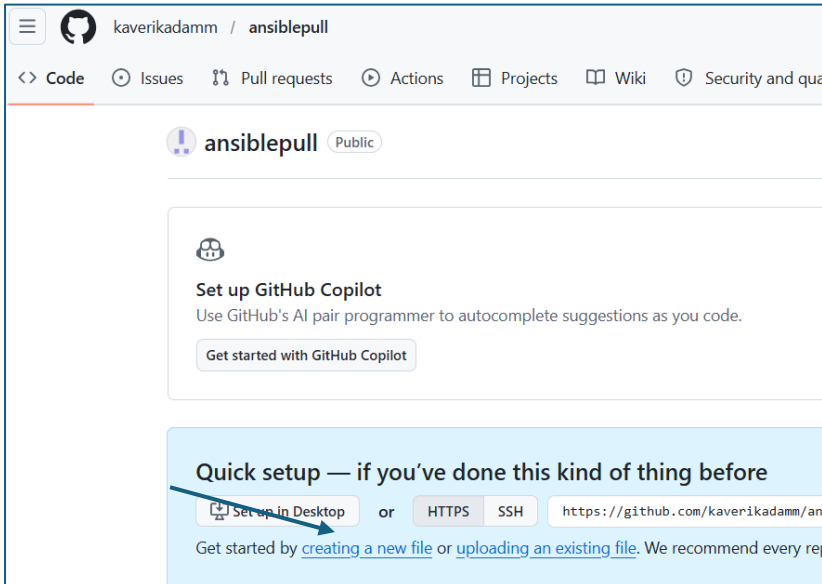

inventory.ini:

```
[localhost]\n127.0.0.1 ansible_connection=local
```

pullhello.yml

```
- name: First Pull Demo Ansible Playbook\n  hosts: localhost\n  tasks:\n    - name: print hello world\n      debug:\n        msg: "Hello World!..." \n    - name: print host name\n      debug:\n        var: ansible_hostname\n    - name: print Ubuntu Version\n      debug:\n        var: ansible_distribution
```

Then in powershell run command

First create project directory

```
kaveri@KAVERI:/home$ cd /home\nkaveri@KAVERI:/home$ sudo mkdir myansibleprj\nkaveri@KAVERI:/home$ cd myansibleprj\nkaveri@KAVERI:/home/myansibleprj$ sudo mkdir ansiblepulldemo
```

ansible-pull -d /home/myansibleprj/ansiblepulldemo -U

https://github.com/kaverikadamm/ansiblepull.git -i /home/myansibleprj/inventory.ini pulldemo.yml

but it fails as belows:

```
kaveri@KAVERI:/home/myansibleprj$ ansible-pull -d /home/myansibleprj/ansiblepulldemo -U https://github.com/kaverikadamm/ansiblepull.git -i /home/myansibleprj/inventory.ini pulldemo.yml
Starting Ansible Pull at 2026-05-13 15:25:37
/usr/bin/ansible-pull -d /home/myansibleprj/ansiblepulldemo -U https://github.com/kaverikadamm/ansiblepull.git -i /home/myansibleprj/inventory.ini pulldemo.yml
[WARNING]: Could not match supplied host pattern, ignoring: KAVERI
[WARNING]: Could not match supplied host pattern, ignoring: KAVERI.localdomain
localhost | FAILED! => {
  "changed": false,
  "cmd": "/usr/bin/git clone --origin origin --depth 1 https://github.com/kaverikadamm/ansiblepull.git /home/myansibleprj/ansiblepulldemo",
  "msg": "Cloning into '/home/myansibleprj/ansiblepulldemo'...\n/home/myansibleprj/ansiblepulldemo/.git: Permission denied",
  "rc": 1,
  "stderr": "Cloning into '/home/myansibleprj/ansiblepulldemo'...\n/home/myansibleprj/ansiblepulldemo/.git: Permission denied\n",
  "stderr_lines": [
    "Cloning into '/home/myansibleprj/ansiblepulldemo'...",
    "/home/myansibleprj/ansiblepulldemo/.git: Permission denied"
  ],
  "stdout": "",
  "stdout_lines": []
}
kaveri@KAVERI:/home/myansibleprj$
```

So run below commands:

sudo chown -R kaveri:kaveri /home/myansibleprj/ansiblepulldemo

```
kaveri@KAVERI:/home/myansibleprj$ sudo chown -R kaveri:kaveri /home/myansibleprj/ansiblepulldemo
```

Then check again:

ansible-pull -d /home/myansibleprj/ansiblepulldemo -U

https://github.com/kaverikadamm/ansiblepull.git -i /home/myansibleprj/inventory.ini pullhello.yml

```
kaveri@KAVERI:/home/myansibleprj$ ansible-pull -d /home/myansibleprj/ansiblepulldemo -U https://github.com/kaverikadamm/ansiblepull.git -i /home/myansibleprj/inventory.ini pullhello.yml
Starting Ansible Pull at 2026-05-13 15:28:02
/usr/bin/ansible-pull -d /home/myansibleprj/ansiblepulldemo -U https://github.com/kaverikadamm/ansiblepull.git -i /home/myansibleprj/inventory.ini pullhello.yml
[WARNING]: Could not match supplied host pattern, ignoring: KAVERI
[WARNING]: Could not match supplied host pattern, ignoring: KAVERI.localdomain
localhost | SUCCESS => {
  "after": "3160a0a7f648ffb6f0ebc9fc50697ed3b6f686ff",
  "before": "3160a0a7f648ffb6f0ebc9fc50697ed3b6f686ff",
  "changed": false,
  "remote_url_changed": false
}
[WARNING]: Could not match supplied host pattern, ignoring: KAVERI
[WARNING]: Could not match supplied host pattern, ignoring: KAVERI.localdomain

PLAY [First Pull Demo Ansible Playbook] *****

TASK [Gathering Facts] *****
ok: [localhost]

TASK [print hello world] *****
ok: [localhost] => {
  "msg": "Hello World!..."
}

TASK [print host name] *****
ok: [localhost] => {
  "ansible_hostname": "KAVERI"
}

TASK [print Ubuntu Version] *****
ok: [localhost] => {
  "ansible_distribution": "Ubuntu"
}

PLAY RECAP *****
localhost                : ok=4   changed=0    unreachable=0    failed=0    skipped=0    rescued=0    ignored=0
```

3. Deploy a NodeJS web application with a basic welcome message using the pull model.

Create a repository as ansiblenodejspull.

Create **inventory.ini**.

[localhost]

127.0.0.1 ansible_connection=local

Create **app.js**

```
const http = require('http');
```

```
const server = http.createServer((req, res) => {
  res.write("Welcome to NodeJS web application!");
  res.end();
});
```

```
server.listen(3000, () => {
```

```
console.log("Server running on http://localhost:3000");
});
```

Create **nodepull.yml**

- name: Deploy NodeJS App using Pull Model

hosts: localhost

become: yes

tasks:

- name: Install NodeJS

apt:

name: nodejs

state: present

update_cache: yes

- name: Copy app.js

copy:

src: app.js

dest: /home/kaveri/app.js

- name: Run NodeJS App

shell: |

nohup node /home/kaveri/app.js > /dev/null 2>&1 &

```
kaveri@KAVERI:/home/myansibleprj$ sudo chown -R kaveri:kaveri /home/myansibleprj/nodepulldemo
```

```
kaveri@KAVERI:/home/myansibleprj$ sudo mkdir nodepulldemo
```

ansible-pull -d /home/myansibleprj/nodepulldemo -U

<https://github.com/kaverikadamm/ansiblenodejspull.git> -i /home/myansibleprj/inventory.ini

nodepull.yml

Wait for some time

```
kaveri@KAVERI:/home/myansibleprj$ ansible-pull -d /home/myansibleprj/nodepulldemo -U https://github.com/kaverikadamm/ansiblenodejspull.git -i /home/myansibleprj/inventory.ini nodepull.yml
Starting Ansible Pull at 2026-05-13 17:48:47
/usr/bin/ansible-pull -d /home/myansibleprj/nodepulldemo -U https://github.com/kaverikadamm/ansiblenodejspull.git -i /home/myansibleprj/inventory.ini nodepull.yml
[WARNING]: Could not match supplied host pattern, ignoring: KAVERI
Starting Ansible Pull at 2026-05-13 17:48:47
/usr/bin/ansible-pull -d /home/myansibleprj/nodepulldemo -U https://github.com/kaverikadamm/ansiblenodejspull.git -i /home/myansibleprj/inventory.ini nodepull.yml
[WARNING]: Could not match supplied host pattern, ignoring: KAVERI
[WARNING]: Could not match supplied host pattern, ignoring: KAVERI.localdomain
localhost | SUCCESS => {
  "after": "a5848a0837fe051ca8ed55ada70aba69bc789c09",
  "before": "a5848a0837fe051ca8ed55ada70aba69bc789c09",
  "changed": false,
  "remote_url_changed": false
}
[WARNING]: Could not match supplied host pattern, ignoring: KAVERI
[WARNING]: Could not match supplied host pattern, ignoring: KAVERI.localdomain

PLAY [Deploy NodeJS App using Pull Model] *****

TASK [Gathering Facts] *****
ok: [localhost]


TASK [Install NodeJS] *****
changed: [localhost]

TASK [Copy app.js] *****
changed: [localhost]

TASK [Run NodeJS App] *****
changed: [localhost]

PLAY RECAP *****
localhost                : ok=4    changed=3    unreachable=0    failed=0    skipped=0    rescued=0    ignored=0
```

Open localhost:3000 in browser

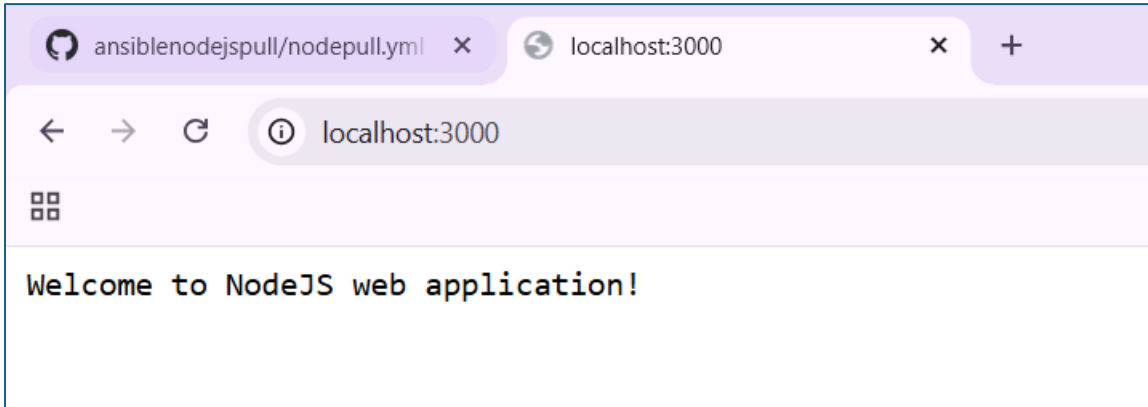

4. Create a simple playbook that demonstrates configuration management.

```
PS C:\windows\system32> wsl
kaveri@KAVERI:/mnt/c/windows/system32$ cd /
kaveri@KAVERI:/$ cd /home/myansibleprj
kaveri@KAVERI:/home/myansibleprj$ sudo vi custom_apache.conf
```

press i to insert text

```
kaveri@KAVERI:/home/myansibleprj
<VirtualHost *:80>
    ServerAdmin admin@example.com
    DocumentRoot /var/www/html
    ServerName example.com
    ErrorLog ${APACHE_LOG_DIR}/error.log
    CustomLog ${APACHE_LOG_DIR}/access.log combined
</VirtualHost>
~
~
~
```

```
<VirtualHost *:80>
    ServerAdmin admin@example.com
    DocumentRoot /var/www/html
    ServerName example.com
    ErrorLog ${APACHE_LOG_DIR}/error.log
    CustomLog ${APACHE_LOG_DIR}/access.log combined
</VirtualHost>
```

```
kaveri@KAVERI:/home/myansibleprj$ sudo vi configplaybook.yml
kaveri@KAVERI:/home/myansibleprj$ cat configplaybook.yml
- name: Apache Configuration Management
  hosts: localhost
  become: yes

  tasks:
    - name: Install Apache
      apt:
        name: apache2
        state: present
        update_cache: yes

    - name: Copy custom Apache Configuration File
      copy:
        src: /home/myansibleprj/custom_apache.conf
        dest: /etc/apache2/sites-available/custom_apache.conf
        owner: root
        group: root
        mode: '0644'

    - name: Reload Apache to apply changes
      systemd:
        name: apache2
        state: restarted
        enabled: yes
```

- name: Apache Configuration Management
 - hosts: localhost
 - become: yes
- tasks:
 - name: Install Apache
 - apt:
 - name: apache2
 - state: present
 - update_cache: yes
 - name: Copy custom Apache Configuration File
 - copy:
 - src: /home/myansibleprj/custom_apache.conf
 - dest: /etc/apache2/sites-available/custom_apache.conf
 - owner: root
 - group: root
 - mode: '0644'
 - name: Reload Apache to apply changes
 - systemd:
 - name: apache2
 - state: restarted
 - enabled: yes

(As nginx was already using 80 port mentioned in conf file we had to stop it from using as follows;

```

kaveri@KAVERI:/home/myansibleprj$ sudo ansible-playbook configplaybook.yml
PLAY [Apache Configuration Management] *****
TASK [Gathering Facts] *****
ok: [localhost]

TASK [Install Apache] *****
*[[C*[[Cok: [localhost]

TASK [Copy custom Apache Configuration File] *****
changed: [localhost]

TASK [Reload Apache to apply changes] *****
fatal: [localhost]: FAILED! => {"changed": false, "msg": "Unable to start service apache2: Job for apache2.service failed because the control process exited with error code.\nSee \"systemctl status apache2.servi\nce\" and \"journalctl -xeu apache2.service\" for details.\n"}

PLAY RECAP *****
localhost      : ok=3  changed=1  unreachable=0  failed=1  skipped=0  rescued=0  ignored=0

```

To check if nginx is using:

sudo lsof -i :80

```

kaveri@KAVERI:/home/myansibleprj$ sudo systemctl stop nginx
kaveri@KAVERI:/home/myansibleprj$ sudo ansible-playbook configplaybook.yml
PLAY [Apache Configuration Management] *****
TASK [Gathering Facts] *****
ok: [localhost]

TASK [Install Apache] *****
ok: [localhost]

TASK [Copy custom Apache Configuration File] *****
ok: [localhost]

TASK [Reload Apache to apply changes] *****
changed: [localhost]

PLAY RECAP *****
localhost      : ok=4  changed=1  unreachable=0  failed=0  skipped=0  rescued=0  ignored=0

kaveri@KAVERI:/home/myansibleprj$ _

```



```
kaveri@KAVERI:/home/myansibleprj$ sudo systemctl status apache2
● apache2.service - The Apache HTTP Server
   Loaded: loaded (/usr/lib/systemd/system/apache2.service; enabled; preset: enabled)
   Active: active (running) since Thu 2026-05-14 02:24:04 UTC; 4min 33s ago
     Docs: https://httpd.apache.org/docs/2.4/
   Process: 1668 ExecStart=/usr/sbin/apachectl start (code=exited, status=0/SUCCESS)
  Main PID: 1671 (apache2)
    Tasks: 55 (limit: 9303)
   Memory: 5.4M (peak: 7.6M)
      CPU: 50ms
   CGroup: /system.slice/apache2.service
           └─1671 /usr/sbin/apache2 -k start
             └─1673 /usr/sbin/apache2 -k start
               └─1674 /usr/sbin/apache2 -k start

May 14 02:24:04 KAVERI systemd[1]: Starting apache2.service - The Apache HTTP Server...
May 14 02:24:04 KAVERI systemd[1]: Started apache2.service - The Apache HTTP Server.
```

```
kaveri@KAVERI:/home/myansibleprj$ sudo netstat -tulnp | grep ':80\|:443'
sudo: netstat: command not found
kaveri@KAVERI:/home/myansibleprj$ sudo apt install net-tools -y
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done
The following NEW packages will be installed:
  net-tools
0 upgraded, 1 newly installed, 0 to remove and 102 not upgraded.
Need to get 204 kB of archives.
After this operation, 811 kB of additional disk space will be used.
Get:1 http://archive.ubuntu.com/ubuntu noble-updates/main amd64 net-tools amd64 2.10-0.1ubuntu4.4 [204 kB]
Fetched 204 kB in 6s (33.8 kB/s)
Selecting previously unselected package net-tools.
(Reading database ... 65525 files and directories currently installed.)
Preparing to unpack .../net-tools_2.10-0.1ubuntu4.4_amd64.deb ...
Unpacking net-tools (2.10-0.1ubuntu4.4) ...
Setting up net-tools (2.10-0.1ubuntu4.4) ...
Processing triggers for man-db (2.12.0-4build2) ...
kaveri@KAVERI:/home/myansibleprj$
```

```
kaveri@KAVERI:/home/myansibleprj$ sudo netstat -tulnp | grep ':80\|:443'
tcp6      0      0 :::80      :::*        LISTEN    1671/apache2
```

5. Integrate Ansible with Jenkins for CI/CD wherein write a playbook to deploy an application and configure Jenkins to execute the playbook after each code push.

First create a playbook

```
kaveri@KAVERI:/home/myansibleprj$ sudo vi appdeployplaybook.yml
kaveri@KAVERI:/home/myansibleprj$ cat appdeployplaybook.yml
- name: Deploy a PHP Web Application
  hosts: localhost
  become: yes

  tasks:
    - name: Install Apache and PHP
      apt:
        name:
          - apache2
          - php
        state: present

    - name: Deploy a PHP application
      copy:
        content:
          <?php
          echo "<h1>Hello from Ansible and PHP! </h1>";
          echo "<body>This is demo page </body>";
          ?>

        dest: /var/www/html/index.php

    - name: Restart Apache
      service:
        name: apache2
        state: restarted
```

```
kaveri@KAVERI:/home/myansibleprj$ sudo ansible-playbook appdeployplaybook.yml

PLAY [Deploy a PHP Web Application] *****

TASK [Gathering Facts] *****
ok: [localhost]


TASK [Install Apache and PHP] *****
changed: [localhost]

TASK [Deploy a PHP application] *****
changed: [localhost]


TASK [Restart Apache] *****
changed: [localhost]

PLAY RECAP *****
localhost : ok=4  changed=3  unreachable=0  failed=0  skipped=0  rescued=0  ignored=0
```


Check whether running: localhost/index.php

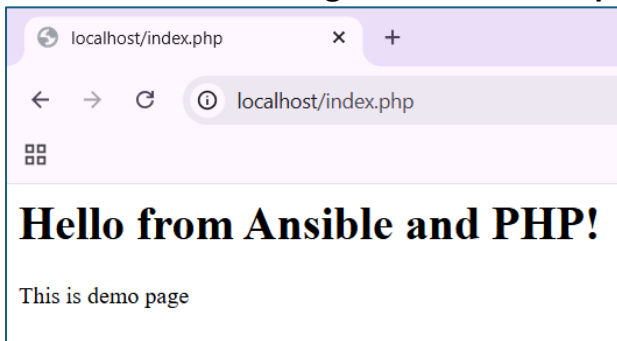

Open jenkins and create a freestyle project

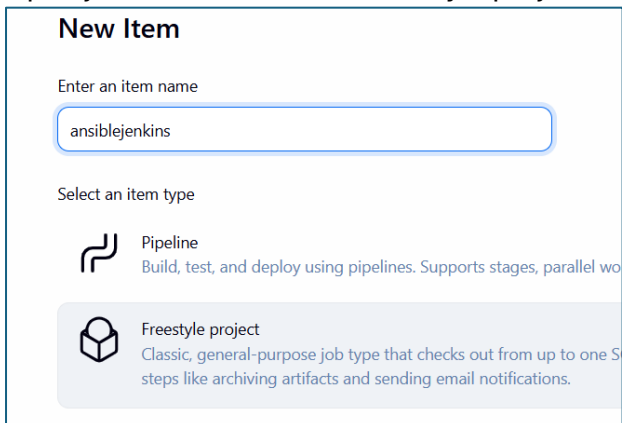

Scroll down to build steps>>Add build step >> execute windows batch command

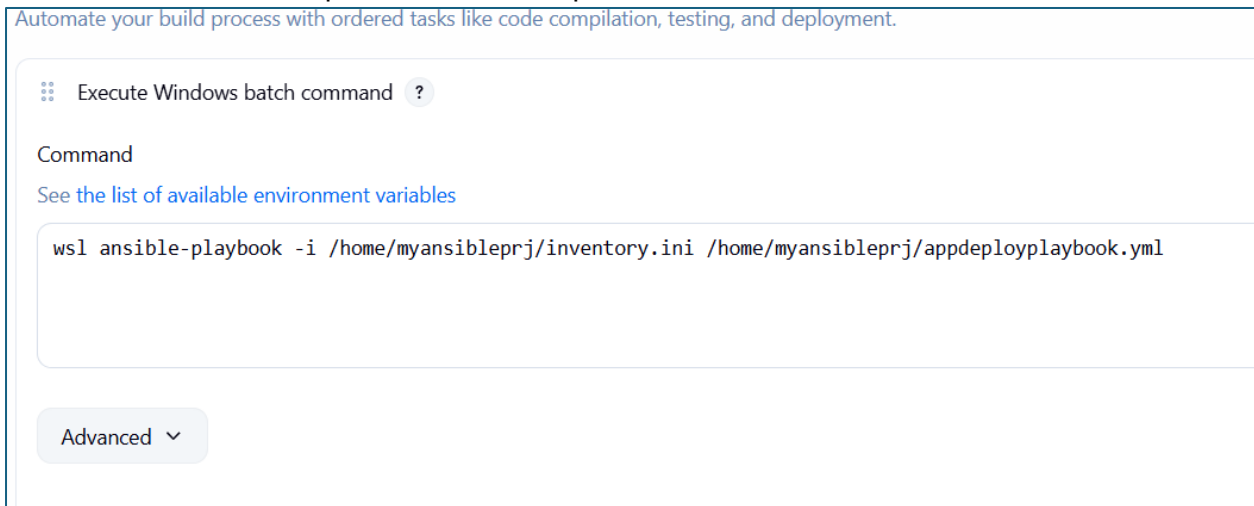

```
wsl ansible-playbook -i /home/myansibleprj/inventory.ini
/home/myansibleprj/appdeployplaybook.yml
```

It gives error:

```
Started by user Devops
Running as SYSTEM
Building in workspace C:\ProgramData\Jenkins\.jenkins\workspace\ansiblejenkins
[ansiblejenkins] $ cmd /c call C:\windows\TEMP\jenkins11878703193504909658.bat


C:\ProgramData\Jenkins\.jenkins\workspace\ansiblejenkins>wsl ansible-playbook -i /home/myansibleprj/inventory.ini
/home/myansibleprj/appdeployplaybook.yml
Running WSL as local system is not supported.

Error code: Wsl/WSL_E_LOCAL_SYSTEM_NOT_SUPPORTED

C:\ProgramData\Jenkins\.jenkins\workspace\ansiblejenkins>exit -1
Build step 'Execute Windows batch command' marked build as failure
Finished: FAILURE
```

Open **services** from windows>> Find jenkins >>Right click>> stop >>Right click>> Properties>> Log On tab>> Select This account >> Enter your Windows username and password. To find username run below command in cmd: (username is after\ i.e kaver)

```
C:\Users\kaver>whoami
kaveri\kaver
C:\Users\kaver>
```

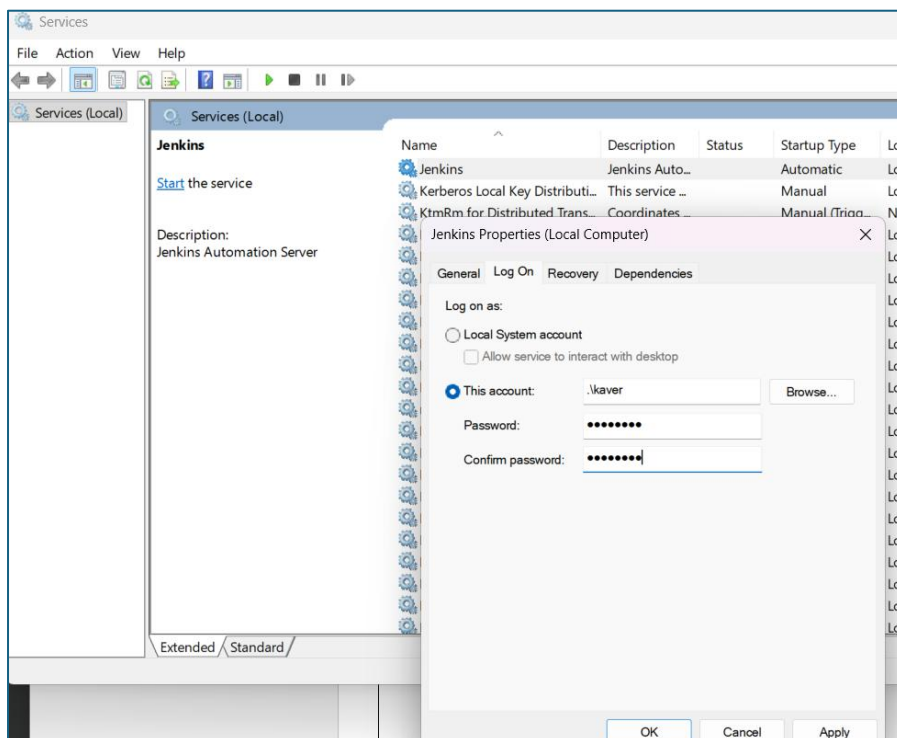

Click on apply >>ok
Build pipeline again

Output:

utput

✔

Console Output

Download

Copy

View as plain text

Started by user [Devops](#)

Running as SYSTEM

[EnvInject] - Loading node environment variables.

Building in workspace C:\ProgramData\Jenkins\jenkins\workspace\wsl ansible

[wsl ansible] \$ cmd /c call C:\Users\admin\AppData\Local\Temp\jenkins5156382488725544565.bat

C:\ProgramData\Jenkins\jenkins\workspace\wsl ansible>wsl ansible-playbook -i /home/myansibleprj/inventory.ini

/home/myansibleprj/appdeployplaybook.yml

[WARNING]: Unable to parse /home/myansibleprj/inventory.ini as an inventory

source

[WARNING]: No inventory was parsed, only implicit localhost is available

[WARNING]: provided hosts list is empty, only localhost is available. Note that

the implicit localhost does not match 'all'

PLAY [Deploy a PHP Web Application] *****

TASK [Gathering Facts] *****

ok: [localhost]

TASK [Install Apache and PHP] *****

ok: [localhost]

TASK [Deploy a PHP application] *****

ok: [localhost]

put

[WARNING]: Unable to parse /home/myansibleprj/inventory.ini as an inventory

source

[WARNING]: No inventory was parsed, only implicit localhost is available

[WARNING]: provided hosts list is empty, only localhost is available. Note that

the implicit localhost does not match 'all'

PLAY [Deploy a PHP Web Application] *****

TASK [Gathering Facts] *****

ok: [localhost]

TASK [Install Apache and PHP] *****

ok: [localhost]

TASK [Deploy a PHP application] *****

ok: [localhost]

TASK [Restart Apache] *****

changed: [localhost]

PLAY RECAP *****

localhost : ok=4 changed=1 unreachable=0 failed=0 skipped=0 rescued=0 ignored=0

C:\ProgramData\Jenkins\jenkins\workspace\wsl ansible>exit 0

Finished: SUCCESS

localhost/index.php

✕

+

←

→

↺

localhost/index.php

⌵

Hello from Ansible and PHP!

This is demo page

