Status	Finished
Started	Sunday, 11 October 2026, 10:36 AM
Completed	Sunday, 11 October 2026, 10:52 AM
Duration	15 mins 42 secs
Grade	**10.00** out of 10.00 (**100**%)

Question **1**

Correct

Mark 1.00 out of 1.00

Given a tuple and a positive integer k, the task is to find the count of distinct pairs in the tuple whose sum is equal to **K**.

Examples:

> **Input:** t = (5, 6, 5, 7, 7, 8), K = 13
> **Output:** 2
> **Explanation:**
> Pairs with sum K(= 13) are {(5, 8), (6, 7), (6, 7)}.
> Therefore, distinct pairs with sum K(= 13) are { (5, 8), (6, 7) }.
> Therefore, the required output is 2.

For example:

Input	Result
1,2,1,2,5 3	1
1,2 0	0

Answer: (penalty regime: 0 %)

```
def count_distinct_pairs(t, K):
    seen = set()
    pairs = set()

    for num in t:
        complement = K - num
        if complement in seen:
            # Store the pair as a sorted tuple to treat (a, b) and (b, a) as the same distinct pair
            pair = tuple(sorted((num, complement)))
            pairs.add(pair)
        seen.add(num)

    return len(pairs)


# Read input format (comma-separated values for tuple on first line, K on second line)
if __name__ == "__main__":
    t_input = input().strip()
    k_input = input().strip()

    if t_input:
        t = tuple(map(int, t_input.split(",")))
    else:
        t = ()

    K = int(k_input)

    print(count_distinct_pairs(t, K))
```

	Input	Expected	Got	
✓	5,6,5,7,7,8 13	2	2	✓
✓	1,2,1,2,5 3	1	1	✓
✓	1,2 0	0	0	✓

Passed all tests! ✓

Correct

Marks for this submission: 1.00/1.00.

Question **2**

Correct

Mark 1.00 out of 1.00

Check if a set is a subset of another set.

Example:

Sample Input1:

mango apple

mango orange

mango

output1:

yes

set3 is subset of set1 and set2

```
input2:
```

```
mango orange
```

```
banana orange
```

```
grapes
```

```
output2:
```

no

For example:

Test	Input	Result
1	mango apple mango orange mango	yes set3 is subset of set1 and set2
2	mango orange banana orange grapes	No

Answer: (penalty regime: 0 %)

```
def check_subsets():
    # Read three lines of space-separated strings into sets
    set1 = set(input().split())
    set2 = set(input().split())
    set3 = set(input().split())

    # Check subset conditions for set3
    is_sub_1 = set3.issubset(set1)
    is_sub_2 = set3.issubset(set2)

    if is_sub_1 and is_sub_2:
        print("yes")
        print("set3 is subset of set1 and set2")
    elif is_sub_1:
        print("yes")
        print("set3 is subset of set1")
    elif is_sub_2:
        print("yes")
        print("set3 is subset of set2")
    else:
        print("No")


if __name__ == "__main__":
    check_subsets()
```

```
check_subset3()
```

	Test	Input	Expected	Got	
✓	1	mango apple mango orange mango	yes set3 is subset of set1 and set2	yes set3 is subset of set1 and set2	✓
✓	2	mango orange banana orange grapes	No	No	✓

Passed all tests! ✓

Correct

Marks for this submission: 1.00/1.00.

Question **3**

Correct

Mark 1.00 out of 1.00

Program to print all the distinct elements in an array. Distinct elements are nothing but the unique (non-duplicate) elements present in the given array.

Input Format:

First line take an Integer input from stdin which is array length n.

Second line take n Integers which is inputs of array.

Output Format:

Print the Distinct Elements in Array in single line which is space Separated

Example Input:

5

1 2 2 3 4

Output:

1 2 3 4

Example Input:

6

1 1 2 2 3 3

Output:

1 2 3

For example:

Input	Result
5 1 2 2 3 4	1 2 3 4

Answer: (penalty regime: 0 %)

```
import sys


def print_distinct_elements():
    # Read all inputs from standard input
    input_data = sys.stdin.read().split()

    if not input_data:
        return

    # First value is n (size of array), remaining values are the array elements
    n = int(input_data[0])
    elements = input_data[1 : n + 1]

    # Maintain insertion order while filtering distinct elements
    distinct_elements = []
    seen = set()

    for item in elements:
        if item not in seen:
            seen.add(item)
            distinct_elements.append(item)

    # Print space-separated distinct elements
    print(*distinct_elements)


if __name__ == "__main__":
```

```
29    print_distinct_elements()
```

	Input	Expected	Got	
✓	5 1 2 2 3 4	1 2 3 4	1 2 3 4	✓
✓	6 1 1 2 2 3 3	1 2 3	1 2 3	✓
✓	5 11 22 11 22 11	11 22	11 22	✓
✓	10 1 2 3 4 5 1 2 3 4 5	1 2 3 4 5	1 2 3 4 5	✓

Passed all tests! ✓

Correct

Marks for this submission: 1.00/1.00.

Question **4**

Correct

Mark 1.00 out of 1.00

Given an array of integers `nums` containing `n + 1` integers where each integer is in the range `[1, n]` inclusive.There is only **one repeated number** in `nums`, return *this repeated number*. Solve the problem using set.

Example 1:

```
Input: nums = [1,3,4,2,2]
```

```
Output: 2
```

Example 2:

```
Input: nums = [3,1,3,4,2]
```

```
Output: 3
```

For example:

Input	Result
1 3 4 4 2	4

Answer: (penalty regime: 0 %)

```
def find_duplicate(nums):
    seen = set()
    for num in nums:
        if num in seen:
            return num
        seen.add(num)


if __name__ == "__main__":
    # Read input line, split by spaces, and convert to integers
    nums = list(map(int, input().split()))
    print(find_duplicate(nums))
```

	Input	Expected	Got	
✓	1 3 4 4 2	4	4	✓
✓	1 2 2 3 4 5 6 7	2	2	✓

Passed all tests! ✓

Correct

Marks for this submission: 1.00/1.00.

Question **5**

Correct

Mark 1.00 out of 1.00

There is a malfunctioning keyboard where some letter keys do not work. All other keys on the keyboard work properly.

Given a string text of words separated by a single space (no leading or trailing spaces) and a string brokenLetters of all distinct letter keys that are broken, return the number of words in text you can fully type using this keyboard.

Example 1:

Input: text = "hello world", brokenLetters = "ad"

Output:

1

Explanation: We cannot type "world" because the 'd' key is broken.

For example:

Input	Result
hello world ad	1
Faculty Upskilling in Python Programming ak	2

Answer: (penalty regime: 0 %)

```
import sys


def count_typable_words():
    lines = sys.stdin.read().splitlines()
    if not lines:
        return

    text = lines[0]
    # Convert broken letters to lowercase set
    broken_letters = set(lines[1].lower()) if len(lines) > 1 else set()

    words = text.split()
    count = 0

    for word in words:
        # Check lowercase version of each word against broken letters
        if not any(char in broken_letters for char in word.lower()):
            count += 1

    print(count)


if __name__ == "__main__":
    count_typable_words()
```

	Input	Expected	Got	
✓	hello world ad	1	1	✓
✓	Welcome to REC e	1	1	✓
✓	Faculty Upskilling in Python Programming ak	2	2	✓

Passed all tests! ✓

Correct

Marks for this submission: 1.00/1.00.

Question **6**

Correct

Mark 1.00 out of 1.00

Write a program to eliminate the common elements in the given 2 arrays and print only the non-repeating elements and the total number of such non-repeating elements.

Input Format:

The first line contains space-separated values, denoting the size of the two arrays in integer format respectively.

The next two lines contain the space-separated integer arrays to be compared.

Sample Input:

5 4

1 2 8 6 5

2 6 8 10

Sample Output:

1 5 10

3

Sample Input:

5 5

1 2 3 4 5

1 2 3 4 5

Sample Output:

NO SUCH ELEMENTS

For example:

Input	Result
5 4 1 2 8 6 5 2 6 8 10	1 5 10 3
5 5 1 2 3 4 5 1 2 3 4 5	NO SUCH ELEMENTS

Answer: (penalty regime: 0 %)

```
import sys


def non_repeating_elements():
    # Read all tokens from standard input
    input_data = sys.stdin.read().split()
    if not input_data:
        return

    # First line contains sizes n1 and n2
    n1 = int(input_data[0])
    n2 = int(input_data[1])

    # Extract elements of both arrays
    arr1 = [int(x) for x in input_data[2 : 2 + n1]]
    arr2 = [int(x) for x in input_data[2 + n1 : 2 + n1 + n2]]

    # Find symmetric difference using sets
    set1 = set(arr1)
    set2 = set(arr2)

    # Elements in set1 or set2, but not in both
    unique_elements = set1 ^ set2

    if unique_elements:
```

```
        # Preserve relative order: elements from arr1 first, then arr2
        res = []
        for x in arr1:
            if x in unique_elements and x not in res:
                res.append(x)
        for x in arr2:
            if x in unique_elements and x not in res:
                res.append(x)

        print(*res)
        print(len(res))
    else:
        print("NO SUCH ELEMENTS")


if __name__ == "__main__":
    non_repeating_elements()
```

	Input	Expected	Got	
✓	5 4 1 2 8 6 5 2 6 8 10	1 5 10 3	1 5 10 3	✓
✓	3 3 10 10 10 10 11 12	11 12 2	11 12 2	✓
✓	5 5 1 2 3 4 5 1 2 3 4 5	NO SUCH ELEMENTS	NO SUCH ELEMENTS	✓

Passed all tests! ✓

Correct

Marks for this submission: 1.00/1.00.

Question **7**

Correct

Mark 1.00 out of 1.00

The **DNA sequence** is composed of a series of nucleotides abbreviated as `'A'`, `'C'`, `'G'`, and `'T'`.

- For example, `"ACGAATTCCG"` is a **DNA sequence**.

When studying **DNA**, it is useful to identify repeated sequences within the DNA.

Given a string `s` that represents a **DNA sequence**, return all the `10`**-letter-long** sequences (substrings) that occur more than once in a DNA molecule. You may return the answer in **any order**.

Example 1:

```
Input: s = "AAAAACCCCCAAAAACCCCCCAAAAAGGGTTT"
Output: ["AAAAACCCCC","CCCCCAAAAA"]
```

Example 2:

```
Input: s = "AAAAAAAAAAAAA"
Output: ["AAAAAAAAAA"]
```

For example:

Input	Result
AAAAACCCCCAAAAACCCCCCAAAAAGGGTTT	AAAAACCCCC CCCCCAAAAA

Answer: (penalty regime: 0 %)

```
import sys


def find_repeated_dna_sequences():
    s = sys.stdin.read().strip()

    seen = set()
    repeated_set = set()
    repeated_list = []

    for i in range(len(s) - 9):
        sub = s[i : i + 10]
        if sub in seen:
            if sub not in repeated_set:
                repeated_set.add(sub)
                repeated_list.append(sub)
        else:
            seen.add(sub)

    for sequence in repeated_list:
        print(sequence)


if __name__ == "__main__":
    find_repeated_dna_sequences()
```

	Input	Expected	Got	
✓	AAAAACCCCCAAAAACCCCCCAAAAAGGGTTT	AAAAACCCCC CCCCCAAAAA	AAAAACCCCC CCCCCAAAAA	✓
✓	AAAAAAAAAAAAA	AAAAAAAAAA	AAAAAAAAAA	✓

Passed all tests! ✓

Correct

Marks for this submission: 1.00/1.00.

Question **8**

Correct

Mark 1.00 out of 1.00

You are given an integer tuple `nums` containing distinct numbers. Your task is to perform a sequence of operations on this tuple until it becomes empty. The operations are defined as follows:

1. If the first element of the tuple has the smallest value in the entire tuple, remove it.
2. Otherwise, move the first element to the end of the tuple.

You need to return an integer denoting the number of operations required to make the tuple empty.

Constraints

- The input tuple `nums` contains distinct integers.
- The operations must be performed using tuples and sets to maintain immutability and efficiency.
- Your function should accept the tuple `nums` as input and return the total number of operations as an integer.

Example:

Input: nums = (3, 4, -1)
Output: 5

Explanation:
Operation 1: [3, 4, -1] -> First element is not the smallest, move to the end -> [4, -1, 3]
Operation 2: [4, -1, 3] -> First element is not the smallest, move to the end -> [-1, 3, 4]
Operation 3: [-1, 3, 4] -> First element is the smallest, remove it -> [3, 4]
Operation 4: [3, 4] -> First element is the smallest, remove it -> [4]
Operation 5: [4] -> First element is the smallest, remove it -> []
Total operations: 5

For example:

Test	Result
`print(count_operations((3, 4, -1)))`	5

Answer: (penalty regime: 0 %)

Reset answer

```
def count_operations(nums):
    if not nums:
        return 0

    operations = 0
    # Store remaining values in a set for O(1) membership checks
    remaining_set = set(nums)

    # Pre-sort unique elements to efficiently get the next minimum in O(1)
    sorted_uniques = sorted(remaining_set)
    min_index = 0
    current_min = sorted_uniques[min_index]

    while nums:
        operations += 1
        first = nums[0]

        if first == current_min:
            # Remove from tuple and set
            nums = nums[1:]
            remaining_set.remove(first)

            # Move to the next smallest element
            min_index += 1
            if min_index < len(sorted_uniques):
                current_min = sorted_uniques[min_index]
        else:
            # Rotate tuple to end
            nums = nums[1:] + (first,)

    return operations
```

	Test	Expected	Got	
✓	`print(count_operations((3, 4, -1)))`	5	5	✓
✓	`print(count_operations((1, 2, 3, 4, 5)))`	5	5	✓
✓	`print(count_operations((5, 4, 3, 2, 1)))`	15	15	✓
✓	`print(count_operations((42, )))`	1	1	✓
✓	`print(count_operations((-2, 3, -5, 4, 1)))`	11	11	✓

Passed all tests! ✓

Correct

Marks for this submission: 1.00/1.00.

Question **9**

Correct

Mark 1.00 out of 1.00

Coders here is a simple task for you, Given string str. Your task is to check whether it is a binary string or not by using python set.

Examples:

Input: str = "01010101010"

Output: Yes

Input: str = "REC101"

Output: No

For example:

Input	Result
01010101010	Yes
010101 10101	No

Answer: (penalty regime: 0 %)

```
import sys


def check_binary_string():
    # Read the full line including spaces
    s = sys.stdin.read().rstrip("\r\n")

    if not s:
        print("No")
        return

    # Create a set of unique characters present in the input string
    char_set = set(s)

    # A string is binary if its unique characters are a subset of {'0', '1'}
    if char_set <= {"0", "1"}:
        print("Yes")
    else:
        print("No")


if __name__ == "__main__":
    check_binary_string()
```

	Input	Expected	Got	
✓	01010101010	Yes	Yes	✓
✓	REC123	No	No	✓
✓	010101 10101	No	No	✓

Passed all tests! ✓

Correct

Marks for this submission: 1.00/1.00.

Question **10**


Correct

Mark 1.00 out of 1.00

Given an array of strings `words`, return *the words that can be typed using letters of the alphabet on only one row of American keyboard like the image below.*

In the **American keyboard**:

- the first row consists of the characters `"qwertyuiop"`,
- the second row consists of the characters `"asdfghjkl"`, and
- the third row consists of the characters `"zxcvbnm"`.

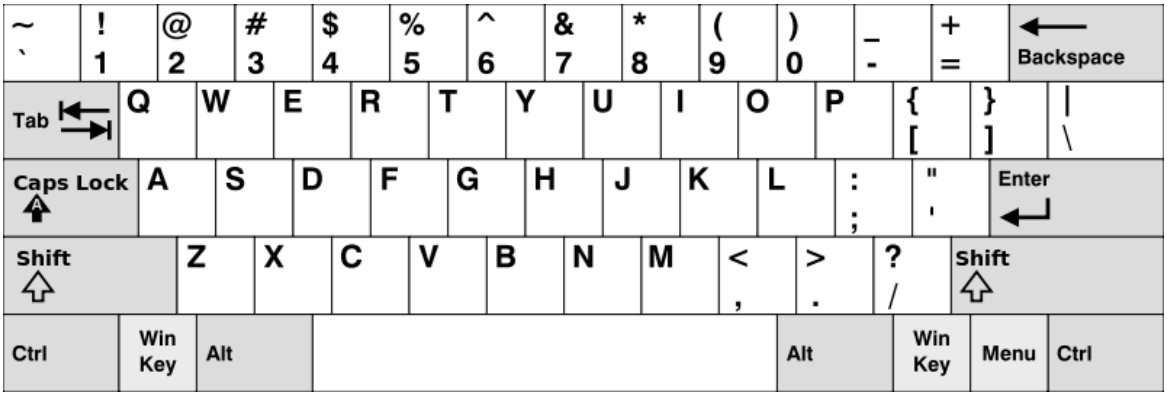

Example 1:

```
Input: words = ["Hello","Alaska","Dad","Peace"]
Output: ["Alaska","Dad"]
```

Example 2:

```
Input: words = ["omk"]
Output: []
```

Example 3:

```
Input: words = ["adsdf","sfd"]
Output: ["adsdf","sfd"]
```

For example:

Input	Result
4 Hello Alaska Dad Peace	Alaska Dad
2 adsfd afd	adsfd afd

Answer: (penalty regime: 0 %)

```
import sys


def find_words():
    row1 = set("qwertyuiop")
    row2 = set("asdfghjkl")
    row3 = set("zxcvbnm")

    input_data = sys.stdin.read().splitlines()
    if not input_data:
        return

```

```
    n = int(input_data[0].strip())
    words = input_data[1 : n + 1]

    result = []
    for word in words:
        word_set = set(word.lower())
        if word_set <= row1 or word_set <= row2 or word_set <= row3:
            result.append(word)

    if result:
        for w in result:
            print(w)
    else:
        print("No words")


if __name__ == "__main__":
    find_words()
```

	Input	Expected	Got	
✓	4 Hello Alaska Dad Peace	Alaska Dad	Alaska Dad	✓
✓	1 omk	No words	No words	✓
✓	2 adsfd afd	adsfd afd	adsfd afd	✓

Passed all tests! ✓

Correct

Marks for this submission: 1.00/1.00.