```
   Exit: (4,017,637) pompeian(marcus) ? Unknown option (h for help)
   Exit: (4,017,637) pompeian(marcus) ? /Users/kavip/Downloads/prolog/ai.pl']).
[Illegal port specification]
   Exit: (4,017,637) pompeian(marcus) ? Trace commands:
+                set spy point          | -              clear spy point
/c|e|r|f|u|a goal find goal at port     | .              repeat find
a                abort to toplevel      | A              alternatives
b                break (new toplevel)   | c (ret, space) creep to next port
[depth] d        depth for printing     | e              exit Prolog
f                make goal fail         | [depth] g      backtrace (-N from top)
h (?)            help                   | i              ignore current goal
l                leap to spy point      | L              list current goal
[level] r        retry goal [at level]  | s              skip over
[level] S        save goal [at level]   | u              up (complete goal)
p                print goals            | w              (quoted) write goals
m                exception details      | C              toggle show context
   Exit: (4,017,637) pompeian(marcus) ? abort
% Execution Aborted
31 ?- tes(marcus, caesar).aaaconsult(['c:/Users/kavip/Downloads/prolog/ai.pl']).
ERROR: Unknown procedure: user:('.')/2
ERROR:     However, there are definitions for:
ERROR:         ('.')/3
false.

32 ?- hates(marcus, caesar).
```

```
true.

27 ?- loyal(marcus, caesar).
Action (h for help) ? Unknown option (h for help)
Action (h for help) ? Unknown option (h for help)
Action (h for help) ? abort
% Execution Aborted
28 ?-
|    loyal(marcus, caesar).
Action (h for help) ? abort
% Execution Aborted
28 ?-
|    consult(['c:/Users/kavip/Downloads/prolog/ai.pl']).
true.

29 ?- loyal(marcus, caesar).
Action (h for help) ? abort
% Execution Aborted
30 ?- hates(marcus, caesar).
```

```
hanoi(N, From, To, Aux) :-
    N > 1,
    N1 is N - 1,
    hanoi(N1, From, Aux, To),
    write('Move disk from '),
    write(From),
    write(' to '),
    write(To), nl,
    hanoi(N1, Aux, To, From).
```


% Execution Aborted
15 ?- planet(Planet, gas_giant).
Planet = jupiter .

```
14 ?- onsult(['c:/Users/kavip/Downloads/prolog/planet.pl']).
Correct to: "consult(['c:/Users/kavip/Downloads/prolog/planet.pl'])"?
Please answer 'y' or 'n'?
Please answer 'y' or 'n'? yes
true.

15 ?- planet(earth, Type)
|    '
|    .
|    .
|    planet(earth, Type)Action (h for help) ?
continue

onsult(['c:/Users/kavip/Downloads/prolog/planet.pl']).
|    ?- planet(earth, Type).
|    consult(['c:/Users/kavip/Downloads/prolog/planet.pl']).
|
|
|    ?- planet(Planet, gas_giant).
|
|
|
```

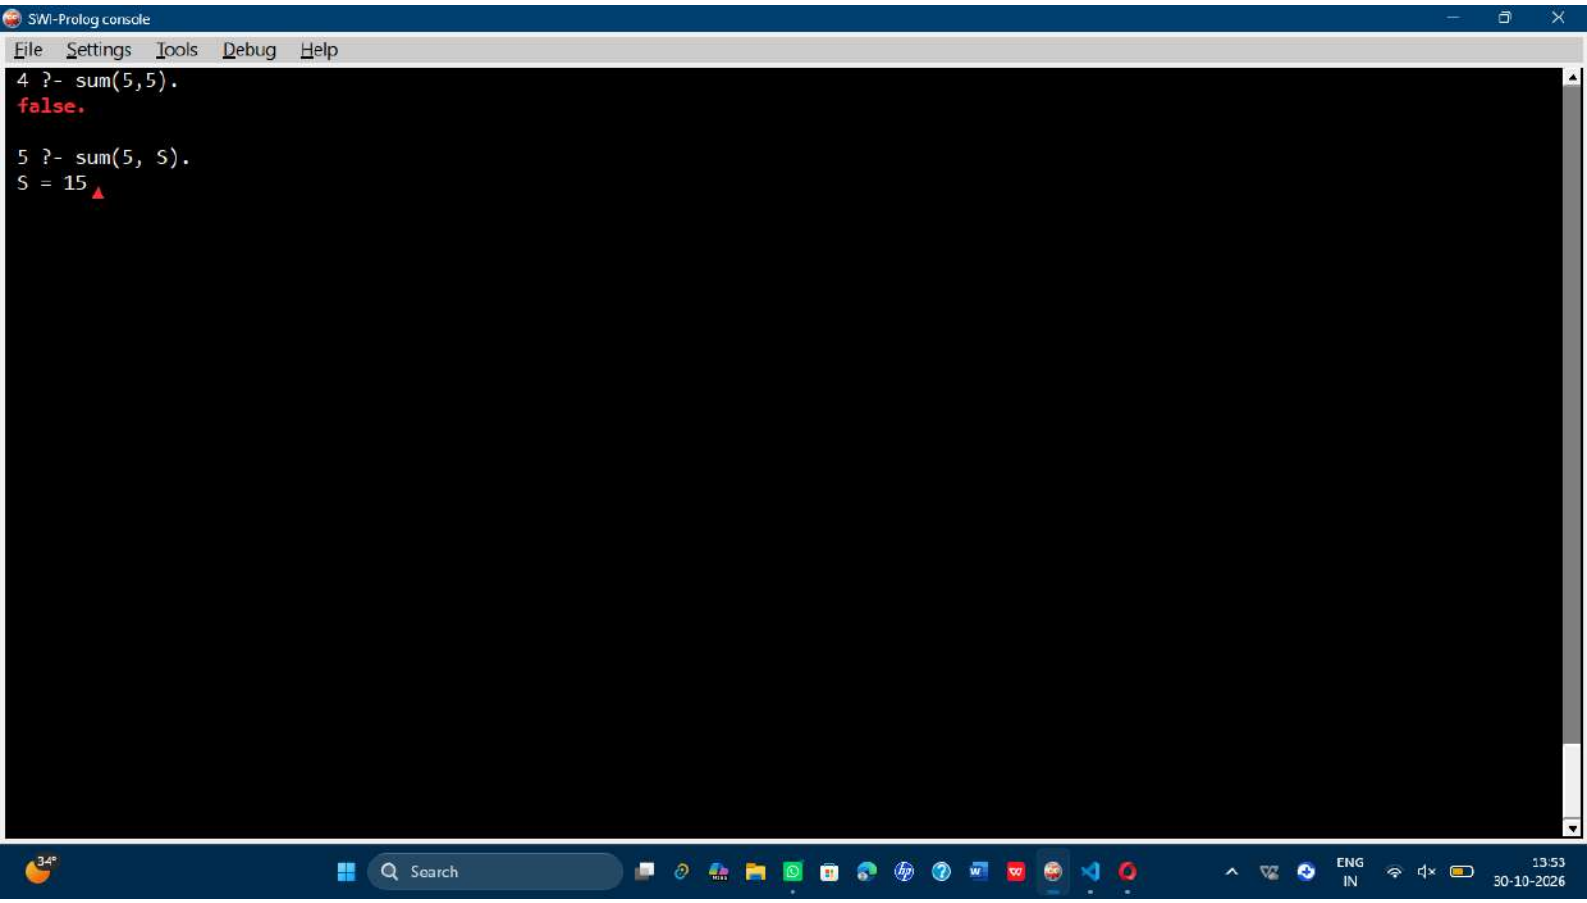
```
11 ?- onsult(['c:/Users/kavip/Downloads/prolog/student teacher sub
Correct to: "consult(['c:/Users/kavip/Downloads/prolog/student tea
Please answer 'y' or 'n'? yes
true.

12 ?- teaches(Teacher, Subject).
Teacher = ravi,
Subject = programming .

13 ?- subject(Subject, Code).
Subject = programming,
Code = cse101
```

```
9 ?- person(kavi, DOB).
DOB = '15-08-2007'.

10 ?-
```


SWI-Prolog console
File Settings Tools Debug Help
4 ?- sum(5,5).
false.
5 ?- sum(5, S).
S = 15