


Review User Story:

Fetch User Story and Generate test cases – Flow:

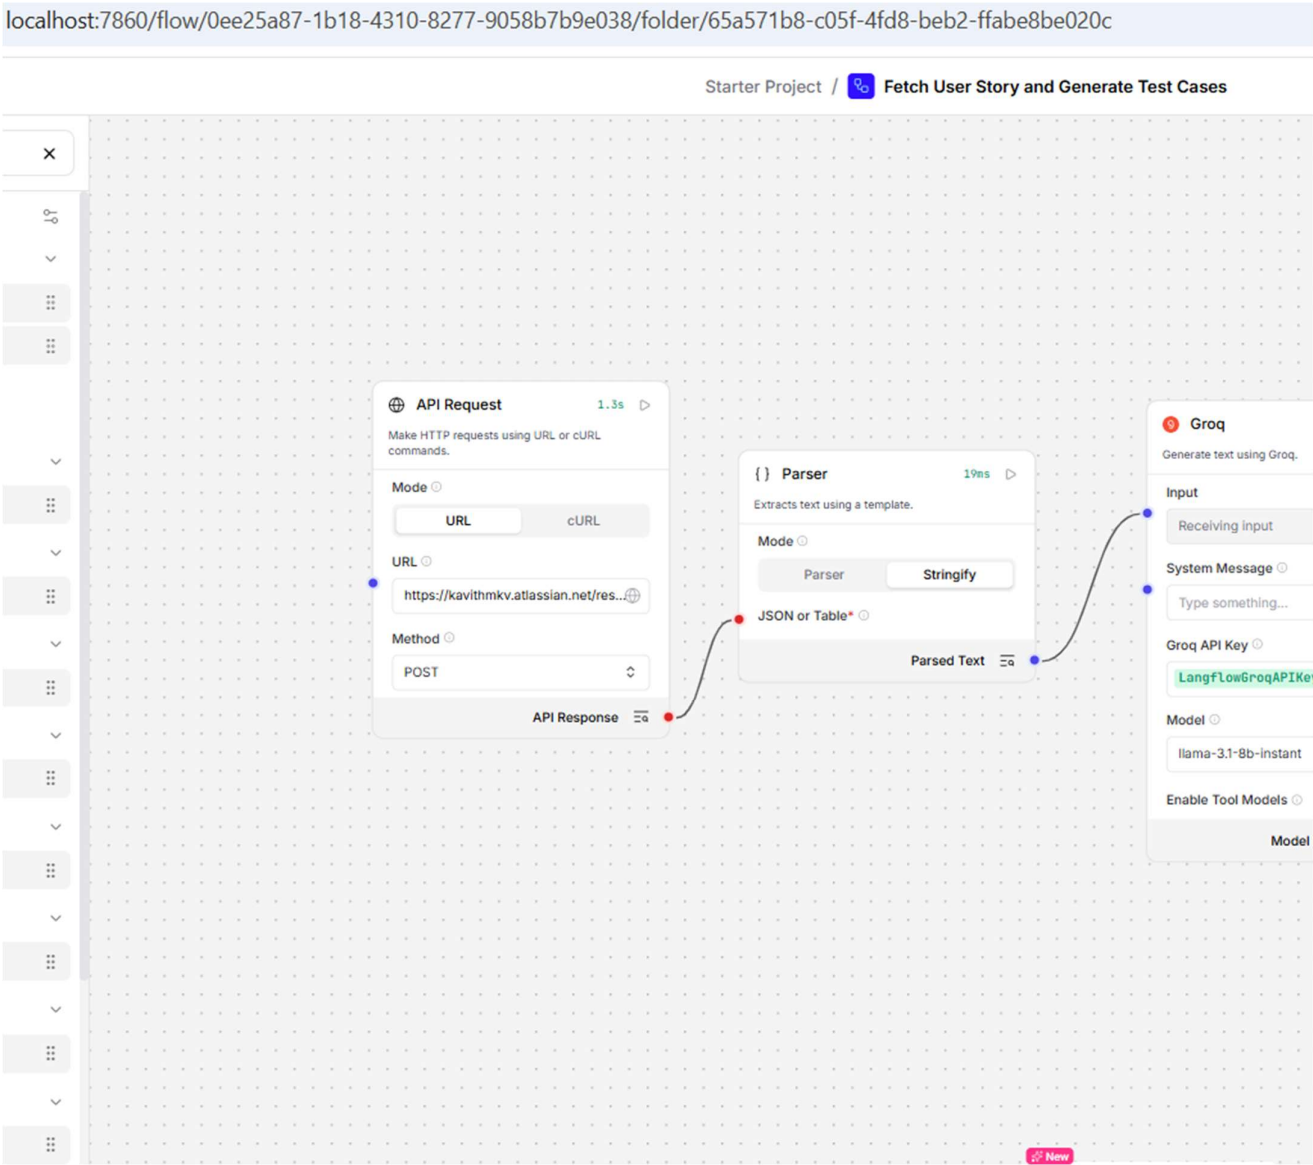

Body

The body to send with the request as a dictionary (for POST, PATCH, PUT).

☐ Key 	Value 
☐ jql	key="MYF-25"
☐ fields	["key","summary","description","status","reporter"]

+







Headers

The headers to send with the request

Header	Value
User-Agent	Langflow/1.0
Authorization	Basic a2F2aXRobWt2QGdtYWlsLmNvbTpBVEFUVjV1NiIa3g0Rk5vXzlyLXkwVXIxQkJFZS1ULTQ2LTf0Z3ZIandmSGl5d1psWUs:

+ □ 🗑️ ↺

User Story URL: <https://kavithmkv.atlassian.net/rest/api/3/search/jql>

Output produced in Langflow:

Component Output

Inspect the output of the component below.

Outputs

Logs

```
**User Story Review Summary**

**Parameter** | **Description** | **Score (out of 20)**
-----|-----|-----
**Clarity** | The story is clear but lacks detailed acceptance criteria. | 16
**Completeness** | Preconditions not clearly mentioned. | 14
**Business Value Alignment** | Strong healthcare relevance and compliance focus. | 19
**Testability** | Can be tested through API response validation. | 17
**Technical Feasibility** | Technically feasible with Jira API integration. | 18

**Overall Score:** 84 / 100

**Improvement Areas:**

1. **Add explicit acceptance criteria for API response validation**: Define clear rules for validating the API response, including error handling and edge cases.
2. **Specify validation rules for API response headers**: Include rules for validating the API response headers, such as checking for specific header values or formats.
3. **Include system actor details for API request**: Specify the system actor details for the API request, including authentication and authorization mechanisms.
4. **Define preconditions for API request**: Clearly define the preconditions for the API request, including any necessary setup or configuration.
5. **Improve API response data structure**: Consider improving the API response data structure to make it more readable and easier to validate.

**Recommendations:**

* Review the API documentation to ensure that the API response is correctly formatted and validated.
* Work with the development team to implement the necessary validation rules and error handling mechanisms.
* Consider using a testing framework to automate the testing of the API response validation.

**Conclusion:**
```

Customized Flow:

Input Schema



Endpoint Name

An alternative name to run the endpoint

Expose API

Select which component fields to expose as inputs in this flow's API schema.

	Groq API Base	leave blank if not using a proxy or service emulator.	https://api.groq.com
	Max Output Tokens	The maximum number of tokens to generate.	Integer number
	Temperature	Run inference with this temperature. Must be in the closed interval [0.0, 1.0].	0.10 Precise Creative
	N	Number of chat completions to generate for each prompt. Note that the API may not return the full n completions if duplicates are generated.	0
	Model	The name of the model to use. Add your Groq API key to access additional available models.	llama-3.1-8b-instant
	Enable Tool Models	Select if you want to use models that can work with tools. If yes, only those models will be shown.	☐

Input Schema

Endpoint Name

An alternative name to run the endpoint

Expose API

Select which component fields to expose as inputs in this flow's API schema.

Expose Input	Field Name	Description	Current Value
	Template		For this given Input as user story : {userStory}, follow these; Instructions You are an expert AI assistant specialized in
	Use Double Brackets	Use {{variable}} syntax instead of {variable}.	☐
	userStory		Receiving input 
Groq			
Chat Input			
Chat Output			

Input Schema



Endpoint Name

An alternative name to run the endpoint

Expose API

Select which component fields to expose as inputs in this flow's API schema.

Expose Input	Field Name	Description	Current Value
	Input Text	Message to be passed as input.	Type something...
	Store Messages	Store the message in the history.	☐
	Sender Type	Type of sender.	User
	Sender Name	Name of the sender.	User
	Session ID	The session ID of the chat. If empty, the current session ID parameter will be used.	Type something...
	Context ID	The context ID of the chat. Adds an extra layer to the local memory.	Type something...
	Files	Files to be sent with the message.	Upload a file...

Fetch User Story and Generate Test Cases Output – Postman:

POST Fetch User Story and Generate TC

➤ FLOWS

```

**Score
-----
detaile
16\n\n*
assumes
Alignme
patient
through
17\n\n*
API cor
Areas:*
validat
validat
ector c

```