

Home Assignments

- 1) With vibe coding implement the playwright/typescript or any other tool which you work say Selenium/Python

Sample prompt for playwright/typescript integration:

Ask mode :

Read my entire workspace and confirm me what are the files will be impacted if I want to add playwright typescript same like implemented for Selenium Java

Prompt for agent mode :

Read the Entire workspace and understand how I implemented the selenium Java

I want to add the playwright typescript

1.Go to prompts.js and add new prompt templates for Playwright TypeScript

Take selenium Java as reference

PLAYWRIGHT_TYPESCRIPT_PAGE_ONLY

PLAYWRIGHT_TYPESCRIPT_WITH_CUCUMBER

CUCUMBER_WITH_PLAYWRIGHT_TYPESCRIPT_STEPS

2 .Go to chat.js

Update getPromptKeys() method to handle Playwright/TypeScript combinations


3.Go to panel.html

Add the logics to handle playwright typescript same like selenium Java

IMPLEMENTING PLAYWRIGHT TYPESCRIPT:

ASK MODE FOR PLAYWRIGHT TYPESCRIPT:


Read my entire workspace and confirm me what are the files will be impacted if I want to add playwright typescript same like implemented for Selenium Java

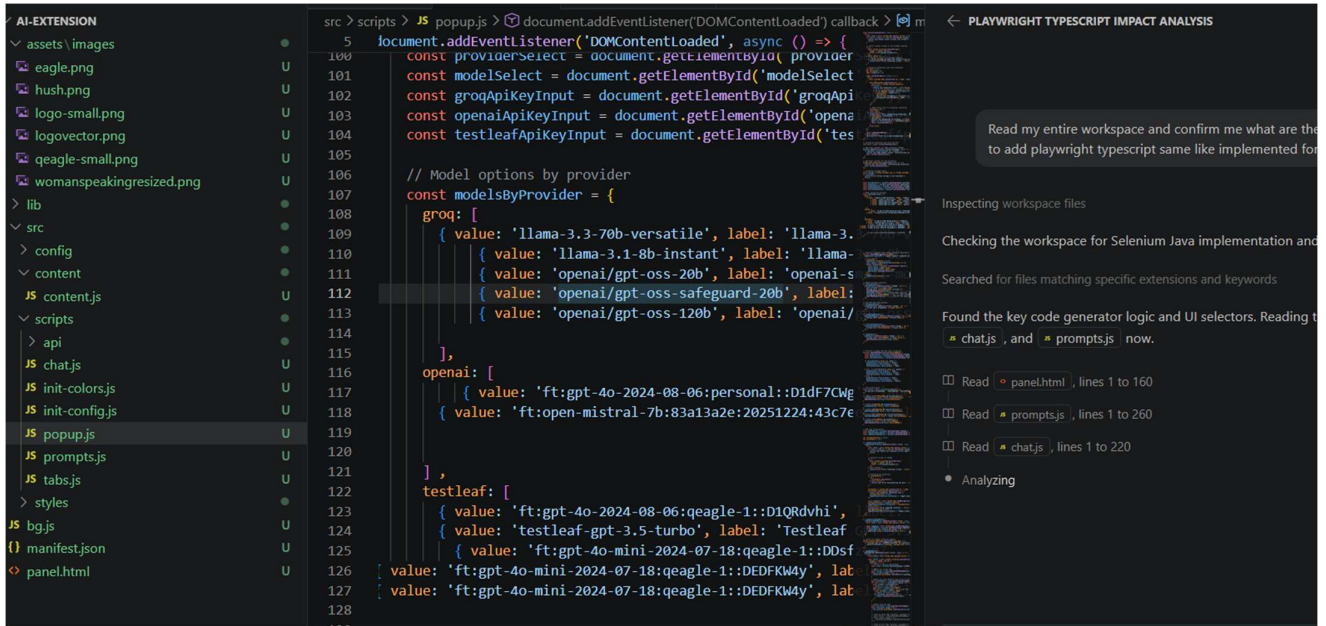

AGENT MODE:

Read the Entire workspace and understand how I implemented the selenium Java

I want to add the playwright typescript

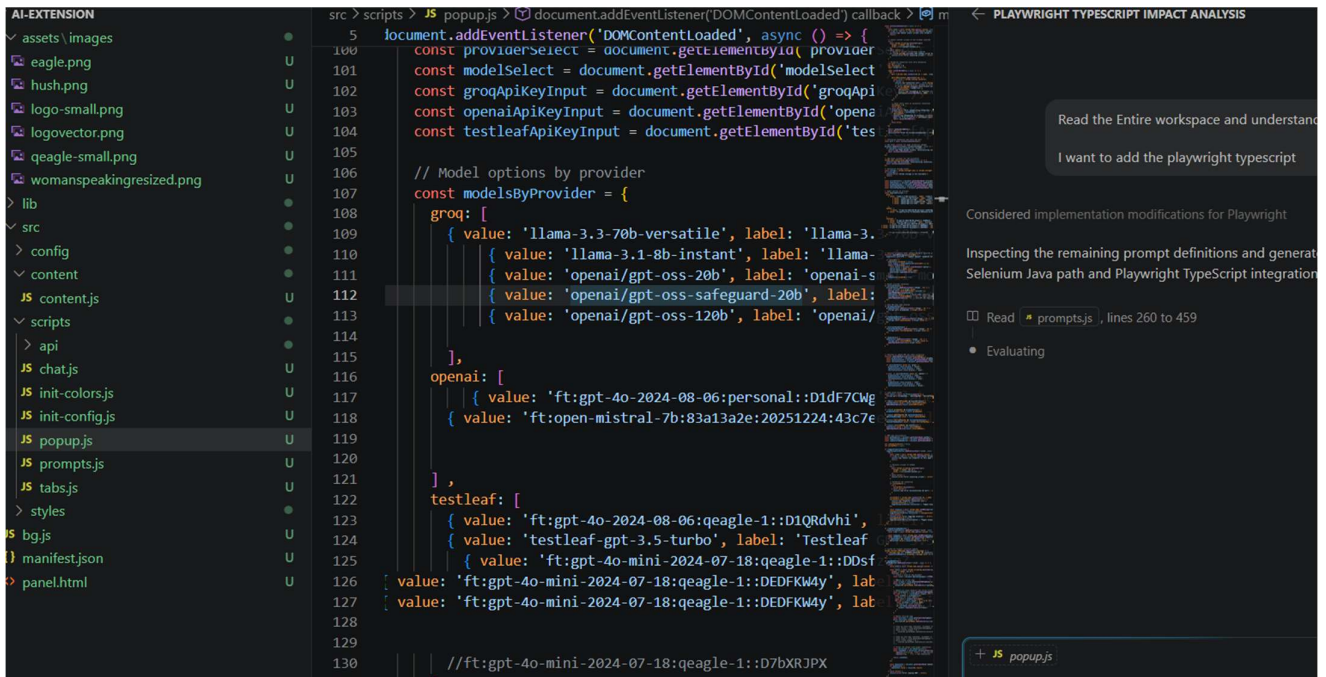

Best files to update if you want to refine/add behavior

- `prompts.js`
 - adjust or extend Playwright TypeScript prompt templates
- `chat.js`
 - change `getPromptKeys()` logic if you want different mapping
 - update unsupported/combo handling
- `panel.html`
 - change UI labels, default options, or add new generator controls

1. Go to `prompts.js` and add new prompt templates for Playwright TypeScript

Take selenium Java as reference

`PLAYWRIGHT_TYPESCRIPT_PAGE_ONLY`

`PLAYWRIGHT_TYPESCRIPT_WITH_CUCUMBER`

`CUCUMBER_WITH_PLAYWRIGHT_TYPESCRIPT_STEPS`

PLAYWRIGHT TYPESCRIPT IMPACT ANALYSIS

I want to add the playwright typescript

1. Go to `prompts.js` and add new prompt templates for Playwright TypeScript

Take selenium Java as reference

`PLAYWRIGHT_TYPESCRIPT_PAGE_ONLY`

`PLAYWRIGHT_TYPESCRIPT_WITH_CUCUMBER`

`CUCUMBER_WITH_PLAYWRIGHT_TYPESCRIPT_STEPS`

existing Playwright prompts are already present, so I'm aligning them with the Selenium Java structure and adding the three requested prompt keys explicitly.

Templates are added as new export keys without causing any breaking changes. The key goal is to fulfill the user's request effectively!

Updating prompt templates

I think it's best to add the new prompt templates while keeping the existing ones in `prompts.js`. I need to check if `chat.js` references these new prompt keys, as it currently uses `PLAYWRIGHT_TYPESCRIPT_POM`. To meet the user's request effectively, I might need to update `chat.js` to support the new prompt names, but the focus is explicitly on `prompts.js`. If

Working

`prompts.js`

JS

chat.js

3.Go to panel.html

Add the logics to handle playwright typescript same like selenium Java

AI-EXTENSION

assets \ images

eagle.png

hush.png

logo-small.png

logovector.png

qeagle-small.png

womanspeakingresized.png

lib

src

config

content

JS content.js

scripts

api

JS chat.js

JS init-colors.js

JS init-config.js

JS popup.js

JS prompts.js

JS tabs.js

styles

JS bg.js

manifest.json

panel.html

OUTLINE

panel.html > ...

2 <html>

18 <body>

19 <div class="container">

27 <div id="chatTab" class="tab-content active">

28 <div class="generator-options" style="display: flex; gap: 16px; mar

48 Page Class

49 </label>

50 </div>

51 </div>

52 </div>

53 <!-- End radio buttons row -->

54

55 <div class="controls-section">

56 <div class="button-container">

57 <button id="resetChat" class="reset-button">

58 <i class="fas fa-redo-alt"></i>

59 Reset Chat

60 </button>

61 </div>

62 </div>

63

64 <div class="chat-container">

65 <div class="chat-messages" id="chatMessages">

66 <div class="loading-container">

67 <div class="loading-spinner"></div>

68 <div class="loading-text">Generating code.</div>

69 </div>

70 </div>

71

72 <div class="chat-input-container">

73 <textarea id="chatInput" placeholder="Provide additional information" r

74 </div>

75 <div class="chat-bottom-container">

76

77 <div class="chat-input-container">

78 <button id="inspectorButton" class="inspector-toggle">

PLAYWRIGHT TYPESCRIPT IMPACT ANALYSIS

for Playwright, typescript as they already do for selenium

Updated panel.html and evaluated UI logic implementation

The generator labels now switch contextually when the

+ Playwright.

Reviewed panel.html

Panel UI updated for Playwright TypeScript

The generator mode labels in panel.html now adapt

Playwright:

Feature checkbox label becomes "Test Spec"

Page checkbox label becomes "Page Object"

This mirrors the Selenium Java flow more closely while k

checkbox-based generation model.

Verification

I checked the updated file and VS Code reports:

No errors found in panel.html

If you want, I can next help you make the checkbox beh

explicit for Playwright by changing the default selection

helper note in the UI.

panel.html

Describe what to build

+ Auto

leaf taps.com/crmsfa/control/createLeadForm

Create Lead

Shortcuts

My Leads

Create Lead

Find Leads

Request Catalog

Create Account

Create Contact

Create Case

Create Lead

Company Name

Forename

Source

First Name (Local)

Salutation

Title

Annual Revenue

Industry

Ownership

SIC Code

Description

Important Note

Country Code

Parent Account

Surname

Marketing Campaign

Last Name (Local)

Date of birth

Department

Preferred Currency

Number Of Employees

Ticker Symbol

Currently recording network activity

Perform a request or reload the page by using

the "Reload page" button or by pressing Ctrl +

R. [Learn more](#)

☒ Feature File ☒ Page Class

 Reset Chat

```
// pages/CreateLeadPage.ts
import { Page, Locator } from '@playwright/test';

/**
 * Page Object for the Create Lead form.
 */
export class CreateLeadPage {
  readonly page: Page;
  readonly companyNameInput: Locator;
  readonly firstNameInput: Locator;
  readonly lastNameInput: Locator;
  readonly createLeadButton: Locator;

  constructor(page: Page) {
    this.page = page;
    this.companyNameInput = page.locator('#createLeadForm_companyName');
    this.firstNameInput = page.locator('#createLeadForm_firstName');
    this.lastNameInput = page.locator('#createLeadForm_lastName');
    this.createLeadButton = page.locator('button:has-text("Create Lead")');
  }
}
```

 Copy

2) IMPLEMENTING CYPRESS TYPESCRIPT:

Initially Cypress Typescript not supported:

leaf taps.com/crmsfa/control/createLeadForm

Create Lead

Company Name		Parent Account	
Forename		Surname	
Source		Marketing Campaign	
First Name (Local)		Last Name (Local)	
Salutation		Date of birth	
Title		Department	
Annual Revenue		Preferred Currency	USD - American Dollar
Industry		Number Of Employees	
Ownership		Ticker Symbol	
SIC Code			
Description			
Important Note			
Contact Information			
Country Code			

AI Browser Extension f

Code Gen


Feature File Page

Reset Chat

ts/cypress combinatio

- 1) In Ask Mode, asking agent what are the files that will be impacted if Cypress Typescript needs to be implemented.

Analyze my entire workspace and find what are the files that will be impacted if cypress typescript need to be implemented like Selenium java

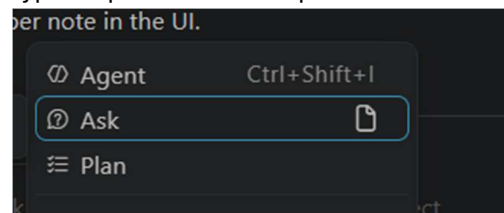

← PLAYWRIGHT TYPESCRIPT IMPACT ANALYSIS

I reviewed the current implementation pattern for Selenium Java and the existing Playwright TypeScript flow. these files:

1. `panel.html`

- This is the UI entry point.
- It already exposes the browser engine dropdown, including Cypress.
- You would update it to:
 - handle Cypress-specific labels or helper text
 - make the generator-mode wording behave correctly for TypeScript + Cypress
 - ensure the selected combination is reflected in the UI

2. `chat.js`

- This is the core routing logic.
- The current logic only has explicit handling for:
 - Java + Selenium
 - TypeScript + Playwright
- To support Cypress TypeScript, you would need to:
 - extend `getPromptKeys()`
 - add a new helper such as `isTypeScriptCypress()`
 - update unsupported-combination handling
 - ensure the right prompt key is chosen for page/spec/combined generation

3. `prompts.js`

- This is where the actual prompt templates are defined.
- For Cypress TypeScript, you would add new prompt definitions similar to the Selenium Java and Playwright ones, for example:
 - page-only prompt
 - feature/spec prompt
 - combined prompt
- You would also add matching entries in `CODE_GENERATOR_TYPES`

Likely optional files


4. `sidepanel.css`

- Only needed if you want to visually distinguish Cypress-specific UI options or add styling for new labels/help text.

5. `manifest.json`


- Not needed for the current prompt-based flow unless you plan to add Cypress-related assets, scripts, or permissions.

Current Architectural Flow:

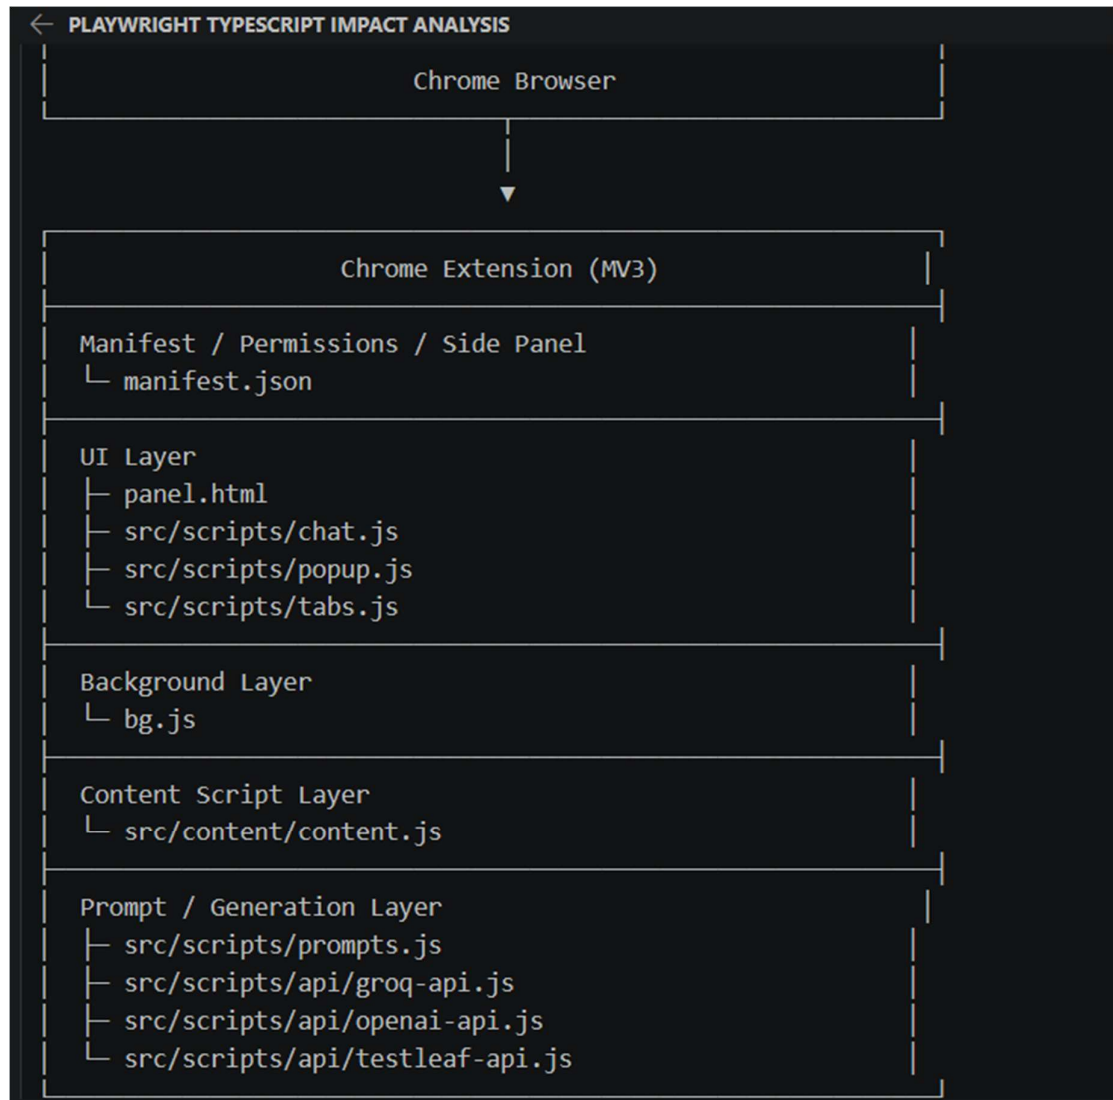

1. Update panel.html to handle cypress typescript specific code similar to selenium java

In Agent mode, asking agent to update panel.html:

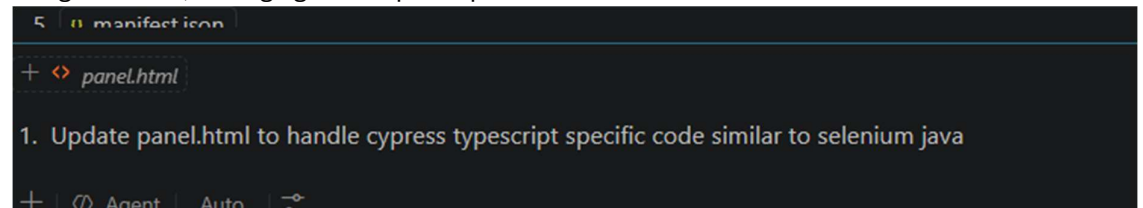

2. Update chat.js to handle cypress typescript similar to selenium java
- Extend getPromptKeys()
- add a new helper such as isTypeScriptCypress()
 - update unsupported-combination handling
 - ensure the right prompt key is chosen for page/spec/combined generation

In Agent mode, asking agent to update chat.js:

2. Update chat.js to handle cypress typescript similar to selenium java

Extend getPromptKeys()

- add a new helper such as isTypeScriptCypress()
- update unsupported-combination handling
- ensure the right prompt key is chosen for page/spec/combined generation

✓ Chat routing updated for Cypress TypeScript

The logic in `chat.js` now handles TypeScript + Cypress in the same style as the existing Selenium Java and Playwright paths:

- Page-only generation → `CYPRESS_TYPESCRIPT_PAGE_ONLY`
- Feature/spec generation → `CUCUMBER_WITH_CYPRESS_TYPESCRIPT_STEPS`
- Combined generation → `CYPRESS_TYPESCRIPT_WITH_CUCUMBER`

What changed

- Extended `getPromptKeys()`
- Added `isTypeScriptCypress()`
- Updated unsupported-combination messaging
- Routed page/spec/combined generation to Cypress-specific prompt keys

Verification

checked the updated file and VS Code reports:

- No errors found in `chat.js`

If you want, I can next add the actual Cypress TypeScript prompt templates in `prompts.js` so these new keys are defined and usable.

3. In Prompt.js, For Cypress TypeScript, add new prompt definitions similar to the Selenium Java and Playwright ones, for example:

- a. page-only prompt
- b. feature/spec prompt
- c. combined prompt

Also add matching entries in `CODE_GENERATOR_TYPES`

+ `panel.html`

3. In Prompt.js, For Cypress TypeScript, add new prompt definitions similar to the Selenium Java and Playwright

- a. page-only prompt
- b. feature/spec prompt
- c. combined prompt

Also add matching entries in `CODE_GENERATOR_TYPES`

Asking agent to update Prompt.js:

Reviewed 2 files

I've confirmed the expected Cypress prompt keys from the chat router and I'm wiring in the matching prompt templates and

Searched for multiple prompt definitions and updated them

The Cypress prompt set is being added in the same pattern as the existing Playwright and Selenium templates, with matching chat router.

Updated prompts.js +163 -0

✓ Cypress TypeScript prompts added

The missing Cypress TypeScript prompt definitions are now in place in `prompts.js`, including:

- page-only prompt
- feature/spec prompt
- combined prompt

I also added matching entries to the generator type map so the new chat routing can resolve them properly.

Verification

VS Code diagnostics report:

- No errors found in `prompts.js`

If you want, I can next help verify the full end-to-end flow from the UI selection through generation.

Cypress TypeScript Code now generated:

Create Lead

Company Name		Parent Account	
Forename		Surname	
Source		Marketing Campaign	
First Name (Local)		Last Name (Local)	
Salutation		Date of birth	
Title		Department	
Annual Revenue		Preferred Currency	USD - American Dollar
Industry		Number Of Employees	
Ownership		Ticker Symbol	
SIC Code			
Description			
Important Note			
Contact Information			
Country Code	1	Phone Number	
Area Code		Person to Ask For	
Extension		Web Url	
E-Mail Address			
Primary Address			
To Name		Attention Name	
Address Line 1		Address Line 2	
City		State/Province	
Postal Code		Country	United States
Zip/Postal Code Extension			
Create Lead			

Code Generator

☒ Feature File ☒ Page Class

Reset Chat

Feature: Create Lead

Scenario: Create a new lead
Given I open the create l
When I enter company name
And I enter first name "A
And I enter last name "Ku
And I click the create le
Then I should see the lea

```
export class CreateLeadPage {  
  visit(): CreateLeadPage {  
    cy.visit('https://lea  
    return this;  
  }  
}
```

```
enterCompanyName(name: st  
  cy.get('#createLeadFo  
  return this;  
}
```