

FINAL ASSESSMENT 2

In [1]:

```
#importing libraries
import pandas as pd
import numpy as np
import matplotlib.pyplot as plt
import seaborn as sns
```

In [2]:

```
#importing dataset
data=pd.read_csv(r"C:\Users\user\Downloads\rainfall in india 1901-2015.csv")
data
```

Out[2]:

	index	SUBDIVISION	YEAR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	
0	0	ANDAMAN & NICOBAR ISLANDS	1901	49.2	87.1	29.2	2.3	528.8	517.5	365.1	481.1	332.6	:
1	1	ANDAMAN & NICOBAR ISLANDS	1902	0.0	159.8	12.2	0.0	446.1	537.1	228.9	753.7	666.2	:
2	2	ANDAMAN & NICOBAR ISLANDS	1903	12.7	144.0	0.0	1.0	235.1	479.9	728.4	326.7	339.0	:
3	3	ANDAMAN & NICOBAR ISLANDS	1904	9.4	14.7	0.0	202.4	304.5	495.1	502.0	160.1	820.4	:
4	4	ANDAMAN & NICOBAR ISLANDS	1905	1.3	0.0	3.3	26.9	279.5	628.7	368.7	330.5	297.0	:
...	
4111	4111	LAKSHADWEEP	2011	5.1	2.8	3.1	85.9	107.2	153.6	350.2	254.0	255.2	
4112	4112	LAKSHADWEEP	2012	19.2	0.1	1.6	76.8	21.2	327.0	231.5	381.2	179.8	:
4113	4113	LAKSHADWEEP	2013	26.2	34.4	37.5	5.3	88.3	426.2	296.4	154.4	180.0	
4114	4114	LAKSHADWEEP	2014	53.2	16.1	4.4	14.9	57.4	244.1	116.1	466.1	132.2	:
4115	4115	LAKSHADWEEP	2015	2.2	0.5	3.7	87.1	133.1	296.6	257.5	146.4	160.4	:

4116 rows × 20 columns

MATATHWADA

In [3]:

df=data.iloc[2737:2852]
df

Out[3]:

	index	SUBDIVISION	YEAR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT
2737	2737	MATATHWADA	1901	15.8	3.3	32.1	48.5	26.5	193.1	184.1	249.8	74.0	81.6
2738	2738	MATATHWADA	1902	1.3	0.0	0.4	7.2	0.8	52.4	120.9	85.2	273.3	61.3
2739	2739	MATATHWADA	1903	2.6	0.8	0.0	1.7	58.3	104.4	264.2	281.9	173.3	139.9
2740	2740	MATATHWADA	1904	0.0	0.9	12.1	0.3	7.2	79.2	118.4	57.3	339.0	76.2
2741	2741	MATATHWADA	1905	1.3	2.0	0.0	6.6	4.8	84.6	94.8	137.6	157.8	15.4
...
2847	2847	MATATHWADA	2011	0.0	3.8	0.7	3.5	3.1	79.2	230.1	228.5	90.0	24.8
2848	2848	MATATHWADA	2012	0.0	0.0	0.0	0.6	2.3	72.2	161.1	101.4	120.0	68.8
2849	2849	MATATHWADA	2013	1.5	9.4	2.6	7.9	6.4	160.9	293.4	136.9	154.1	94.3
2850	2850	MATATHWADA	2014	1.4	13.4	79.0	11.9	7.0	30.4	105.0	178.9	84.5	14.2
2851	2851	MATATHWADA	2015	10.1	1.6	32.0	39.6	12.3	118.3	27.4	112.2	154.3	19.5

115 rows × 20 columns

Data Cleaning and Preprocessing

In [4]:

df.head()

Out[4]:

	index	SUBDIVISION	YEAR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT
2737	2737	MATATHWADA	1901	15.8	3.3	32.1	48.5	26.5	193.1	184.1	249.8	74.0	81.6
2738	2738	MATATHWADA	1902	1.3	0.0	0.4	7.2	0.8	52.4	120.9	85.2	273.3	61.3
2739	2739	MATATHWADA	1903	2.6	0.8	0.0	1.7	58.3	104.4	264.2	281.9	173.3	139.9
2740	2740	MATATHWADA	1904	0.0	0.9	12.1	0.3	7.2	79.2	118.4	57.3	339.0	76.2
2741	2741	MATATHWADA	1905	1.3	2.0	0.0	6.6	4.8	84.6	94.8	137.6	157.8	15.4

In [5]: `df.tail()`

Out[5]:

	index	SUBDIVISION	YEAR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT
2847	2847	MATATHWADA	2011	0.0	3.8	0.7	3.5	3.1	79.2	230.1	228.5	90.0	24.8
2848	2848	MATATHWADA	2012	0.0	0.0	0.0	0.6	2.3	72.2	161.1	101.4	120.0	68.8
2849	2849	MATATHWADA	2013	1.5	9.4	2.6	7.9	6.4	160.9	293.4	136.9	154.1	94.3
2850	2850	MATATHWADA	2014	1.4	13.4	79.0	11.9	7.0	30.4	105.0	178.9	84.5	14.2
2851	2851	MATATHWADA	2015	10.1	1.6	32.0	39.6	12.3	118.3	27.4	112.2	154.3	19.5

In [6]: `df.info()`

```
<class 'pandas.core.frame.DataFrame'>
RangeIndex: 115 entries, 2737 to 2851
Data columns (total 20 columns):
#   Column          Non-Null Count  Dtype
---  -
0   index           115 non-null    int64
1   SUBDIVISION     115 non-null    object
2   YEAR            115 non-null    int64
3   JAN             115 non-null    float64
4   FEB             115 non-null    float64
5   MAR             115 non-null    float64
6   APR             115 non-null    float64
7   MAY             115 non-null    float64
8   JUN             115 non-null    float64
9   JUL             115 non-null    float64
10  AUG             115 non-null    float64
11  SEP             115 non-null    float64
12  OCT             115 non-null    float64
13  NOV             115 non-null    float64
14  DEC             115 non-null    float64
15  ANNUAL          115 non-null    float64
16  Jan-Feb         115 non-null    float64
17  Mar-May         115 non-null    float64
18  Jun-Sep         115 non-null    float64
19  Oct-Dec         115 non-null    float64
dtypes: float64(17), int64(2), object(1)
memory usage: 18.1+ KB
```

```
In [7]: #filling null values
df1=df.fillna(0)
df1
```

Out[7]:

	index	SUBDIVISION	YEAR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT
2737	2737	MATATHWADA	1901	15.8	3.3	32.1	48.5	26.5	193.1	184.1	249.8	74.0	81.6
2738	2738	MATATHWADA	1902	1.3	0.0	0.4	7.2	0.8	52.4	120.9	85.2	273.3	61.3
2739	2739	MATATHWADA	1903	2.6	0.8	0.0	1.7	58.3	104.4	264.2	281.9	173.3	139.9
2740	2740	MATATHWADA	1904	0.0	0.9	12.1	0.3	7.2	79.2	118.4	57.3	339.0	76.2
2741	2741	MATATHWADA	1905	1.3	2.0	0.0	6.6	4.8	84.6	94.8	137.6	157.8	15.4
...
2847	2847	MATATHWADA	2011	0.0	3.8	0.7	3.5	3.1	79.2	230.1	228.5	90.0	24.8
2848	2848	MATATHWADA	2012	0.0	0.0	0.0	0.6	2.3	72.2	161.1	101.4	120.0	68.8
2849	2849	MATATHWADA	2013	1.5	9.4	2.6	7.9	6.4	160.9	293.4	136.9	154.1	94.3
2850	2850	MATATHWADA	2014	1.4	13.4	79.0	11.9	7.0	30.4	105.0	178.9	84.5	14.2
2851	2851	MATATHWADA	2015	10.1	1.6	32.0	39.6	12.3	118.3	27.4	112.2	154.3	19.5

115 rows × 20 columns

```
In [8]: df1.describe()
```

Out[8]:

	index	YEAR	JAN	FEB	MAR	APR	MAY
count	115.000000	115.000000	115.000000	115.000000	115.000000	115.000000	115.000000
mean	2794.000000	1958.000000	5.000870	4.443478	7.105217	7.594783	15.646957
std	33.341666	33.341666	10.644795	8.726690	12.542271	10.028581	21.826779
min	2737.000000	1901.000000	0.000000	0.000000	0.000000	0.000000	0.000000
25%	2765.500000	1929.500000	0.000000	0.000000	0.200000	1.500000	2.200000
50%	2794.000000	1958.000000	0.900000	0.700000	2.600000	4.600000	8.000000
75%	2822.500000	1986.500000	5.600000	4.550000	8.050000	10.500000	19.200000
max	2851.000000	2015.000000	70.400000	63.500000	79.000000	61.300000	142.100000

```
In [9]: df1.columns
```


Out[9]:

Index(['index', 'SUBDIVISION', 'YEAR', 'JAN', 'FEB', 'MAR', 'APR', 'MAY', 'JUN', 'JUL', 'AUG', 'SEP', 'OCT', 'NOV', 'DEC', 'ANNUAL', 'Jan-Feb', 'Mar-May', 'Jun-Sep', 'Oct-Dec'], dtype='object')

Data Visulaization


In [10]: `df1.plot.line()`

Out[10]: `<AxesSubplot:>`

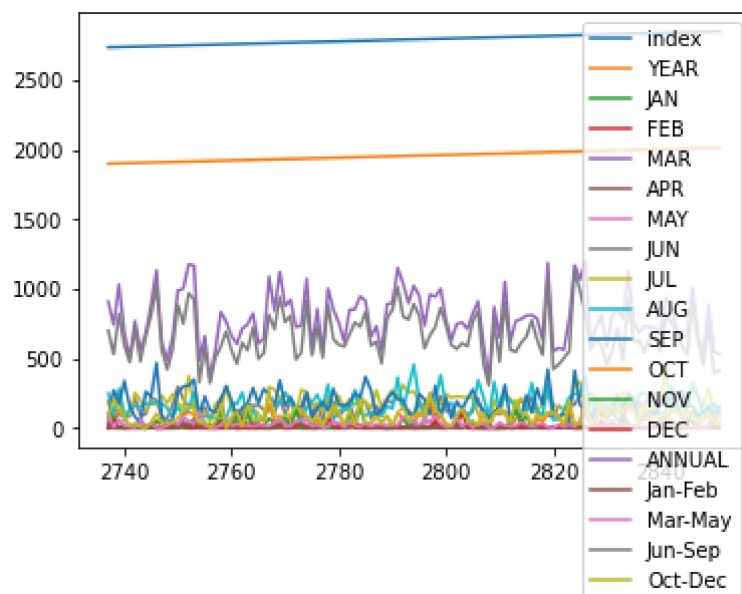


In [11]: `df1.plot.bar()`

Out[11]: `<AxesSubplot:>`

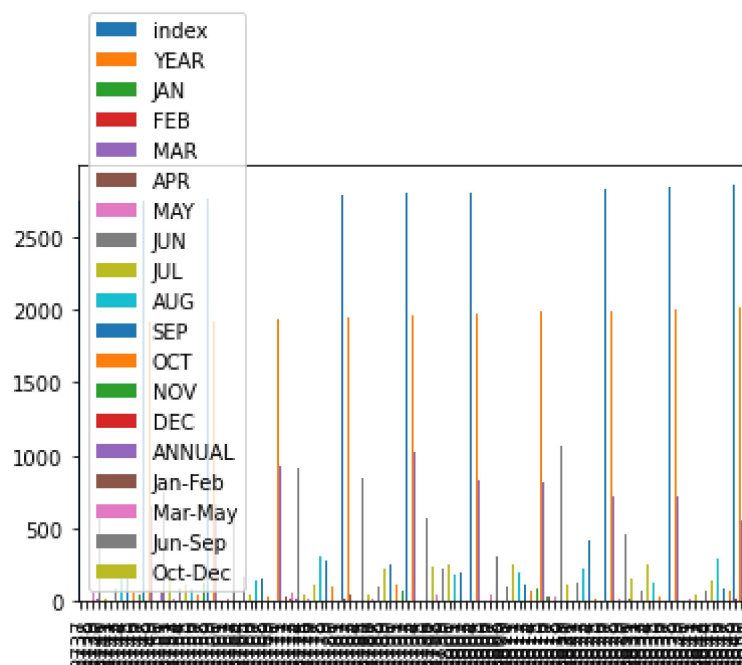


```
In [12]: df1.plot.box()
```

```
Out[12]: <AxesSubplot:>
```

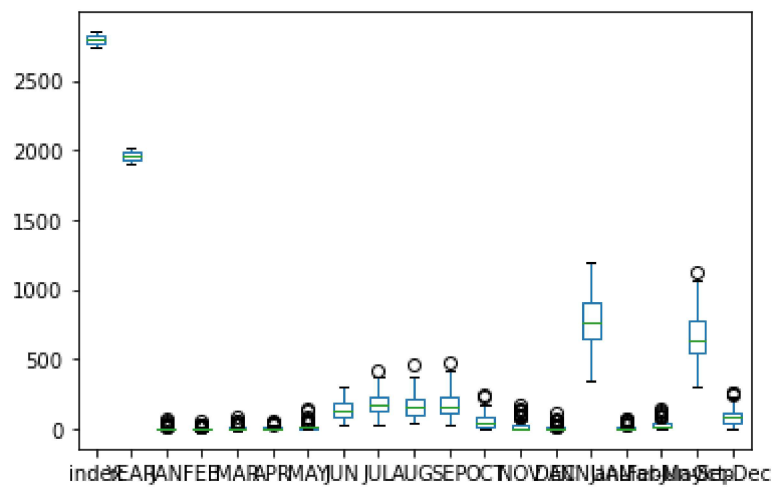


```
In [13]: df1.plot.hist()
```

```
Out[13]: <AxesSubplot:ylabel='Frequency'>
```

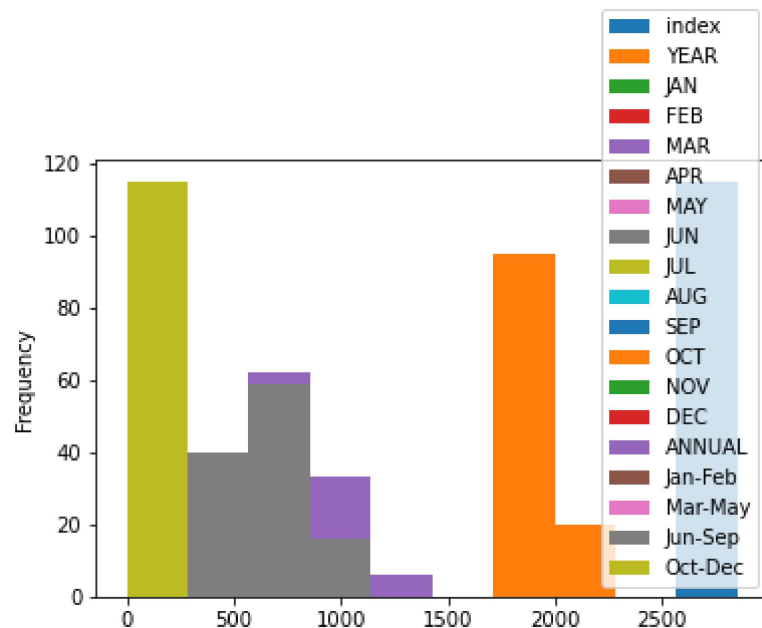


```
In [14]: df1.plot.scatter(x="SUBDIVISION",y="YEAR")
```

```
Out[14]: <AxesSubplot:xlabel='SUBDIVISION', ylabel='YEAR'>
```

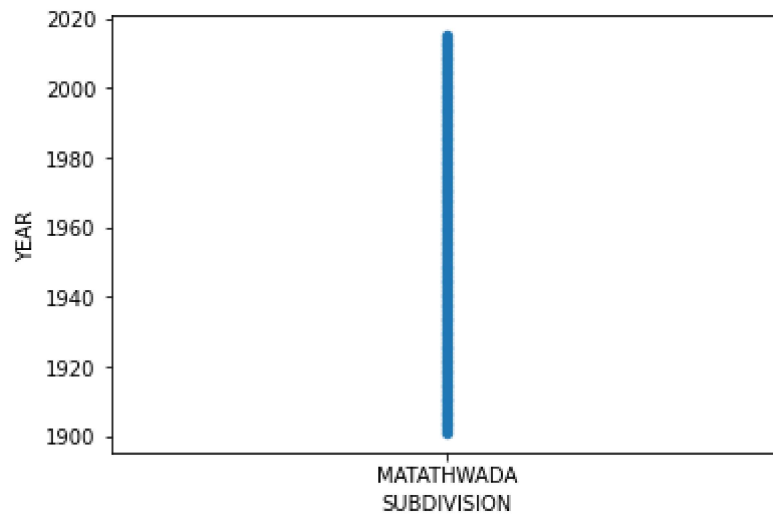

```
In [15]: df2=df1[[ 'Jun-Sep']]  
df2.plot.pie(subplots=True)
```


```
Out[15]: array([<AxesSubplot:ylabel='Jun-Sep'>], dtype=object)
```

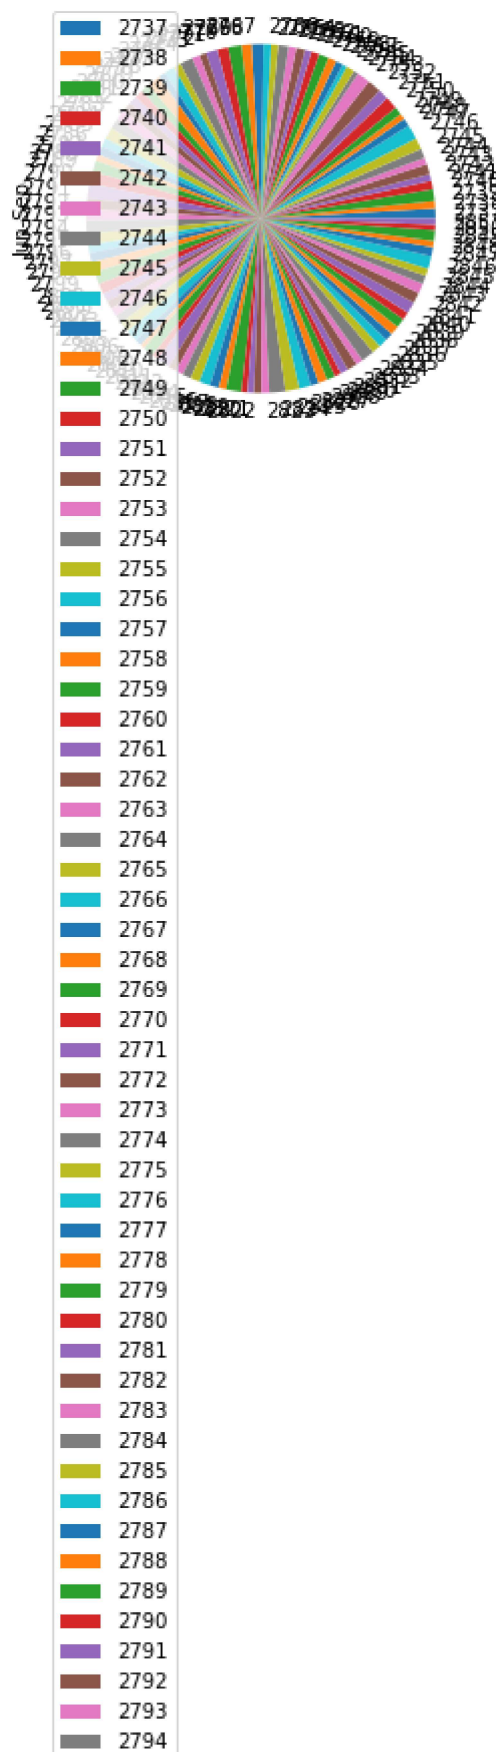

2795
2796
2797
2798
2799
2800
2801
2802
2803
2804
2805
2806
2807
2808
2809
2810
2811
2812
2813
2814
2815
2816
2817
2818
2819
2820
2821
2822
2823
2824
2825
2826
2827
2828
2829
2830
2831
2832
2833
2834
2835
2836
2837
2838
2839
2840
2841
2842
2843
2844
2845
2846
2847
2848
2849
2850
2851


```
In [16]: sns.pairplot(df1)
```

```
Out[16]: <seaborn.axisgrid.PairGrid at 0x202e8ad5ee0>
```

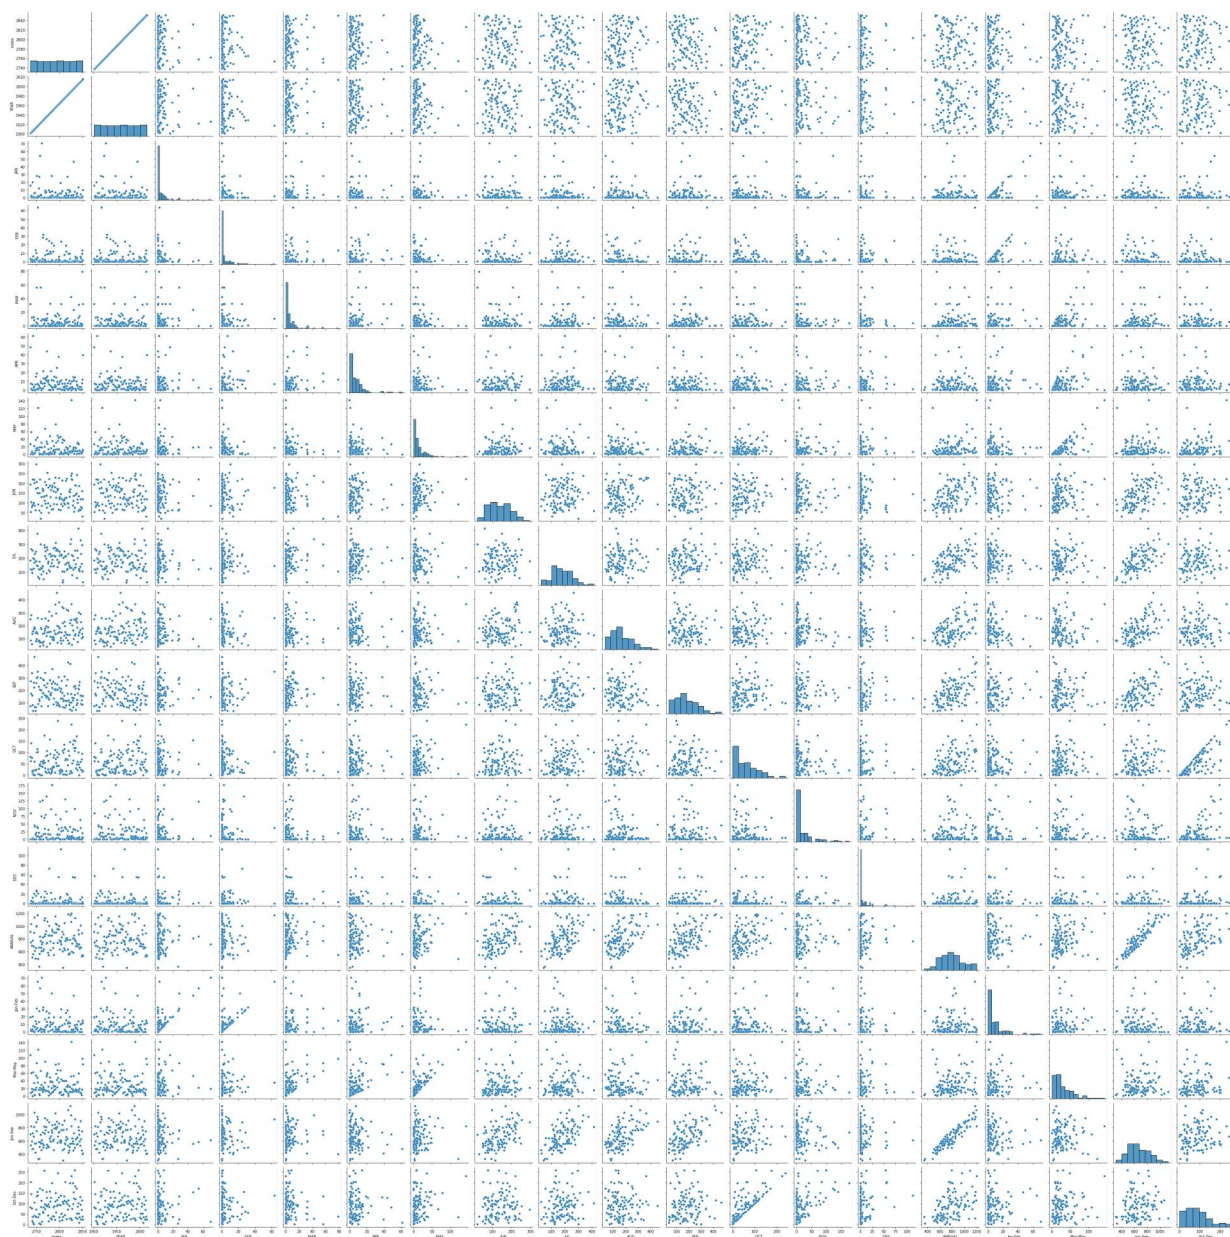

```
In [17]: sns.displot(data["Jun-Sep"])
```

```
Out[17]: <seaborn.axisgrid.FacetGrid at 0x202f72fa8e0>
```

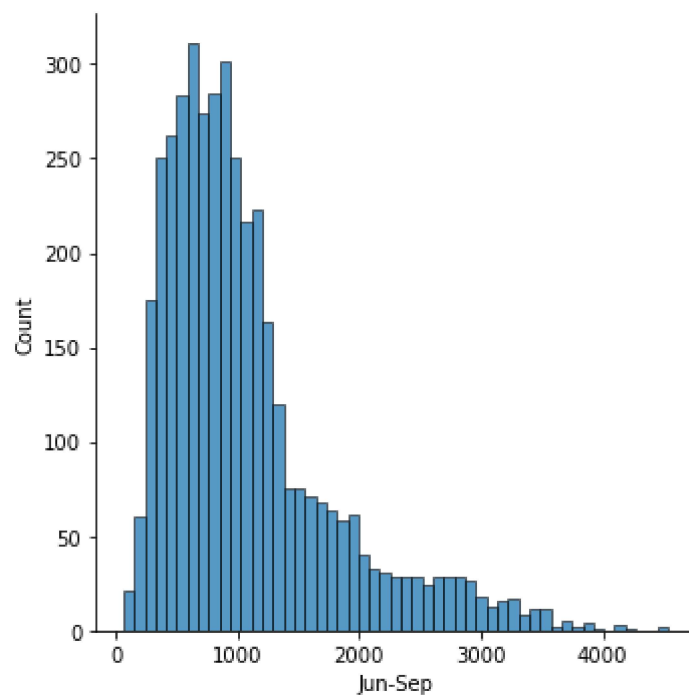

```
In [18]: sns.heatmap(df1.corr())
```

```
Out[18]: <AxesSubplot:>
```

