

FINAL ASSESSMENT 2

```
In [1]: #importing libraries
import pandas as pd
import numpy as np
import matplotlib.pyplot as plt
import seaborn as sns
```

```
In [2]: #importing dataset
data=pd.read_csv(r"C:\Users\user\Downloads\rainfall in india 1901-2015.csv")
data
```

Out[2]:

	index	SUBDIVISION	YEAR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	
0	0	ANDAMAN & NICOBAR ISLANDS	1901	49.2	87.1	29.2	2.3	528.8	517.5	365.1	481.1	332.6	:
1	1	ANDAMAN & NICOBAR ISLANDS	1902	0.0	159.8	12.2	0.0	446.1	537.1	228.9	753.7	666.2	:
2	2	ANDAMAN & NICOBAR ISLANDS	1903	12.7	144.0	0.0	1.0	235.1	479.9	728.4	326.7	339.0	:
3	3	ANDAMAN & NICOBAR ISLANDS	1904	9.4	14.7	0.0	202.4	304.5	495.1	502.0	160.1	820.4	:
4	4	ANDAMAN & NICOBAR ISLANDS	1905	1.3	0.0	3.3	26.9	279.5	628.7	368.7	330.5	297.0	:
...	
4111	4111	LAKSHADWEEP	2011	5.1	2.8	3.1	85.9	107.2	153.6	350.2	254.0	255.2	
4112	4112	LAKSHADWEEP	2012	19.2	0.1	1.6	76.8	21.2	327.0	231.5	381.2	179.8	:
4113	4113	LAKSHADWEEP	2013	26.2	34.4	37.5	5.3	88.3	426.2	296.4	154.4	180.0	
4114	4114	LAKSHADWEEP	2014	53.2	16.1	4.4	14.9	57.4	244.1	116.1	466.1	132.2	:
4115	4115	LAKSHADWEEP	2015	2.2	0.5	3.7	87.1	133.1	296.6	257.5	146.4	160.4	:

4116 rows × 20 columns

JHARKHAND

In [3]:

df=data.iloc[782:897]
df

Out[3]:

	index	SUBDIVISION	YEAR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT
782	782	JHARKHAND	1901	92.7	66.6	11.1	18.4	33.5	70.9	269.4	415.1	248.0	37.3
783	783	JHARKHAND	1902	4.2	7.7	13.2	28.5	59.8	89.9	456.1	204.9	306.6	17.6
784	784	JHARKHAND	1903	25.1	19.5	10.7	32.8	56.4	142.1	206.1	280.8	190.2	210.1
785	785	JHARKHAND	1904	2.5	17.0	38.1	9.1	116.1	308.9	494.1	336.1	125.6	30.6
786	786	JHARKHAND	1905	38.4	53.3	61.6	32.9	66.2	41.5	420.3	293.7	322.8	21.3
...
892	892	JHARKHAND	2011	3.3	2.5	6.4	25.4	55.0	349.0	181.8	403.2	324.6	23.3
893	893	JHARKHAND	2012	34.6	10.3	1.5	9.6	6.6	121.1	287.2	282.4	217.6	37.8
894	894	JHARKHAND	2013	1.1	17.9	1.6	22.3	85.0	181.5	211.1	278.1	173.8	281.1
895	895	JHARKHAND	2014	9.9	47.5	22.9	1.9	98.2	139.7	321.3	290.9	178.2	44.9
896	896	JHARKHAND	2015	12.2	2.6	21.6	55.5	25.5	183.3	429.7	240.7	85.1	22.7

115 rows × 20 columns

Data Cleaning and Preprocessing

In [4]:

df.head()

Out[4]:

	index	SUBDIVISION	YEAR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT
782	782	JHARKHAND	1901	92.7	66.6	11.1	18.4	33.5	70.9	269.4	415.1	248.0	37.3
783	783	JHARKHAND	1902	4.2	7.7	13.2	28.5	59.8	89.9	456.1	204.9	306.6	17.6
784	784	JHARKHAND	1903	25.1	19.5	10.7	32.8	56.4	142.1	206.1	280.8	190.2	210.1
785	785	JHARKHAND	1904	2.5	17.0	38.1	9.1	116.1	308.9	494.1	336.1	125.6	30.6
786	786	JHARKHAND	1905	38.4	53.3	61.6	32.9	66.2	41.5	420.3	293.7	322.8	21.3

In [5]: `df.tail()`

Out[5]:

	index	SUBDIVISION	YEAR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT
892	892	JHARKHAND	2011	3.3	2.5	6.4	25.4	55.0	349.0	181.8	403.2	324.6	23.3
893	893	JHARKHAND	2012	34.6	10.3	1.5	9.6	6.6	121.1	287.2	282.4	217.6	37.8
894	894	JHARKHAND	2013	1.1	17.9	1.6	22.3	85.0	181.5	211.1	278.1	173.8	281.1
895	895	JHARKHAND	2014	9.9	47.5	22.9	1.9	98.2	139.7	321.3	290.9	178.2	44.9
896	896	JHARKHAND	2015	12.2	2.6	21.6	55.5	25.5	183.3	429.7	240.7	85.1	22.7

In [6]: `df.info()`

```
<class 'pandas.core.frame.DataFrame'>
RangeIndex: 115 entries, 782 to 896
Data columns (total 20 columns):
#   Column          Non-Null Count  Dtype
---  -
0   index           115 non-null    int64
1   SUBDIVISION     115 non-null    object
2   YEAR            115 non-null    int64
3   JAN             115 non-null    float64
4   FEB             115 non-null    float64
5   MAR             115 non-null    float64
6   APR             115 non-null    float64
7   MAY             115 non-null    float64
8   JUN             115 non-null    float64
9   JUL             115 non-null    float64
10  AUG             115 non-null    float64
11  SEP             115 non-null    float64
12  OCT             115 non-null    float64
13  NOV             115 non-null    float64
14  DEC             115 non-null    float64
15  ANNUAL          115 non-null    float64
16  Jan-Feb         115 non-null    float64
17  Mar-May         115 non-null    float64
18  Jun-Sep         115 non-null    float64
19  Oct-Dec         115 non-null    float64
dtypes: float64(17), int64(2), object(1)
memory usage: 18.1+ KB
```

```
In [7]: #filling null values
df1=df.fillna(0)
df1
```

Out[7]:

	index	SUBDIVISION	YEAR	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT
782	782	JHARKHAND	1901	92.7	66.6	11.1	18.4	33.5	70.9	269.4	415.1	248.0	37.3
783	783	JHARKHAND	1902	4.2	7.7	13.2	28.5	59.8	89.9	456.1	204.9	306.6	17.6
784	784	JHARKHAND	1903	25.1	19.5	10.7	32.8	56.4	142.1	206.1	280.8	190.2	210.1
785	785	JHARKHAND	1904	2.5	17.0	38.1	9.1	116.1	308.9	494.1	336.1	125.6	30.6
786	786	JHARKHAND	1905	38.4	53.3	61.6	32.9	66.2	41.5	420.3	293.7	322.8	21.3
...
892	892	JHARKHAND	2011	3.3	2.5	6.4	25.4	55.0	349.0	181.8	403.2	324.6	23.3
893	893	JHARKHAND	2012	34.6	10.3	1.5	9.6	6.6	121.1	287.2	282.4	217.6	37.8
894	894	JHARKHAND	2013	1.1	17.9	1.6	22.3	85.0	181.5	211.1	278.1	173.8	281.1
895	895	JHARKHAND	2014	9.9	47.5	22.9	1.9	98.2	139.7	321.3	290.9	178.2	44.9
896	896	JHARKHAND	2015	12.2	2.6	21.6	55.5	25.5	183.3	429.7	240.7	85.1	22.7


115 rows × 20 columns



```
In [8]: df1.describe()
```

Out[8]:

	index	YEAR	JAN	FEB	MAR	APR	MAY
count	115.000000	115.000000	115.000000	115.000000	115.000000	115.000000	115.000000
mean	839.000000	1958.000000	17.621739	24.186087	18.423478	19.366957	48.317391
std	33.341666	33.341666	20.491016	25.779639	19.867899	16.149628	28.652462
min	782.000000	1901.000000	0.000000	0.100000	0.000000	0.100000	3.200000
25%	810.500000	1929.500000	2.400000	7.750000	3.350000	8.200000	26.950000
50%	839.000000	1958.000000	9.500000	16.200000	11.100000	15.700000	42.300000
75%	867.500000	1986.500000	24.900000	32.950000	27.300000	26.350000	66.300000
max	896.000000	2015.000000	102.900000	128.500000	95.000000	95.600000	150.100000




```
In [9]: df1.columns
```

```
Out[9]: Index(['index', 'SUBDIVISION', 'YEAR', 'JAN', 'FEB', 'MAR', 'APR', 'MAY',
              'JUN', 'JUL', 'AUG', 'SEP', 'OCT', 'NOV', 'DEC', 'ANNUAL', 'Jan-Feb',
              'Mar-May', 'Jun-Sep', 'Oct-Dec'],
              dtype='object')
```

Data Visulaization


```
In [10]: df1.plot.line()
```

```
Out[10]: <AxesSubplot:>
```

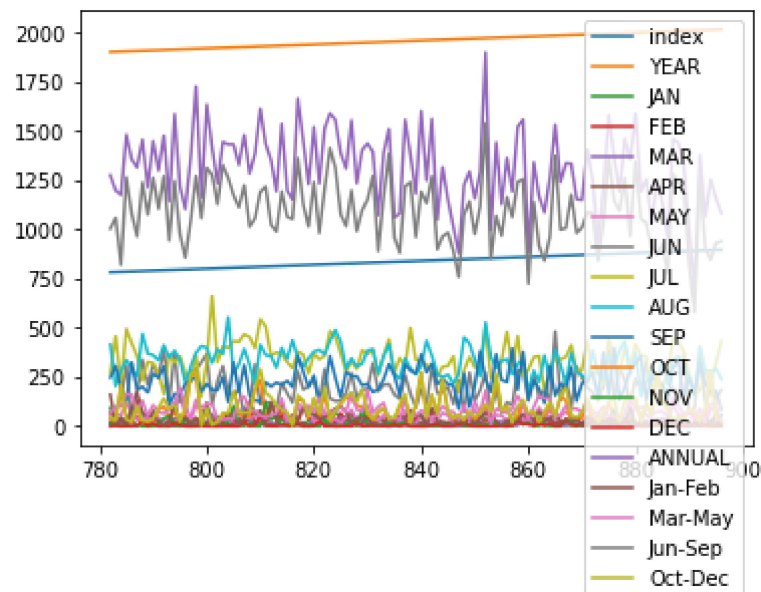


```
In [11]: df1.plot.bar()
```

```
Out[11]: <AxesSubplot:>
```

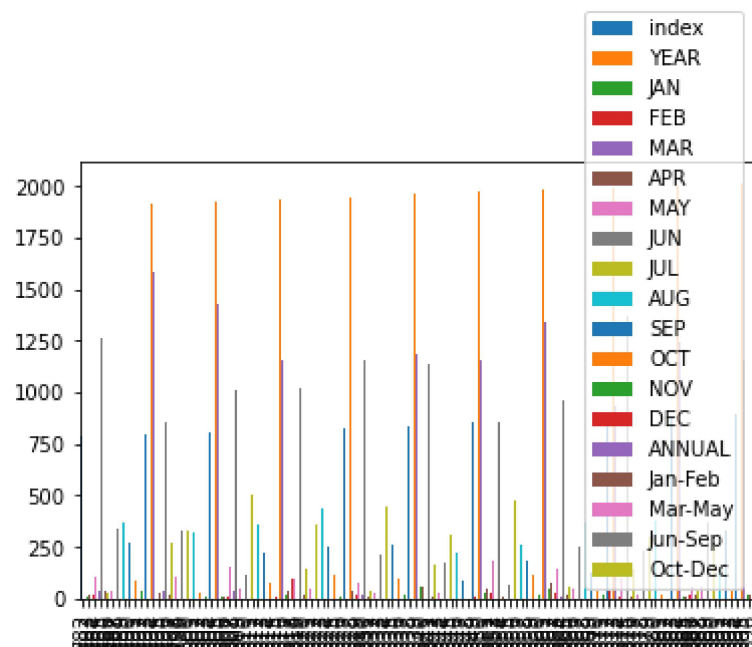


```
In [12]: df1.plot.box()
```

```
Out[12]: <AxesSubplot:>
```

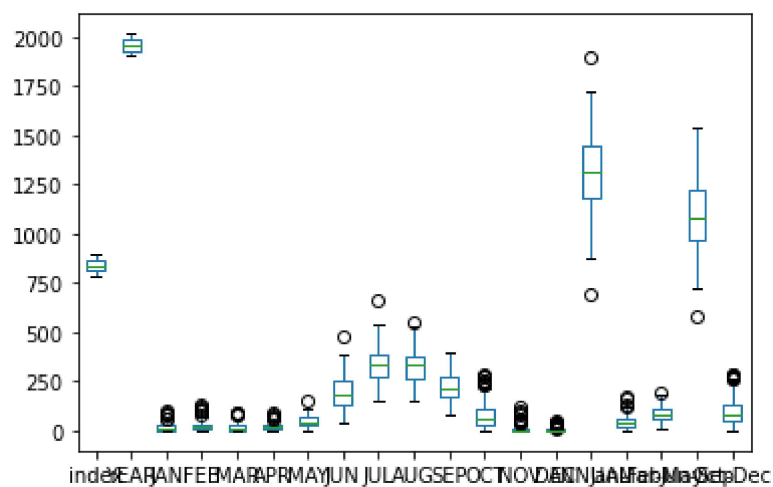


```
In [13]: df1.plot.hist()
```

```
Out[13]: <AxesSubplot:ylabel='Frequency'>
```

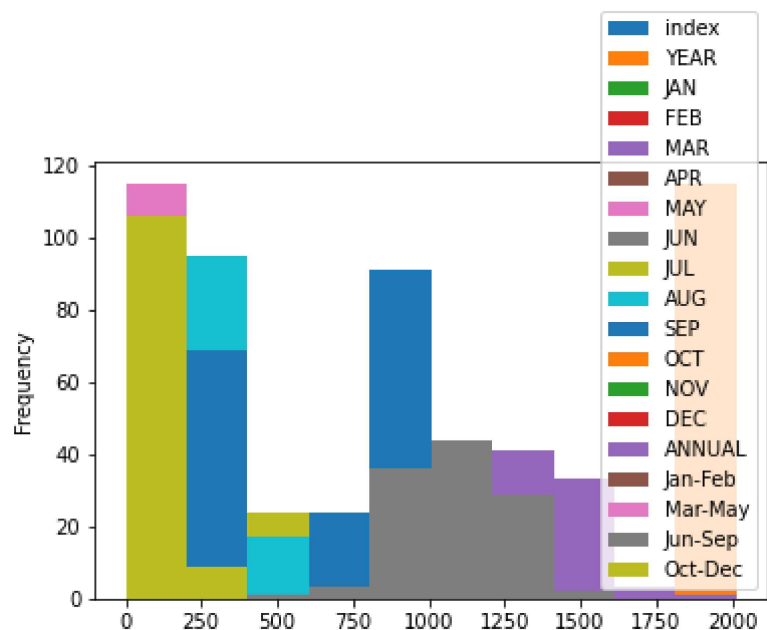


```
In [14]: df1.plot.scatter(x="SUBDIVISION",y="YEAR")
```

```
Out[14]: <AxesSubplot:xlabel='SUBDIVISION', ylabel='YEAR'>
```

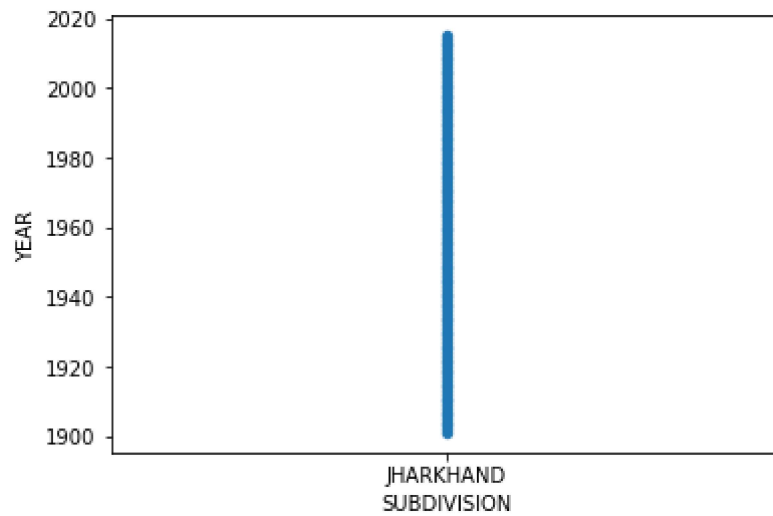

```
In [15]: df2=df1[[ 'Jun-Sep']]
df2.plot.pie(subplots=True)
```


```
Out[15]: array([<AxesSubplot:ylabel='Jun-Sep'>], dtype=object)
```

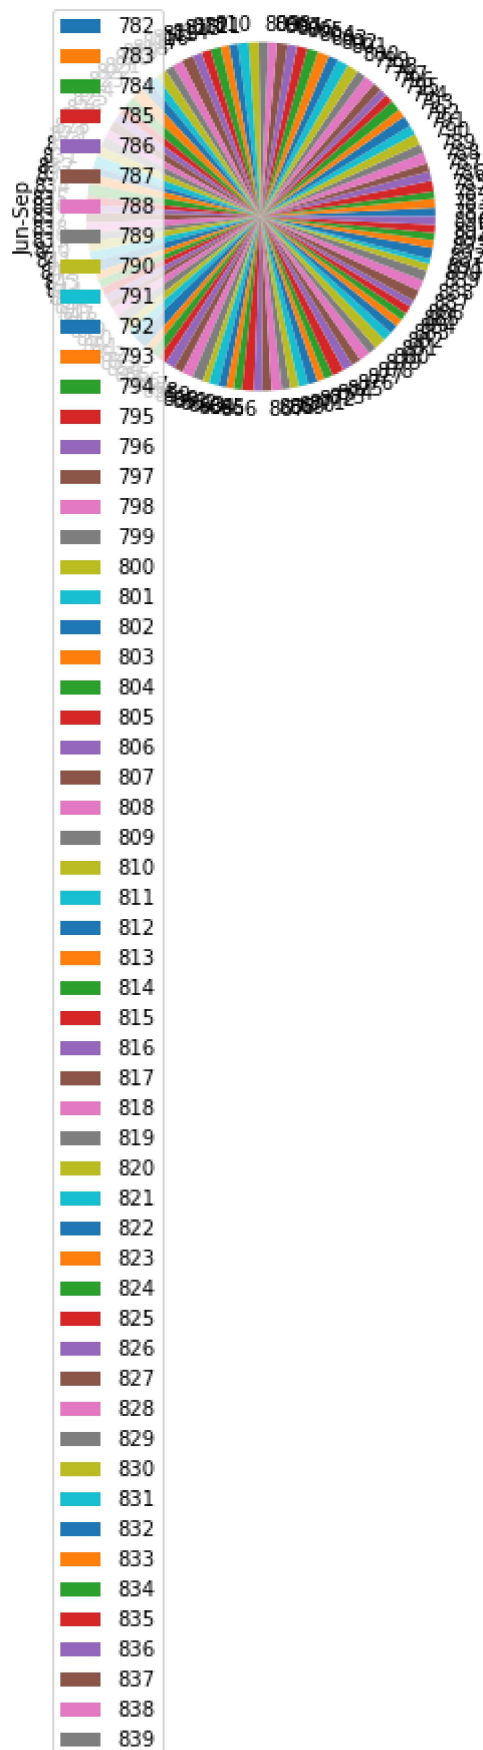

840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896


```
In [16]: sns.pairplot(df1)
```

```
Out[16]: <seaborn.axisgrid.PairGrid at 0x28ffc3abc10>
```

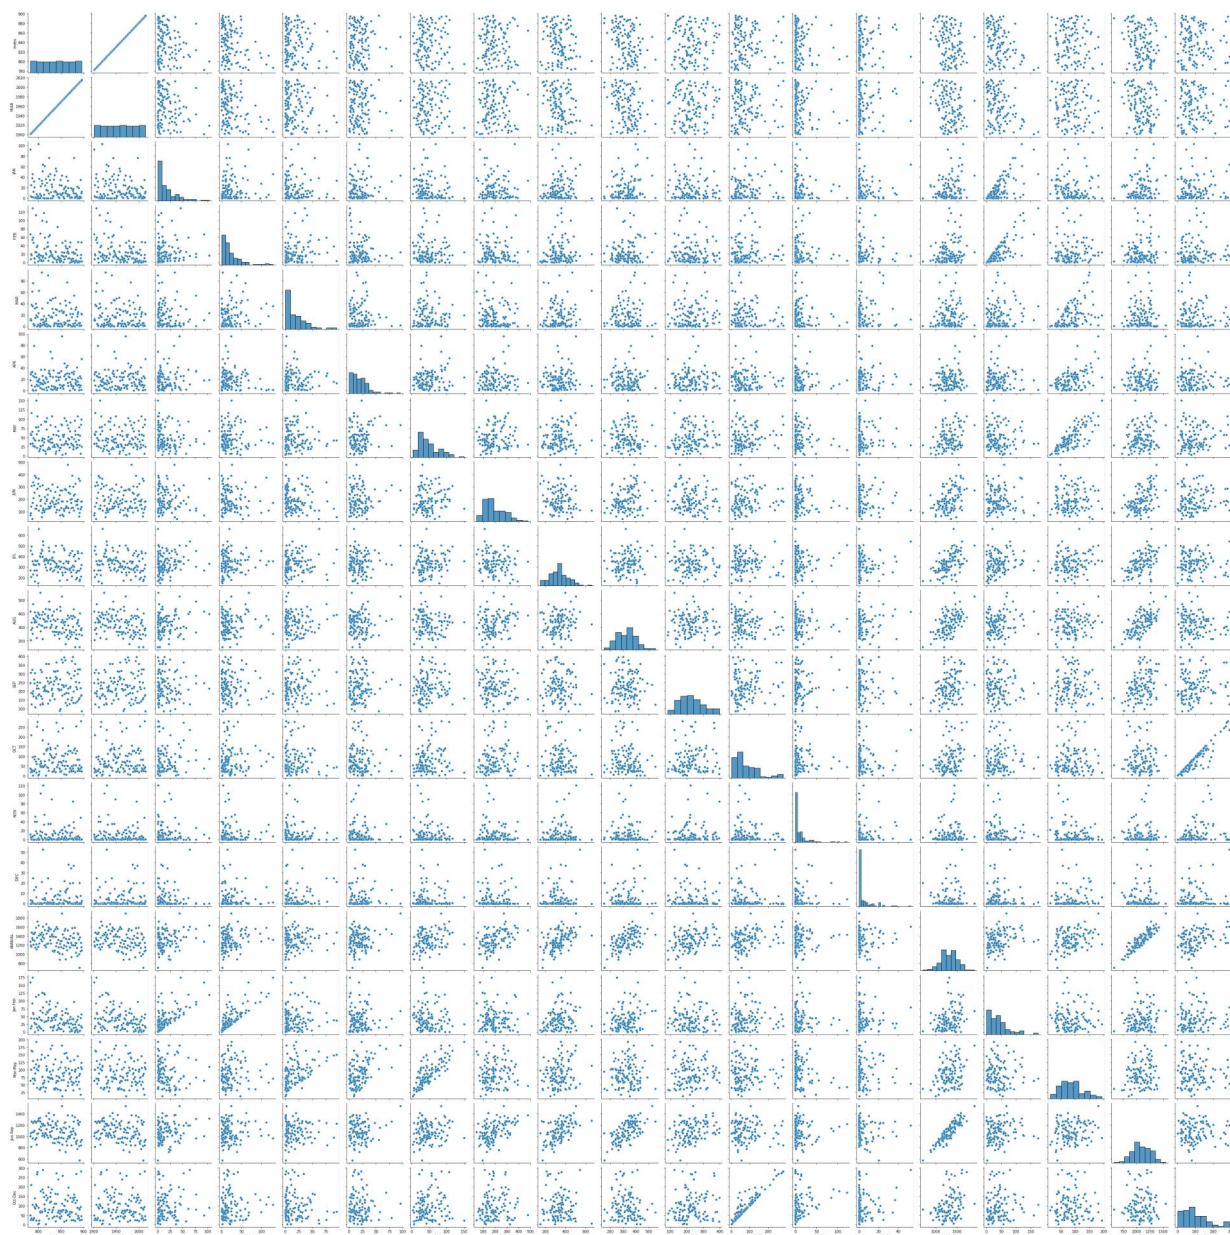

```
In [17]: sns.displot(data["Jun-Sep"])
```

```
Out[17]: <seaborn.axisgrid.FacetGrid at 0x28ffc7dc700>
```

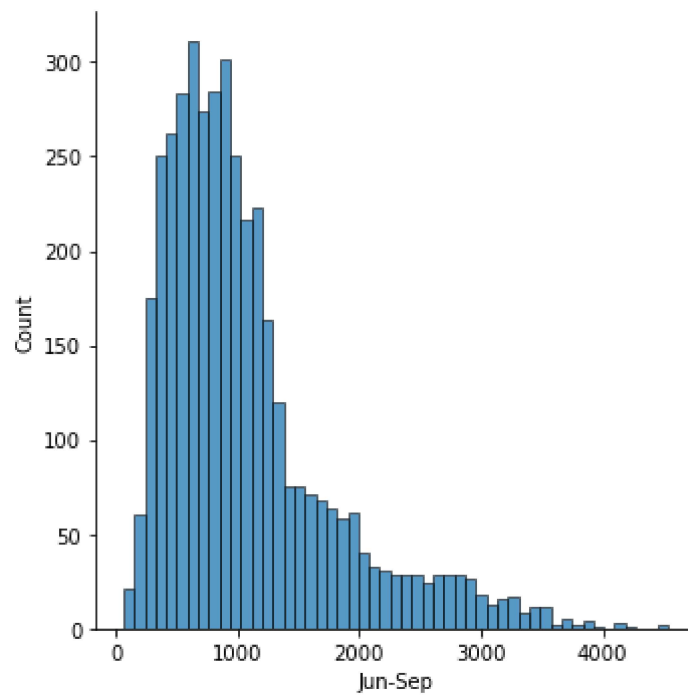

```
In [18]: sns.heatmap(df1.corr())
```

```
Out[18]: <AxesSubplot:>
```

