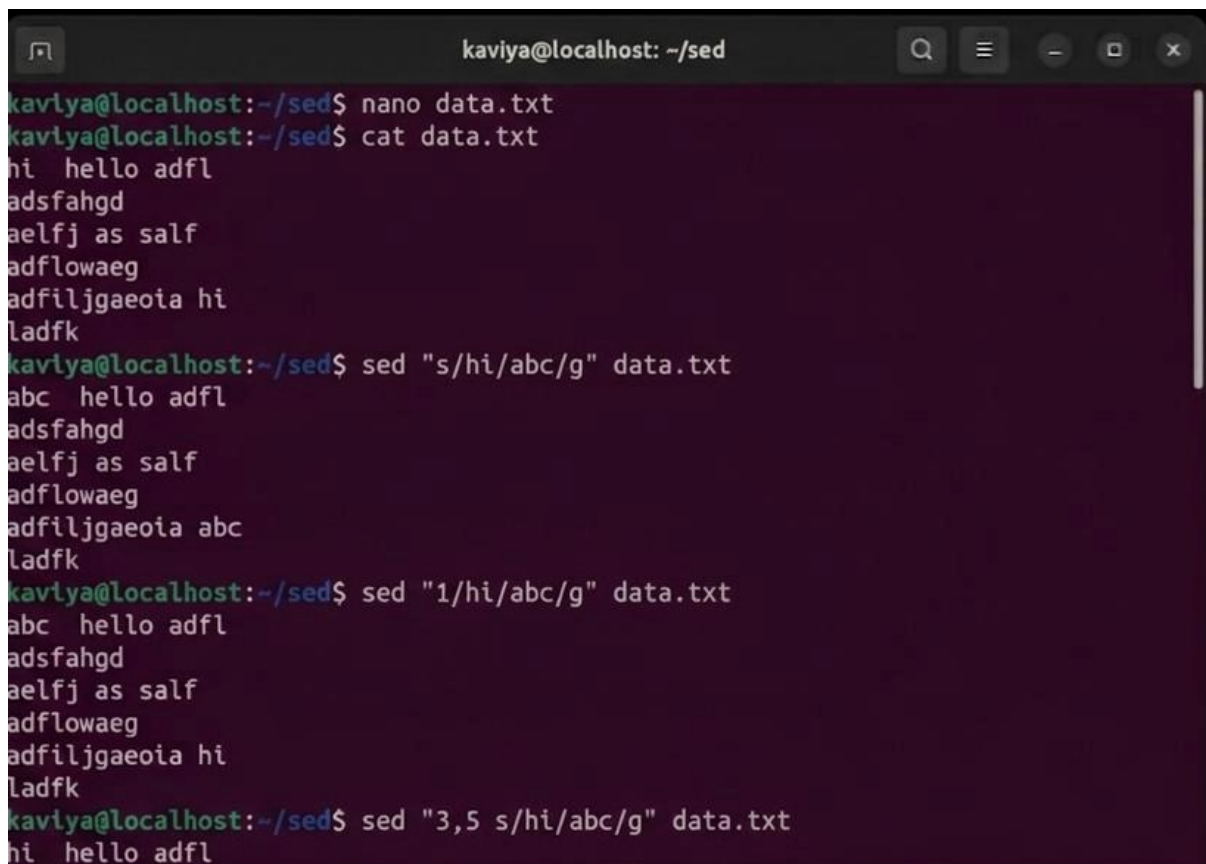


STUDY OF UNIX COMMANDS: SED ,VI,EMACS

INPUT & OUTPUT:

FIGURE1:

A terminal window titled 'kaviya@localhost: ~/sed' with standard window controls. It shows a sequence of commands and their outputs. First, 'nano data.txt' is run. Then, 'cat data.txt' displays the contents of data.txt: 'hi hello adfl', 'adsfahgd', 'aelfj as salf', 'adflowaeg', 'adfiljgaeoia hi', and 'ladfk'. Next, 'sed "s/hi/abc/g" data.txt' is run, showing the result of replacing 'hi' with 'abc' on the first line. Then, 'sed "1/hi/abc/g" data.txt' is run, showing the result of replacing 'hi' with 'abc' only on the first line. Finally, 'sed "3,5 s/hi/abc/g" data.txt' is run, showing the result of replacing 'hi' with 'abc' on lines 3 and 5. The terminal has a dark purple background and green text for prompts and commands, and white text for output.

```
kaviya@localhost:~/sed$ nano data.txt
kaviya@localhost:~/sed$ cat data.txt
hi hello adfl
adsfahgd
aelfj as salf
adflowaeg
adfiljgaeoia hi
ladfk
kaviya@localhost:~/sed$ sed "s/hi/abc/g" data.txt
abc hello adfl
adsfahgd
aelfj as salf
adflowaeg
adfiljgaeoia abc
ladfk
kaviya@localhost:~/sed$ sed "1/hi/abc/g" data.txt
abc hello adfl
adsfahgd
aelfj as salf
adflowaeg
adfiljgaeoia hi
ladfk
kaviya@localhost:~/sed$ sed "3,5 s/hi/abc/g" data.txt
hi hello adfl
```

FIGURE 2:

```
kaviya@localhost: ~/sed
adsfahgd
aelfj as salf
adfiowaeg
adfiljgaeoia abc
ladfk
kaviya@localhost:~/sed$ sed "2,$ s/hi/abc/g" data.txt
hi hello adfl
adsfahgd
aelfj as salf
adfiowaeg
adfiljgaeoia abc
ladfk
kaviya@localhost:~/sed$ sed -i "s/hi/abc/g" data.txt
kaviya@localhost:~/sed$ cat data.txt
abc hello adfl
adsfahgd
aelfj as salf
adfiowaeg
adfiljgaeoia abc
ladfk
kaviya@localhost:~/sed$ sed -n "4p" data.txt
adfiowaeg
kaviya@localhost:~/sed$ sed -n 4,$p" data.txt
sed: -e expression #1, char 2: unexpected `,'
```

FIGURE 3:

```
kaviya@localhost: ~/sed
kaviya@localhost:~/sed$ cat data.txt
abc hello adfl
adsfahgd
aelfj as salf
adfiowaeg
adfiljgaeoia abc
ladfk
kaviya@localhost:~/sed$ sed -n "4p" data.txt
adfiowaeg
kaviya@localhost:~/sed$ sed -n "4,$p" data.txt
sed: -e expression #1, char 2: unexpected `,'
kaviya@localhost:~/sed$ sed -n "4,$p" data.txt
sed: -e expression #1, char 2: unexpected `,'
kaviya@localhost:~/sed$ sed -n "4,6p" data.txt
adfiowaeg
adfiljgaeoia abc
ladfk
kaviya@localhost:~/sed$ sed -n "4d" data.txt
abc hello adfl
adsfahgd
aelfj as salf
adfiljgaeoia abc
ladfk
kaviya@localhost:~/sed$
```