


Experiment

Arm-run $\times n$ repeats (default / random / LLM; proxy- or grt-ranked)

Round $\times 4$

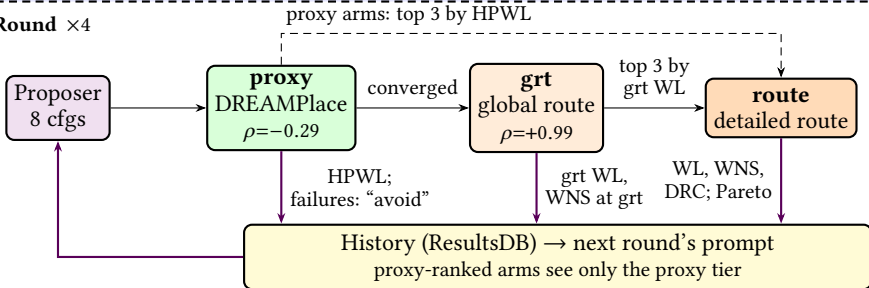

Proposer modes (not enabled in the reported runs):
failure memory, critique-then-propose, constraint prompts

repair infra-failed runs first

re-route best
on seeds 101–104

credit if $> 2\sigma$
over default