

**Bhaves R. Joshi**  
**UNICODE TECHNOLOG**  
**Porbandar - 360 575**



# **PHP**

## **Introduction to PHP**

# AJAX Introduction

- AJAX stands for **A**ynchronous **J**avaScript and **X**ML.
- AJAX is a new technique for creating better, faster, and more interactive web applications with the help of XML, HTML, CSS, and Java Script.
- With AJAX, when you hit submit, JavaScript will make a request to the server, interpret the results, and update the current screen.

# AJAX Introduction

- AJAX cannot work independently. It is used in combination with other technologies to create interactive webpages.
- **JavaScript**
- **DOM (Document Object Model)**
- **CSS (Cascading Style Sheets)**
- **XMLHttpRequest**


# AJAX Introduction


- A list of some famous web applications that make use of AJAX.
- **Google Maps**
- **Yahoo Maps (new)**
- **Facebook**
- **Twitter**
- **Gmail**
- **YouTube**

# How AJAX Works?

- AJAX communicates with the server using **XMLHttpRequest** object.
- Let's try to understand the flow of ajax or how ajax works by the image displayed below.

# How AJAX Works?

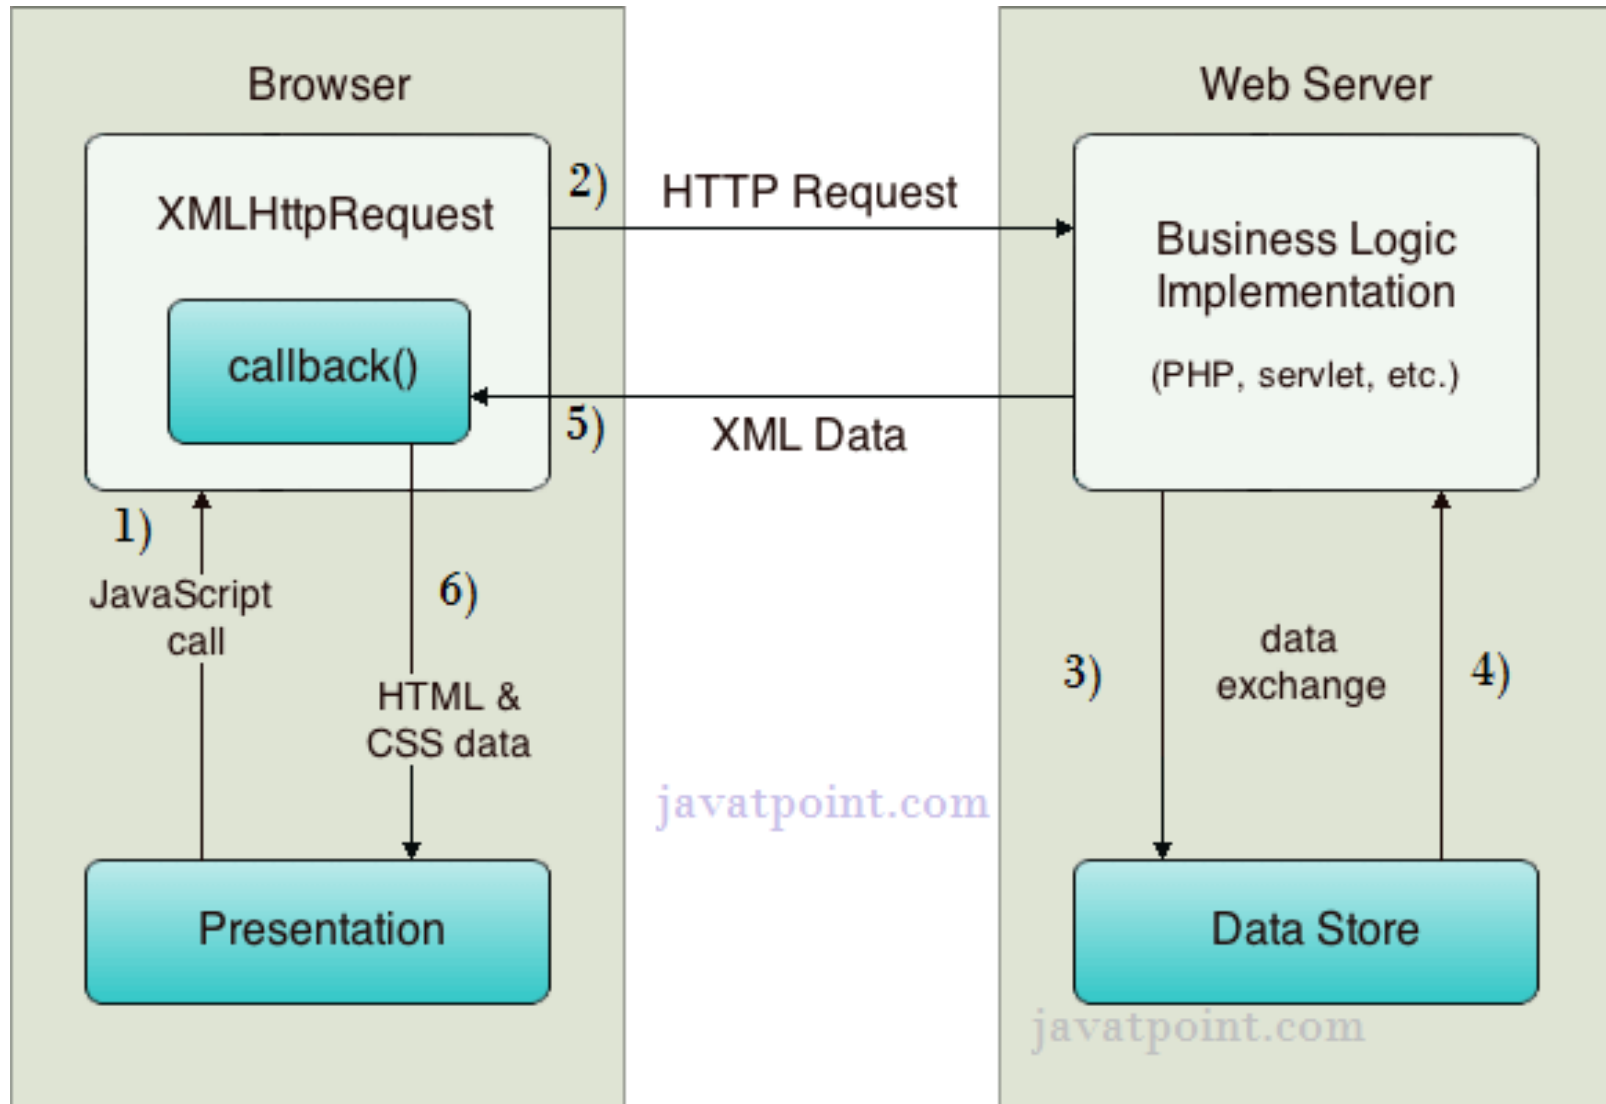

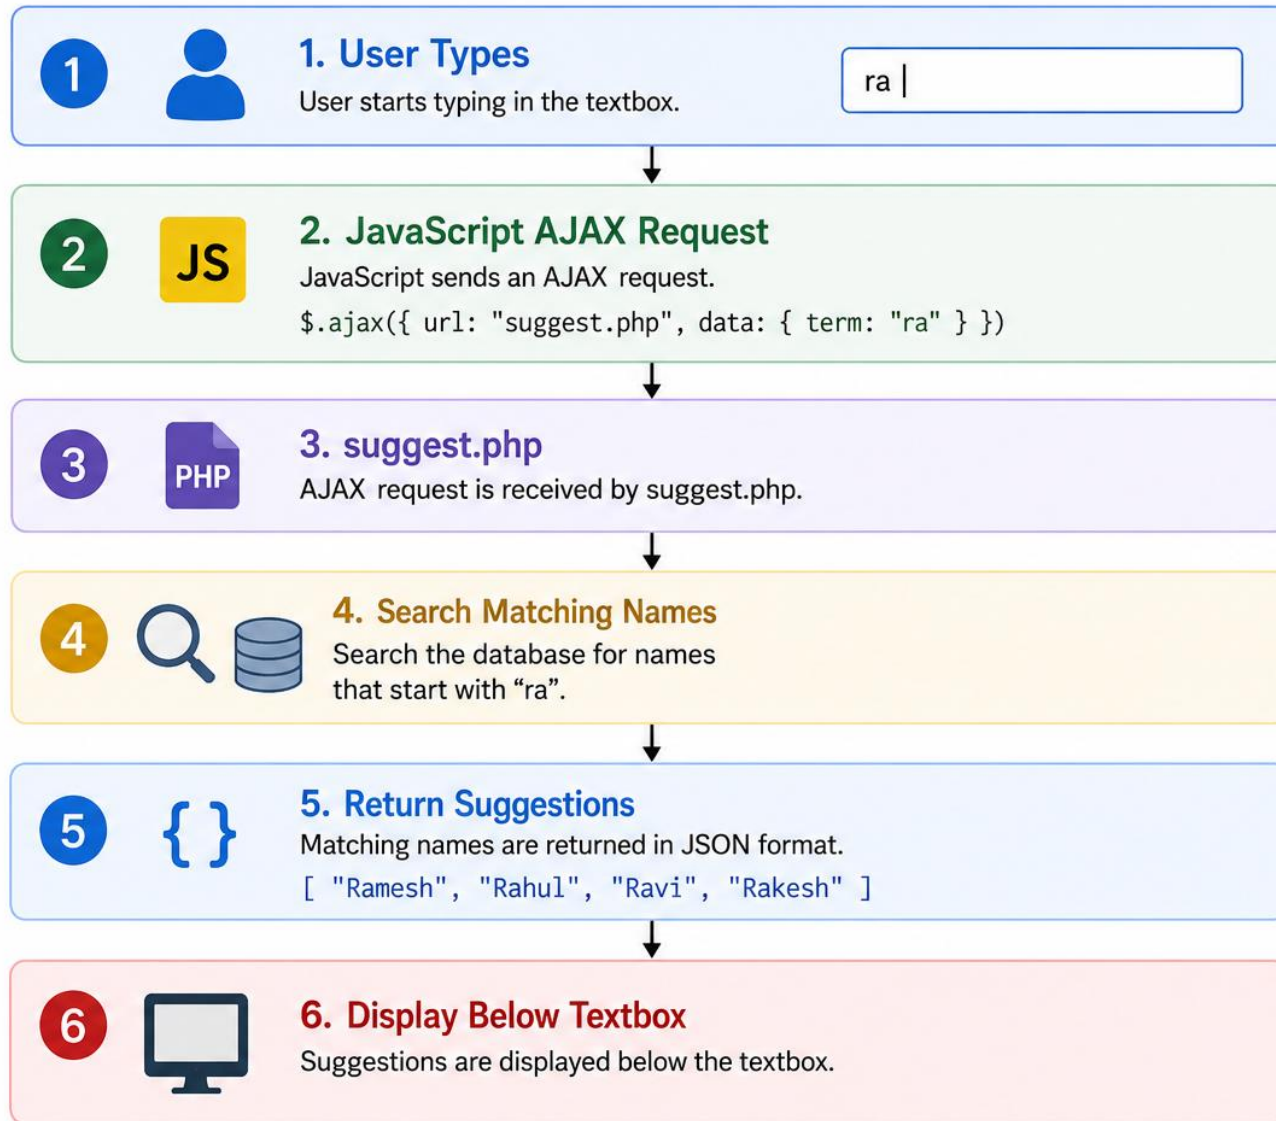

|        |
|--------|
| ra     |
| Ramesh |
| Rahul  |
| Ravi   |
| Rakesh |

# How AJAX Works?

- User sends a request from the UI and a javascript call goes to XMLHttpRequest object.
- HTTP Request is sent to the server by XMLHttpRequest object.
- Server interacts with the database using JSP, PHP, Servlet, ASP.net etc.
- Data is retrieved.
- Server sends XML data or JSON data to the XMLHttpRequest callback function.
- HTML and CSS data is displayed on the browser.



# XMLHttpRequest

- An object of **XMLHttpRequest** is used for asynchronous communication between client and server.
- It performs following operations:
  1. **Sends data** from the client in the background
  2. **Receives the data** from the server
  3. Updates the webpage **without reloading** it.

# XMLHttpRequest Properties

| Property           | Description                                                                                                                                                                                                                                                                                                                                                                                              |
|--------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| onReadyStateChange | It is called whenever readystate attribute changes.                                                                                                                                                                                                                                                                                                                                                      |
| readyState         | <p>represents the state of the request. It ranges from 0 to 4.</p> <p><b>0 UNOPENED</b> open() is not called.</p> <p><b>1 OPENED</b> open is called but send() is not called.</p> <p><b>2 HEADERS_RECEIVED</b> send() is called, and headers and status are available.</p> <p><b>3 LOADING</b> Downloading data; responseText holds the data.</p> <p><b>4 DONE</b> The operation is completed fully.</p> |
| responseText       | returns response as text.                                                                                                                                                                                                                                                                                                                                                                                |
| responseXML        | returns response as XML                                                                                                                                                                                                                                                                                                                                                                                  |

# XMLHttpRequest Methods

| Methods                                                        | Description                                              |
|----------------------------------------------------------------|----------------------------------------------------------|
| <code>void open(method, URL)</code>                            | opens the request specifying get or post method and url. |
| <code>void open(method, URL, async)</code>                     | same as above but specifies asynchronous or not.         |
| <code>void open(method, URL, async, username, password)</code> | same as above but specifies username and password.       |
| <code>void send()</code>                                       | sends get request.                                       |
| <code>void send(string)</code>                                 | send post request.                                       |
| <code>setRequestHeader(header,value)</code>                    | it adds request headers.                                 |