


Glasses

Look closer.

One workspace for the traffic, the questions, and the next experiment.

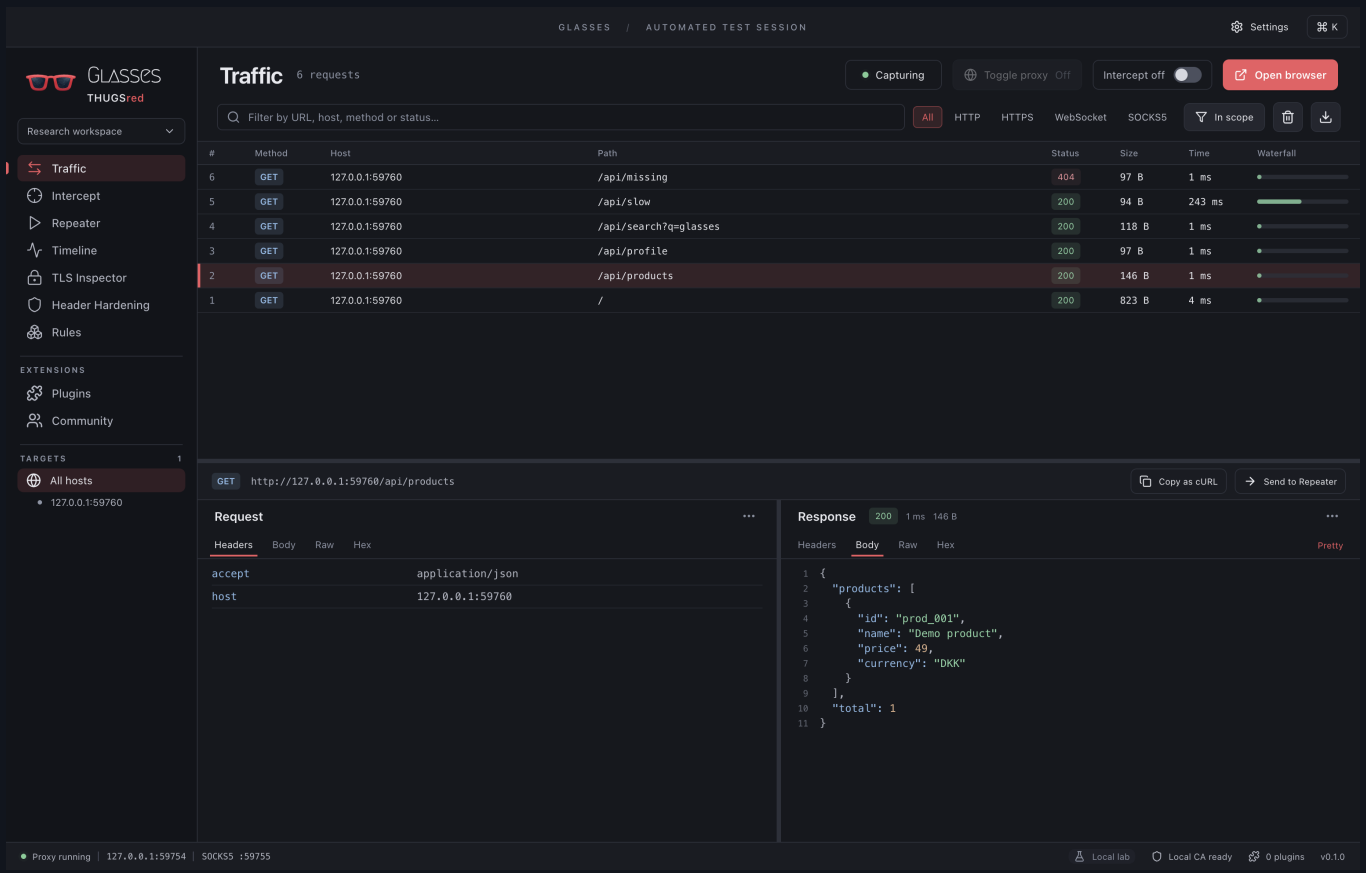

PRODUCT OVERVIEW / 0.1


glasses.thugs.red

Real application screenshot using the built-in local lab. macOS development release.

FROM OBSERVATION TO EXPERIMENT

Follow the request.

See what moved across the wire, ask a better question, and test it from the same workspace.

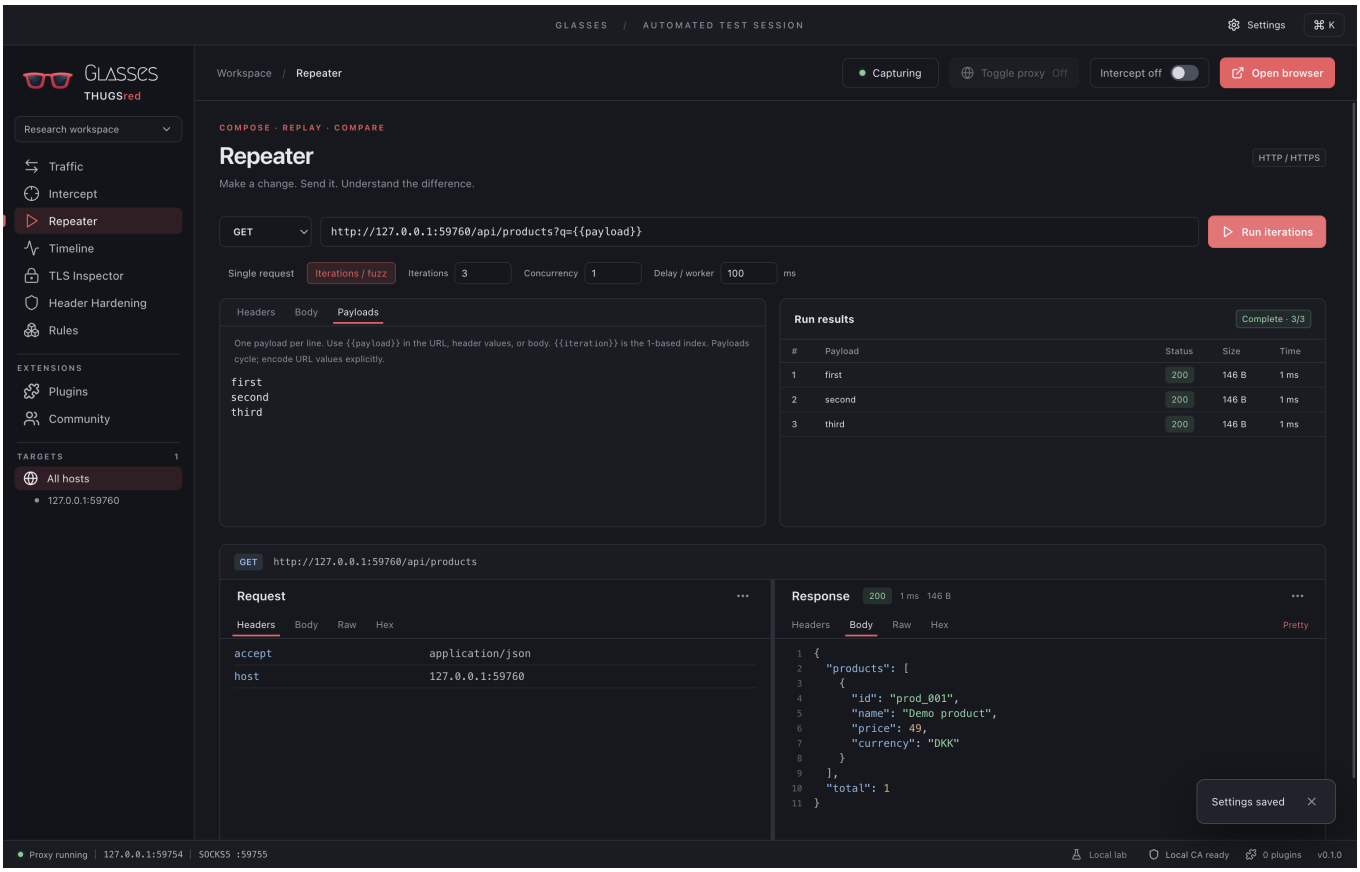

Inspect the evidence

Paired request/response views keep headers, readable bodies and bytes close together. Context menus move the selected exchange into the next tool.

Make a precise change

Intercept and edit a message before forwarding. Repeater turns an observed request into a controlled experiment, with payload iterations when you need to compare inputs.

Find the delay

A request waterfall, durations and transfer totals help explain slow exchanges. Follow an outlier back to the request that caused it.


Review transport and policy

Inspect TLS identity and certificate chains. Review CSP, CORS, nosniff, HSTS and other response-header signals with advice tied to the captured evidence.

WORK WITH YOUR ENVIRONMENT

Keep your route.

A research proxy should fit the network you actually have - and keep confidential destinations out of the capture.

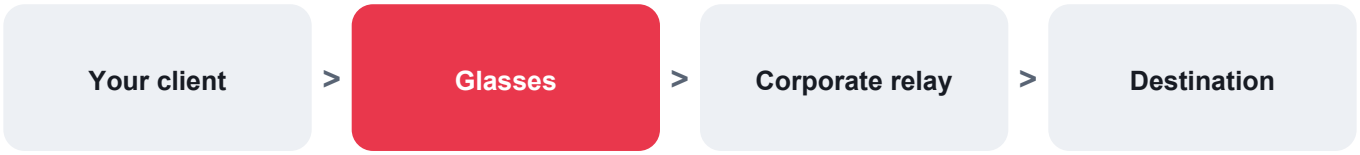

Chain the required proxies

Configure ordered HTTP, HTTPS and SOCKS5 hops, with supported authentication and a route test. If the relay fails, Glasses does not silently connect directly.

Bring your organization CA

Import an RSA signing CA and matching key, including its issuer chain. Existing managed client trust can fit your workflow; OS trust installation stays an explicit administrative choice.

Switch without the setup ritual

The macOS system proxy toggle saves the existing configuration and restores it when you switch off, stop or quit. Local listeners remain separate from system routing.

Build the tool you wish existed

Extensions can add complete sidebar tools, focused context actions, header rules and analysis. The v1 SDK and working examples support local development today.

Keep private traffic private

Exclude hostnames, wildcard subdomains, IPs or CIDRs before capture. Excluded HTTPS remains an opaque tunnel. Your configured corporate relay still carries the traffic.

A workspace that stays readable

Dedicated Settings, OS-following light/dark modes, multiple accent palettes and consistent cross-tool actions keep attention on the investigation.

Built around hostile data. Captured content stays text in the application UI. Sandboxed windows, constrained IPC and isolated extension frames protect the boundary between web traffic and application authority.

A COMMUNITY TOOL, TAKING SHAPE

Look closer. Build further.

Created by THUGSred, the Danish hacking community, for web security research and development.



Available in the first build

HTTP/1.1 and HTTPS inspection, SOCKS5 TCP tunnels, interception, Repeater iterations, timeline, TLS/header inspection, local extensions, custom CA, bypass policies and upstream proxy chains.

macOS first, portable by design

The first desktop is built and exercised on Apple Silicon. Packages target Intel macOS and x64/ARM64 Windows/Linux, with all builds initiated from the Mac checkout. Native platform acceptance and distribution hardening continue.

A community you can extend

The app supports catalog browsing, signed package verification and explicit permission review. Browser install links open a review request. The service at glasses.thugs.red is deployed separately; local JSON installation works today. No silent updates.

Release status

Version 0.1 is a local development release, not an audited enterprise deployment. Packages are not Developer ID signed/notarized. HTTP/2/3, WebSocket frame editing and enterprise proxy SSO are not yet supported.

glasses.thugs.red

The official home for Glasses.
Keep this introduction with the illustrated user manual.