



Implement Network Security Fundamentals

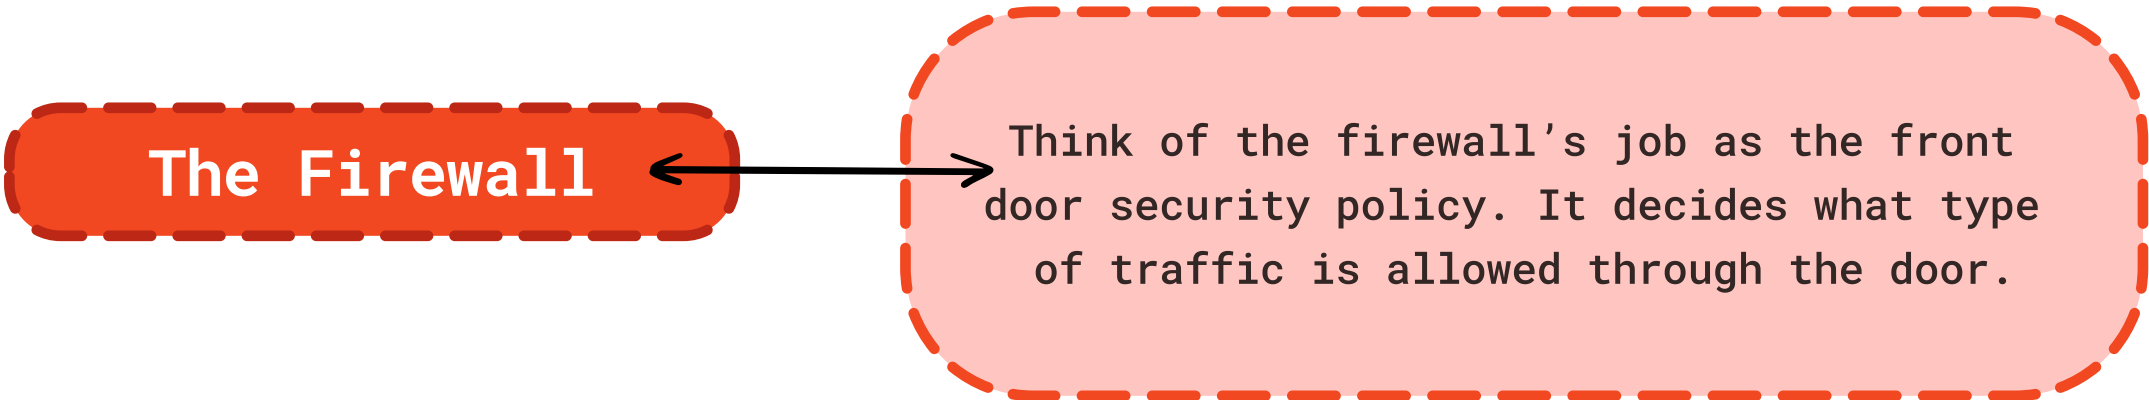


Example: Allow HTTPS (TCP port 443) to access DeRexi web application

Why: Company employees will need secure encrypted access to DeRexi.

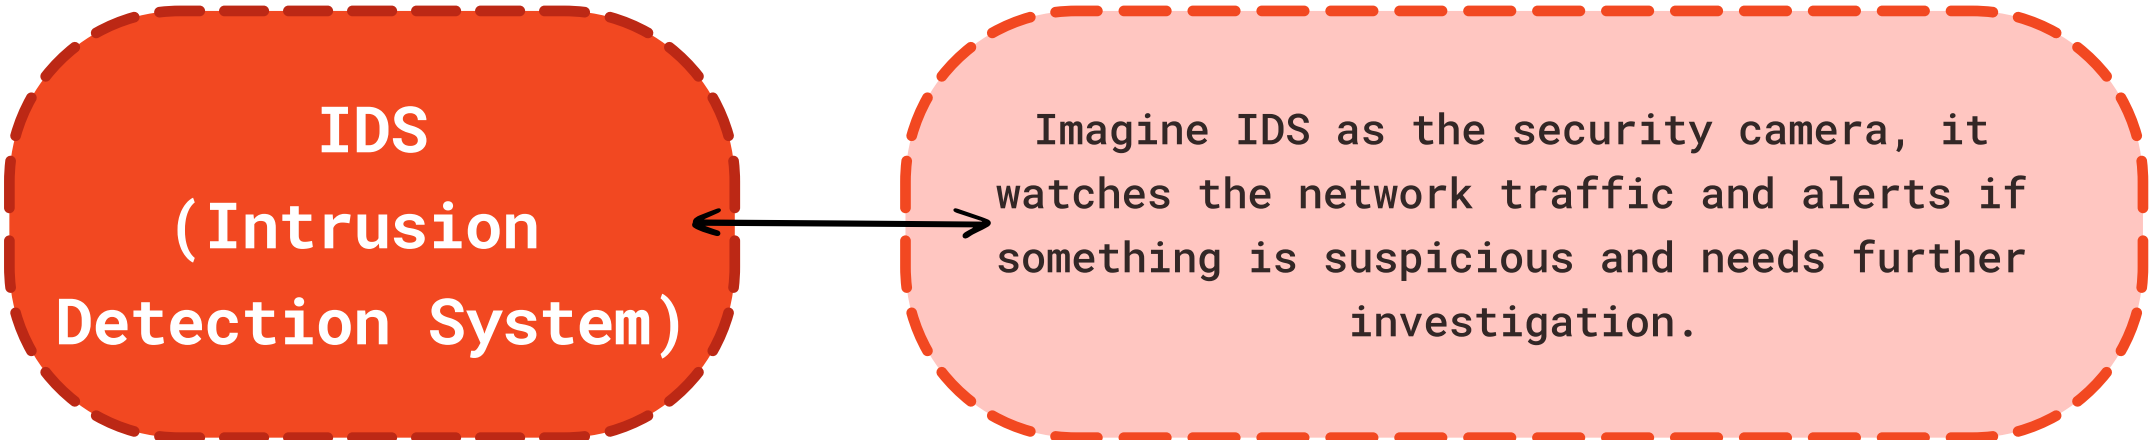

Example: DeRexi would have detection configurations to identify multiple failed login attempts.

Why: Multiple failed login attempts could be suspicious and IDS would potentially identify these as malicious attempts to access DeRexi's servers.

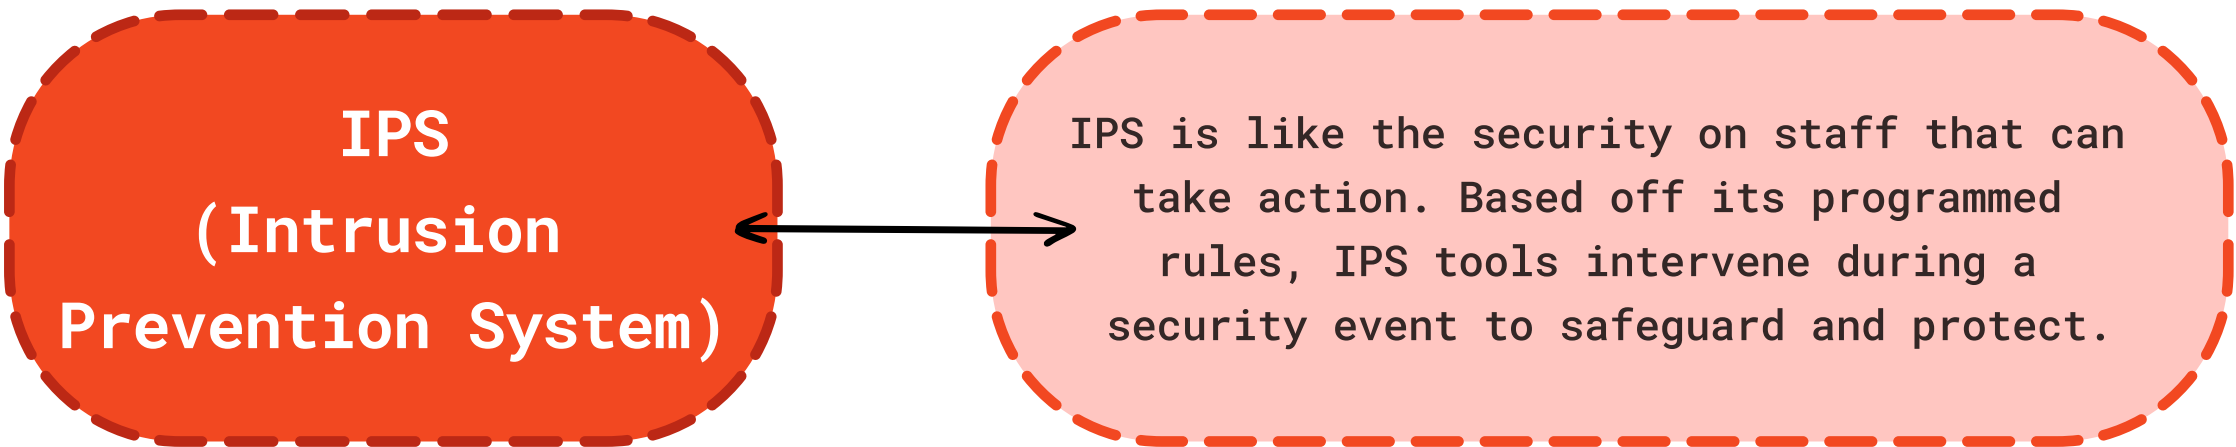

Example: A black hat hacker is trying to access confidential policies from a particular company that uses DeRexi. However, due to the IPS controls in place, the client's data was safe.

Why: With every firm that utilizes DeRexi, their policies/governance documents/operational processes are on file and would that proprietary data needs to be safeguarded.