(c) JEPPESEN SANDERSON, INC., 2025, ALL RIGHTS RESERVED

JEPPESEN
JeppView for Windows

List of pages in this Trip Kit

Trip Kit Index
Airport Information For UKDE
Terminal Charts For UKDE
Revision Letter For Cycle 26-2024
Change Notices
Notebook

(c) JEPPESEN SANDERSON, INC., 2025, ALL RIGHTS RESERVED

General Information

Location: ZAPORIZHZHIA UKR
ICAO/IATA: UKDE / OZH
Lat/Long: N47° 52.0', E035° 18.9'
Elevation: 374 ft

Airport Use: Public
Daylight Savings: Observed
UTC Conversion: -2:00 = UTC
Magnetic Variation: 7.0° E

Fuel Types: Jet A-1
Repair Types: Minor Airframe, Minor Engine
Customs: Yes
Airport Type: IFR
Landing Fee: Yes
Control Tower: Yes
Jet Start Unit: No
LLWS Alert: No
Beacon: No

Sunrise: 0504 Z
Sunset: 1441 Z

Runway Information

Runway: 02
Length x Width: 8209 ft x 138 ft
Surface Type: concrete
TDZ-Elev: 339 ft
Lighting: Edge, ALS

Runway: 20
Length x Width: 8209 ft x 138 ft
Surface Type: concrete
TDZ-Elev: 373 ft
Lighting: Edge, ALS

Communication Information

Zaporizhzhia Tower: 120.050
Zaporizhzhia Tower: 126.050 Secondary
Zaporizhzhia Radar: 119.200

Printed from JeppView for Windows 5.3.0.0 on 03 Feb 2025; Terminal chart data cycle 26-2024 (Expired); Notice: After 02 Jan 2025, 0000Z, this chart may no longer be valid


UKDE/OZH
ZAPORIZHZHIA INTL

JEPPESEN

11 FEB 22 (10-1R) Eff 24 Feb

ZAPORIZHZHIA, UKRAINE
RADAR MINIMUM ALTITUDES

ZAPORIZHZHIA Radar (APP) 119.2	Apt Elev 374	Alt Set: hPa Trans level: By ATC Trans alt: 10010 1. This chart may only be used for cross-checking of altitudes assigned while under vectoring control. 2. MRVA are safe if the temperature at the surface is 4°C or above. For lower temperatures, corrected minimum levels will be provided by ATC.

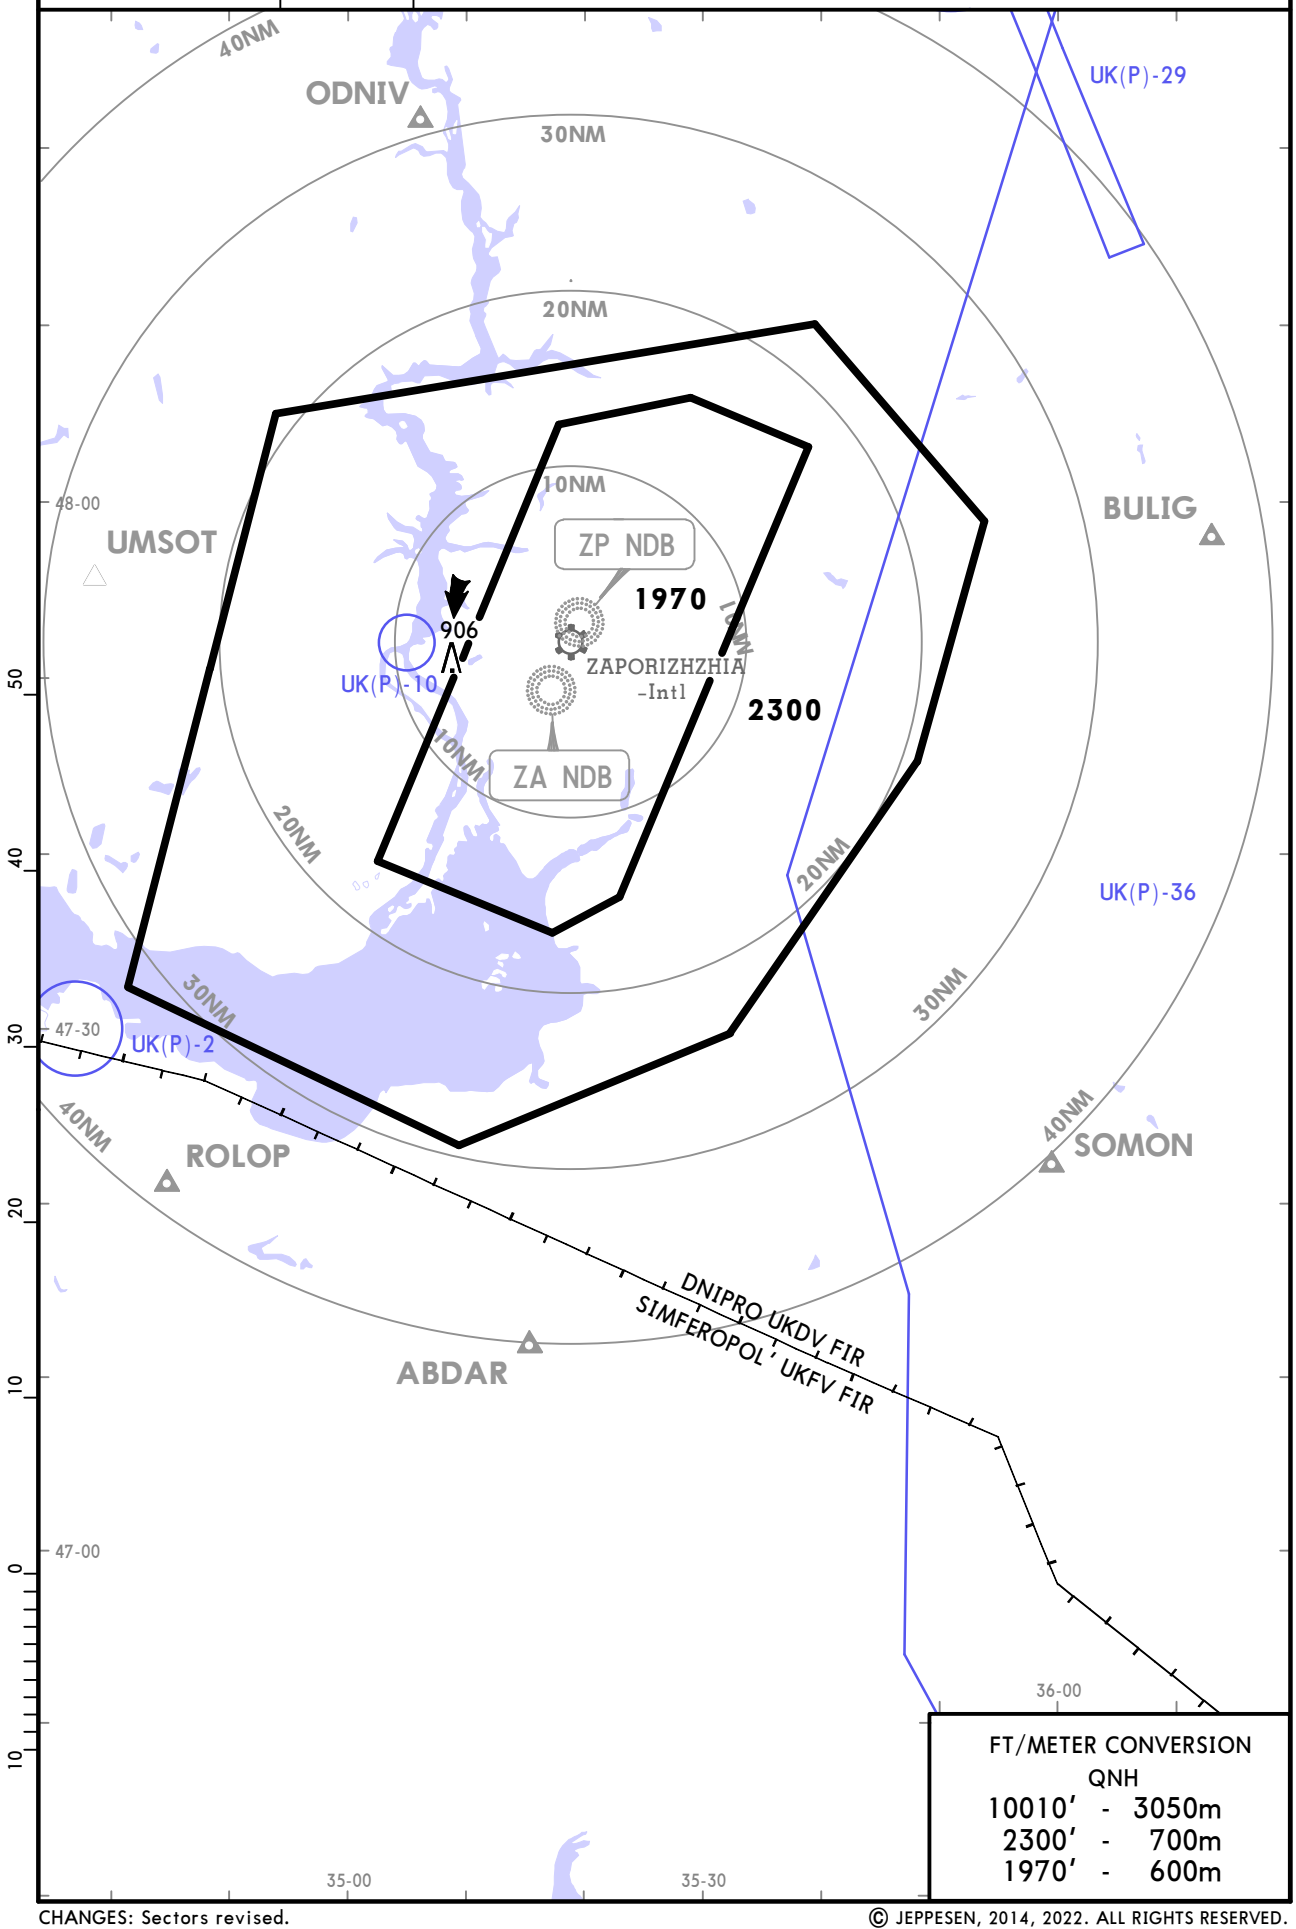

FT/METER CONVERSION QNH	
10010'	3050m
2300'	700m
1970'	600m

CHANGES: Sectors revised.

© JEPPESEN, 2014, 2022. ALL RIGHTS RESERVED.


Printed from JeppView for Windows 5.3.0.0 on 03 Feb 2025; Terminal chart data cycle 26-2024 (Expired); Notice: After 02 Jan 2025, 0000Z, this chart may no longer be valid

Apt Elev 374′	Alt Set: hPa Trans level: By ATC Trans alt: 10010′ Due to noise abatement strict adherence to exit patterns by crews is required.

2000
MSA
ZA NDB

ABDAR 6C [ABDA6C]
BULIG 2C [BULI2C]
SOMON 2C [SOMO2C]
ARRIVALS
(RWY 02)

N
NOT TO SCALE

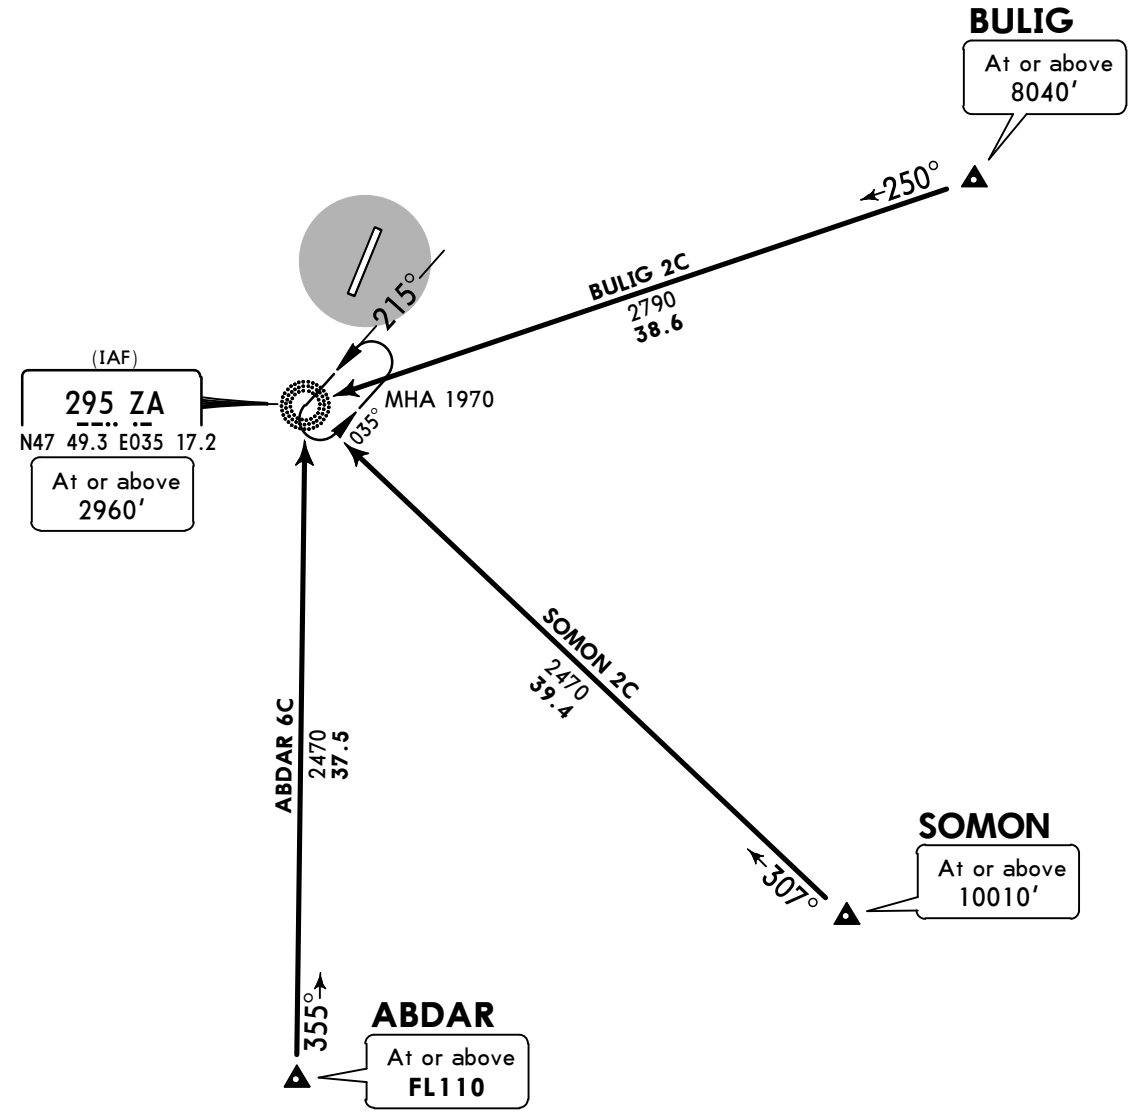

FT/METER CONVERSION
QNH

10010′	-	3050m
8040′	-	2450m
2960′	-	900m
2790′	-	850m
2470′	-	750m
1970′	-	600m

STAR	ROUTING
ABDAR 6C	On 355° bearing to ZA NDB.
BULIG 2C	On 250° bearing to ZA NDB.
SOMON 2C	On 307° bearing to ZA NDB.

CHANGES: None.


© JEPPESEN, 2013, 2020. ALL RIGHTS RESERVED.

Printed from JeppView for Windows 5.3.0.0 on 03 Feb 2025; Terminal chart data cycle 26-2024 (Expired); Notice: After 02 Jan 2025, 0000Z, this chart may no longer be valid

Apt Elev	
374′	Alt Set: hPa Trans level: By ATC Trans alt: 10010′ Due to noise abatement strict adherence to exit patterns by crews is required.

2000
MSA
ZA NDB

DITIX 4C [DITI4C]
ODNIV 3C [ODNI3C]
ROLOP 4C [ROLO4C]
UMSOT 5C [UMSO5C]
ARRIVALS
(RWY 02)

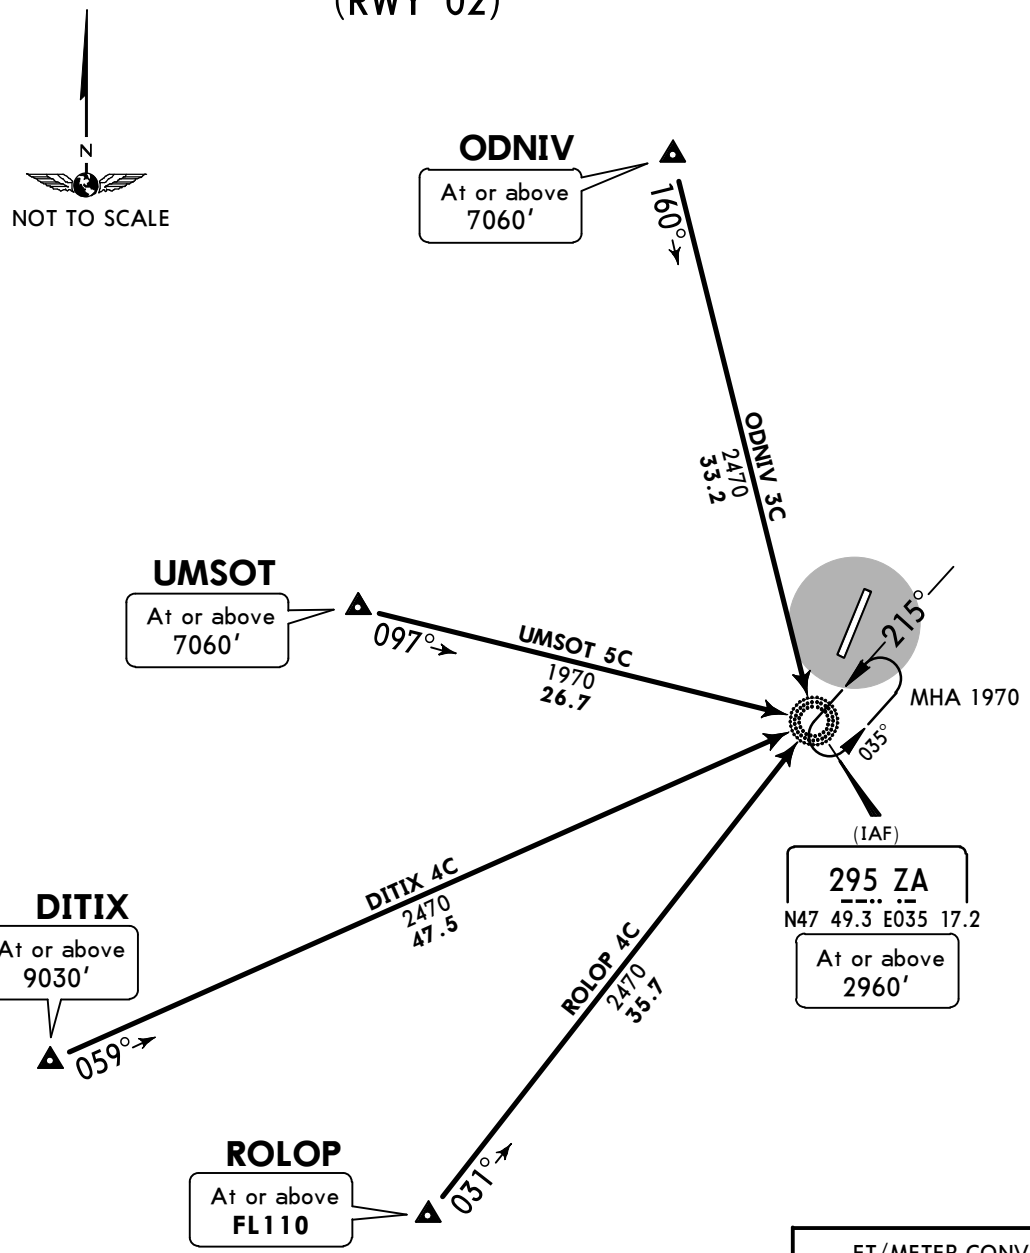

FT/METER CONVERSION
QNH

10010′	-	3050m
9030′	-	2750m
7060′	-	2150m
2960′	-	900m
2470′	-	750m
1970′	-	600m

STAR	ROUTING
DITIX 4C	On 059° bearing to ZA NDB.
ODNIV 3C	On 160° bearing to ZA NDB.
ROLOP 4C	On 031° bearing to ZA NDB.
UMSOT 5C	On 097° bearing to ZA NDB.

CHANGES: STAR DNP 2C replaced by ODNIV 3C.

© JEPPESEN, 2018, 2021. ALL RIGHTS RESERVED.


Printed from JeppView for Windows 5.3.0.0 on 03 Feb 2025; Terminal chart data cycle 26-2024 (Expired); Notice: After 02 Jan 2025, 0000Z, this chart may no longer be valid

Apt Elev	
374′	Alt Set: hPa Trans level: By ATC Trans alt: 10010′ Due to noise abatement strict adherence to exit patterns by crews is required.

2000

MSA
ZP NDB

ABDAR 6D [ABDA6D]
BULIG 2D [BULI2D]
SOMON 2D [SOMO2D]
ARRIVALS
(RWY 20)

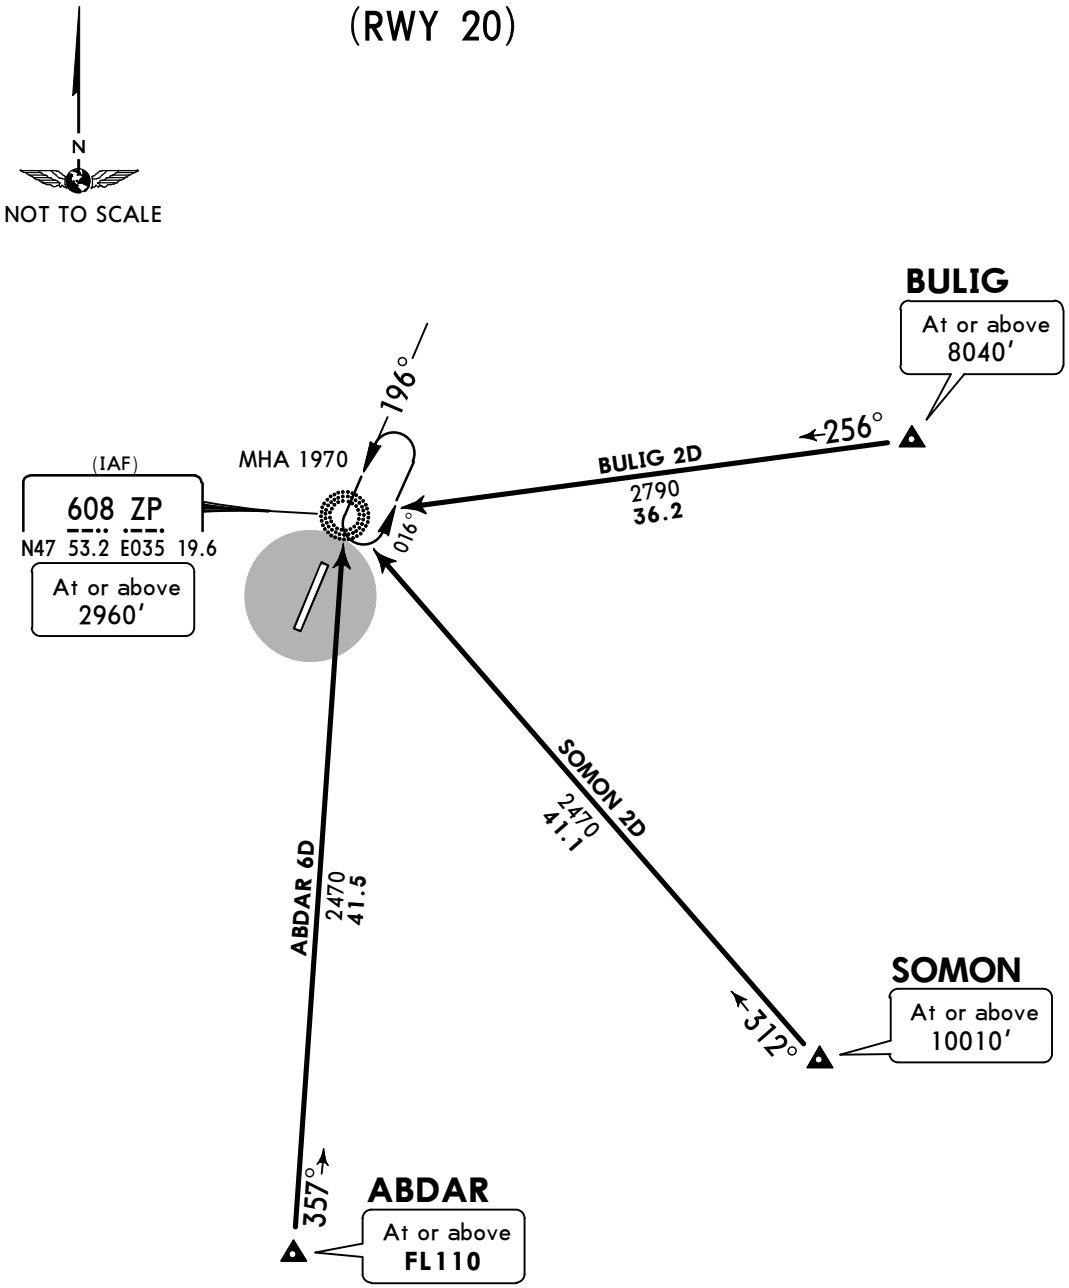

FT/METER CONVERSION
QNH

10010′	-	3050m
8040′	-	2450m
2960′	-	900m
2790′	-	850m
2470′	-	750m
1970′	-	600m


STAR	ROUTING
ABDAR 6D	On 357° bearing to ZP NDB.
BULIG 2D	On 256° bearing to ZP NDB.
SOMON 2D	On 312° bearing to ZP NDB.

CHANGES: None.


© JEPPESEN, 2017, 2020. ALL RIGHTS RESERVED.

Printed from JeppView for Windows 5.3.0.0 on 03 Feb 2025; Terminal chart data cycle 26-2024 (Expired); Notice: After 02 Jan 2025, 0000Z, this chart may no longer be valid

Apt Elev	
374′	Alt Set: hPa Trans level: By ATC Trans alt: 10010′ Due to noise abatement strict adherence to exit patterns by crews is required.



DITIX 4D [DITI4D]
ODNIV 3D [ODNI3D]
ROLOP 4D [ROLO4D]
UMSOT 5D [UMSO5D]
ARRIVALS
(RWY 20)

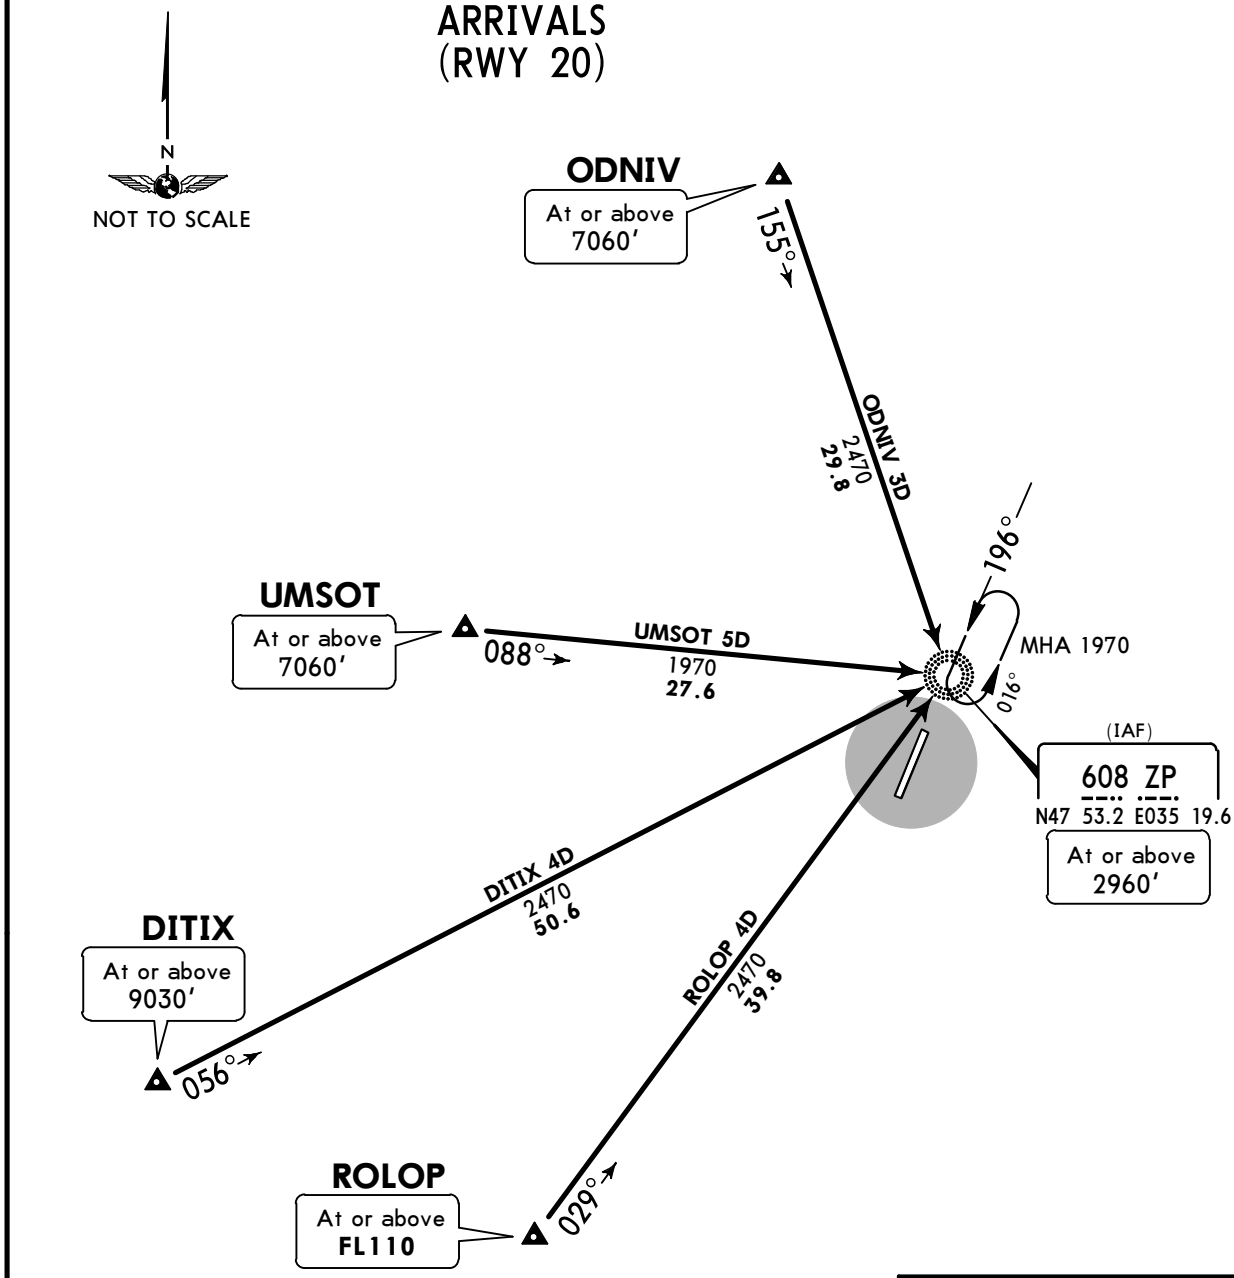

FT/METER CONVERSION QNH	
10010′	3050m
9030′	2750m
7060′	2150m
2960′	900m
2470′	750m
1970′	600m

STAR	ROUTING
DITIX 4D	On 056° bearing to ZP NDB.
ODNIV 3D	On 155° bearing to ZP NDB.
ROLOP 4D	On 029° bearing to ZP NDB.
UMSOT 5D	On 088° bearing to ZP NDB.

CHANGES: STAR DNP 2D replaced by ODNIV 3D.


© JEPPESEN, 2017, 2021. ALL RIGHTS RESERVED.

Printed from JeppView for Windows 5.3.0.0 on 03 Feb 2025; Terminal chart data cycle 26-2024 (Expired); Notice: After 02 Jan 2025, 0000Z, this chart may no longer be valid

Apt Elev	
374′	Trans level: By ATC Trans alt: 10010′ 1. EXPECT close-in obstacles. 2. Due to noise abatement strict adherence to exit patterns by crews is required.

2000
MSA
ZA NDB

BULIG 2A [BULI2A]
ODNIV 3A [ODNI3A]
SOMON 3A [SOMO3A]
DEPARTURES
(RWY 02)

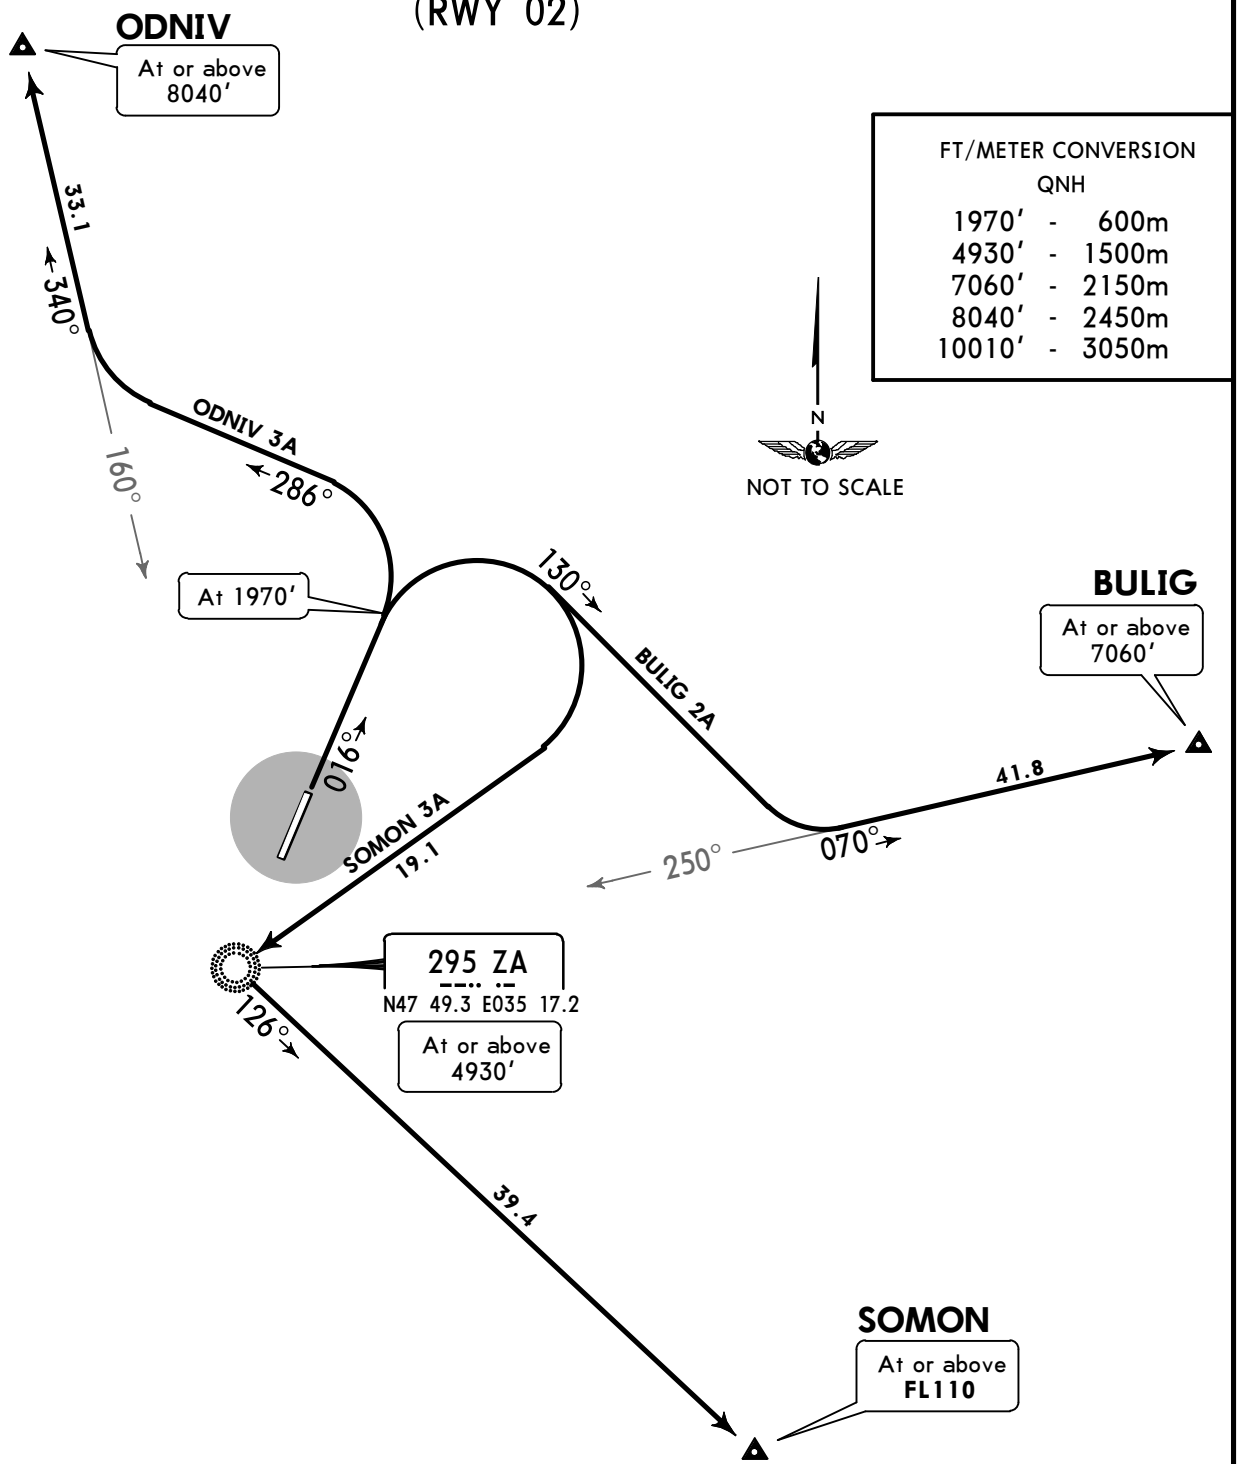

FT/METER CONVERSION
QNH

1970′	-	600m
4930′	-	1500m
7060′	-	2150m
8040′	-	2450m
10010′	-	3050m

SID	ROUTING
BULIG 2A	Climb on 016° track to 1970′, turn RIGHT, 130° track, turn LEFT to intercept 070° bearing from ZA NDB to BULIG.
ODNIV 3A	Climb on 016° track to 1970′, turn LEFT, 286° track, turn RIGHT to intercept 340° beraing from ZA NDB to ODNIV.
SOMON 3A	Climb on 016° track to 1970′, turn RIGHT to ZA NDB, turn LEFT, 126° bearing from ZA NDB to SOMON.

CHANGES: DNP 2A replaced by ODNIV 3A; SOMON 2A renumbered & revised.


© JEPPESEN, 2013, 2021. ALL RIGHTS RESERVED.

Printed from JeppView for Windows 5.3.0.0 on 03 Feb 2025; Terminal chart data cycle 26-2024 (Expired); Notice: After 02 Jan 2025, 0000Z, this chart may no longer be valid

Apt Elev 374′	Trans level: By ATC Trans alt: 10010′ 1. EXPECT close-in obstacles. 2. Due to noise abatement strict adherence to exit patterns by crews is required.

2000
MSA
ZA NDB

DITIX 4A [DITI4A]
ROLOP 5A [ROLO5A]
UMSOT 5A [UMSO5A]
DEPARTURES
(RWY 02)

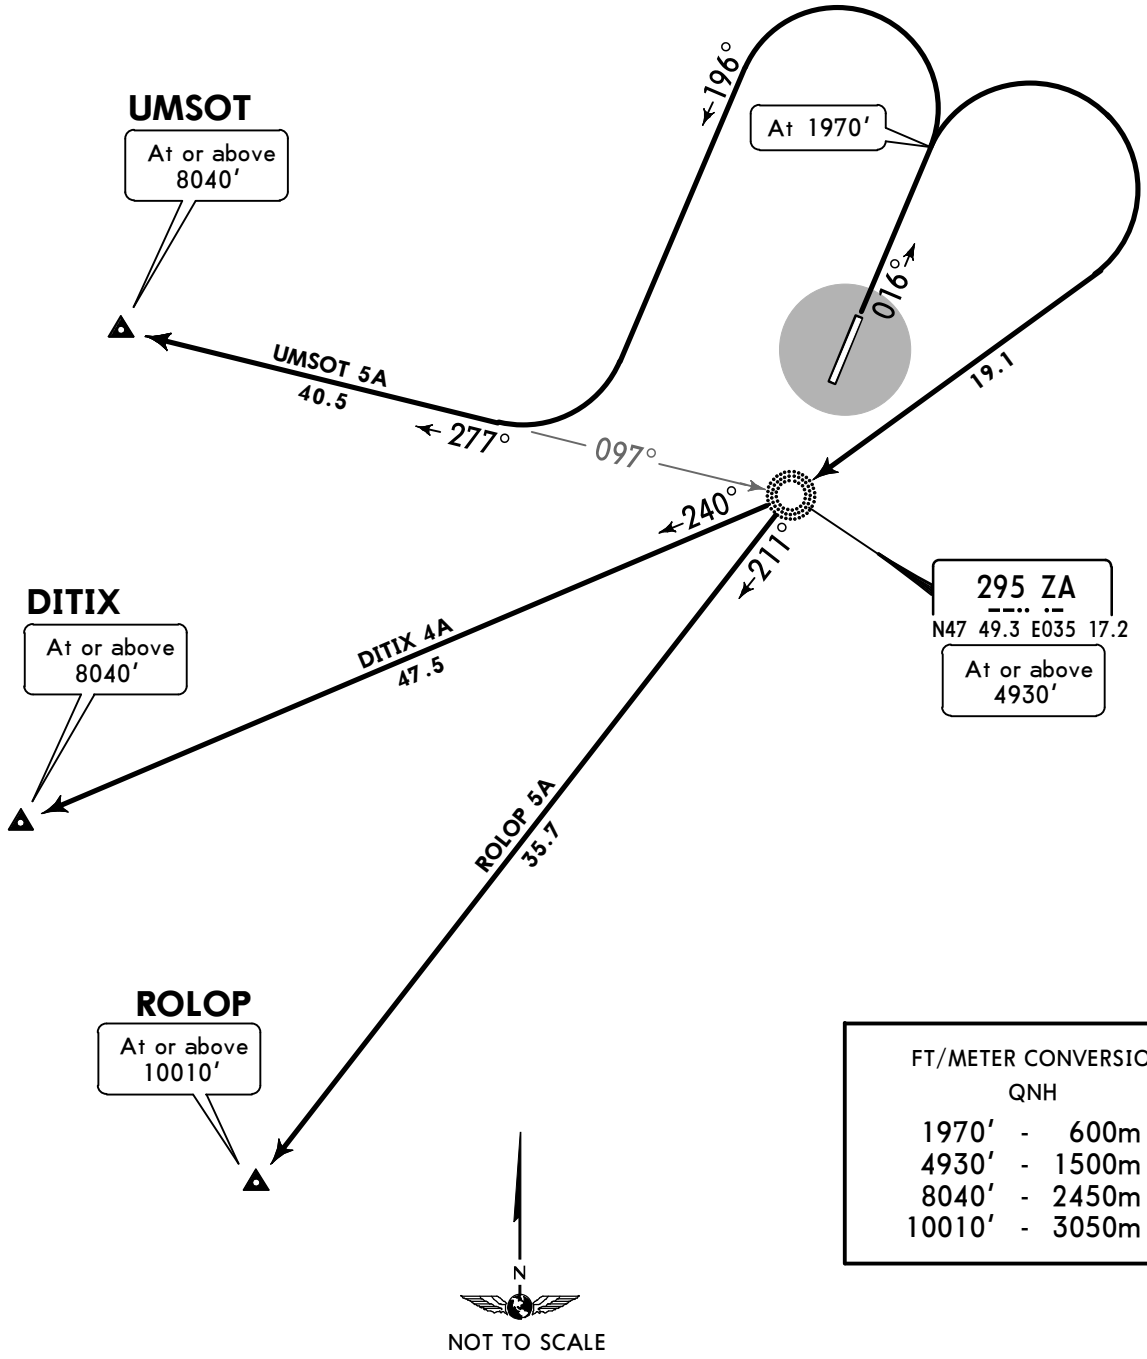

FT/METER CONVERSION
QNH

1970′	-	600m
4930′	-	1500m
8040′	-	2450m
10010′	-	3050m

SID	ROUTING
DITIX 4A	Climb on 016° track to 1970′, turn RIGHT to ZA NDB, turn RIGHT, 240° bearing from ZA NDB to DITIX.
ROLOP 5A	Climb on 016° track to 1970′, turn RIGHT to ZA NDB, turn LEFT, 211° bearing from ZA NDB to ROLOP.
UMSOT 5A	Climb on 016° track to 1970′, turn LEFT, track 196°, turn RIGHT to intercept 277° bearing from ZA NDB to UMSOT.

CHANGES: None.


© JEPPESEN, 2013, 2020. ALL RIGHTS RESERVED.

Printed from JeppView for Windows 5.3.0.0 on 03 Feb 2025; Terminal chart data cycle 26-2024 (Expired); Notice: After 02 Jan 2025, 0000Z, this chart may no longer be valid

Apt Elev 374′	Trans level: By ATC Trans alt: 10010′ 1. EXPECT close-in obstacles. 2. Due to noise abatement strict adherence to exit patterns by crews is required.

2000
MSA
ZP NDB

BULIG 2B [BULI2B]
ODNIV 3B [ODNI3B]
SOMON 2B [SOMO2B]
DEPARTURES
(RWY 20)

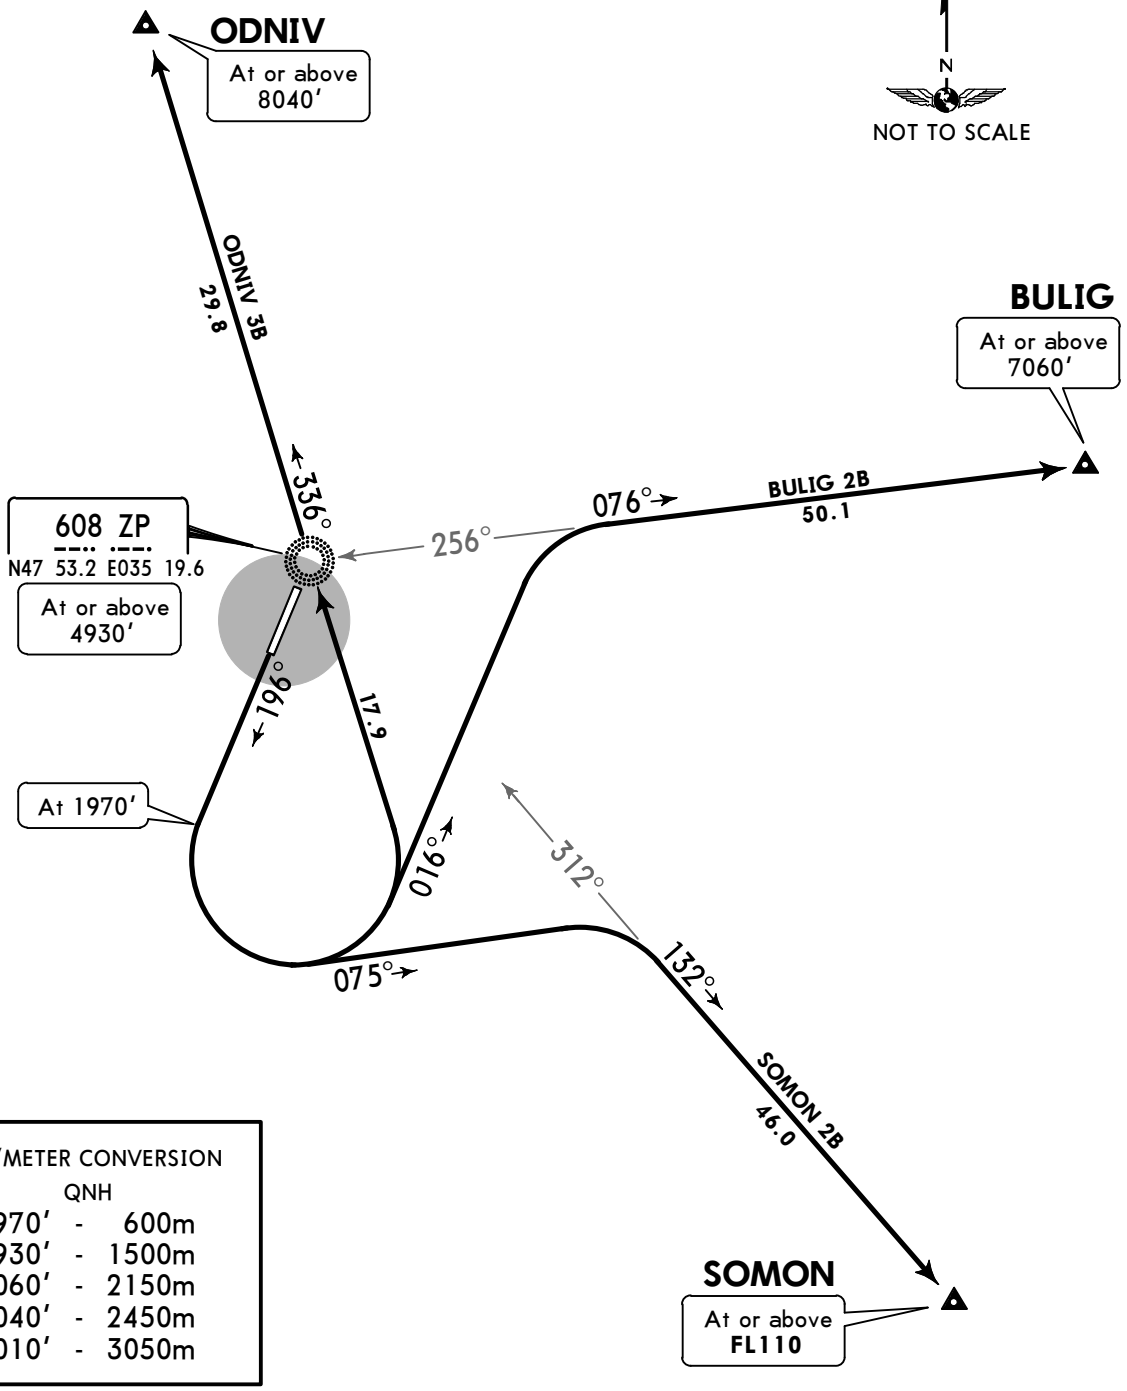

FT/METER CONVERSION QNH	
1970′	600m
4930′	1500m
7060′	2150m
8040′	2450m
10010′	3050m

SID	ROUTING
BULIG 2B	Climb on 196° track to 1970′, turn LEFT, 016° track, turn RIGHT to intercept 076° bearing from ZP NDB to BULIG.
ODNIV 3B	Climb on 196° track to 1970′, turn LEFT to ZP NDB, 336° bearing from ZN NDB to ODNIV.
SOMON 2B	Climb on 196° track to 1970′, turn LEFT, 075° track, turn RIGHT to intercept 132° bearing from ZP NDB to SOMON.

CHANGES: SID DNP 2B replaced by ODNIV 3B.

© JEPPESEN, 2017, 2021. ALL RIGHTS RESERVED.


Printed from JeppView for Windows 5.3.0.0 on 03 Feb 2025; Terminal chart data cycle 26-2024 (Expired); Notice: After 02 Jan 2025, 0000Z, this chart may no longer be valid

Apt Elev 374′

Trans level: By ATC Trans alt: 10010′
1. EXPECT close-in obstacles.
2. Due to noise abatement strict adherence to exit patterns by crews is required.

2000
MSA
ZP NDB

DITIX 4B [DITI4B]
ROLOP 5B [ROLO5B]
UMSOT 5B [UMSO5B]
DEPARTURES
(RWY 20)

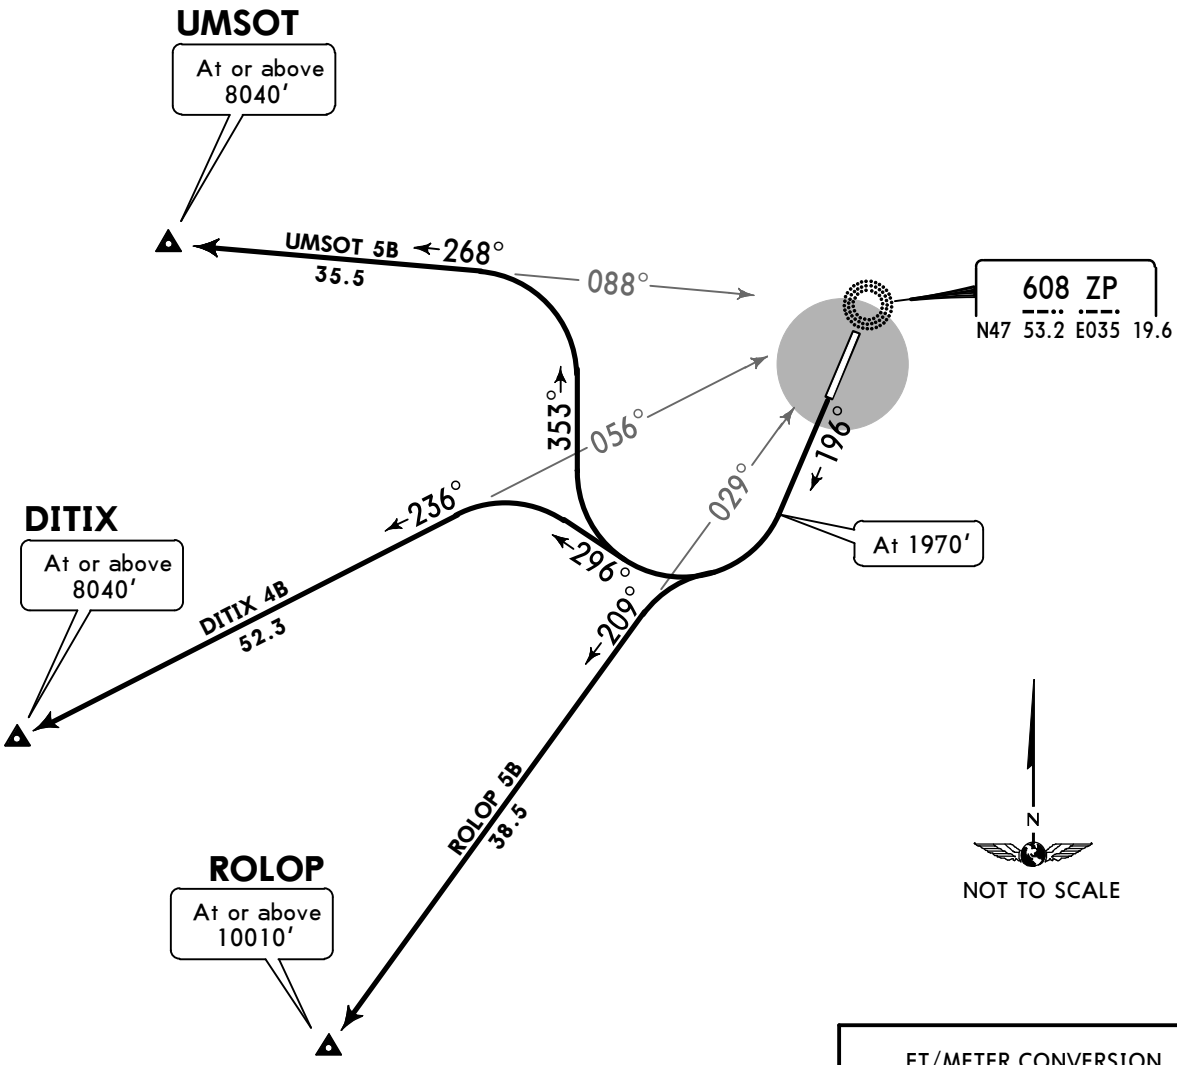

FT/METER CONVERSION
QNH

1970′	-	600m
4930′	-	1500m
8040′	-	2450m
10010′	-	3050m

DITIX 4B, UMSOT 5B
These SIDs require a minimum climb gradient of
7.0% up to 4930′.

Gnd speed-KT	75	100	150	200	250	300
7.0% V/V (fpm)	532	709	1063	1418	1772	2127

SID	ROUTING
DITIX 4B	Climb on 196° track to 1970′, turn RIGHT, 296° track, turn LEFT to intercept 236° bearing from ZP NDB to DITIX.
ROLOP 5B	Climb on 196° track to 1970′, turn RIGHT to intercept 209° bearing from ZP NDB to ROLOP.
UMSOT 5B	Climb on 196° track to 1970′, turn RIGHT, 353° track, turn LEFT to intercept 268° bearing from ZP NDB to UMSOT.

CHANGES: None.

© JEPPESEN, 2017, 2020. ALL RIGHTS RESERVED.

Printed from JeppView for Windows 5.3.0.0 on 03 Feb 2025; Terminal chart data cycle 26-2024 (Expired); Notice: After 02 Jan 2025, 0000Z, this chart may no longer be valid

UKDE/OZH


Apt Elev **374′**
N47 52.0 E035 18.9

JEPPESEN

1 OCT 21 (10-9) **Eff 7 Oct**

ZAPORIZHZHIA, UKRAINE
ZAPORIZHZHIA INTL

ZAPORIZHZHIA Tower
120.050

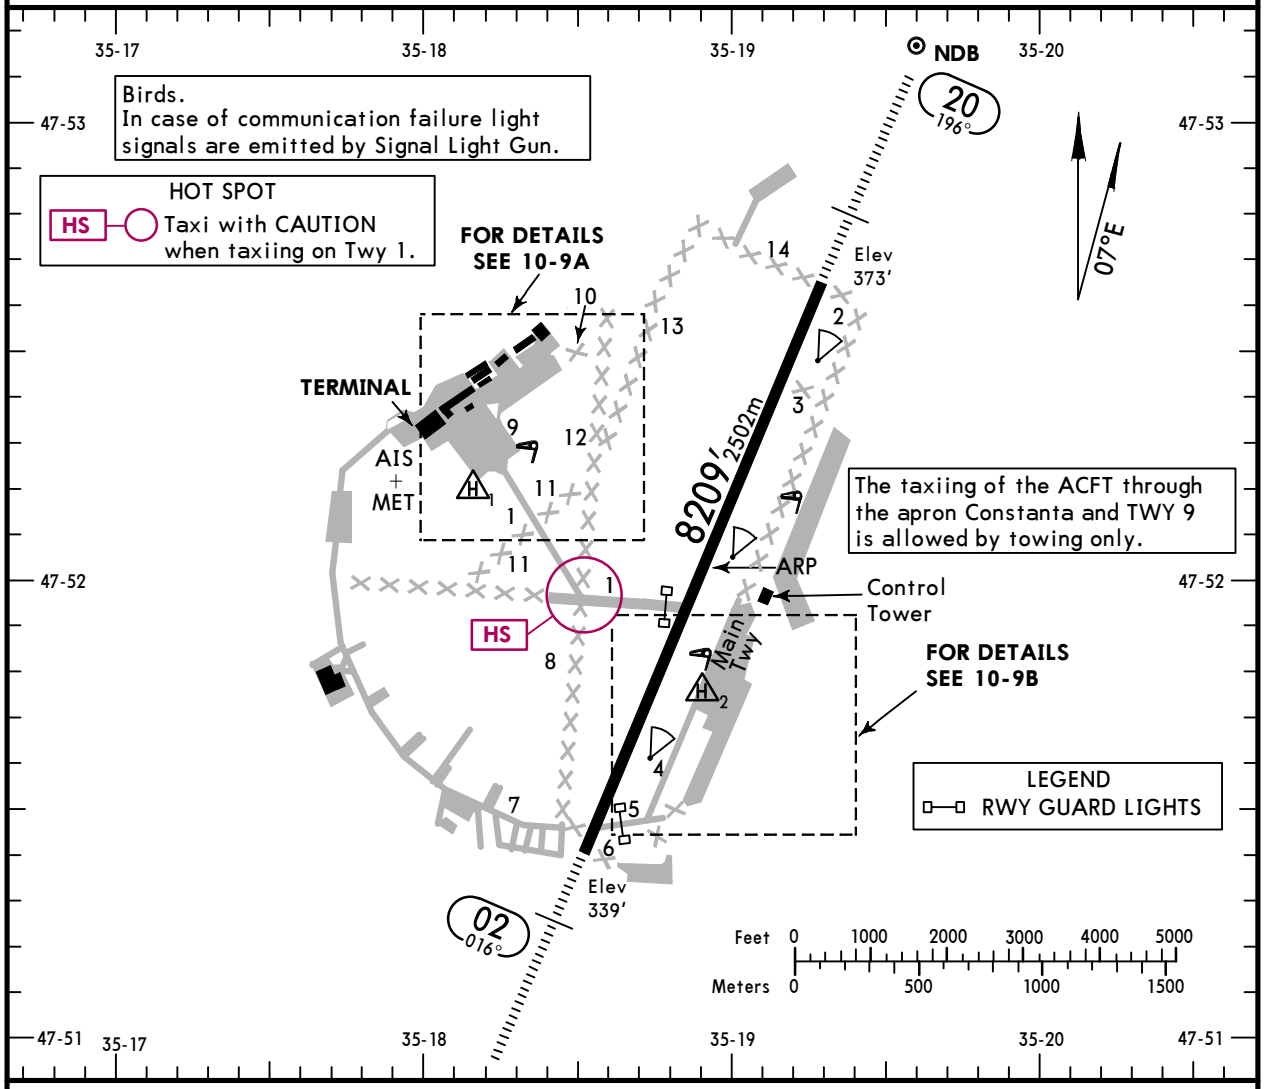

ADDITIONAL RUNWAY INFORMATION

RWY		USABLE LENGTHS LANDING BEYOND Threshold	Glide Slope	TAKE-OFF	WIDTH
02	HIRL (60m) HIALS PAPI-R (angle 3.0°) RVR			❶	138′ 42m
20	HIRL (60m) HIALS PAPI-L (angle 3.0°) RVR		7108′2167m		

❶ TAKE-OFF RUN AVAILABLE

RWY 02:
From rwy head 8209′ (2502m)
twy 1 int 4724′ (1440m)

RWY 20:
From rwy head 8209′ (2502m)
twy 1 int 3478′ (1060m)

For ACFT code C and D 180° turn is allowed for RWY vacation only at the end of RWY at abeam TWY 2, 14 and TWY 5, 6, 7.
Taxiing ACFT via TWY 1 and Large Apron only under Follow-me car instructions.
Taxiing via RWY for line-up is performed via centreline with further Right (Left) turn.
Taxiing via RWY and TWY 1 are performed under the inner engine power and should taxi to/from stands of Large Apron strictly marking.
TWY 2, 3, 6, 7, 8, 10, 11, 12, 13, 14 - for taxiing of the ACFT are inapplicable.

Std TAKE-OFF

RL & RCLM	RL	RL or RCLM	Adequate Vis Ref	
DAY	NIGHT	DAY	DAY	NIGHT
R300m		R400m	R/V500m	NA

CHANGES: Rwy 02 approach lights. Windsock. H3 withdrawn. TORA. Rwy length.

© JEPPESEN, 1998, 2021. ALL RIGHTS RESERVED.

Printed from JeppView for Windows 5.3.0.0 on 03 Feb 2025; Terminal chart data cycle 26-2024 (Expired); Notice: After 02 Jan 2025, 0000Z, this chart may no longer be valid

UKDE/OZH


JEPPESEN

1 OCT 21
Eff 7 Oct

10-9A

ZAPORIZHZHIA, UKRAINE

ZAPORIZHZHIA INTL

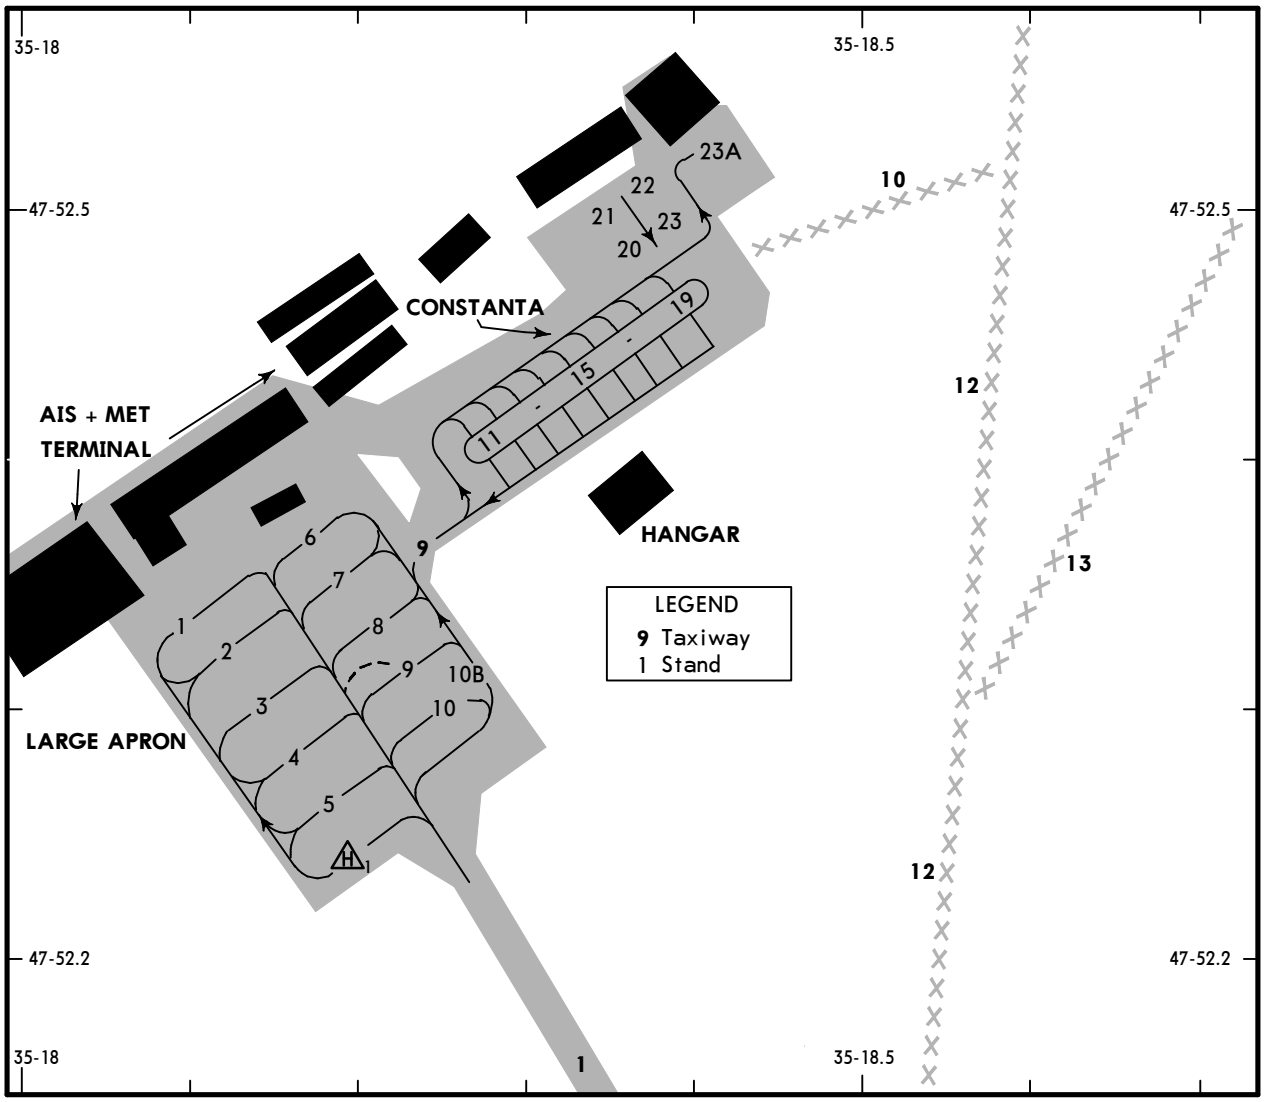

INS COORDINATES

STAND	COORDINATES	ELEV	STAND	COORDINATES	ELEV
1	N47 52.3 E035 18.1	343′	11	N47 52.4 E035 18.3	355′
2	N47 52.3 E035 18.1	342′	12	N47 52.4 E035 18.3	354′
3	N47 52.3 E035 18.2	342′	13 thru 15	N47 52.4 E035 18.3	352′
4	N47 52.3 E035 18.2	341′	16	N47 52.4 E035 18.4	353′
5	N47 52.3 E035 18.2	343′	17	N47 52.4 E035 18.4	354′
6, 7	N47 52.4 E035 18.2	345′	18	N47 52.5 E035 18.4	354′
8	N47 52.3 E035 18.2	343′	19	N47 52.5 E035 18.4	355′
9	N47 52.3 E035 18.3	345′	20	N47 52.5 E035 18.3	352′
10, 10B	N47 52.3 E035 18.2	344′	21	N47 52.5 E035 18.3	351′
H1	N47 52.2 E035 18.2	342′	22, 23	N47 52.5 E035 18.4	351′
			23A	N47 52.5 E035 18.4	355′

CHANGES: None.

© JEPPESEN, 1998, 2020. ALL RIGHTS RESERVED.

Printed from JeppView for Windows 5.3.0.0 on 03 Feb 2025; Terminal chart data cycle 26-2024 (Expired); Notice: After 02 Jan 2025, 0000Z, this chart may no longer be valid

UKDE/OZH


JEPPESEN

ZAPORIZHZHIA, UKRAINE

1 OCT 21
Eff 7 Oct

10-9B

ZAPORIZHZHIA INTL

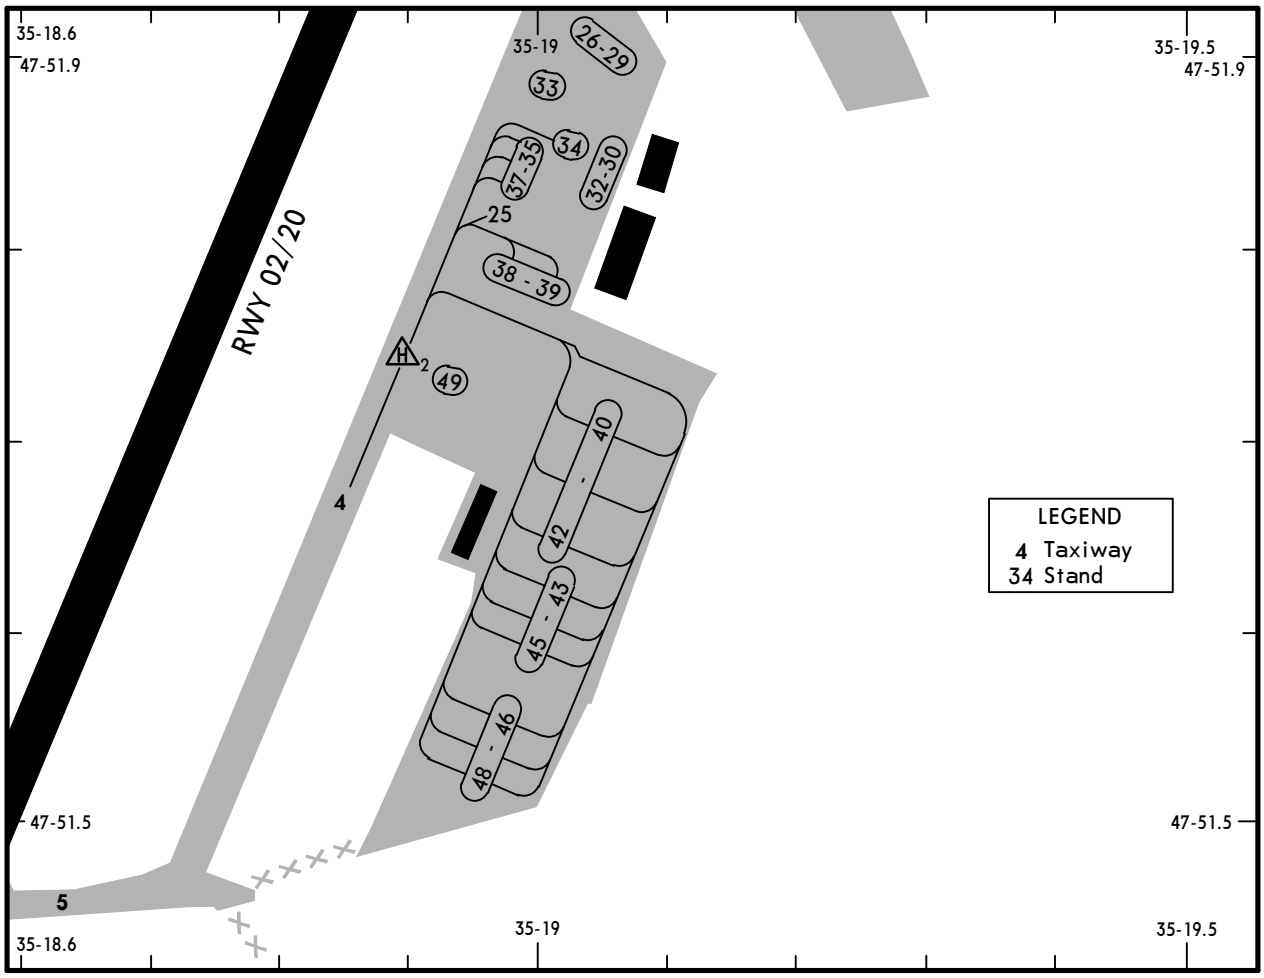

INS COORDINATES

STAND	COORDINATES	ELEV
H2	N47 51.8 E035 18.9	355
38	N47 51.8 E035 19.0	357
39	N47 51.8 E035 19.0	356
40	N47 51.8 E035 19.0	354
41	N47 51.7 E035 19.0	352
42	N47 51.7 E035 19.0	350
43	N47 51.7 E035 19.0	347
44	N47 51.7 E035 19.0	344
45	N47 51.6 E035 19.0	342
46	N47 51.6 E035 18.9	339
47	N47 51.6 E035 18.9	337
48	N47 51.6 E035 18.9	338
49	N47 51.7 E035 18.9	355

CHANGES: Grass Rwy withdrawn. Rwy 02/20 designators.

© JEPPESEN, 2019, 2021. ALL RIGHTS RESERVED.

Printed from JeppView for Windows 5.3.0.0 on 03 Feb 2025; Terminal chart data cycle 26-2024 (Expired); Notice: After 02 Jan 2025, 0000Z, this chart may no longer be valid

ZAPORIZHZHIA, UKRAINE

ZAPORIZHZHIA INTL

STRAIGHT-IN RWY		A	B	C	D
02	❶ NDB	**730**′(391′)	**730**′(391′)	**730**′(391′)	**730**′(391′)
	with ZA NDB	R1100m	R1100m	R1100m	R1100m
	ALS out	R1500m	R1500m	R1800m	R1800m
	NDB	**730**′(391′)	**730**′(391′)	**730**′(391′)	**730**′(391′)
	with ZA NDB	R1300m	R1300m	R1500m	R1500m
	ALS out	R2000m	R2000m	R2200m	R2200m
	❶ NDB	**790**′(451′)	**790**′(451′)	**790**′(451′)	**790**′(451′)
	w/o ZA NDB	R1400m	R1400m	R1400m	R1400m
	ALS out	R1500m	R1500m	R2100m	R2100m
	NDB	**790**′(451′)	**790**′(451′)	**790**′(451′)	**790**′(451′)
	w/o ZA NDB	R1600m	R1600m	R1800m	R1800m
	ALS out	R2300m	R2300m	R2500m	R2500m
20	ILS	**573**′(200′)	**573**′(200′)	**573**′(200′)	**583**′(210′)
	FULL	❷ R550m	❷ R550m	❷ R550m	❷ R550m
	ALS out	R1200m	R1200m	R1200m	R1200m
	❶ NDB	**890**′(517′)	**890**′(517′)	**890**′(517′)	**890**′(517′)
		R1500m	R1500m	R1600m	R1600m
	ALS out	R1500m	R1500m	R2400m	R2400m
	NDB	**890**′(517′)	**890**′(517′)	**890**′(517′)	**890**′(517′)
		R1800m	R1800m	R2000m	R2000m
	ALS out	R2600m	R2600m	R2800m	R2800m

❶ Continuous Descent Final Approach.

❷ R750m when a Flight Director or Autopilot or HUD to DA is not used.

CIRCLE-TO-LAND	100 KT	135 KT	180 KT	205 KT
After NDB 02	**840**′(466′)	**880**′(506′)	**1130**′(756′)	**1150**′(776′)
After ILS 20	**780**′(406′)	**880**′(506′)	**1120**′(746′)	**1150**′(776′)
After NDB 20	**890**′(516′)	**890**′(516′)	**1130**′(756′)	**1140**′(766′)
	❸ V1500m	❸ V1600m	❸ V2400m	V3600m

❸ or higher straight-in minimums.

TAKE-OFF

Low Visibility Take-off		RL or RCLM	RL	Adequate Vis Ref	
RL & RCLM	RL				
DAY	NIGHT	DAY	NIGHT	DAY	NIGHT
R300m		R/V400m		R/V500m	NA

CHANGES: New chart.

© JEPPESEN, 2021. ALL RIGHTS RESERVED.

Printed from JeppView for Windows 5.3.0.0 on 03 Feb 2025; Terminal chart data cycle 26-2024 (Expired); Notice: After 02 Jan 2025, 0000Z, this chart may no longer be valid

UKDE/OZH
ZAPORIZHZHIA INTL

JEPPESEN 1 OCT 21 (11-1) Eff 7 Oct

ZAPORIZHZHIA, UKRAINE
ILS Rwy 20

BRIEFING STRIP™

ZAPORIZHZHIA Radar (APP)	ZAPORIZHZHIA Tower
119.2	120.050

LOC IZP	Final Apch Crs	D5.0 IZP	ILS DA(H)	Apt Elev / Rwy
111.5	196°	1970′ (1597′)	Refer to Minimums	374′ / 373′


MISSED APCH: Climb on 196° to 1970′, then turn LEFT climbing to 2960′ to ZP NDB, then according to chart.

2000

MSA ZP NDB

Alt Set: hPa (MM on req) | Rwy Elev: 14 hPa | Trans level: By ATC | Trans alt: 10010′


DME required.

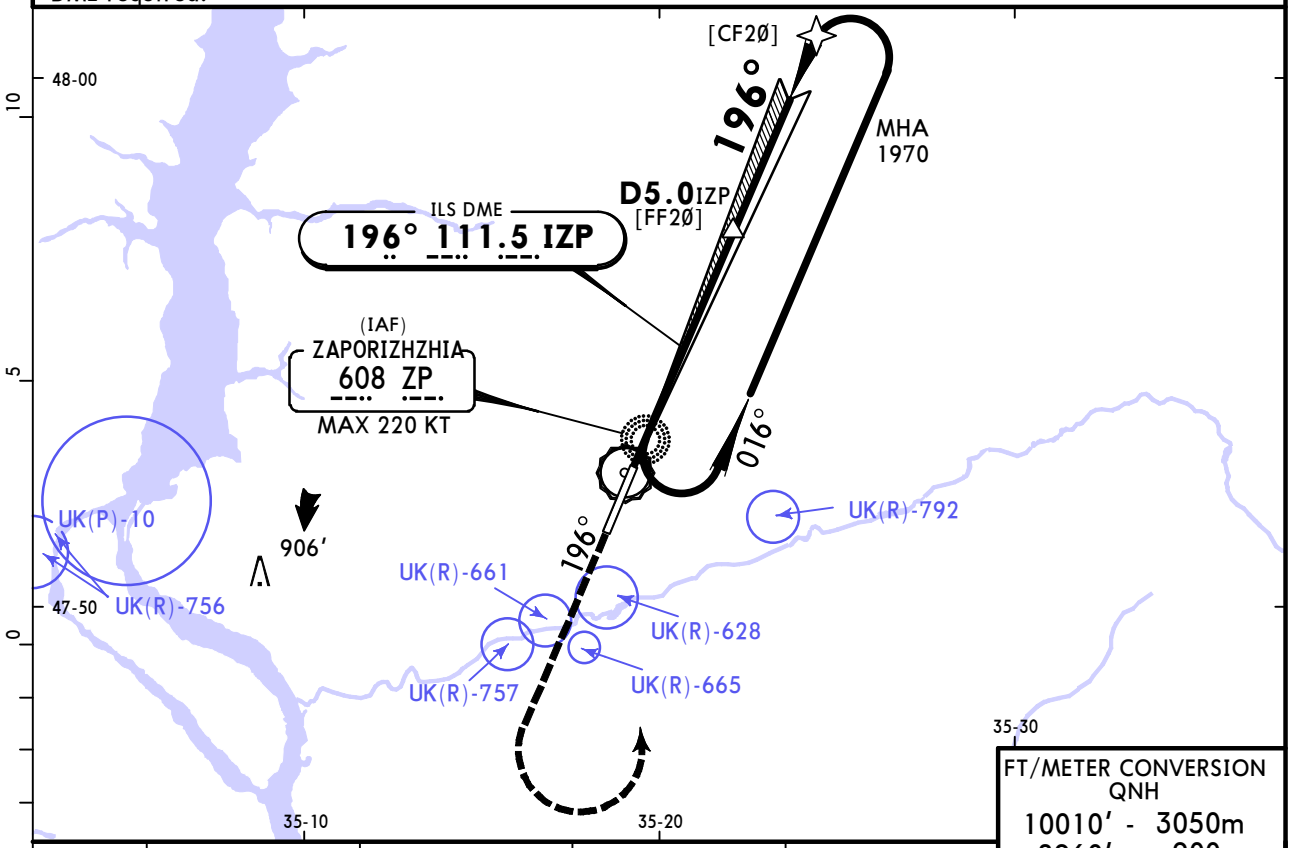

IZP DME	1.1	2.1	3.2	4.3
ALTITUDE	709′	1053′	1398′	1742′

FT/METER CONVERSION QNH

10010′	3050m
2960′	900m
1970′	600m

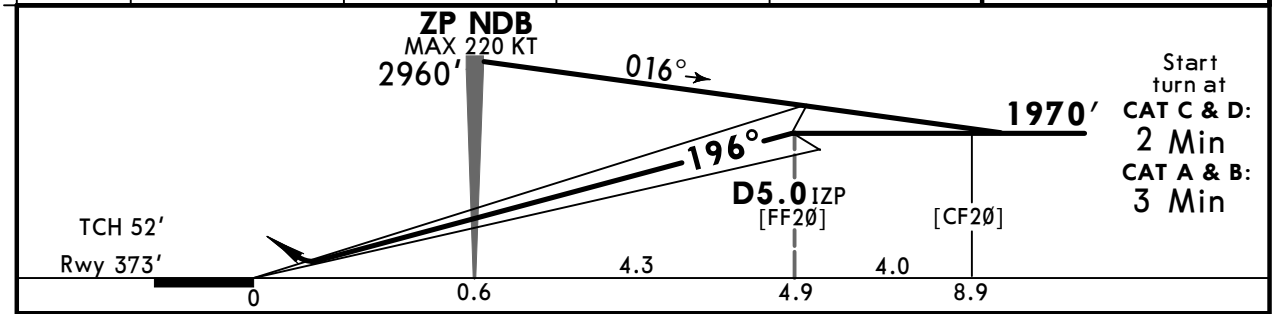

Gnd speed-Kts		70	90	100	120	140	160
GS	3.00°	372	478	531	637	743	849

HIALS
PAPI
1970′ on 196°

PANS OPS

Std STRAIGHT-IN LANDING

ILS

DA(H)

ABC: **573′** (200′) D: **583′** (210′)

	FULL	ALS out
A	1 R550m	R1200m
B		
C		
D		

CIRCLE-TO-LAND

	Max Kts	MDA(H)
A	100	780′ (406′) V1500m
B	135	880′ (506′) V1600m
C	180	1120′ (746′) V2400m
D	205	1150′ (776′) V3600m

1 R750m when a Flight Director or Autopilot or HUD to DA is not used.

CHANGES: Restricted areas.

© JEPPESEN, 2019, 2021. ALL RIGHTS RESERVED.

Printed from JeppView for Windows 5.3.0.0 on 03 Feb 2025; Terminal chart data cycle 26-2024 (Expired); Notice: After 02 Jan 2025, 0000Z, this chart may no longer be valid

UKDE/OZH
ZAPORIZHZHIA INTL

JEPPESEN 1 OCT 21 (16-1) Eff 7 Oct

ZAPORIZHZHIA, UKRAINE
NDB Rwy 02

BRIEFING STRIP™

ZAPORIZHZHIA Radar (APP)	ZAPORIZHZHIA Tower
119.2	120.050


NDB ZA	Final Apch Crs	ZA NDB	DA/MDA(H) (CONDITIONAL)	Apt Elev / Rwy
295	016°	1120′ (781′)	730′ (391′)	Apt Elev 374′ / Rwy 339′

MISSED APCH: Climb on 016° to 1970′, then turn RIGHT climbing to 2960′ to ZA NDB, then according to chart.


2000

MSA ZA NDB

Alt Set: hPa (MM on req)	Rwy Elev: 12 hPa	Trans level: By ATC	Trans alt: 10010′

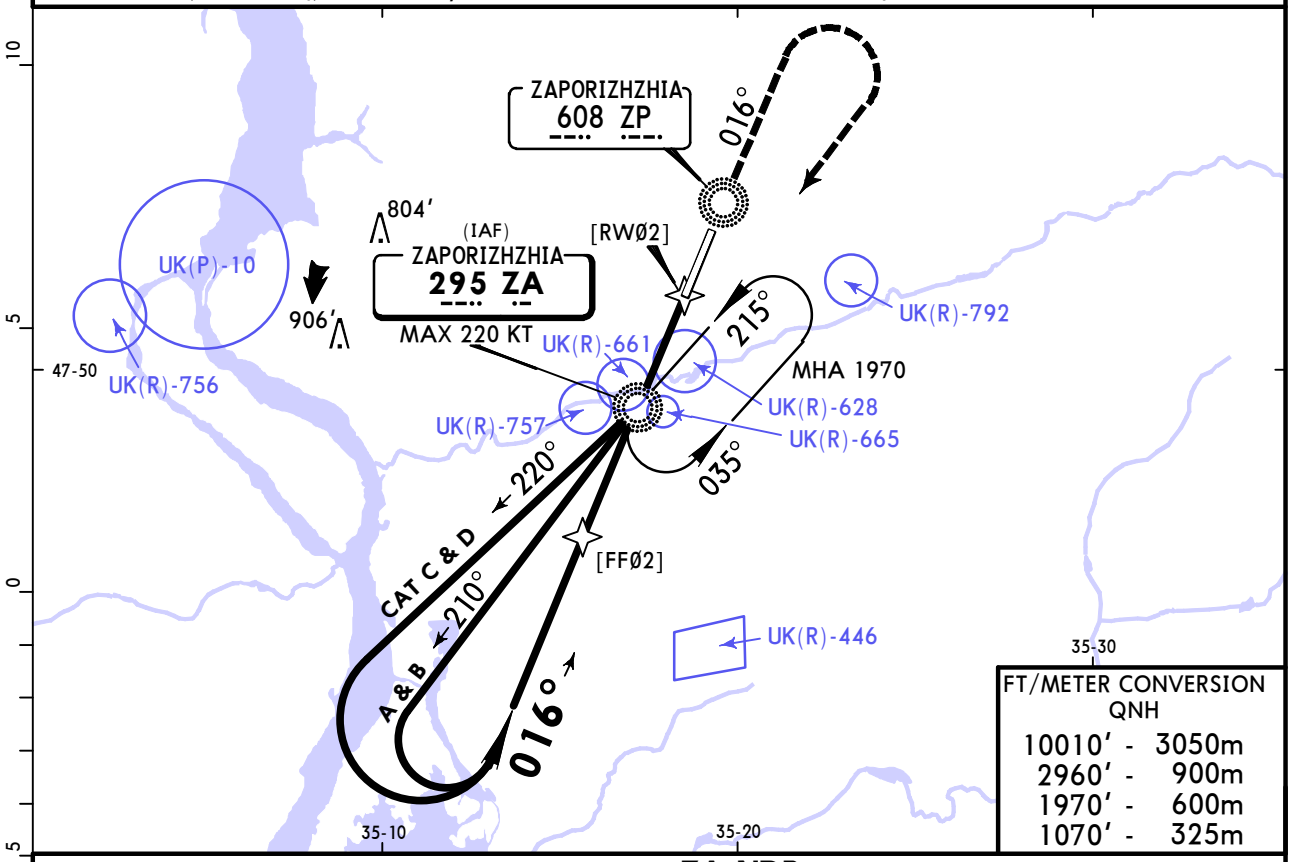

FT/METER CONVERSION QNH	
10010′	3050m
2960′	900m
1970′	600m
1070′	325m

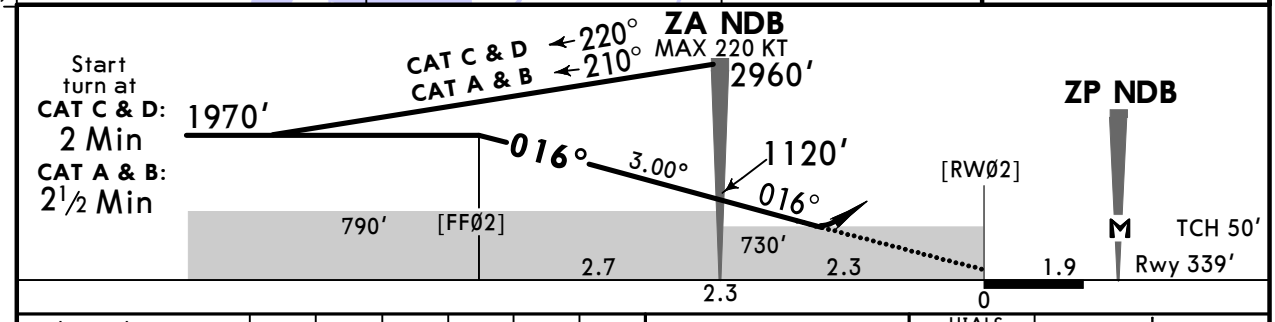

Gnd speed-Kts		70	90	100	120	140	160
Descent Angle	3.00°	372	478	531	637	743	849
MAP at ZP NDB							

Timing not authorized for defining the MAP.

HIALS PAPI 1970′ on 016°

PANS OPS

Std

STRAIGHT-IN LANDING

	CDFA with ZA NDB 1 DA/MDA(H) 730′ (391′)		CDFA w/o ZA NDB 1 DA/MDA(H) 790′ (451′)	
		ALS out		ALS out
A	R1100m	R1500m	R1400m	R1500m
B				
C		R1800m		R2100m
D				

CIRCLE-TO-LAND

Max Kts	MDA(H)	
100	840′ (466′)	V1500m
135	880′ (506′)	V1600m
180	1130′ (756′)	V2400m
205	1150′ (776′)	V3600m

1 VNAV DA(H) in lieu of MDA(H) depends on operator policy.

CHANGES: Restricted areas. Approach lights added. Minimums.

© JEPPESEN, 2004, 2021. ALL RIGHTS RESERVED.

Printed from JeppView for Windows 5.3.0.0 on 03 Feb 2025; Terminal chart data cycle 26-2024 (Expired); Notice: After 02 Jan 2025, 0000Z, this chart may no longer be valid

UKDE/OZH
ZAPORIZHZHIA INTL

JEPPESEN 1 OCT 21 (16-2) Eff 7 Oct

ZAPORIZHZHIA, UKRAINE
NDB Rwy 20

BRIEFING STRIP™

ZAPORIZHZHIA Radar (APP)	ZAPORIZHZHIA Tower
119.2	120.050


NDB ZP	Final Apch Crs	No FAF	DA/MDA(H)	Apt Elev / Rwy
608	196°		890′ (517′)	Apt Elev 374′ / Rwy 373′

MISSED APCH: Climb on 196° to 1970′, then turn LEFT climbing 2960′ to NDB, then according to chart.


Alt Set: hPa (MM on req) Rwy Elev: 14 hPa Trans level: By ATC Trans alt: 10010′

2000

MSA ZP NDB

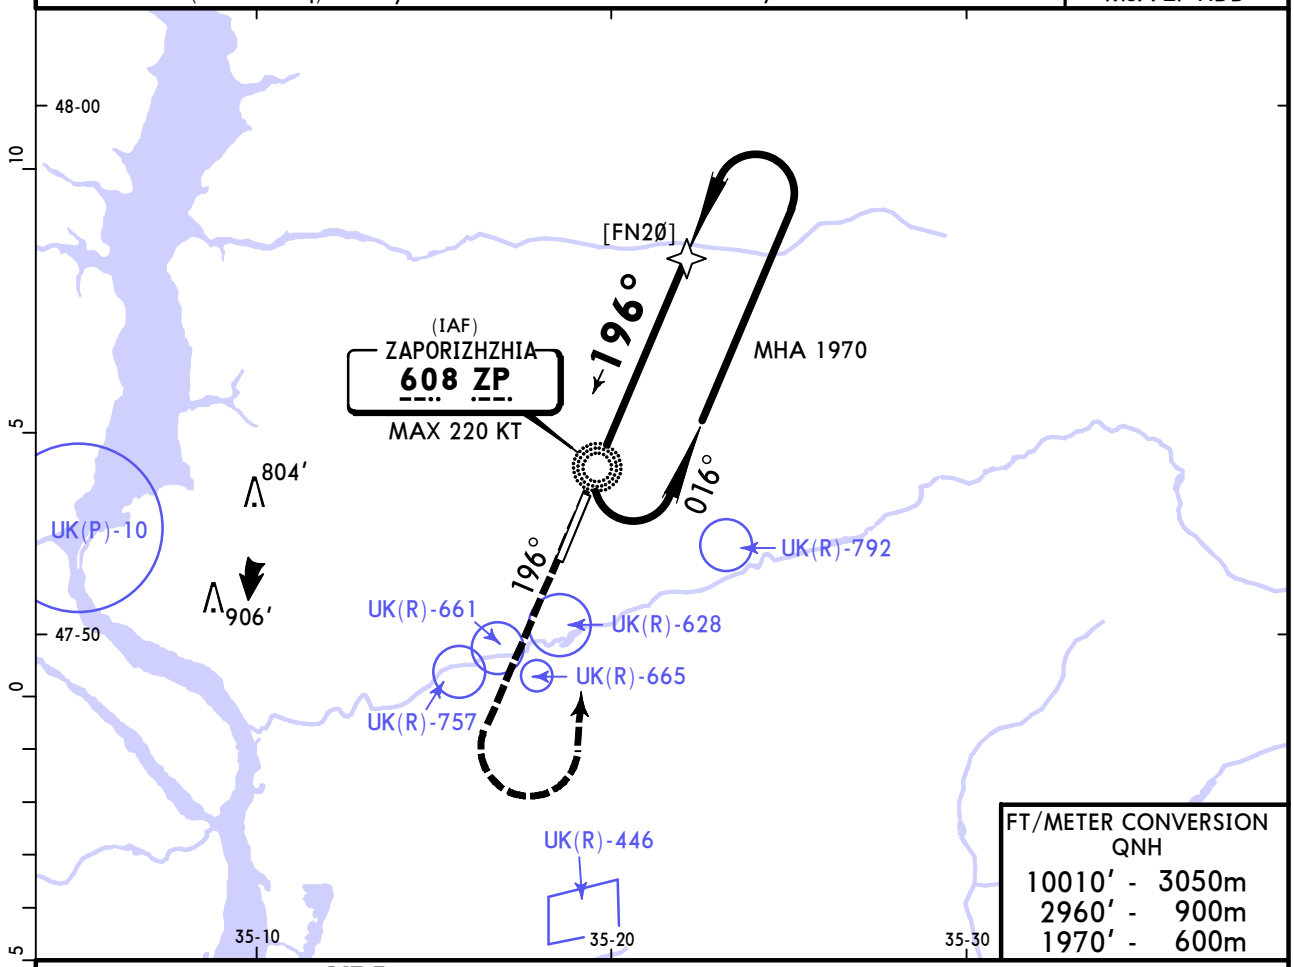

FT/METER CONVERSION QNH	
10010′	3050m
2960′	900m
1970′	600m

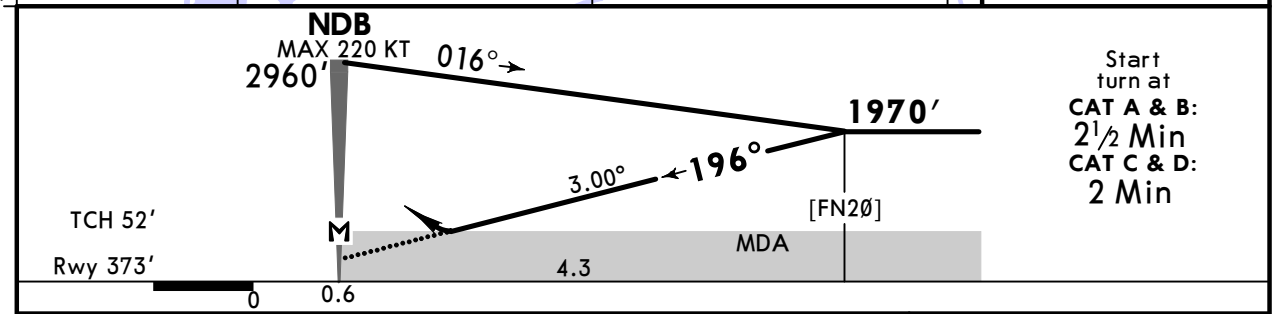

Start turn at
CAT A & B: 2½ Min
CAT C & D: 2 Min

Gnd speed-Kts		70	90	100	120	140	160
Descent Angle	3.00°	372	478	531	637	743	849
MAP at NDB							

Timing not authorized for defining the MAP.

HIALS PAPI 1970′ on 196°

Std STRAIGHT-IN LANDING

CDFA

1 DA/MDA(H) 890′ (517′)

ALS out

A	R1500m	
B		
C	R1600m	R2400m
D		

CIRCLE-TO-LAND

Max Kts	MDA(H)	
100	890′ (516′)	2 V1500m
135	890′ (516′)	2 V1600m
180	1130′ (756′)	V2400m
205	1140′ (766′)	V3600m

PANS OPS

1 VNAV DA(H) in lieu of MDA(H) depends on operator policy. 2 or higher straight-in minimums.

CHANGES: Restricted areas.

© JEPPESEN, 2017, 2021. ALL RIGHTS RESERVED.

(c) JEPPESEN SANDERSON, INC., 2025, ALL RIGHTS RESERVED

Chart changes since cycle 25-2024

ADD = added chart, REV = revised chart, DEL = deleted chart.

ACT	PROCEDURE IDENT	INDEX	REV DATE	EFF DATE

ZAPORIZHZHIA, (ZAPORIZHZHIA INTL - UKDE)

(c) JEPPESEN SANDERSON, INC., 2025, ALL RIGHTS RESERVED

TERMINAL CHART CHANGE NOTICES

No Chart Change Notices for Airport UKDE

UKVE AD 3 Heliport Zaporizhzhia/Motor / Вертодром Запоріжжя/Мотор

UKVE AD 3.1 Location Indicator and Name of heliport / Індекс місця розташування і назва вертодрому

UKVE - Heliport "Zaporizhzhia/Motor" UKVE - Вертодром "Запоріжжя/Мотор"

UKVE AD 3.2 Heliport Geographical and Administrative Data / Географічні й адміністративні дані по вертодрому

ARP coordinates and site at heliport *Контрольна точка і координати місця розташування на вертодромі*	475136N 0351920E In the centre or RWY
Direction and distance from (city) *Напрямок та відстань від міста*	14 km from city Zaporizhzhia
Elevation/Reference temperature *Перевищення / розрахункова температура*	101 M / 26°C
MAG VAR/Annual change *Магнітне відхилення / річні зміни*	7° E / nil
Heliport administration, address, telephone, telefax, telex, AFS *Адміністрація вертодрому, адреса, телефон, телефакс, телекс, AFS*	Postal Address: Motor Sich Aircompany, 12, Blakytna str, Zaporizhzhia, Ukraine, 69120 Phone: +380 61 213 91 50, +380 61 720 44 43 Fax: +380 61 720 50 09, +380 61 224 43 92 E-mail: msidpt@m9.com.ua AFS: UKDEMSIX

UKVE AD 3.3 Operational Hours / Години роботи

Heliport administration *Вертодромна адміністрація*	07:00 - 16:00 (05:00 - 16:00) except HOL
Customs and immigration *Митниця і імміграція*	nil
Health and sanitation *Медична і санітарна служби*	As HP Administration
AIS Briefing Office *Бюро AIS по інструктажу*	nil
ATS Reporting office (ARO) *Бюро інформації ОПР (ARO)*	nil
Air traffic service *ОПР*	nil
MET Briefing Office *Метеорологічне бюро по інструктажу*	As HP Administration
Fuelling *Заправка паливом*	As HP Administration
Handlig *Обслуговування*	nil
De-icing *Протиобледеніння*	As HP Administration
Remarks *Примітки*	nil

 © UkSATSE, 2017

UKVE AD 3.4 Handling Services and Facilities / Служби і засоби по обслуговуванню

Cargo-Handling facilities *Вантажно-розвантажувальні засоби*	nil
Fuel/oil types *Типи палива/мастил*	TC-1, JETA1 / MS-8P, MS-20
Fuelling facilities/capacity *Засоби заправки паливом/пропускна спроможність*	1 truck 22000 litres, 10 litres per second Limited Liability Company "Zaporozhye Handling Company"
De-icing facilities *Засоби по видаленню криги*	De-icing mashine, liquid for de-icing of CLARIANT, Type-II "Trans-Aerohandling Zaporizhzhya" LLC
Hangar space for visiting aircraft *Місце в ангарі для прибуваючих повітряних суден*	nil
Repair facilities for visiting aircraft *Ремонтне обладнання для прибуваючих повітряних суден*	Helicopter ground service

UKVE AD 3.5 Heliport data / Дані по вертодрому

Type of heliport *Тип вертодрому*	Levelsurface
TLOF dimension *Розміри TLOF*	110x21 M
FATO, GEO bearing *Істинний пеленг зони FATO*	039.00° GEO 219.00° GEO
FATO dimension and surface type *Розміри FATO і тип поверхні*	116x25 M Concrete
TLOF surface and BRG strength *Поверхня і несуча здатність зони TLOF*	Concrete 13 t
Coordinates of geometric centre TLOF or THR FATO and geoid undulation *Координати геометричного центру TLOF або порога FATO і хвиля геоїда*	475136.00N 0351920.00E
TLOF/FATO elevation and slope *Перевищення і уклін TLOF / FATO*	101 M 0.012
Safety area dimension *Розміри зони безпеки*	140x50 M
HEL CWY dimension *Розміри смуги вільної від перешкод*	250x50 M
Obstacle-free sector *Сектор вільний від перешкод*	nil
Remarks *Примітки*	nil

© UkSATSE, 2017

UKVE AD 3.6 ATS Airspace / Повітряний простір ATS

NIL NIL

UKVE AD 3.7 ATS Communication Facilities / Засоби зв'язку ATS

Service designation *Позначення служби*	Call sign *Позивний*	Frequency *Частота*	Hours of operation *Години роботи*	Remarks *Примітки*
1	2	3	4	5
TWR	Motor	130.425 MHZ	07:00-16:00 (05:00-16:00) except HOL	nil

UKVE AD 3.8 Radio navigation and landing aids / Радіонавігаційні засоби і засоби посадки

NIL NIL

© UkSATSE, 2017

INTENTIONALLY LEFT BLANK

© UkSATSE, 2017

HELIPORT CHART

HRP
47°51'36"N
035°19'20"E

ELEV 101 m

Motor 130.425

ZAPORIZHZHIA/Motor


VAR 7° E

NOT TO SCALE

DECLARED DISTANCES

	TODAH,m	RTODAH,m	LDAH,m	Remarks
03	168	116	116	Nil
21	196	116	196	Nil

GEOID UNDULATION 21m

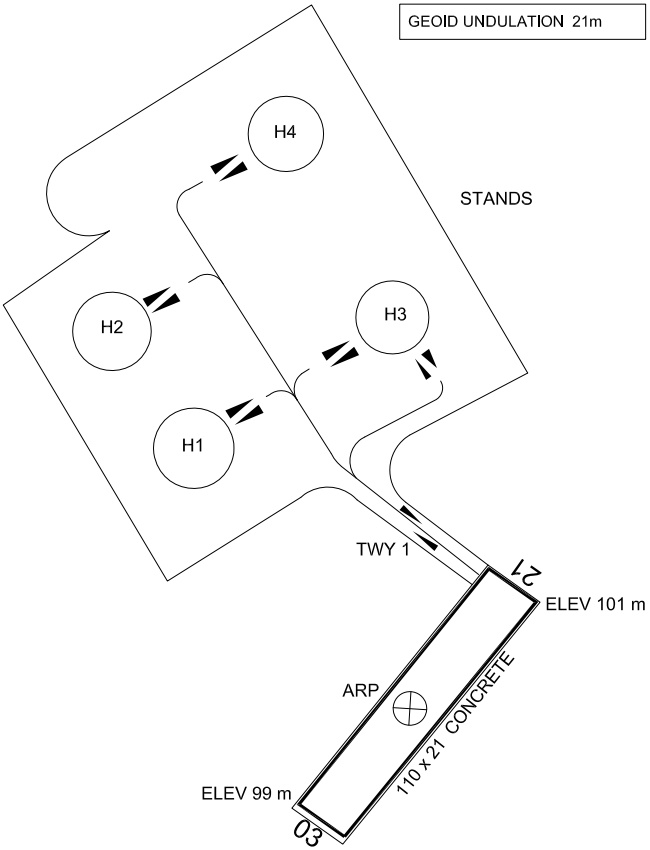

Data of HELIPORT:

1. Type of heliport - at the level of surface.
2. Safety area dimension - 140 x 50 m
3. HEL CWY dimension - 250 x 50 m
4. TLOF/FATO elevation and slope - 101m / 0.012%.

ELEVATIONS AND
DIMENSIONS IN METRES
BEARINGS ARE MAGNETIC

HELIPORT LIGHTING: NIL

CHANGE:


RWY	DIRECTION	THR	BEARING STRENGTH		SURFACE	BEARING STRENGTH	WIDTH
03	032°	47°51'34.60"N 035°19'18.00"E	13.0 t	TWY 1	CONCRETE	13.0 t	8 m
21	212°	47°51'37.40"N 035°19'21.30"E					

© UkSATSE, 2017

VISUAL APPROACH CHART (VAC)-ICAO AD ELEV 101 m HEIGHTS RELATED TO AD - ELEV 101.0 m ZAPORIZHZHIA/Motor

BEARINGS AND TRACKS ARE MAGNETIC
ELEV-ALT-HGT IN METRES

Zaporizhzhia Radar 119.200
Zaporizhzhia Tower 120.050

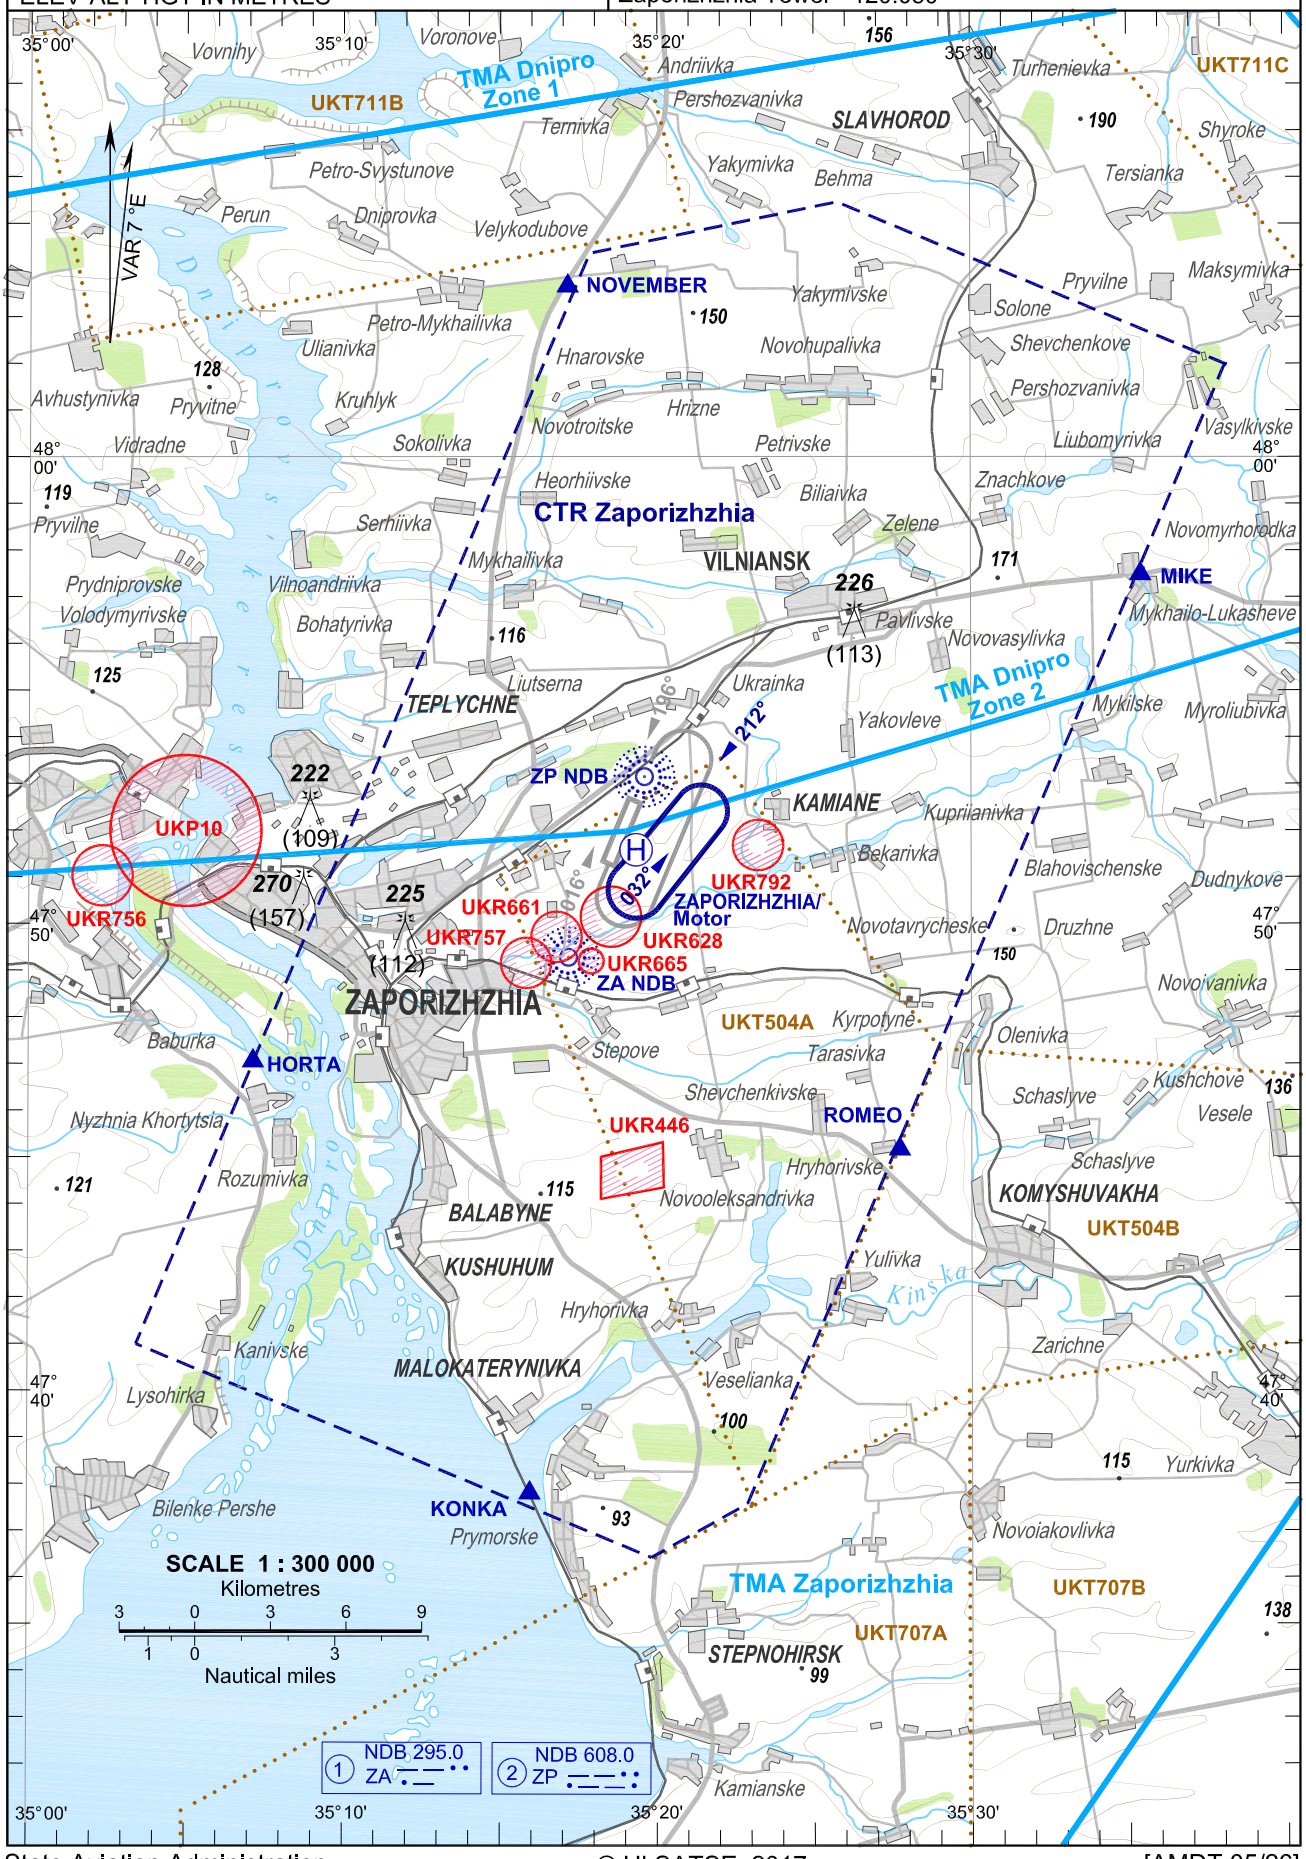

© UkSATSE, 2017

Designation	*Vertical limits and airspace Class*	*Call signs and frequencies (MHz)*	*Designation*	*Vertical limits and airspace Class*	*Call signs and frequencies (MHz)*
CTR Zaporizhzhia	600/SFC Class D	Zaporizhzhia Tower 120.050	TMA Zaporizhzhia	2400/400 Class C	Zaporizhzhia Radar 119.200
TMA Dnipro Zone 1	1500/450 Class C	Dnipro Radar 119.400	TMA Dnipro Zone 2	FL155/1500 Class C	Dnipro Radar 119.400

Designation	*Vertical limits and airspace Class*	*Designation*	*Vertical limits and airspace Class*
UKR446	600/ SFC Unclassified	UKR757	1100/SFC Unclassified
UKR628	1100/SFC Unclassified	UKR792	1150/SFC Unclassified
UKR661	1100/SFC Unclassified	UKP10	1200/SFC Unclassified
UKR665	800/SFC Unclassified		
UKR756	1100/SFC Unclassified		

Designation	*Vertical limits and airspace Class*	*Designation*	*Vertical limits and airspace Class*
UKT504A	600/SFC Unclassified	UKT707B	1500/SFC Unclassified
UKT504B	FL120/SFC Unclassified	UKT711B	2000/SFC Unclassified
UKT707A	FL265/SFC Unclassified	UKT711C	FL155/SFC Unclassified

Waypoint name	*Coordinates*	*Description*	*Waypoint name for Planning purposes*
HORTA	474704N 0350709E	West end of Nyzhnia Khortytsia village	UKDEH
ROMEO	474511N 0352743E	Hryhorivske village	UKDER
KONKA	473749N 0351557E	Railway bridge over Konka river estuary	UKDEK
MIKE	475730N 0353525E	Mykhailo-Lukasheve village	UKDEM
NOVEMBER	480341N 0351709E	Crossroad east of Petro-Mykhailivka village	UKDEN
ZA NDB	474917.8N 0351711.0E	-	-
ZP NDB	475309.6N 0351936.5E	-	-

© UkSATSE, 2017