

Zan Balcom: zbalcom

Autumn Blackburn: kblack37

Jake Chiang: jchiang2

Alex Davis: ahd2112


## Verigames: Crowdsourcing Code Verification Through Video Games

### Motivation

Computer programs have defects, which, as history and experience shows, can be very costly when they survive to be in the final product. For example, in 1996, the Ariane-5 rocket, due to an error casting 64-bit floating point values to 16-bit signed integers, exploded 40 seconds after take off [3]. Program verification is the process by which a program is proved to be free of some of these costly bugs; however, it is expensive to have trained programmers spend the time to evaluate every line of code looking for these defects. This is the way nearly all verification is handled today. There are existing tools that can perform certain amounts of verification checking, but verifying a complete and meaningful program with these tools would take years even with a team of dedicated engineers. Due to these constraints, usually only critical sections of code are verified for correctness.

The main idea of Verification Games is to transform the intricate task of code verification into a game that can be completed with no special training, where a solution to a level provides valuable verification insight[1]. This game can then be deployed to a large audience,

crowdsourcing the laborious task of code verification to a population that doesn't need to be trained for it. Pipe Jam (fig. 1, left), is one such game developed by a team at the University of Washington, that uses a series of differently-sized pipes and balls to represent the variables and values, respectively, of a program. Game levels are made by reading a Java program and a specification in the form of a type system and then converting these into

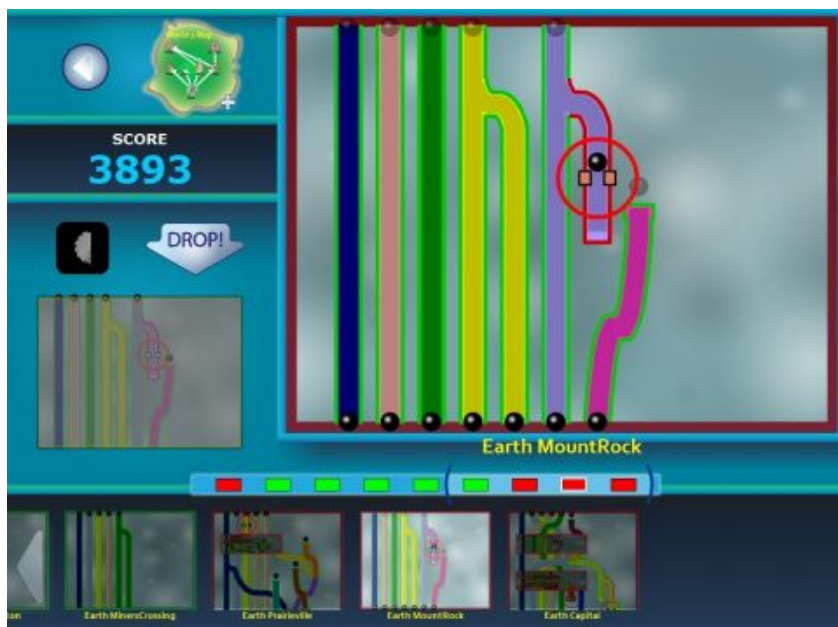


corresponding balls and pipes. The goal of the game is to manipulate the width of the pipes to produce a configuration that allows the balls to flow through the whole system. Such a solution equivalently is a proof that the program holds to the specification. One example of this type

system in practice would be to look for null pointers in the program, with one width of pipe representing nullable assignments and another being non-null types. By solving the game, the player would be proving that no null value could be assigned to something that shouldn't be null. If the player cannot find a solution, then they can use a “buzzsaw” to make all the balls small enough to flow through the pipes. This in turn signifies that there could be a type error in the code that the pipes represent; a trained software engineer can then look at that part of the code and resolve any errors they find manually. In other words, the buzzsaw helps identify areas where a configuration of the type system could not be found that solves the puzzle, which indicates that the specification is not yet met.

With a crowdsourcing approach to code verification, the task of identifying potential problem areas in the code for trained engineers to review becomes much more manageable. The current issue with code verification is that it is a laborious project that has to be undertaken by trained engineers and thus verifying 100% of a large program correct would take far too many people-hours of work to consider as an option. With verification games, large swathes of the program can be verified correct automatically by players and so the developers of the program can then utilize their engineers more efficiently. Currently, however, these verification games are only capable of representing small programs because the number of variables, values, and dependencies quickly becomes unwieldy in meaningful programs. This limits the power of the tool considerably since the number of pipes in larger programs would quickly become unmanageable for a player to deal with.

Other games approach the same sort of crowdsourced verifications with different methods. One is Paradox, which uses the same principles as PipeJam, Paradox handles the

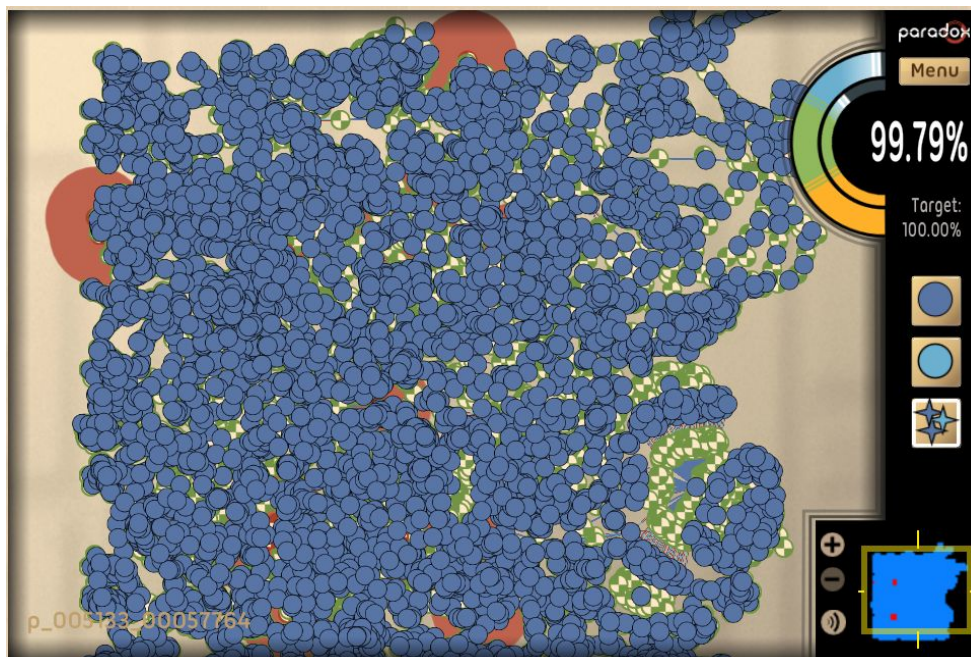

complexity of large programs by leaving it up to the users to decide how much of the program they want to verify. (Fig. 2, left) shows a game of Paradox being played. The red areas identify constraints that are not currently met by the program. It is the player's job to change the links

between the small circles to meet the constraint. This is where the way that Paradox deals with its complexity has a problem in our view, it does not really handle the complexity in any meaningful way. In the game you can use the map in the bottom right hand corner to zoom in on

an area to work on. This is in contrast with how PipeJam works, where the user is only given a small area to work on at a time; with those areas being interconnected to form the verification of the whole larger program. We believe this way of obfuscating the complexity of the program is important to keeping players motivated to play the game and in drawing in new players for the crowdsourcing of verification.

## Approach

Our approach to verification games is to focus on distributing the game to as large of an audience as possible. This will place PipeJam into the realm of large scale crowdsourcing: previous applications of crowdsourcing in computing have utilized many different amounts of users, from relatively small number of individuals like TopCoder to 75,000 users in the protein folding solver FoldIt [2]. To this end, we've developed a few different ideas to implement in sequence, starting with updating the current codebase to a new platform to improvements in the game to improve player retention.

The first goal is to update the platform that PipeJam was built on. The original game was written in ActionScript3, which has fallen largely out of favor in the game development world as Adobe has announced that it will stop supporting its Flash Player browser plug-in[4]. We plan on updating the codebase to Haxe using the as3hx library so it can be easily configured to be distributed via iOS, Android, or HTML5, reaching a wider audience [8] [9]. In addition to this, many of the external libraries the original codebase depended on have fallen out of use or into disrepair, so we will have to find or create replacements for those.

The second goal is to, after the codebase is fixed and we have the prototypes of the game up and running, begin playtesting both implementations of the verification game, PipeJam and FlowJam. We will have a decent amount of people (at least 20) - including those both within and without of our social circle (recruiting from, for example, the HUB on the UW campus) - playtest both games and observe their reactions to playing the game. From this, we can pick the version of the game that has the greatest potential for player engagement and thus will most likely reach the largest audience (more information on this testing can be found in the Playtesting part of this document).

The last goal is to, once we have know which version of the game we're going to move forward with, implement new features to the game to increase player engagement. Secondary objectives have been shown to increase player engagement when placed on the path to completing a level (as opposed to out of the way of the intended path)[5]. To this end, we plan on implementing a system of secondary objectives in the form of collectible tokens that are obtained in the normal path of solving a level. This will be integrated into the scoring system, with picking up collectibles being another way for players to increase their score. With this scoring system in place, we can also implement a competitive aspect into the game, such as a score- or speed-tracking system so players can compete with their friends and possibly recruit new friends into playing[6]. Many of the most widely-played mobile games today have a competitive dynamic<sup>1</sup> (whether directly against another player or in a form similar to high-score

---

<sup>1</sup> Ascertained by a familiarity with and an examination of the top-played games of all categories on the Apple App Store.

charts) so we're confident that this is a worthwhile venture. We want to retain the simple-to-grasp nature of PipeJam and not make the game too unapproachable for newer players, so we're limiting the number of planned features to avoid feature bloat.

## Playtesting

The two versions of the verification game PipeJam and Flowjam will be evaluated by playtesting the games on individuals located in the HUB on the UNiversity of Washington campus. Each individual will only be playing one version of the game to reduce confounding feedback. Our concern is that testers will have bias based on which game they played first or that they will be less interested in the games after a period of time.

We will test each player for 5 minutes on a selected version of the game. The players will be given a laptop with the game loaded and at the opening screen also they will be provided with a brief description of what the game is and what they are doing while they play in terms of verification. They will then be given the task to play the game with no further instructions. During the test observers from our team will collect data on different metrics these will include:

- Whether playtester ended playing early or not and by how many minutes
  - We believe this will point to the version lacking in fun mechanics
- Number of signs of frustration playtesters display. Signs of frustration will be defined as exasperated noises or stressed body signals
  - This is a subjective measurement but it can be useful to gauge how intuitive one game format may be over another.

After playing the game for 5 minutes the playtesters will be asked the following questions about their experience playing PipeJam or Flowjam.

1. On a scale of (very likely, likely, no opinion, not likely, never) where would you place yourself in wanting to play the game again?
  - a. This will be a general measurement on entertainment value of the game.
2. Please rate the level of frustration you experienced while playing the game on a scale of 1 to 10.
  - a. We believe frustration is a good measurement for assessing the game. Players who experience this are less likely to want to play the game in the future. Frustration could have many causes when playing a game and as we will not be changing any major gameplay mechanics of the game we will want to measure this in some way.
3. Where there any aspects of the game that were unclear or was there any point when playing that you didn't know what to do?
  - a. This will be used to further evaluate the games entertainment if the more general question yield no useful information.
4. Would the addition of any of the following features make you change your answers to any of the previous two questions? Leaderboards? Badges/Achievements?
  - a. This question will help us get more input for features that we want to add to the game to increase player engagement.

## Timeline

### **Week 3**

Resolve compiler errors for the Haxe port of PipeJam and FlowJam.

### **Week 4**

Continue resolving compiler errors & replacing external dependencies.

### **Week 5**

Continue resolving compiler errors & replacing external dependencies.

### **Week 6**

Have PipeJam/FlowJam games both running and proceed with comparison playtesting.

### **Week 7 (Midterm) Begin Evaluation Phase**

Have collected enough data from playtesting to choose which version of the game to go forward with.

### **Week 8**

Have implemented & tested the secondary objective of coin collection.

### **Week 9**

Iterate & playtest the secondary objectives.

### **Week 10**

Have implemented & tested client-side high-score tables on a per-level basis.

### **Week 11 (Final)**

Have a release-ready build, fully tested.

## Challenges and Risks

Our most immediate concern involves updating the existing game to a playable state that is open for future development. With Flash support being discontinued and its already limited uses being dropped from modern browsers, adapting the codebase to a more accessible system is both a top priority and one that will require an indeterminate amount of work that will only become clear once the porting is underway. This process will also require becoming familiar with both the ActionScript and Haxe languages, which many of us are new and as of yet unskilled with. The payoff, however, will be a port with stable support and cross platform accessibility. This in turn both makes the audiences necessary for tenable crowdsourcing more reachable and provides a more welcoming development environment for future contributors.


Another challenge is that the codebase we were given for the game is clearly in a prototype state - even after we finish porting and are able to get the game up and running, there will be significant issues with its extensibility and maintainability. There are significant architectural issues in the codebase that will have to be refactored; specifically, we plan to move the codebase to utilize an entity-component-system architectural pattern.

After the game is available and open to be played, we will need to remain cognizant of the problems involved in ensuring that the game is entertaining enough to draw a crowd of users. Our collective experience in regard to game design is limited, and will require consistent



testing, feedback, and iteration to ensure our end product is enjoyable. This will require us to evaluate which particular dynamics players respond best to. Once this is known, we can expand on those game aspects. This could be, for example if players are interested in a competitive dynamic, a comparison among the players' friends of who is completing the most levels or using the least buzzsaws. There could also be a design space for a tertiary game loop with goals such as medals or some form of progression through the "world" of PipeJam. Nonetheless, overcoming this final obstacle will see the utilization of crowdsourcing become a reality.

## Architecture

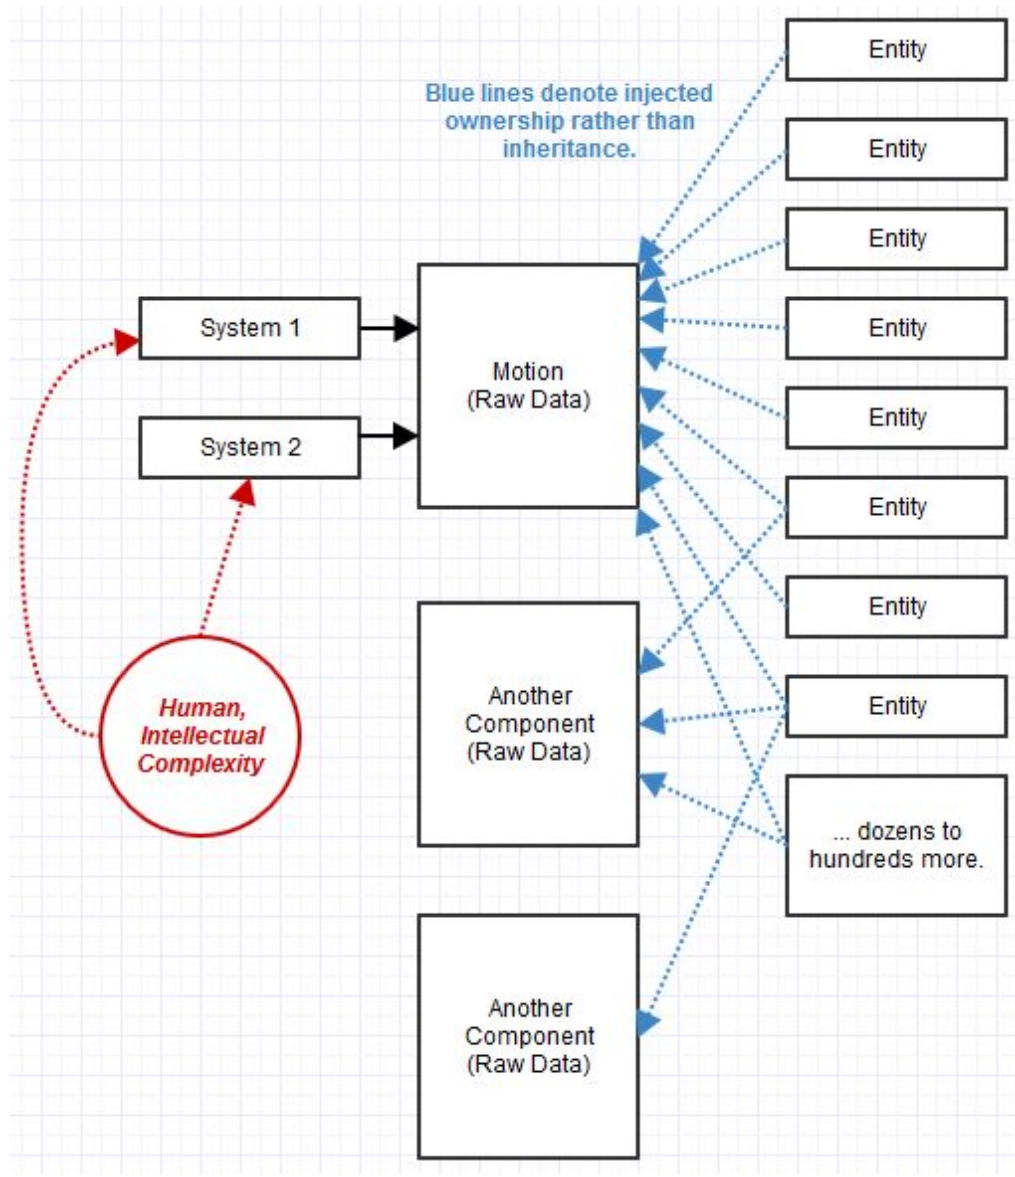


[7]

We wish to move the codebase away from its current, less flexible and maintainable architecture to an entity-component-system architecture. From its current state, the code will require a lot of refactoring. Since it was designed as a prototype and not a codebase to be maintained long-term, it has no definitive architecture that would allow for interesting feature

growth. Many classes (Level, World, GridViewPanel) are so-called “god classes”, performing far too many tasks and having far too large of a stake. As well, many classes make extensive use of static variables to share information. There’s also no clear recognizable architecture. For these reasons, we believe a refactoring is in order, though new features are our first priority.

The goals of migrating the codebase to an entity-component-system architecture are ensuring new game systems can be added more easily as well as reducing the current complexity of the code (for example, the “god class” mentioned above, `scenes.game.display.Level`, is over 2000 lines of code and performs many different tasks that could be refactored into other classes). ECS architectures allow for easier development of new game systems because adding one in is (almost) as simple as creating a new type of component and a system to govern it. They also reduce the complexity of the code through the principle of defining objects through composition instead of inheritance.

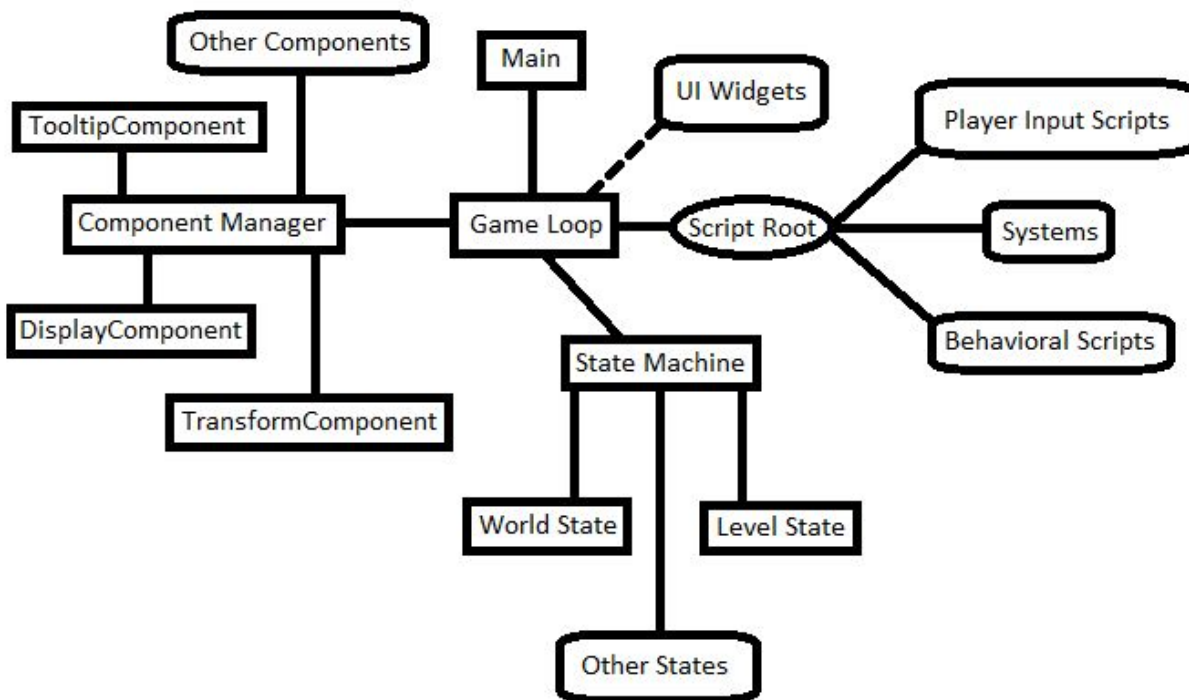

Above is the planned architecture at a high level. Main refers to the static entry point, where possibly different versions of the game (for different release platforms) can be instantiated.

The game loop is not quite a class itself, but part of a class instantiated by Main. It contains many different elements of the architecture and serves as the central locus of communication between them. It passes itself down to classes that may need to reference resources, such as scripts that operate on some particular entities.

The component manager is one element of the game loop class. It handles all addition & removal of components from entities as well as providing methods to retrieve components of a certain type or that belong to a specific entity. Components are generalized objects that systems

can operate on; for example, a transform component contains an entities transformation information (translation, rotation, scale) that a free transform system would reference to move that entity's display component. For example, in PipeJam, the balls in the pipes would have a display component that references their sprite, a transform component that determines where that sprite is placed on screen, and a width component (narrow, wide) that would be checked against the constraint graph.

The state machine is another element of the game loop class. Its responsibility is to ensure clean transitions between different states of the game (ie, the main menu and the puzzle-solving gameplay would be two separate states). This means cleaning up the resources of the previous state and making sure the next state has the resources it needs. It also passes information between transitioning states, if necessary, such as the level data when transitioning from the level select state to the level state.

The script root refers the field in the game loop class that is the root of the script tree. The game loop calls update on the root of the script tree, which then calls update on its children, and so on. These scripts define the mechanics of the game. The player input scripts process player input such as keyboard, mouse, or touch events and pass this information along to affect the game state (usually in the form of events). The behavior of clicking on the pipes to change their width would live here. The systems, as mentioned above, deal with the behaviors the components are meant to express, such as the free transform system that updates the screen position of any objects that have both a display & a transform component. The behavioral scripts handle the rest of the game's behavior; for example, the behavior of collecting the secondary objectives mentioned above lives here.

## **References**

1. **Werner Dietl Stephanie, Dietzel, Michael D. Ernst, Nathaniel Mote Brian Walker, Seth Cooper, Timothy Pavlik, and Zoran Popović. Verification Games: Making Verification Fun.**  
<https://homes.cs.washington.edu/~zoran/verigames-ffjip2012.pdf>, 2012.
2. **Thomas D. LaToza and André van der Hoek. Crowdsourcing in Software Engineering: Models, Opportunities, and Challenges.**  
<https://pdfs.semanticscholar.org/787c/e8e0973fd21051260385bb27d74f6f53c7f9.pdf>, 2016
3. **Gleick, James. "A Bug and a Crash." A Bug and a Crash by James Gleick, New York Times, 1996, [www.around.com/ariane.html](http://www.around.com/ariane.html).**
4. **Mackie, Kurt. "Adobe and Browser Makers Announce the End of Flash." Redmond Magazine 25 Jul. 2017. Web. 4/5/2018**  
<https://redmondmag.com/articles/2017/07/25/adobe-ending-flash-support.aspx>
5. **Erik Andersen, Yun-En Liu, Richard Snider, Roy Szeto, Seth Cooper, and Zoran Popović. On the Harmfulness of Secondary Game Objectives.**  
<http://grail.cs.washington.edu/projects/game-abtesting/fdg2011/fdg2011.pdf>, 2011



6. Hunicke, Robin, Marc LeBlanc, and Robert Zubek. "MDA: A formal approach to game design and game research." *Proceedings of the AAAI Workshop on Challenges in Game AI*. Vol. 4. No. 1. AAAI Press San Jose, CA, **2004**.
7. Owens, Thomas. "Is it reasonable to build applications (not games) using a component-entity-system architecture?" *StackExchange* 4 Feb. 2018. Web. 4/12/2018  
<https://softwareengineering.stackexchange.com/questions/186696/is-it-reasonable-to-build-applications-not-games-using-a-component-entity-system-architecture>
8. Haxe - The Cross-platform Toolkit. (n.d.). Retrieved from <https://haxe.org/>
9. HaxeFoundation. HaxeFoundation/as3hx. Retrieved from <https://github.com/HaxeFoundation/as3hx>



