# Occipitotemporal Representations are Modulated by Conceptual Knowledge and Interact with a Frontoparietal Network


Braunlich, K.<sup>1</sup> & Love B. C.<sup>1,2</sup> <sup>1</sup>University College London, <sup>2</sup>The Alan Turing Institute




#### Introduction

- Through selective attention, conceptual knowledge can emphasize informative stimulus features.
- Although this effect is well-known, its neural substrates are poorly understood.

#### Stimuli

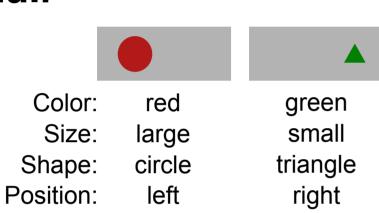







# **Hypothesized Attentional Effects**

Conceptual knowledge is often described as warping psychological space to accentuate behaviorally-relevant stimulus dimensions.

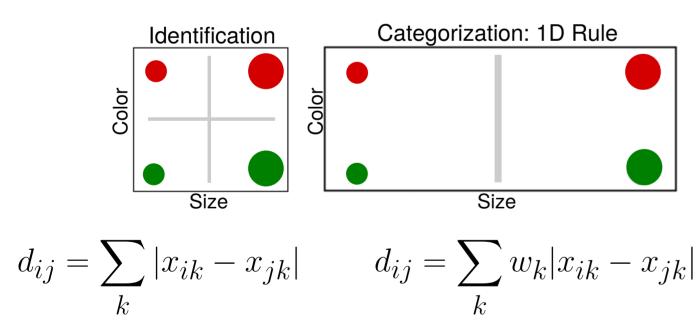

Example: Attention Influences Psychological Space. Left: During object identification, all stimulus dimensions are relevant. Right: In this example, only a single dimension is relevant, and decision-makers could ignore the irrelevant dimension.


#### **Binary Feature Representations**

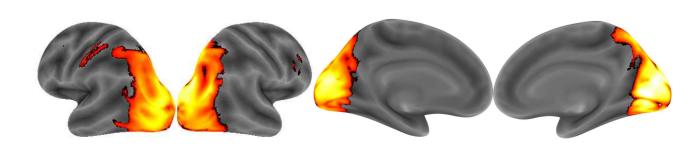

Visual Representations: A searchlight was used in conjunction with a cross-validated support vector classifier to identify regions representing the stimulus features. The strength of these representations reflected the attentional parameters, w.

# Representational Strength Connectivity


#### **Step 1: Dimensionality Reduction**

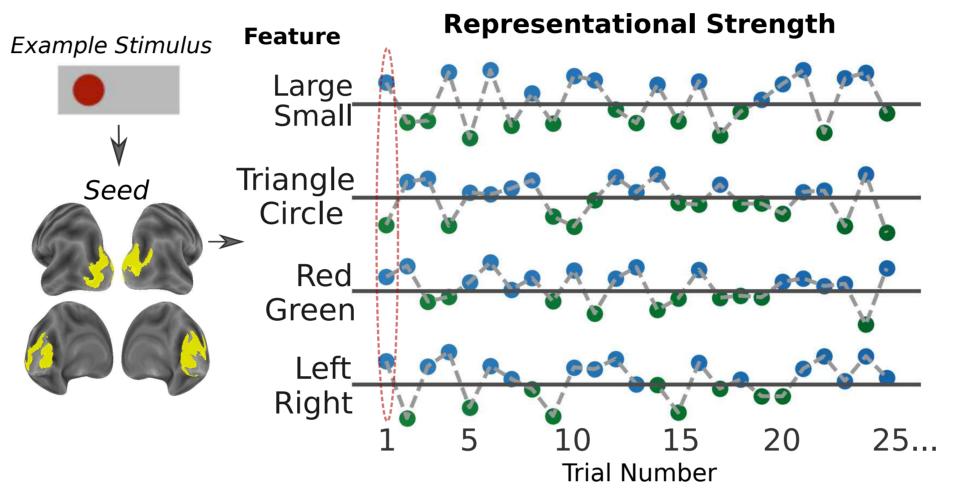

The neuroimaging data (from the seed) was projected onto a lower-dimensional subspace.

#### **Step 2: Cross-Validated Searchlight**

- A searchlight, in conjunction with cross-validated support vector regression, was used to identify regions capable of decoding the basis vectors.
- In a permutation test, the analysis was repeated, each time projecting the seed neuroimaging data onto a random subspace.

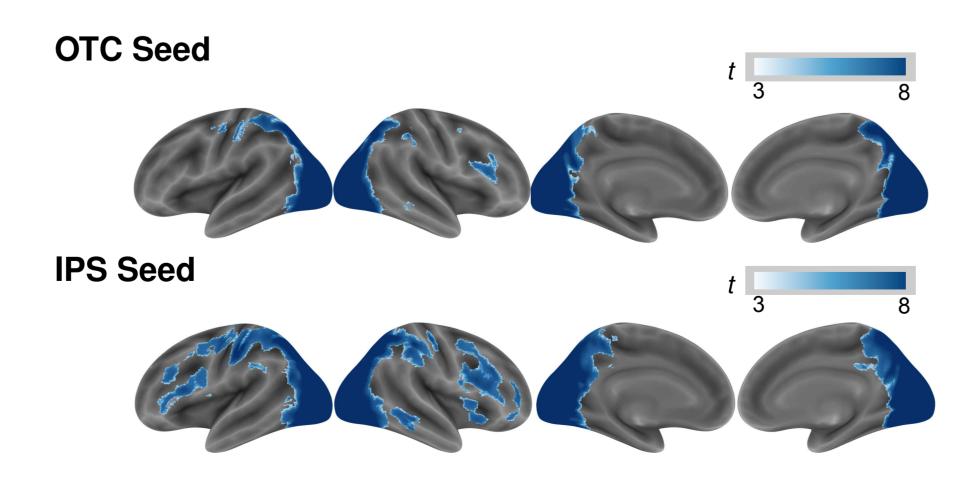

The results highlight regions capable of predicting the strength and sign of the binary stimulus feature representations in the seed.

#### Step 3: *Posthoc* Tests

- Each basis vector was decoded for each binary feature value separately (e.g., "triangle").
- Using the unsigned basis vectors, regression was used to investigate whether the representation of a given feature in the target predicted the representation of that feature in the seed, above and beyond predictions based on the other features in the seed.

# **Attention Modulates Connectivity**

- Using the unsigned basis vectors, the correlation between each feature representation in the seed and each target was calculated.
- Regression was used to determine whether these correlations reflected the attentional parameters, w.

# **OTC Seed IPS Seed**

Results: The correlation between the representational strength of the features in the seed (yellow), and each target (red), reflected the attentional parameters, w.

# Summary

- OTC feature representations reflect conceptual knowledge, and were communicated with IPS and right anterior insula.
- IPS feature representations were communicated with OTC, right anterior insula, and IFS.







**wellcome**trust