

Cube Combat

A 3D 3rd-person shooter created in C++ using Godot 4.6 and GDExtension

By Ken Burchfiel

Released under the MIT License. (See LICENSE file for copyright information for other repositories whose code I incorporated into this project)

GitHub repository: https://github.com/kburchfiel/godot_cpp_3d_demo

Note: I chose not to use generative AI tools to write this project's code or this README. It was important for me to understand what the code was doing, and I felt that LLMs would get in the way of that.

Introduction

Cube Combat is a 3D 3rd-person-shooter game that supports two to eight players (all of whom can watch the game on the same screen). It is coded entirely in C++ using Godot's GDExtension feature and the godot-cpp (<https://github.com/godotengine/godot-cpp>) library.

I created this project primarily in order to learn how to use GDExtension, together with Godot 4.6, to create a game in C++. Now that the project is more or less complete, I hope it can be a useful resource for other newcomers to C++ in Godot.

Note: I am still quite new to GDExtension, and my C++ skills are still developing as well—so this project and its corresponding source code likely have lots of room for improvement. However, they should still help both new and experienced developers become acquainted with C++ development in Godot. After all, an imperfect example is (generally) better than no example at all!

Launching the game

From *itch.io* (<https://kburchfiel.itch.io/cube-combat>):

To run this game, download the .zip file (together with the README); unzip it; and double-click on the executable (godot_cpp_3d_demo.x86_64) in order to run it. At this point, an executable is only available for Linux.

From *GitHub*:

Clone this repository; copy a compiled version of the godot-cpp library (more on this below) into a 'godot-cpp' folder within the repository; and then compile this folder itself by running `scons`. (More on this below as well. Note: I haven't yet tested out this setup, but it *should* work.)

Gameplay instructions

Goal

In this 3rd-person-shooter game, your goal is to outlast all other players. This will involve both hitting other players and avoiding their own projectiles. It only takes one hit to remove a player from the map, so be careful!

The game will also keep track of each player's overall win and hit count, though these can also be reset as needed (see below).

Controls

This game, being multiplayer-only, is meant to be played with game controllers such as Nintendo Switch Pro Controllers (which I used for testing purposes). The keyboard commands built into the input map are really just meant for development and debugging.

(The following commands may vary among controllers. You can of update them within the Godot editor as needed.)

Within the player-selection menu

- Right trigger: Join a game
- Launch a game: Hold down left and right trigger at the same time
- Holding down the left trigger for two or more seconds will reset all overall hit and win stats.
- Note: If you accidentally add a player to the game, simply launch and reset the game to return to this menu. (See below for more details)

Within a live game

- Fire: Right trigger. (This command will not work if the left trigger is also being held down.)
- Move forward and back: Left joystick (up/down)
- Strafe left and right: Left joystick (left/right)
- Rotate left and right: Right joystick (left/right)
- Holding down the left trigger for three or more seconds will return you to the player-selection menu while removing all hits scored in the current game from the overall-stats dictionary.

Tips

- When first starting a round, I suggest launching a practice round so that everyone can get acquainted with his or her controls. You can then reset out of this round (without having it affect your stats) by holding down the left trigger for three or more seconds.
- There are currently no limits on (1) how quickly you can fire projectiles or (2) how many you can fire within a game. I might update these settings within future versions of the game, though.
- There's no music—but feel free to play your own tracks in the background!

References and resources I used to create this project

(This list is incomplete; additional resources are mentioned within the code.)

- Version 4.6 of the Getting Started GDEXTension documentation page (GDEGS): https://docs.godotengine.org/en/4.6/tutorials/gdextension/getting_started_gdextension.html
- Version 4.6 of the Your first 3D Game tutorial (YF3DG): https://docs.godotengine.org/en/4.6/getting_started/first_3d_game.html

This tutorial doesn't include C++ references, but its GDScript and C# code snippets provide valuable 'hints' about what C++ classes, methods, and functions to use. The instructions provided for setting up a 3D project within Godot were very helpful as well, of course.

- godot-cpp library (godot-cpp): <https://github.com/godotengine/godot-cpp>

The *compiled* version of this library is an indispensable C++ reference.

Note: I used the latest master version of this repository available on 2026-03-06 (9ae37ac). This particular version can be found at <https://github.com/godotengine/godot-cpp/tree/9ae37ac8b9b14df5284dc3d4bf87e7d8b3327503>.

- My C++-based Your First 2D Game tutorial (YF2DGC++): https://github.com/kburchfiel/cpp_yf2dg_gd_4pt_6/tree/master

This project is based heavily on a similar tutorial by J-Dax for Godot 4.3 (<https://github.com/j-dax/gd-cpp>). (That tutorial was released under the BSD 3-Clause license; my copy is released under the MIT license.)

- Also of note is Vorlac’s GDEXTENSION documentation, available at https://vorlac.github.io/gdextension-docs/getting_started/quick-start/. (Note that at least some of it is AI-generated, so as Vorlac notes, it should be used with caution. Because of this, I personally chose not to reference it much at all—but you may very well find it to be highly useful.)
- The `example.cpp` (<https://github.com/godotengine/godot-cpp/blob/master/test/src/example.cpp>) file within the `godot-cpp` repository proved extremely helpful as well.

Steps involved in creating this project

(Note: More details on the code, including additional documentation and relevant links, can be found within the `src/` folder. I also plan to create a more detailed step-by-step guide at some point in the future in order to make this project easier for others to replicate.)

I should also note that I later revised certain updates—though I decided to keep their original content in place here to provide a more realistic look at the development process.)

Part 1: Initial setup

For my initial setup, I started with the source code found in GDEGS, but then updated it to accommodate my 3D setup. For instance, rather than use a `Sprite2D` as the basis for my ‘Mnchar’ (main character) class, I used `CharacterBody3D`, as this was the class referenced in YF3DG. (More on this in the following section.)

After compiling my code, I updated my project within the Godot editor to include a floor; a camera; a light source; and a shape for the player. (I had created this shape for a GDNative C++ project back in 2023 (https://github.com/kburchfiel/godot_demo_3d_gdnative_cpp_project).) When I added my `Mnchar` class to the project, I confirmed that it moved in a somewhat-circular fashion as instructed by my code:

```
Vector3 new_position = Vector3(10.0 + (10.0 * sin(
time_passed * 2.0)), 10.0 + (10.0 * cos(time_passed * 1.5)), 0);
```

(This code was based on similar code within GDEGS; I simply replaced ‘`Vector2`’ with ‘`Vector3`’ and added a 0 at the end to represent the third dimension.)

Here’s what things looked like at this point:

Part 2: Basic player movement

To get the player to move, I translated some of the GDScript code found in the Moving the player with code (https://docs.godotengine.org/en/4.6/getting_started/first_3d_game/03.player_movement_code.html) section of YF3DG to C++. (The `player.cpp` code within YF2DGC++ (https://github.com/kburchfiel/cpp_yf2dg_gd_4pt_6/blob) is mostly J-Dax’s own code (<https://github.com/j-dax/gd-cpp/blob/main/src/entity/player.cpp>)—proved helpful here.) I skipped the jump-related code and simply worked on getting the player to move left, right, forward, back, and diagonally using the arrow keys. (I was also able to get the player to rotate in the direction of its movement.)

This process also involved adding some movement commands to my project’s input map as instructed by YF3DG.

(Note: At one point, the player’s `movement_speed` attribute wasn’t appearing within my project editor. However, when I later reopened the editor, the attribute then appeared.)

I later modified this code to allow the player to strafe and rotate, thus freeing up many more movement options.

Part 3: Setting up projectiles

Since Godot’s Third Person Shooter (<https://github.com/godotengine/tps-demo>) demo uses the `CharacterBody3D` class for its bullets, I decided to do the same. (Since this is also the class on which my `Mnchar`

(player) class is based, I copied and pasted my `mchar.h` and `mchar.cpp` code as a basis for my projectile code.)


I added lines of code for my new Projectile class (e.g. `#include "projectile.h"` and `GDREGISTER_CLASS(Projectile);` to `register_types.cpp`).

Within the editor, I created a new scene (which I named `projectile.tscn`); chose my Projectile class as the root node; and added a `Node3D` as a child (which I named `Pivot`); added a `MeshInstance3D` to this `Node3D`. (These steps were based both on https://docs.godotengine.org/en/4.6/getting_started/first_3d_game/02.player_input.html and on https://kidscancode.org/godot_recipes/4.x/3d/rolling_cube/index.html). Since I wanted to make my projectile a green rectangular prism, I turned the `MeshInstance3D` into a box mesh; added a 'StandardMaterial3D' material; changed its albedo to green (`#00FF00`); and changed the x, y, and z values of its scale to 0.3, 0.3, and 1, respectively.

Next, I added a `CollisionShape3D` to the Projectile class; chose a `BoxShape3D` for its Shape entry; and changed its scale to the same values (0.3, 0.3, and 1 for x, y, and z, respectively) that I had chosen for my `MeshInstance3D`.

I then added in code that made the `projectile.tscn` scene accessible to my `Mchar` class. This way, the `Mchar` class could fire bullets by loading the `projectile.tscn` file; casting this scene to a projectile; and then initializing the projectile's transform with the player's transform. (A crucial part of this process involved reloading the editor after updating my code; going to the `Mchar` entry within my `main.tscn` scene tree; clicking on the new Packed Scene entry within the Inspector menu; and choosing the `projectile.tscn` file.)

I then updated my `projectile.cpp` and `Mchar.cpp` code to ensure that the bullets would travel in the same direction that the player was facing. This involved a decent amount of trial and error. Some key steps were (1) to initialize the bullet's transform as the `Mchar`'s `Pivot`'s local transform (as it's that `Pivot`, rather than the `Mchar` itself, that we adjust when moving the player); (2) to perform a local translate of the pivot's transform so that the bullets would start a little ways away from the player; and (3) to adjust the projectile's basis so that the bullets would travel in the intended direction. I also needed to add the bullet as a child of the player's parent scene so that the player's subsequent movement wouldn't affect the bullet's movement.

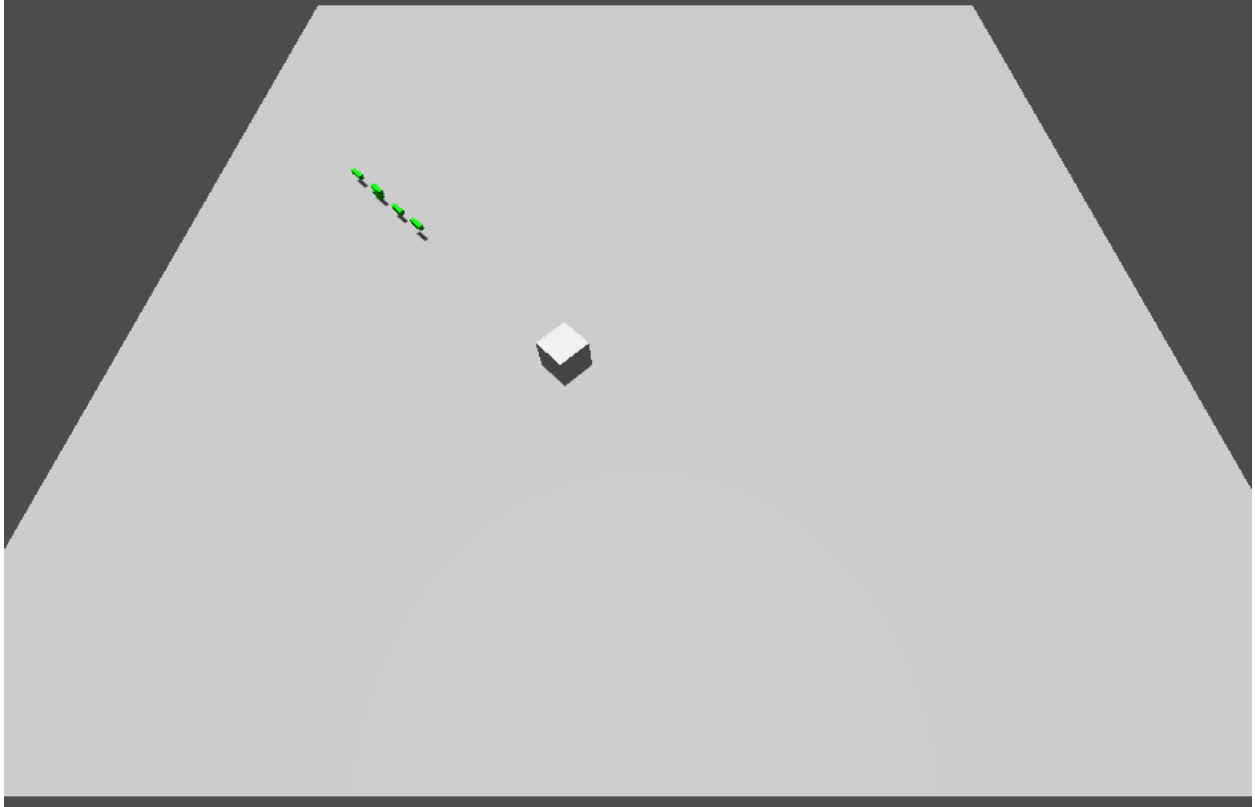

Part 4: Adding multiplayer support

Now that I had a simple, but functional, player class (Mnchar), I wanted to make it possible for multiple players to control multiple Mnchar objects independently.

To prepare for multiplayer gameplay, I moved my Mnchar class to its own scene, then added two copies of this scene to main.tscn. At first, the game crashed (with a Signal 11 error code) when I attempted to do so; I eventually realized that this was because the Mnchar code references a Pivot class, and this class needed to be present before I could successfully add my Mnchar class. Thus, I (1) initialized my Mnchar scene (mnchar.tscn) as a CharacterBody3D node; (2) added a Node3D as a child of this node; (3) renamed that Node3D to 'Pivot'; and (4) changed the CharacterBody3D node to a Mnchar node.


The easiest option for enabling multiplayer functionality, as shown in some online guides, would be to delegate different parts of the keyboard to different players. However, this wasn't ideal for two main reasons. First, I wanted players to be able to use video game controllers to play the game, and it would be tricky to delegate different parts of the controllers to different actions. (Even if I did so, mischievous players could then just hit the buttons corresponding to the other player's movements anyway!)

But more importantly, I wanted to allow up to 8 players to compete at the same time—which more or less necessitated that I allow the same buttons on different controllers to map to different players' inputs.

I implemented a multiplayer setup as follows. First, I updated my project's input map (accessible via Project -> Project Settings -> Input Map) so that it would have multiple copies of each input. (I started with two copies for a 2-player game, but I can later expand this to eight copies.) I added a numerical suffix to the names of these inputs (e.g. "move_right_0", "move_right_1") in order to distinguish them from one another.

Next, I used those same numbers to specify which device would be linked with that input. (All movements ending in "_0" would be linked to Device 0; all movements ending in "_1" will be linked to Device 1; and so on. There are eight device numbers (ranging from 0 to 7) to choose from.

Here are all of my “_1” inputs: (There’s a similar set of “_0” inputs, though those are also mapped to keyboard inputs for convenience’s sake.)

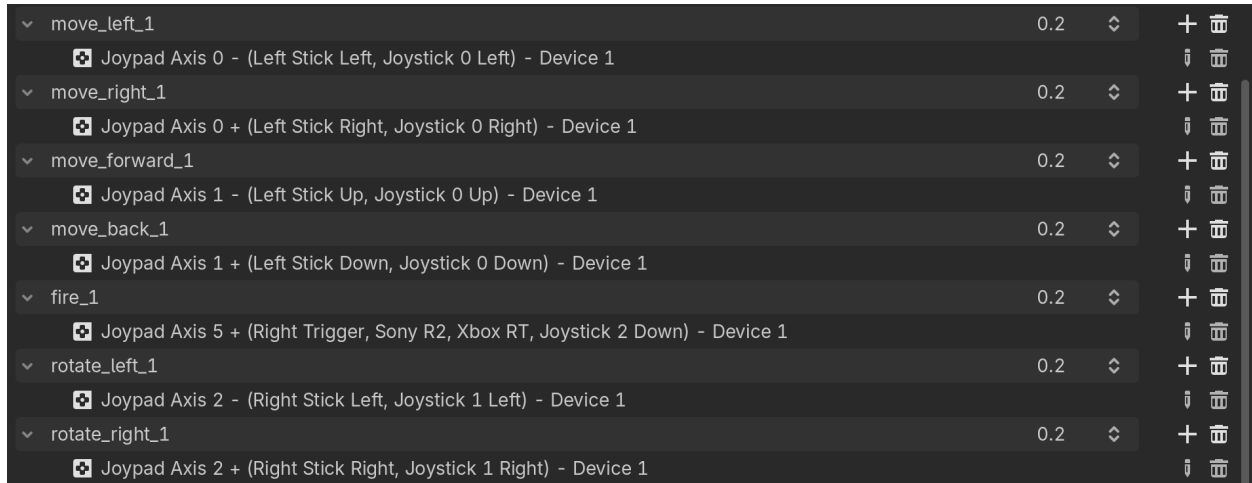

The final step was to update my code such that each player could be linked to one, and only one, set of these inputs. I first added a new String variable (`mnchar_id`) that could store a unique ID for each Mnchar. I made this variable accessible within the editor using my existing `movement_speed` variable as a reference. I then added this ID as a suffix to my original input commands. Here’s an example from `Mnchar::_physics_process()` within `mnchar.cpp`:

```
x_direction = input->get_axis("move_left_"+mnchar_id,
    "move_right_"+mnchar_id);
```

If the character’s `mnchar_id` is 0, the code will use `move_left_0` and `move_right_0` as the basis for its input. Meanwhile, if `mnchar_id` is 1, the code will listen for `move_left_1` and `move_right_1` for its inputs. Since the `_0` movements and `_1` movements are mapped to different devices, this approach allows different devices to get mapped to different players.

A crucial step here, of course, is to make sure that each Mnchar has a different `mnchar_id`. I accomplished this within the editor, but I’m quite sure this can be achieved via code as well (which would be helpful if I used C++ code, rather than the editor, to add Mnchar objects to the game area.)

The following resources helped me figure out this approach:

https://www.reddit.com/r/godot/comments/13ikz4u/best_way_to_handle_controller_input_for_local/

<https://github.com/remram44/godot-multiplayer-example>

https://www.gdquest.com/library/split_screen_coop/

<https://godotassetlibrary.com/asset/QdddqG/multiplayer-input>

https://kidscancode.org/godot_recipes/3.x/2d/splitscreen_demo/index.html

Part 5: Removing players upon collision with a projectile

This step involved adding a `Mnchar::_on_projectile_detector_body_entered()` function within `mnchar.cpp` and `mnchar.h`; creating a new `Area3D` node within the `Mnchar.tscn` file in the editor and connecting its `on_body_entered` signal to this function (see screenshots below); and updating the collision layers and masks for the Mnchar and Projectile classes. (The Jumping and squashing monsters (https://docs.godotengine.org/en/4.6/getting_started/first_3d_game/06.jump_and_squash.html) section of Godot’s Your First 3D Game tutorial proved very helpful here.)

×

Connect a Signal to a Method

From Signal:

body_entered(body: Node3D)

Connect to Script:

Filter Nodes

Go to Source

▼  Mnchar

▼  Pivot

 Character

 CollisionShape3D

▼  Projectile_Detector (Connecting From)

 CollisionShape3D

Scene does not contain any script.

Receiver Method:

_on_projectile_detector_body_entered

 Pick

Advanced


☐

Cancel

Connect

Connecting the signal

7

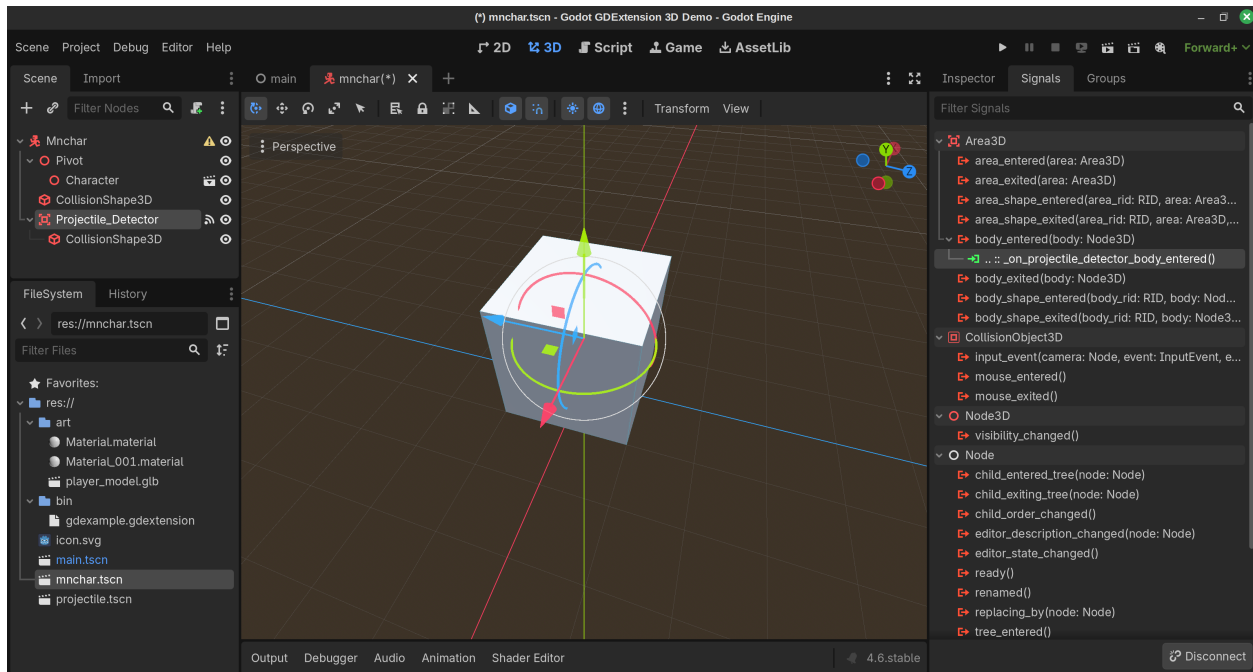

The player's Signals list following this update

In addition, I updated my projectile code to remove projectiles from the screen after they have been active for at least one second.

Part 6: Creating separate colors for each Mnchar and its corresponding projectiles

I wanted to assign different colors to different main-character objects in order to make them easier to distinguish. This first involved recreating the mesh used for my Mnchar object in Godot; I had created it in Blender a while back, but I figured that reconstructing it in Godot would allow for more flexibility. (Since each Mnchar's shape is simply a 2x2x2 cube with a 0.25x0.25x0.25 'turret' attached to the front, this didn't take long to accomplish at all.)

Next, I created a second copy of my mnchar.tscn and projectile.tscn scenes, then assigned `_0` and `_1` suffixes to their filenames. I made the albedos of the Mnchar and Projectile objects in `mnchar_0.tscn` and `projectile_0.tscn` to red; next, I made the Mnchar and Projectile objects in `mnchar_1.tscn` and `projectile_1.tscn` green. (I also set the ID of the Mnchar in `mnchar_1.tscn` to 1; the ID of the Mnchar in `mnchar_0.tscn` was kept as 0. That way, each player could be controlled independently as discussed earlier.

Part 7: Simplifying player setup

With help from RamblingStranger on discord (<https://discordapp.com/channels/212250894228652034/342047011778068481/148>) I was able to update Mnchar colors within my C++ code based on Mnchar IDs. I also added `main.cpp` and `main.h` scripts that configure, then add, Mnchar characters into the game area. (This will make my game setup more flexible, as it will ultimately allow players to specify how many main characters to add to the game.)

Part 8: Configuring a HUD and a simple start menu

At this point, the game was configured to begin immediately with two players whenever it was launched. I instead wanted to allow the players to choose how many characters to include, *then* begin the game.

To implement this feature, I created a new Hud class, then instantiated it as a child of my Main.tscn scene. I then created a `_process` function within Hud that would let me both (1) specify the number of characters to include and (2) start the game when requested by the user. I added a "start_game" signal to my Hud code

and connected it to an `_on_hud_start_game` function within `Main.cpp` that would (1) retrieve the number of players requested by the player and (2) add that number of players to the scene.

I still need to add in player inputs, colors, and start locations to accommodate 3-8 players, but the game is close to being able to support up to 8 players at this point.

Part 9: Adding in maps

I then added in two `TypedDictionaries` within `main.h`, one for player colors and one for starting locations, that my `main.cpp` code could use to determine which starting locations and values to assign to each player. I'll need to modify these starting locations to make them more even, however; in addition, I'll need to add in code that rotates each player towards the center. (All are currently facing away from the camera, which isn't ideal for 3 out of the 4 sides of the game area.)

Part 10: Determining a winner

In order to figure out who (if any) won the game, I first needed to create a set that would store all active `Mnchar` IDs. Next, I updated my `mnchar.cpp` code such that each `Mnchar` would emit a signal after being hit. By connecting this signal to my `main.cpp` code, I could remove `Mnchars` from the active-`Mnchar` set upon being hit. (This also required that I connect the `Mnchar`'s signal to a function within `main.cpp` within my `main.cpp` code, since a `Mnchar` is not part of my `Main.tscn` scene.)

I then added in code that would send game-over information to my `Hud` scene once this set contained fewer than 2 characters. As part of this update, I also allowed the player-selection menu to return once a given game was complete.

Part 11: Sharing statistics for the most recent game and all games within the session thus far

I also wanted the game to show information about how many hits each player had scored within the most recent game—along with how many hits (and wins) each player had achieved across rounds. In order to implement these updates, I first allowed information about the firing `Mnchar`'s ID to get stored within each projectile. Next, I updated my `Mnchar::_on_projectile_detector_body_entered` command so that it could extract these firing-`Mnchar` IDs, then send them over to `main.cpp`'s `on_mnchar_mnchar_hit()` function.

I then added dictionaries that could store current-game hit counts for each player as well as overall hit and win counts. Additional code updates allowed these dictionaries' data to get updated whenever a player got hit or a game ended. Next, I updated my end-of-game code to output the contents of the current-game-hits dictionary along with the winner. I also created a function (`Main::update_constant_message()`) that would convert the information in my overall hits and wins dictionaries into a string, then display that string within a new `Label` child of my `Hud` class.

Part 12: Adding a reset option and making other improvements

Although it's handy to have a running tally of overall stats, I realized it would also be useful for players to be able to reset these stats. For instance, players may want to be able to play an initial practice round in which they can get used to the controls and identify their character, then reset their stats so that this round 'doesn't count.'

Therefore, I added in a new input (`reset_overall_stats_0`) that, when pressed continuously for two seconds, would replace the existing overall-stats dictionaries with empty ones. I plan to map this to the left trigger, since this button isn't currently used for any other purpose.

I also made several other improvements at this point. First, I added in a dictionary of color names (e.g. 'Blue', 'Green') that would allow players to identify the character corresponding to each ID. Second, I added in code that makes projectile colors equal to their firing characters' colors. Third, I added a dictionary of rotation values that allow all players to face towards the center of the screen.

Part 13: Creating a more flexible player selection setup

I had previously specified the number of players to include in each round by having the first player choose a number between 2 and 8; however, this setup isn't that flexible, since players may want to sit some games out and then come back later. Therefore, I updated `hud.cpp` to allow players to add themselves to the game by clicking the Fire button on their controllers. That way, players can decide whether or not to join each game.

I also updated my code for resetting overall stats to allow any player, not just the first player, to reset these statistics. In addition, any player can now launch a game by pressing both the `reset_overall_stats` and `fire` buttons. (However, I still need to add in all of the corresponding button mappings within the editor.)

Part 14: Adding walls and inputs


Using a StackOverflow answer by eagleDog (<https://stackoverflow.com/a/79419758/13097194>) as a reference, I added walls around my game area that would prevent players from being able to leave it.

In addition, I began adding input settings for additional devices in order to accommodate my multiplayer setup. To reduce the number of repetitive steps needed to complete this project, I created a C++ script (available within this repository as `/input_map_creator/input_map_creator.cpp`) that would allow me to create duplicate input settings for each device ID. For more details on this approach, along with other required steps, see the `input_map_creator.cpp` file.

(To be honest, simply creating these inputs within the editor may have been simpler, as this process involved some busywork also. Nevertheless, getting to practice C++ is rarely a bad thing! :))

(Thanks to quentincaffei on Reddit for helping inspire this approach: <https://www.reddit.com/r/godot/comments/k4xcqh/com>)

Here's what the game looked like at this point:

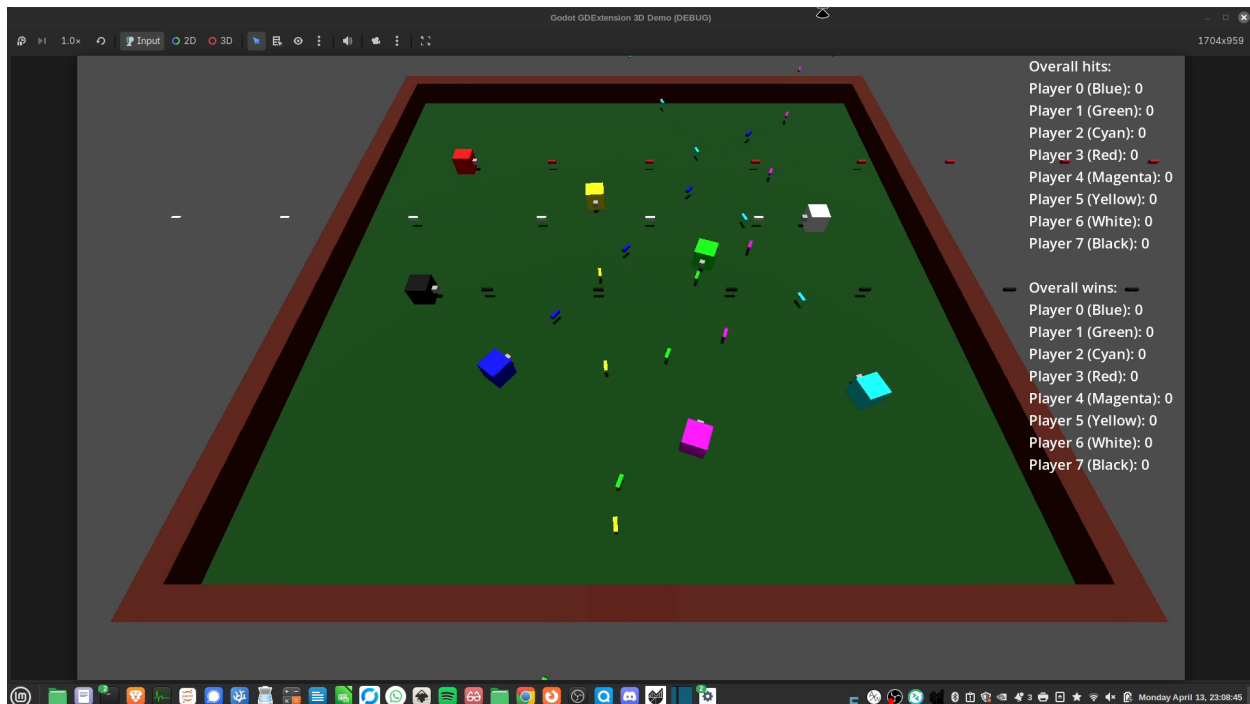

Now that I had a working, 8-player game, I decided to finish up this project and revise my code. There are plenty of ways the code (and game) could further be extended and improved, but I figured that this would be a decent stopping point. My next step will be to create a step-by-step guide that can help newcomers (like myself!) to C++ in Godot to become familiar with the GDEExtension system.

I hope that this project will prove useful in your own game-development endeavors!

Troubleshooting notes

- I sometimes found, particularly after compiling my C++ code, that the Projectile.tscn scene would sometimes disappear from my Packed Scene entry within my Mnchar’s properties. (An “empty” message would appear in its place.) This would then cause the game to crash if I attempted to fire a projectile, as Godot wouldn’t know what scene to use as the basis for projectiles. I’m not sure whether this is due to a glitch within Godot 4.6 or some issue with my own setup, but either way, the fix was thankfully quite simple: I simply had to reload the projectile.tscn scene, a process that takes only a few clicks.
 - However, I think this *also* sometimes caused the editor to crash when I attempted to reopen the editor. (I think what happened was that (1) the Mnchar.tscn reference within main.tscn got lost; (2) the editor then attempted to open an active Main scene; and (3) it then crashed because it didn’t know what packed scene to load. Removing the reference from my code (e.g. by removing `reinterpret_cast<Mnchar*>(get_mnchar_scene()->instantiate());` from main.cpp or adding `return` before that line); recompiling the script; loading the scene; adding the reference; and then recompiling the script helped fix this.

[Note to self: the packed scene entry within main.tscn consists of two lines. The first line, located right below `[gd_scene format=3 uid="uid://cqow47bch5ocs"]`, reads:

```
[ext_resource type="PackedScene" uid="uid://dc3nje2ppsfhy" path="res://mnchar.tscn" id="1_ig7tw"]
```

Another line, located right below `[node name="Main" type="Main" unique_id=1443214972]`, reads:

```
packed_scene = ExtResource("1_ig7tw")
```

Similarly, for the mnchar.tscn file, below the line

`[gd_scene format=3 uid="uid://dc3nje2ppsfhy"]`, you should see:

```
[ext_resource type="PackedScene" uid="uid://ckhuieb6lfi2" path="res://projectile.tscn" id="1_0j8lf"]
```

Then, below `[node name="Mnchar" type="Mnchar" unique_id=1052373598]`, you should see:

```
packed_scene = ExtResource("1_0j8lf")
```

If the game crashes again, try pasting these lines into your main.tscn and mnchar.tscn files.]

- As mentioned within the Multiplayer section: If you’re trying to add a GDExtension class to a scene, make sure that the child nodes referenced by your C++ code (e.g. the Pivot node in the case of the Mnchar class) are present within the editor. See the Multiplayer section for more details.
- My game crashed when I attempted to use a `std::Map()` to assign colors to players based on their ID. Therefore, I used a `TypedDictionary` (see https://docs.godotengine.org/en/stable/engine_details/architecture/core_types) instead.
- If you’re trying to add a new GDExtension scene, you’ll need to make sure that all the nodes referenced by that scene are present within your code. For instance, before you can make the Hud class the root node of hud.tscn, you’ll need to make sure to have a Label named ‘Message’ present as a child of your root node.

This might seem like a Catch 22: how can you create a child of a root Hud node if you can’t add the Hud node to begin with? The solution is to make the class that your GDExtension class extends (CanvasLayer, in the case of Hud) the root node of the scene; add all child nodes referenced by the code to it; and *then* switch the extended class to a Hud class. (You can do so by right-clicking on the extended class (e.g. CanvasLayer); selecting ‘Change Type’; and then selecting your GDExtension class. You may then want to rename the class to your GDExtension class in order to avoid any confusion.)

- If the Godot editor doesn't appear to know about a newly-created GDExtension class, try restarting it. If it still doesn't appear, make sure you've added a reference to this class within your `register_types.cpp` file. (For instance, to get a custom Hud class to appear, make sure to (1) add `GDREGISTER_CLASS(Hud)` within `register_types.cpp`'s initialization function (called `initialize_example_module()` in this project) and (2) add `#include "hud.h"` within your list of include statements.
- If one or more of your GDExtension classes suddenly show up as missing within the editor (as indicated by red Xs next to their name), you might have an issue with one of the functions that you've bound as a method (or its corresponding `bind_method()` function). Try commenting out such functions as needed until the class reappears within Godot, then revise your code as needed. (In one case, I had forgotten to add `Main::` before one of my bound functions in `main.cpp` file—which then caused all of my classes to fail to load. Adding that text back in resolved the issue.)

Finding C++ code equivalents to GDScript code

When first getting acquainted with C++ in Godot, you might wonder how you can find C++ code equivalents for the GDScript code found within tutorials and other documentation materials. My search for a C++-based `CharacterBody3D` class shows what this process might look like for you.

Since YF3DG has GDScript and C# (but not C++) code excerpts, I first needed to double-check the name for this class within the C++ API. A content search within my `godot-cpp` library for 'characterbody' turned up two relevant code files:

* `godot_cpp/classes/character_body3d.hpp` (I needed to include this file within the C++ code for my main

* `godot-cpp/gen/src/classes/character_body3d.cpp`

Using these files, I was able to confirm that this class is also titled `CharacterBody3D` within the C++ API. I also confirmed that this class has the `move_and_slide()` function referenced within YF3DG. (A content search for `move_and_slide` would also have helped me locate the `character_body3d.cpp` file.)

Once you become more familiar with the `godot-cpp` library, you may be able to bypass the process of looking up GDScript code by going directly to a particular source file of interest. For instance, to learn how to erase an entry from a `HashSet`, you can simply go to `godot-cpp/include/godot_cpp/templates/hash_set.hpp` and check for a relevant method or function (e.g. 'erase()'). In many cases, a function for a GDExtension type may be similar to a C++ STL function (as is the case with `erase()`: see <https://en.cppreference.com/w/cpp/container/set/erase.html>.)

Remember that a given function might be available within a class's parent. For example, you won't find `has()` within `typed_dictionary.hpp`, but you *will* find it within `dictionary.hpp` (`godot-cpp/gen/include/godot_cpp/variant/dictionary.hpp`).

Certain C++ API code, however, may not have any GDScript equivalent. In that case, you may need to instead look at the reference information for the Godot Engine's own source code—or directly at the code itself. For example, the Core Types page (https://docs.godotengine.org/en/stable/engine_details/architecture/core_types.html) was a huge help when adding dictionaries and sets into my code.

Of course, existing code that makes use of the C++ API can be very useful as well. For instance, the source code for the 'test' section of the `godot-cpp` project (<https://github.com/godotengine/godot-cpp/tree/master/test/src>), such as the `example.cpp` file (<https://github.com/godotengine/godot-cpp/blob/master/test/src/example.cpp>), was a lifesaver when I was trying to figure out how to get a `TypedDictionary` to work with my project. See the 'References and resources' section near the top of this page for more examples.

The `gdnative-gdextension` channel within the Godot-engine Discord (<https://discord.com/invite/godotengine>) is another great resource to bookmark. I'm very grateful to the participants who helped clarify the questions I asked of them there.

Don't give up!

I certainly went through periods of frustration when working on this project. The game would crash without my understanding why; a seemingly-simple update took much longer than expected to implement; documentation on essential processes seemed hard to come by. However, as time went on, I found my confidence with C++—and my understanding of the editor—slowly building.

My personal belief is that these challenges are actually a crucial step towards gaining expertise in the language. It would have been nice to find answers right away, of course, but the hours I spent on debugging and testing helped me become much more acquainted with the editor. Plus, it felt *so good* once things finally worked!

So, if you find yourself going through challenges and frustrations of your own, don't give up—and remember that those challenges will make you a stronger developer in the end.

Saint Carlo Acutis, Pray for Us!