

NVIDIA CUDA



Introduction to Accelerated Computing using CUDA

2021.08.04

Karthik Bala


KBVIS Software Pty. Ltd., Brisbane, Australia

<http://kbvis.com>

3d@kbvis.com




About KBVIS

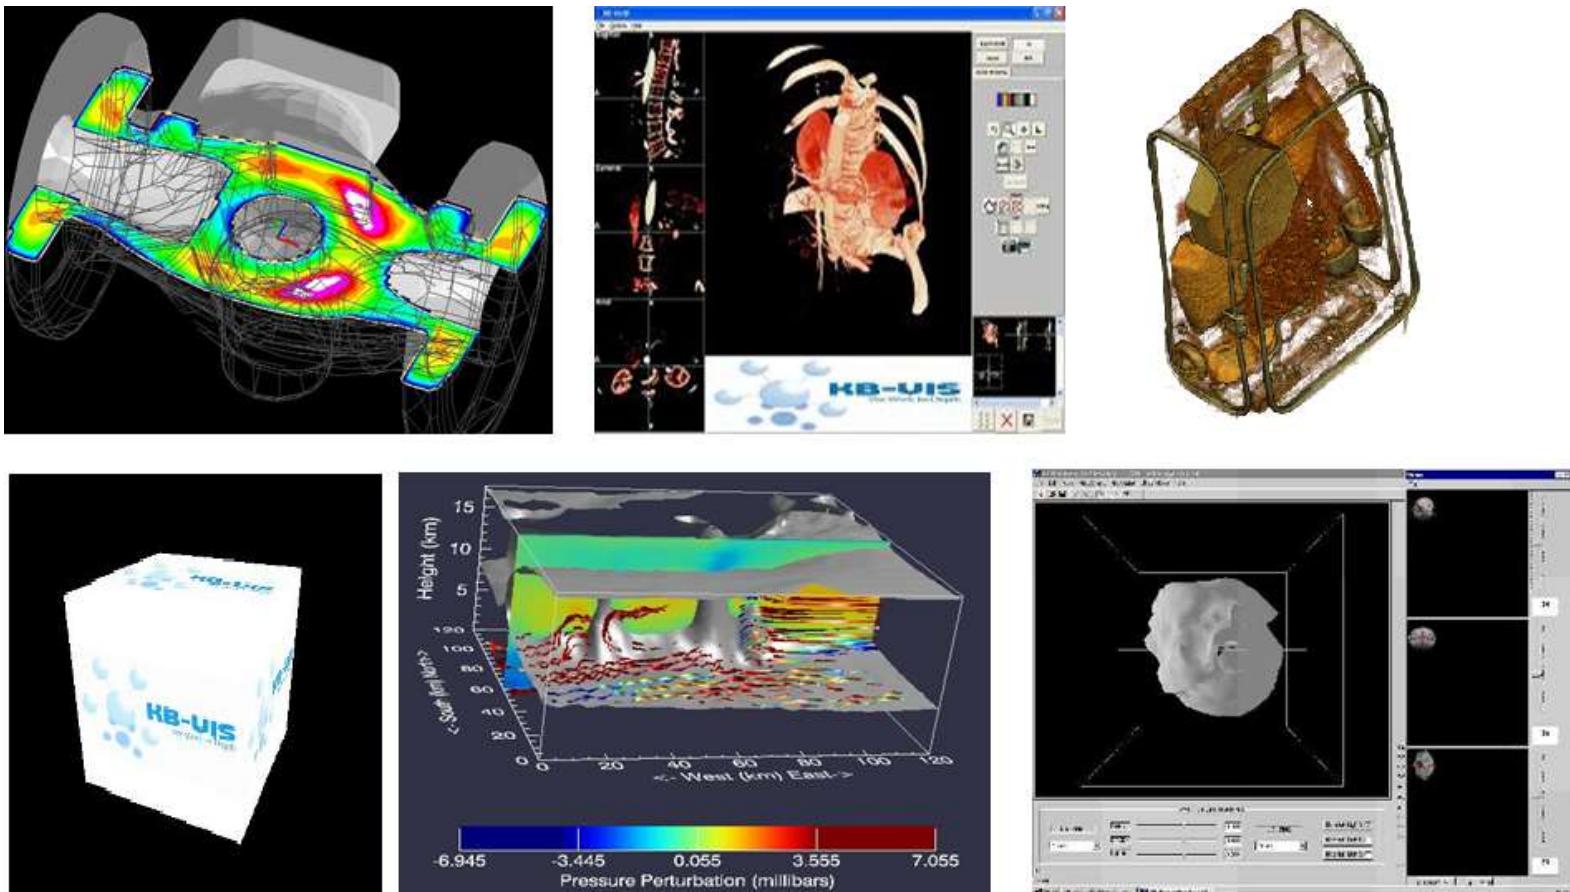

Clients



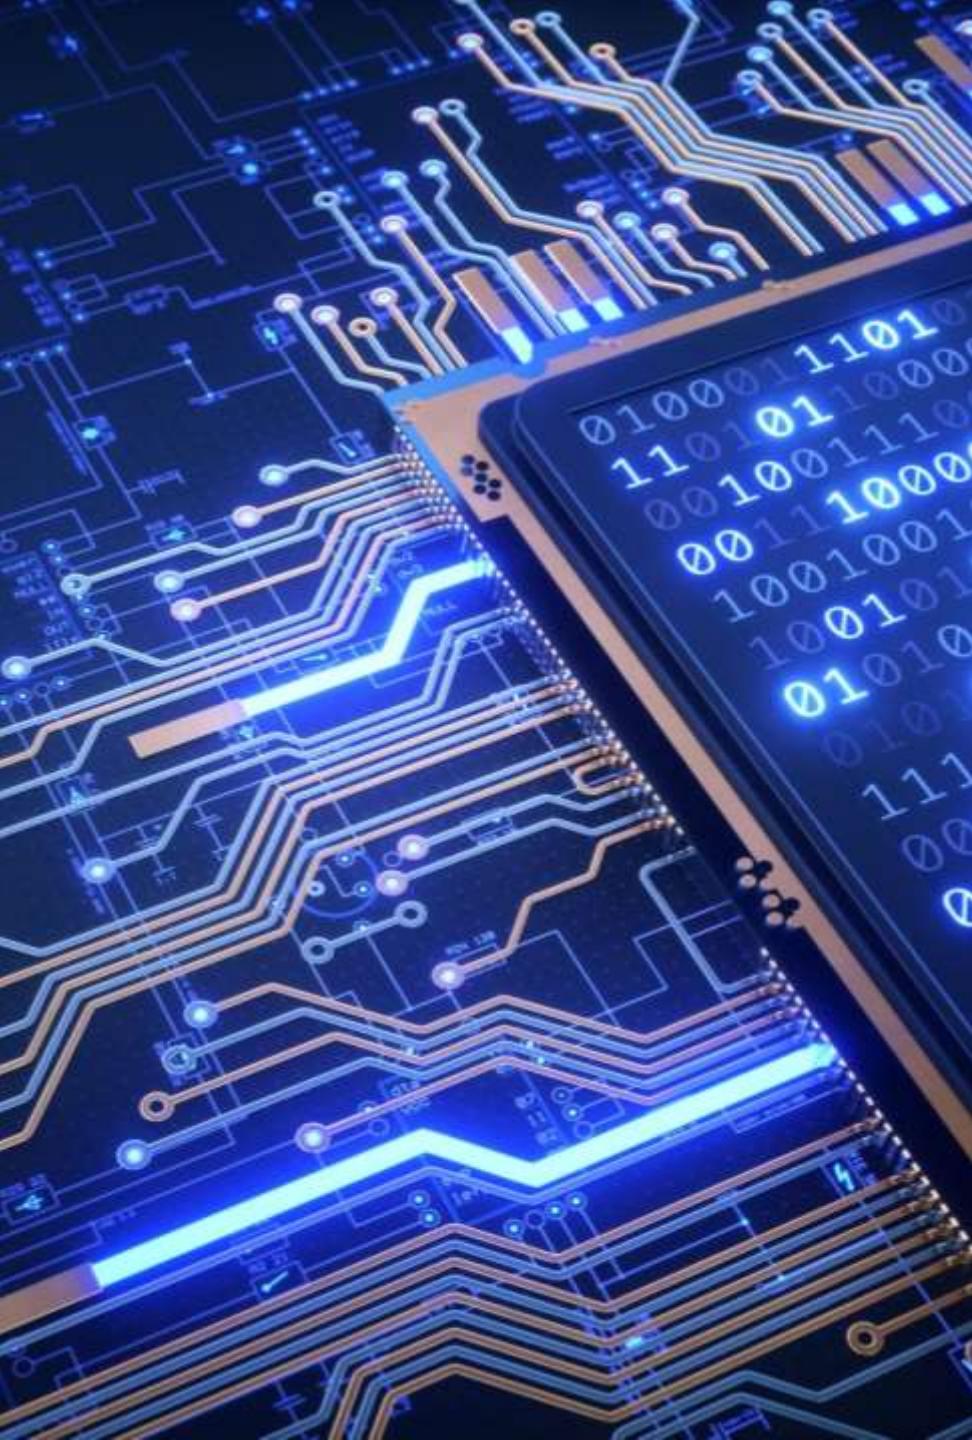

DAY 1

- CUDA - Background, History, Motivation
- Introduction to Massively Parallel Computing
- Introduction to GPU-based Programming
- CUDA Overview
- Getting Started with CUDA
 - CUDA SDK, Samples (Windows) - Overview
 - Nvidia Courseware, VM usage, Exercises - Overview
- Anatomy of a CUDA Program
 - Introduction to CUDA Syntax
 - “Hello World”
 - Vector Addition





Agenda (tentative)

- DAY 2
 - CUDA Memory Model
 - Unified Memory
 - Thread Hierarchy
 - Introduction to Shared Memory
- DAY 3
 - Shared Memory
 - Memory - Best Practices
- DAY 4
 - Asynchronicity
 - Streams
 - Dynamic Parallelism
 - CUDA SDK Samples
- DAY 5
 - Scan/Reduction
 - Atomic operations
 - CUDA SDK Samples
- DAY 6
 - Image Processing
 - Textures
 - Graphics Interop
 - CUDA SDK Samples
- DAY 7
 - Profiling and Debugging
 - Nsight
- DAY 8
 - Advanced Topics – Quick Peek
 - Tools/Libraries
 - Questions / Recap


Feel free to suggest changes/additions!


Dawn of GPGPU

- Since 2005 – Shift to Parallelism rather than Transistor-density
- GPUs are designed for massively parallel computation:
 - Vertex and Fragment Shaders run in parallel – data locality (Cg, GLSL, HLSL)
 - Graphics/Shading essentially floating point computation
- GPGPU aimed to exploit graphics hardware for computation
- CPU – high complexity, low latency
- GPU – high throughput, data-centric

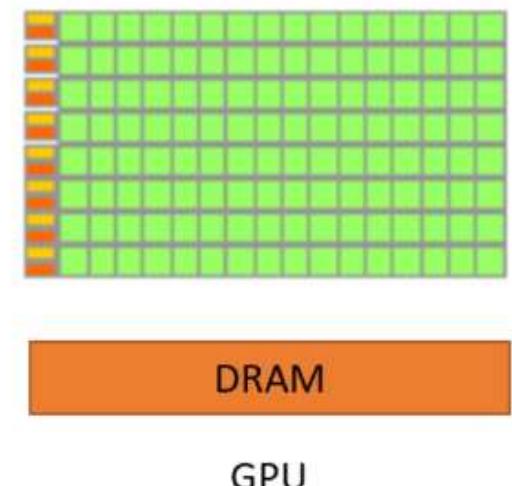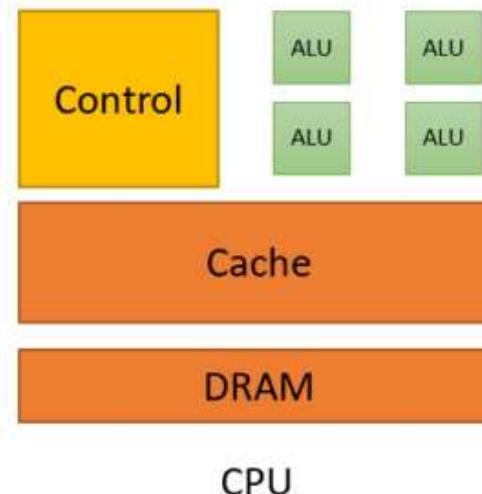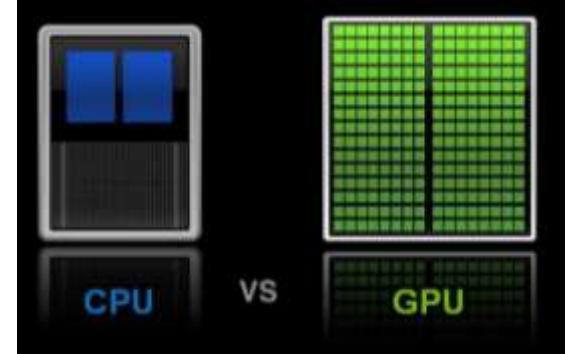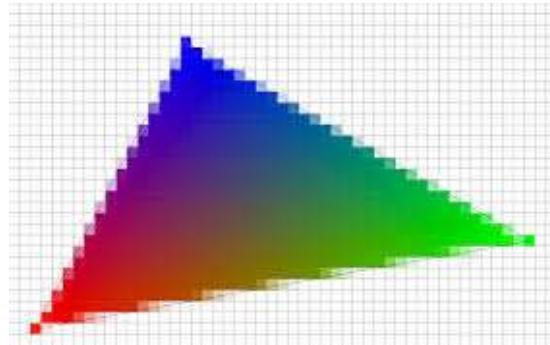

GPGPU Evolution

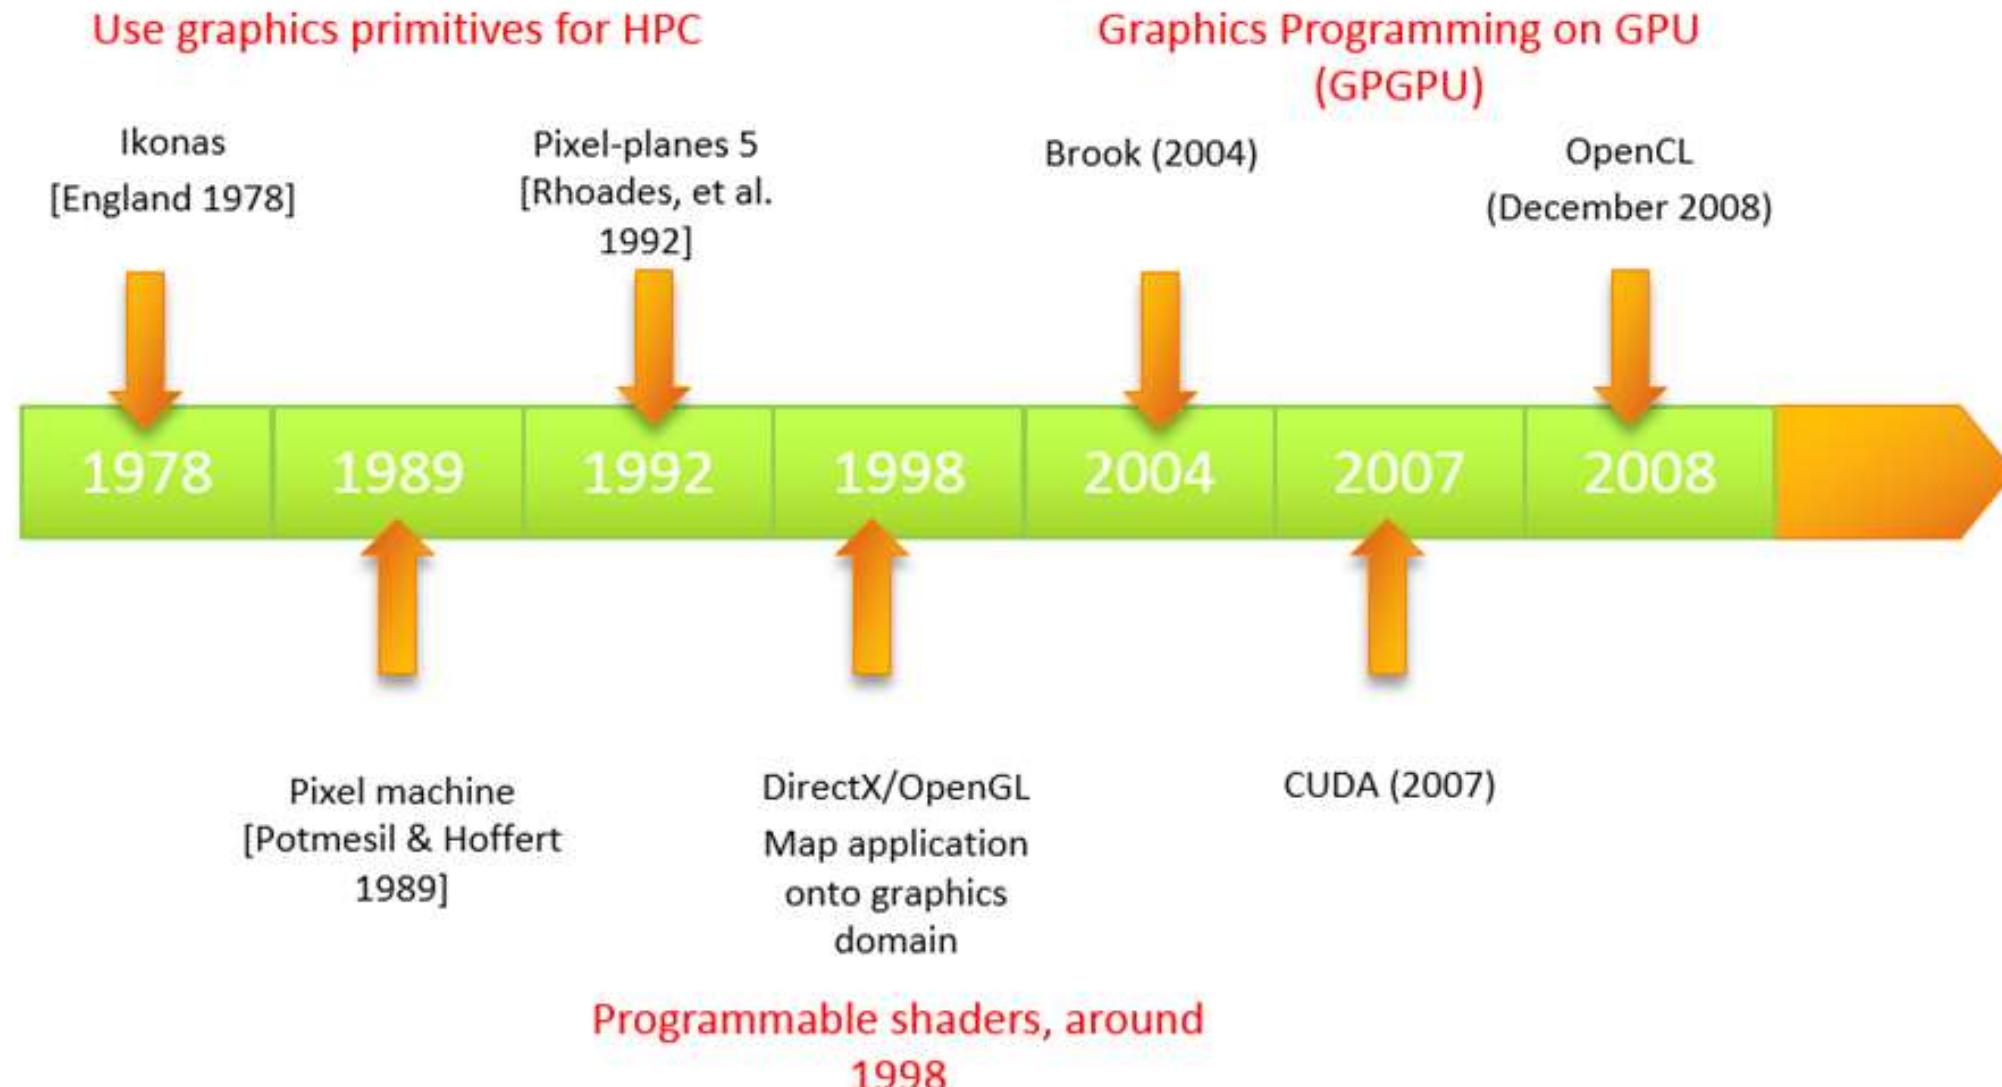


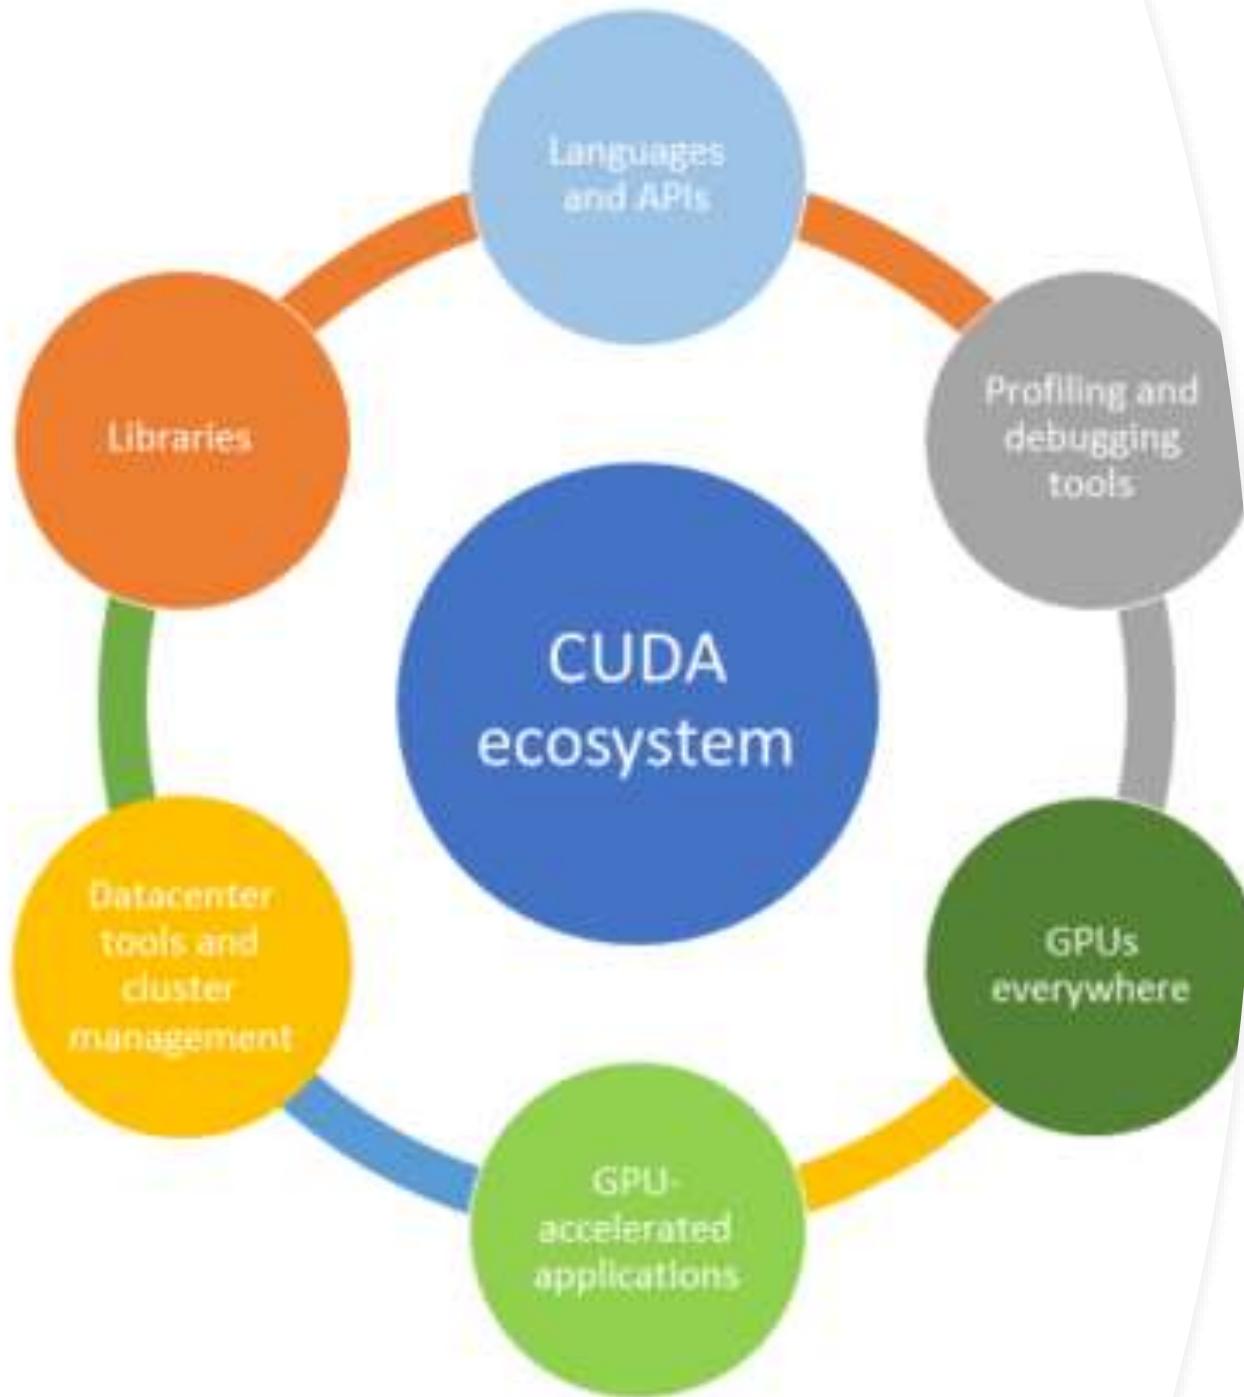

CUDA Ecosystem

- HPC
- Medical Imaging
- Simulation
- Graphics & Visualization
- Computer Vision
- Data Science
- Machine Learning, AI
- Autonomous Vehicles

Introduction to CUDA

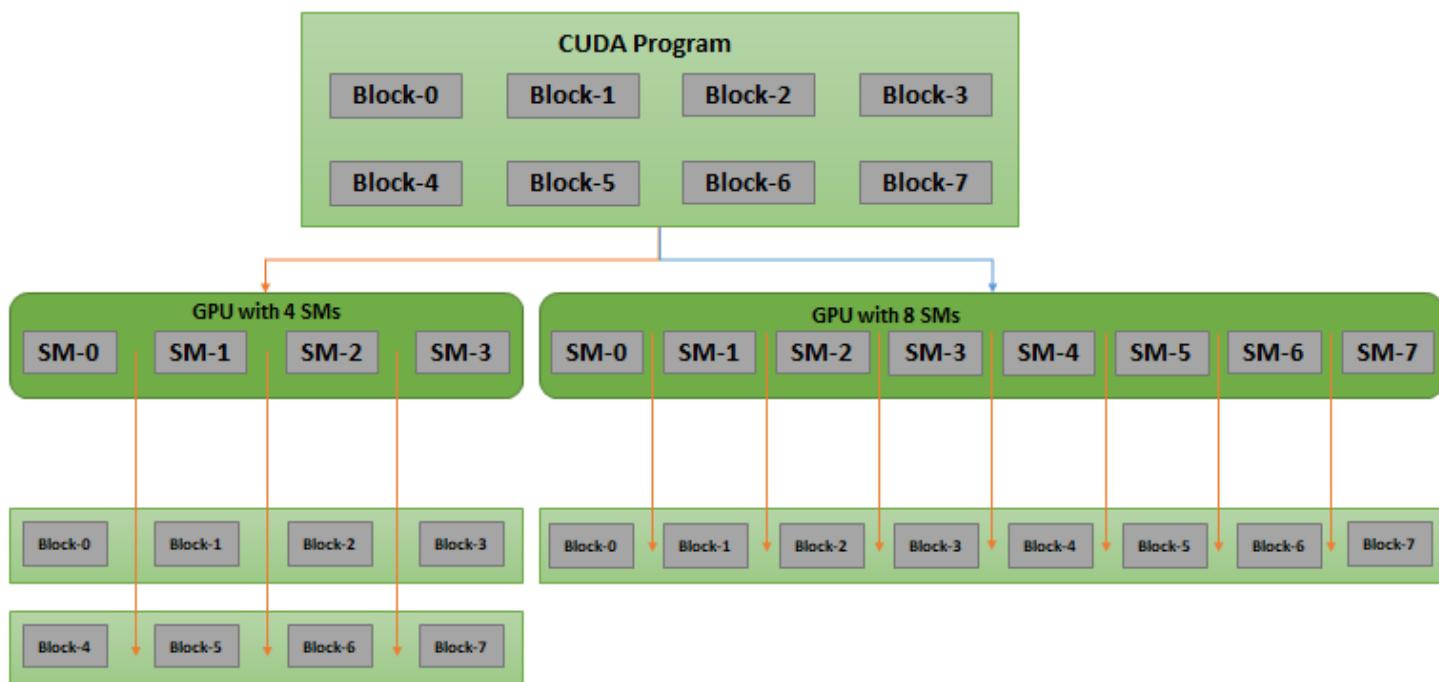

- Launched by Nvidia in 2006
- C-API for Parallel Computation
- Familiar syntax
- Easily scalable across GPUs
- CUDA Toolkit – compiler, toolchain, libraries, runtime



CUDA Resources

- Developer Zone: <https://developer.nvidia.com/cuda-toolkit>
- Download: <https://developer.nvidia.com/cuda-downloads>
- Documentation:
 - [CUDA Programming Guide \(PDF\)](#)
 - [CUDA Best Practices \(PDF\)](#)
- Training: <https://developer.nvidia.com/accelerated-computing-training>
- Nvidia Online Course Login:
<https://courses.nvidia.com/courses/course-v1:DLI+C-AC-01+V1/about>

CONCEPTS

Heterogeneous Computing

Blocks

Threads

Indexing

Shared memory

`__syncthreads()`

Asynchronous operation


Handling errors

Managing devices

Heterogeneous Computing



- Terminology:
 - *Host* The CPU and its memory (host memory)
 - *Device* The GPU and its memory (device memory)

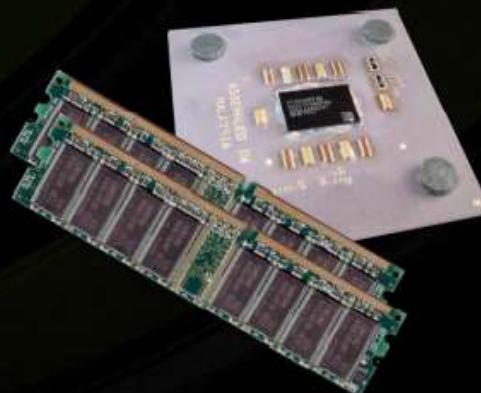

Host



Device

Heterogeneous Computing

device code

parallel function

host code

serial function

serial code

parallel code

serial code

```

#include <algorithm>
#include <algorithm>

using namespace std;

#define N 1024
#define RADIUS 3
#define BLOCK_SIZE 16

__global__ void stencil_1d(int *in, int *out) {
    __shared__ int temp[BLOCK_SIZE + 2 * RADIUS];
    int index = threadIdx.x + blockIdx.x * blockDim.x;
    int index = threadIdx.x + RADIUS;

    // Read input elements into shared memory
    temp[index] = in[index];
    if (threadIdx.x < RADIUS) {
        temp[index - RADIUS] = in[index - RADIUS];
        temp[index + BLOCK_SIZE] = in[index + BLOCK_SIZE];
    }

    // Synchronize (ensure all the data is available)
    __syncthreads();

    // Apply the stencil
    int result = 0;
    for (int offset = -RADIUS; offset <= RADIUS; offset++)
        result += temp[index + offset];

    // Store the result
    out[index] = result;
}

void fill(int *in, int n) {
    fill_n(in, n, 1);
}

int main(void) {
    int *in, *out;           // host copies of a, b, c
    int *d_in, *d_out;       // device copies of a, b, c
    int size = (N + 2*RADIUS) * sizeof(int);

    // Alloc space for host copies and setup values
    in = (int *)malloc(size); fill_n(in, N + 2*RADIUS);
    out = (int *)malloc(size); fill_n(out, N + 2*RADIUS);

    // Alloc space for device copies
    cudaMalloc(&d_in, in_size, cudaMemoryHostToDevice);
    cudaMalloc(&d_out, out_size, cudaMemoryHostToDevice);

    // Copy to device
    cudaMemcpy(d_in, in, size, cudaMemcpyHostToDevice);
    cudaMemcpy(d_out, out, size, cudaMemcpyHostToDevice);

    // Launch stencil_1d() kernel on GPU
    stencil_1d<<(N/BLOCK_SIZE,BLOCK_SIZE>>)(d_in + RADIUS, d_out + RADIUS);


    // Copy result back to host
    cudaMemcpy(out, d_out, size, cudaMemcpyDeviceToHost);

    // Cleanup
    free(in); free(out);
    cudaFree(d_in); cudaFree(d_out);
    return 0;
}


```




Simple Processing Flow

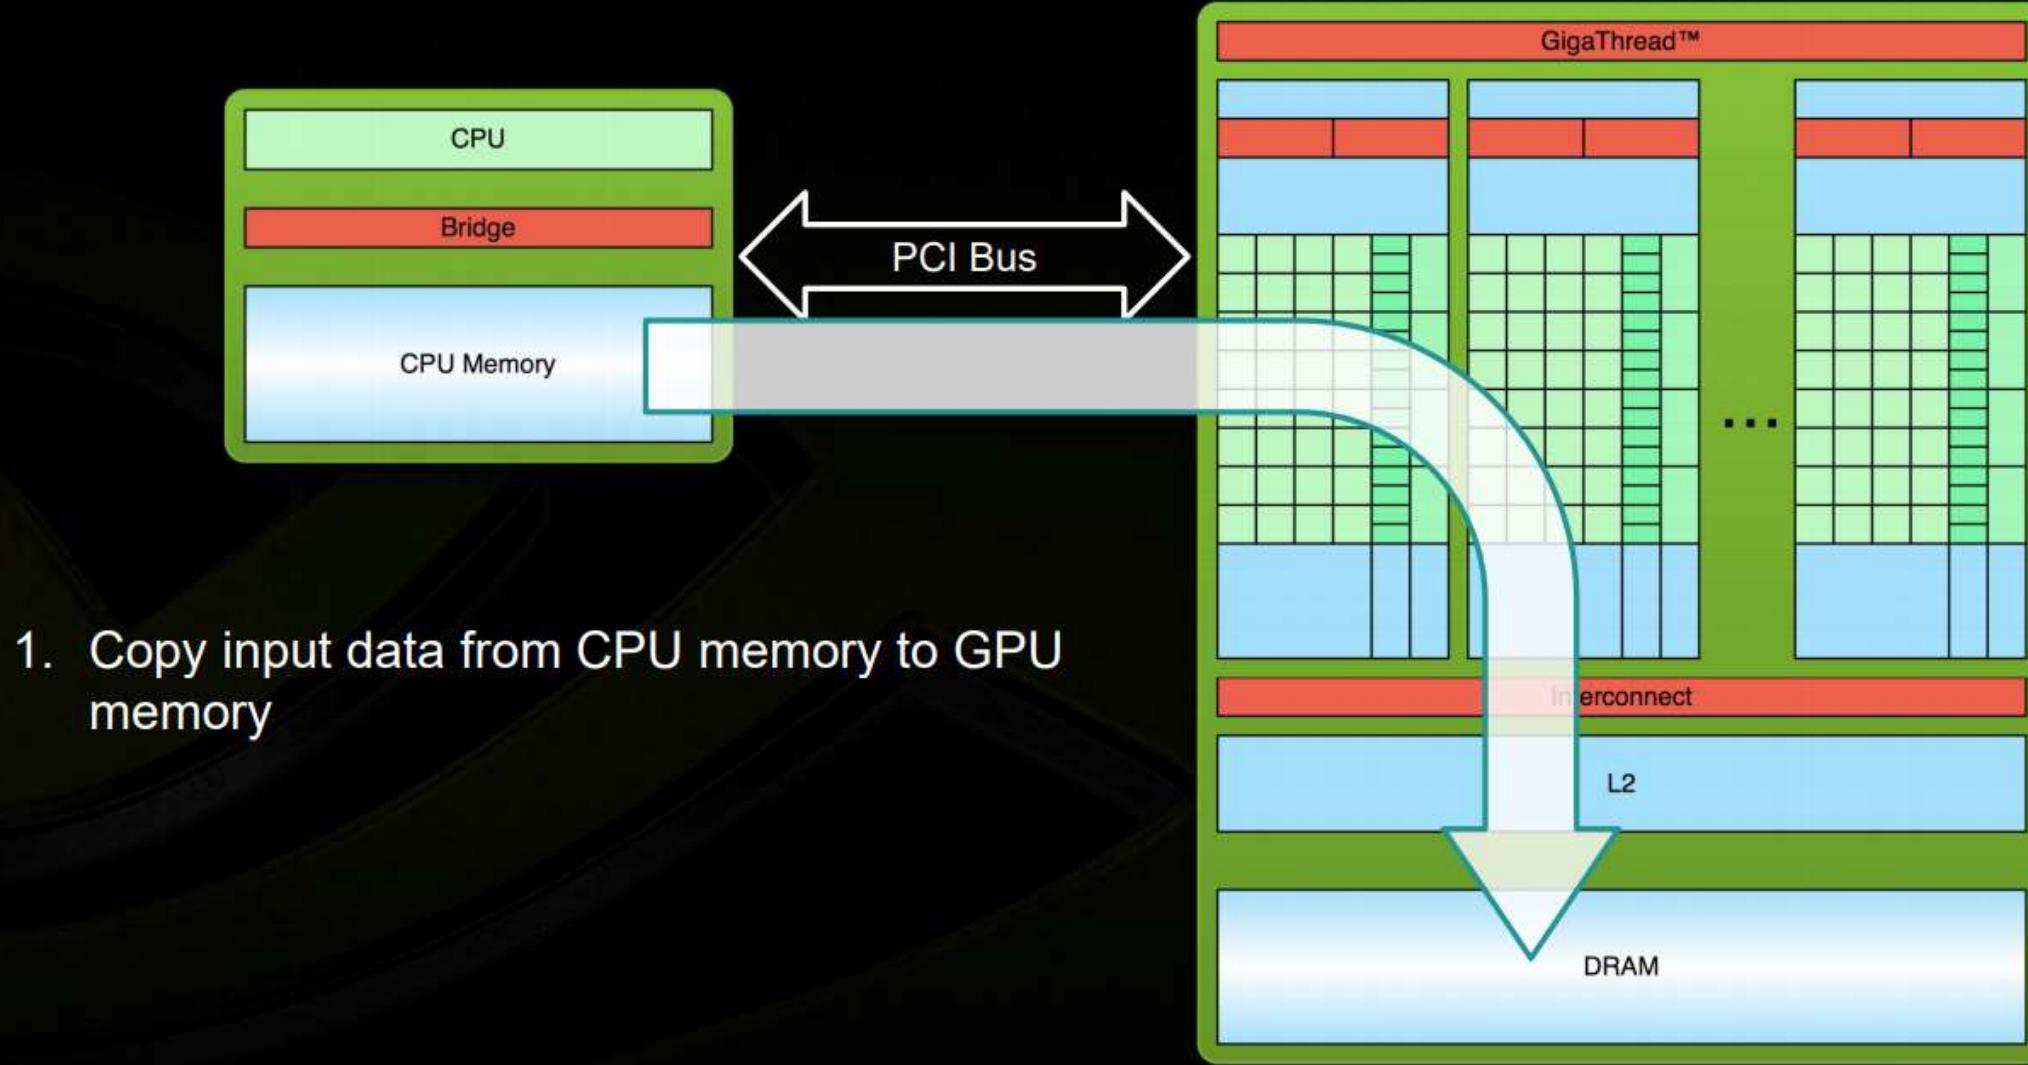

Simple Processing Flow

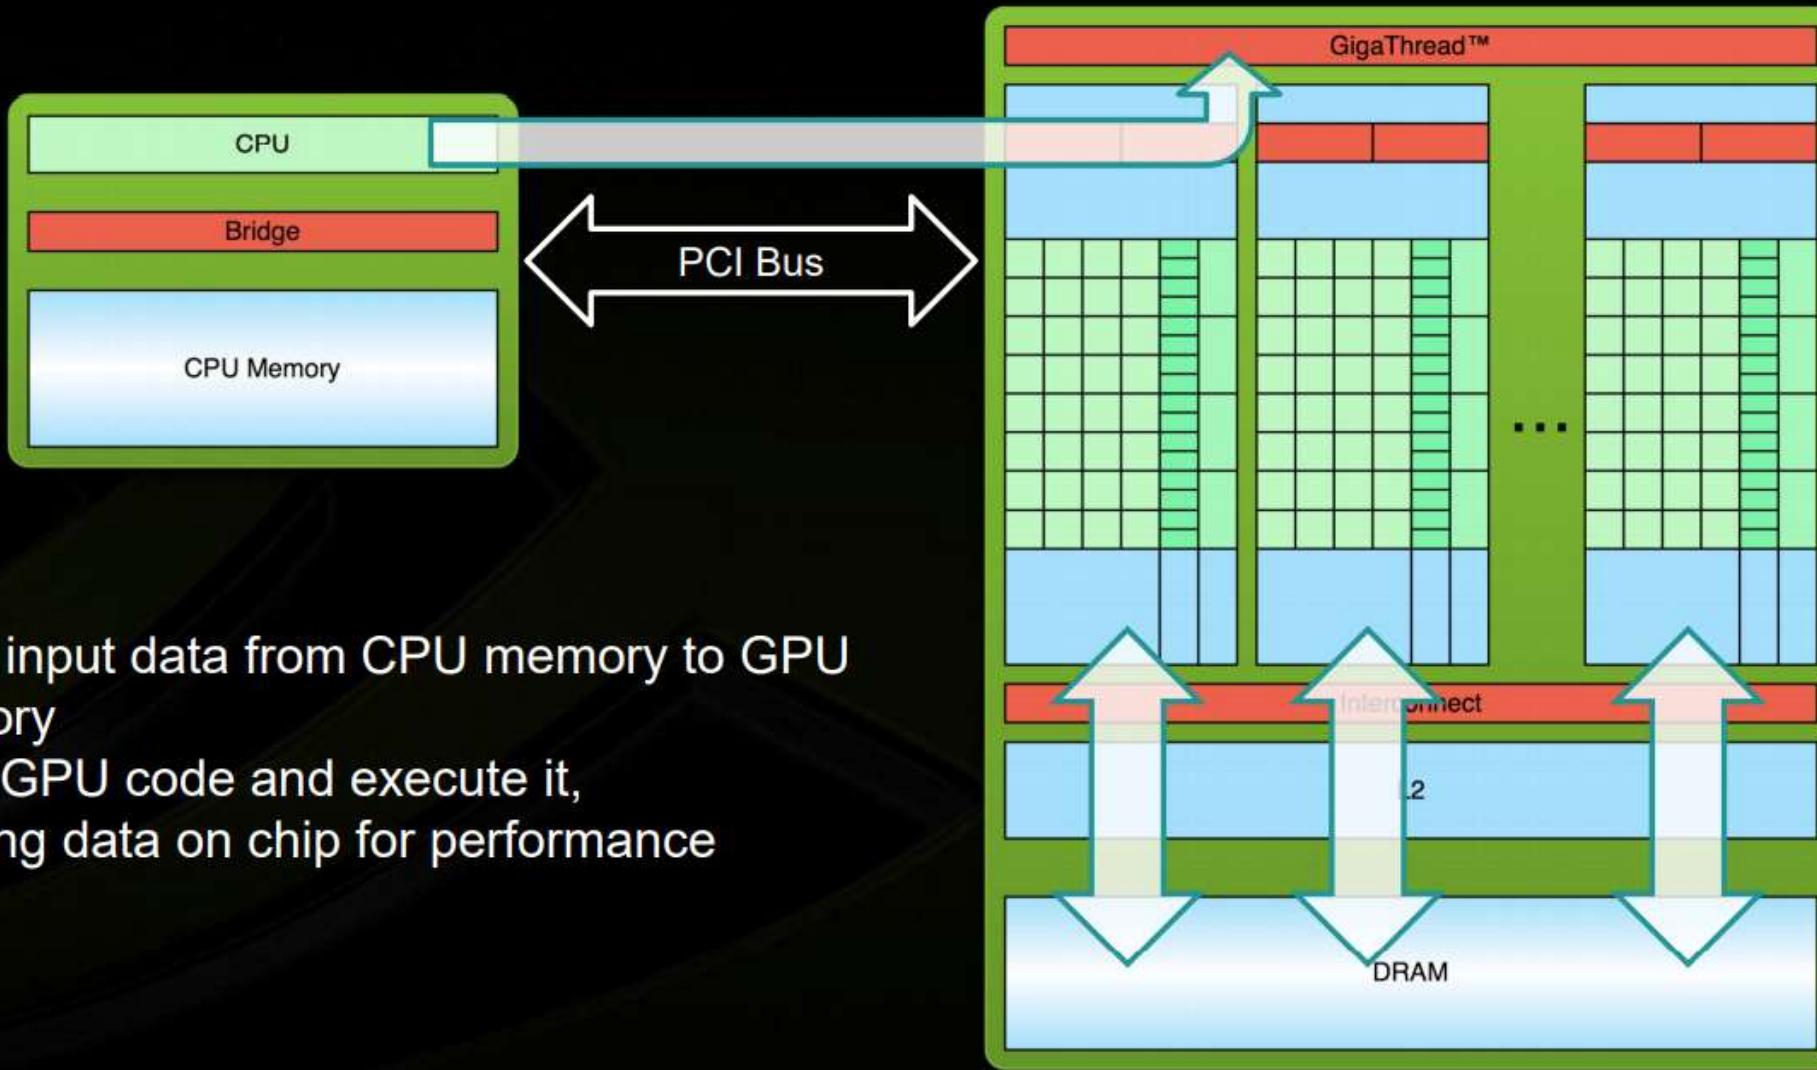

Simple Processing Flow

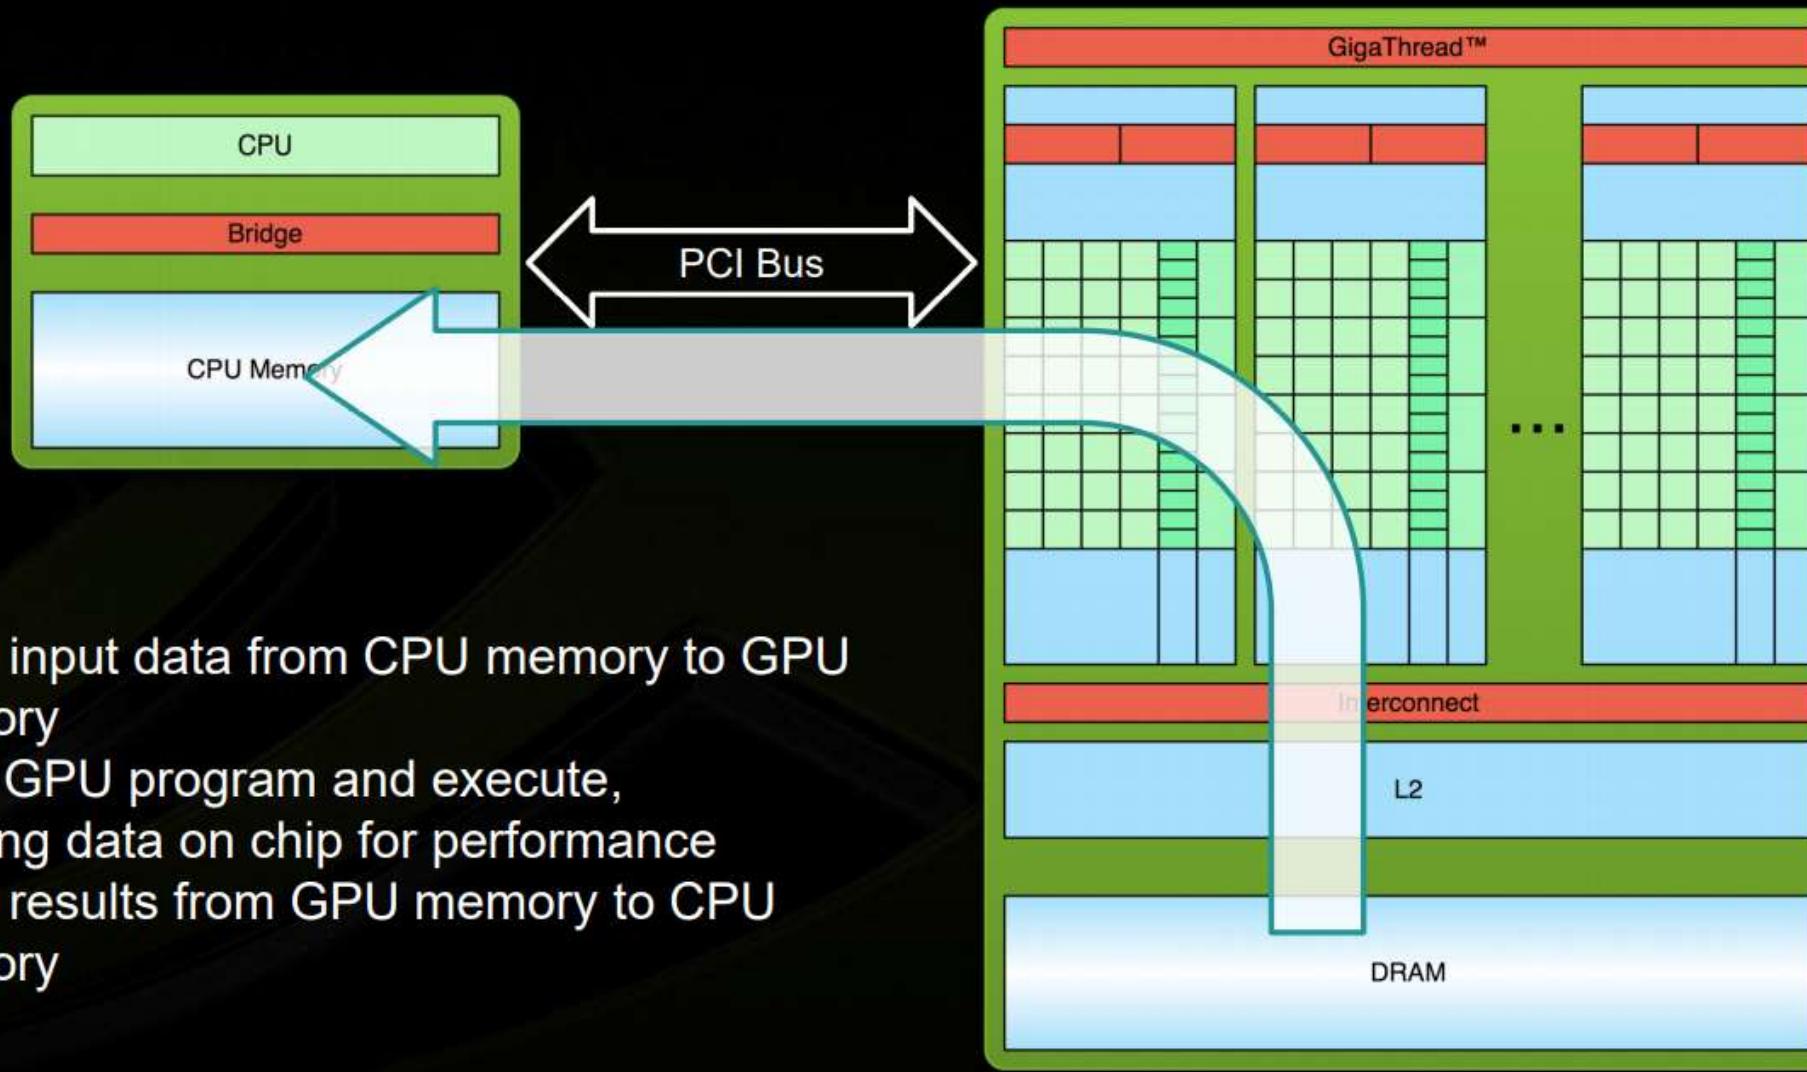



Hello World!

```
int main(void) {  
    printf("Hello World!\n");  
    return 0;  
}
```

- Standard C that runs on the host
- NVIDIA compiler (nvcc) can be used to compile programs with no *device* code

Output:

```
$ nvcc  
hello_world.cu  
$ a.out  
Hello World!  
$
```



Hello World! with Device Code

```
__global__ void mykernel(void) {  
}  
  
int main(void) {  
    mykernel<<<1,1>>>();  
    printf("Hello World!\n");  
    return 0;  
}
```

- Two new syntactic elements...

Hello World! with Device Code



```
__global__ void mykernel(void) {  
}
```

- CUDA C/C++ keyword `__global__` indicates a function that:
 - Runs on the device
 - Is called from host code
- nvcc separates source code into host and device components
 - Device functions (e.g. `mykernel()`) processed by NVIDIA compiler
 - Host functions (e.g. `main()`) processed by standard host compiler
 - gcc, cl.exe

Hello World! with Device Code



```
mykernel<<<1,1>>>();
```

- Triple angle brackets mark a call from *host* code to *device* code
 - Also called a “kernel launch”
 - We’ll return to the parameters (1,1) in a moment
- That’s all that is required to execute a function on the GPU!



Hello World! with Device Code

```
__global__ void mykernel(void) {  
}  
  
int main(void) {  
    mykernel<<<1,1>>>();  
    printf("Hello World!\n");  
    return 0;  
}
```

Output:


```
$ nvcc hello.cu  
$ a.out  
Hello World!  
$
```

- `mykernel()` does nothing, somewhat anticlimactic!

Parallel Programming in CUDA C/C++



- But wait... GPU computing is about massive parallelism!
- We need a more interesting example...
- We'll start by adding two integers and build up to vector addition

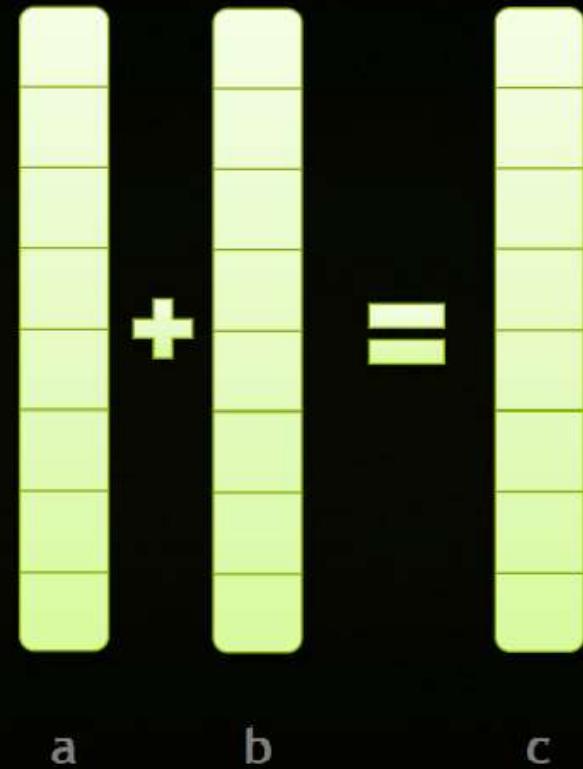



Addition on the Device

- A simple kernel to add two integers

```
__global__ void add(int *a, int *b, int *c) {  
    *c = *a + *b;  
}
```

- As before `__global__` is a CUDA C/C++ keyword meaning
 - `add()` will execute on the device
 - `add()` will be called from the host



Addition on the Device

- Note that we use pointers for the variables

```
__global__ void add(int *a, int *b, int *c) {  
    *c = *a + *b;  
}
```

- `add()` runs on the device, so `a`, `b` and `c` must point to device memory
- We need to allocate memory on the GPU

Memory Management

- Host and device memory are separate entities
 - *Device* pointers point to GPU memory
 - May be passed to/from host code
 - May *not* be dereferenced in host code
 - *Host* pointers point to CPU memory
 - May be passed to/from device code
 - May *not* be dereferenced in device code
- Simple CUDA API for handling device memory
 - `cudaMalloc()`, `cudaFree()`, `cudaMemcpy()`
 - Similar to the C equivalents `malloc()`, `free()`, `memcpy()`





Addition on the Device: add()

- Returning to our `add()` kernel

```
__global__ void add(int *a, int *b, int *c) {  
    *c = *a + *b;  
}
```

- Let's take a look at `main()`...



Addition on the Device: main()

```
int main(void) {
    int a, b, c;                                // host copies of a, b, c
    int *d_a, *d_b, *d_c;                        // device copies of a, b, c
    int size = sizeof(int);

    // Allocate space for device copies of a, b, c
    cudaMalloc((void **) &d_a, size);
    cudaMalloc((void **) &d_b, size);
    cudaMalloc((void **) &d_c, size);

    // Setup input values
    a = 2;
    b = 7;
```

Addition on the Device: main()



```
// Copy inputs to device
cudaMemcpy(d_a, &a, size, cudaMemcpyHostToDevice);
cudaMemcpy(d_b, &b, size, cudaMemcpyHostToDevice);

// Launch add() kernel on GPU
add<<<1,1>>>(d_a, d_b, d_c);

// Copy result back to host
cudaMemcpy(&c, d_c, size, cudaMemcpyDeviceToHost);

// Cleanup
cudaFree(d_a); cudaFree(d_b); cudaFree(d_c);
return 0;
}
```

RUNNING IN PARALLEL

CONCEPTS

Heterogeneous Computing

Blocks

Threads

Indexing

Shared memory

`__syncthreads()`

Asynchronous operation

Handling errors

Managing devices



Moving to Parallel

- GPU computing is about massive parallelism
 - So how do we run code in parallel on the device?

```
add<<< 1, 1 >>> () ;  
          ^  
          |  
add<<< N, 1 >>> () ;
```

- Instead of executing add () once, execute N times in parallel

Vector Addition on the Device



- With `add()` running in parallel we can do vector addition
- Terminology: each parallel invocation of `add()` is referred to as a **block**
 - The set of blocks is referred to as a **grid**
 - Each invocation can refer to its block index using `blockIdx.x`

```
__global__ void add(int *a, int *b, int *c) {  
    c[blockIdx.x] = a[blockIdx.x] + b[blockIdx.x];  
}
```

- By using `blockIdx.x` to index into the array, each block handles a different element of the array



Vector Addition on the Device

```
__global__ void add(int *a, int *b, int *c) {  
    c[blockIdx.x] = a[blockIdx.x] + b[blockIdx.x];  
}
```

- On the device, each block can execute in parallel:

Block 0

```
c[0] = a[0] + b[0];
```

Block 1

```
c[1] = a[1] + b[1];
```

Block 2

```
c[2] = a[2] + b[2];
```

Block 3

```
c[3] = a[3] + b[3];
```



Vector Addition on the Device: add()

- Returning to our parallelized add() kernel

```
__global__ void add(int *a, int *b, int *c) {  
    c[blockIdx.x] = a[blockIdx.x] + b[blockIdx.x];  
}
```

- Let's take a look at main()...

Vector Addition on the Device: main()



```
#define N 512
int main(void) {
    int *a, *b, *c;                      // host copies of a, b, c
    int *d_a, *d_b, *d_c;                  // device copies of a, b, c
    int size = N * sizeof(int);

    // Alloc space for device copies of a, b, c
    cudaMalloc((void **) &d_a, size);
    cudaMalloc((void **) &d_b, size);
    cudaMalloc((void **) &d_c, size);

    // Alloc space for host copies of a, b, c and setup input values
    a = (int *)malloc(size); random_ints(a, N);
    b = (int *)malloc(size); random_ints(b, N);
    c = (int *)malloc(size);
```



Vector Addition on the Device: main()

```
// Copy inputs to device
cudaMemcpy(d_a, a, size, cudaMemcpyHostToDevice);
cudaMemcpy(d_b, b, size, cudaMemcpyHostToDevice);

// Launch add() kernel on GPU with N blocks
add<<<N,1>>>(d_a, d_b, d_c);

// Copy result back to host
cudaMemcpy(c, d_c, size, cudaMemcpyDeviceToHost);

// Cleanup
free(a); free(b); free(c);
cudaFree(d_a); cudaFree(d_b); cudaFree(d_c);
return 0;
}
```



Review (1 of 2)

- Difference between *host* and *device*
 - *Host* CPU
 - *Device* GPU
- Using `__global__` to declare a function as device code
 - Executes on the device
 - Called from the host
- Passing parameters from host code to a device function



Review (2 of 2)

- Basic device memory management
 - `cudaMalloc()`
 - `cudaMemcpy()`
 - `cudaFree()`
- Launching parallel kernels
 - Launch N copies of `add()` with `add<<<N, 1>>>(...);`
 - Use `blockIdx.x` to access block index



INTRODUCING THREADS

CONCEPTS

Heterogeneous Computing

Blocks

Threads

Indexing

Shared memory

`__syncthreads()`

Asynchronous operation

Handling errors

Managing devices



CUDA Threads

- Terminology: a block can be split into parallel **threads**
- Let's change `add()` to use parallel *threads* instead of parallel *blocks*

```
__global__ void add(int *a, int *b, int *c) {  
    c[threadIdx.x] = a[threadIdx.x] + b[threadIdx.x];  
}
```

- We use `threadIdx.x` instead of `blockIdx.x`
- Need to make one change in `main()`...

Vector Addition Using Threads: main()



```
#define N 512
int main(void) {
    int *a, *b, *c;                      // host copies of a, b, c
    int *d_a, *d_b, *d_c;                  // device copies of a, b, c
    int size = N * sizeof(int);

    // Alloc space for device copies of a, b, c
    cudaMalloc((void **) &d_a, size);
    cudaMalloc((void **) &d_b, size);
    cudaMalloc((void **) &d_c, size);

    // Alloc space for host copies of a, b, c and setup input values
    a = (int *)malloc(size); random_ints(a, N);
    b = (int *)malloc(size); random_ints(b, N);
    c = (int *)malloc(size);
```

Vector Addition Using Threads: main()



```
// Copy inputs to device
cudaMemcpy(d_a, a, size, cudaMemcpyHostToDevice);
cudaMemcpy(d_b, b, size, cudaMemcpyHostToDevice);

// Launch add() kernel on GPU with N threads
add<<<1,N>>>(d_a, d_b, d_c);

// Copy result back to host
cudaMemcpy(c, d_c, size, cudaMemcpyDeviceToHost);

// Cleanup
free(a); free(b); free(c);
cudaFree(d_a); cudaFree(d_b); cudaFree(d_c);
return 0;
}
```

COMBINING THREADS AND BLOCKS

CONCEPTS

- Heterogeneous Computing
- Blocks
- Threads
- Indexing
- Shared memory
- `__syncthreads()`
- Asynchronous operation
- Handling errors
- Managing devices




Combining Blocks and Threads

- We've seen parallel vector addition using:
 - Several blocks with one thread each
 - One block with several threads
- Let's adapt vector addition to use both *blocks* and *threads*
- Why? We'll come to that...
- First let's discuss data indexing...



Indexing Arrays with Blocks and Threads

- No longer as simple as using `blockIdx.x` and `threadIdx.x`
 - Consider indexing an array with one element per thread (8 threads/block)

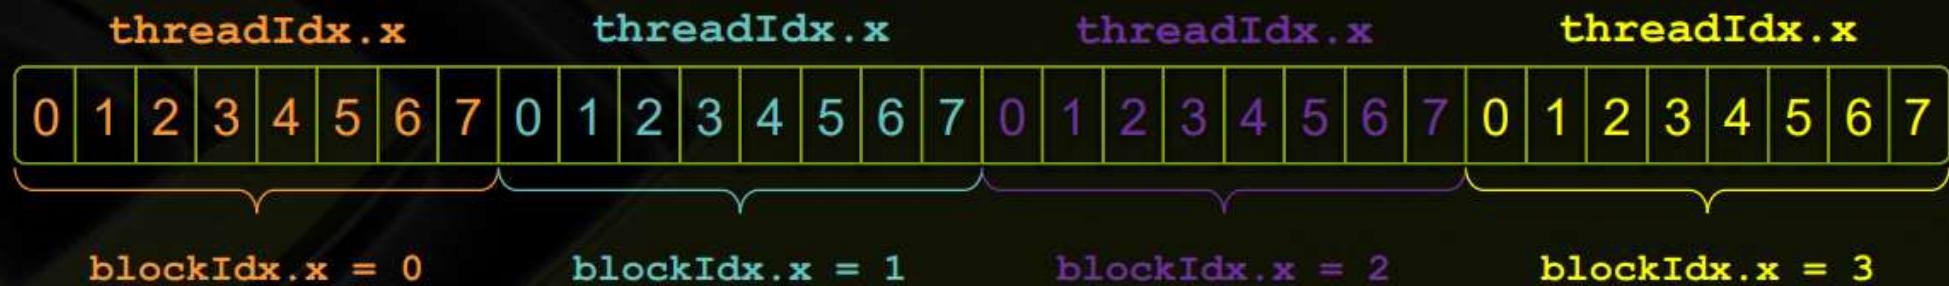

- With M threads per block, a unique index for each thread is given by:

```
int index = threadIdx.x + blockIdx.x * M;
```

Indexing Arrays: Example

- Which thread will operate on the red element?



```
int index = threadIdx.x + blockIdx.x * M;  
= 5 + 2 * 8;  
= 21;
```

Vector Addition with Blocks and Threads



- Use the built-in variable `blockDim.x` for threads per block

```
int index = threadIdx.x + blockIdx.x * blockDim.x;
```

- Combined version of `add()` to use parallel threads *and* parallel blocks

```
__global__ void add(int *a, int *b, int *c) {
    int index = threadIdx.x + blockIdx.x * blockDim.x;
    c[index] = a[index] + b[index];
}
```

- What changes need to be made in `main()`?

Addition with Blocks and Threads: main()



```
#define N (2048*2048)
#define THREADS_PER_BLOCK 512
int main(void) {
    int *a, *b, *c;                                // host copies of a, b, c
    int *d_a, *d_b, *d_c;                            // device copies of a, b, c
    int size = N * sizeof(int);

    // Alloc space for device copies of a, b, c
    cudaMalloc((void **) &d_a, size);
    cudaMalloc((void **) &d_b, size);
    cudaMalloc((void **) &d_c, size);

    // Alloc space for host copies of a, b, c and setup input values
    a = (int *)malloc(size); random_ints(a, N);
    b = (int *)malloc(size); random_ints(b, N);
    c = (int *)malloc(size);
```

Addition with Blocks and Threads: main()



```
// Copy inputs to device
cudaMemcpy(d_a, a, size, cudaMemcpyHostToDevice);
cudaMemcpy(d_b, b, size, cudaMemcpyHostToDevice);

// Launch add() kernel on GPU
add<<<N/THREADS_PER_BLOCK,THREADS_PER_BLOCK>>>(d_a, d_b, d_c);

// Copy result back to host
cudaMemcpy(c, d_c, size, cudaMemcpyDeviceToHost);

// Cleanup
free(a); free(b); free(c);
cudaFree(d_a); cudaFree(d_b); cudaFree(d_c);
return 0;
}
```



Handling Arbitrary Vector Sizes

- Typical problems are not friendly multiples of `blockDim.x`
- Avoid accessing beyond the end of the arrays:

```
__global__ void add(int *a, int *b, int *c, int n) {  
    int index = threadIdx.x + blockIdx.x * blockDim.x;  
    if (index < n)  
        c[index] = a[index] + b[index];  
}
```

- Update the kernel launch:

```
add<<<(N + M-1) / M,M>>>(d_a, d_b, d_c, N);
```



Why Bother with Threads?

- Threads seem unnecessary
 - They add a level of complexity
 - What do we gain?
- Unlike parallel blocks, threads have mechanisms to efficiently:
 - Communicate
 - Synchronize
- To look closer, we need a new example...

COOPERATING THREADS

CONCEPTS

Heterogeneous Computing

Blocks

Threads

Indexing

Shared memory

`__syncthreads()`


Asynchronous operation

Handling errors

Managing devices

1D Stencil

- Consider applying a 1D stencil to a 1D array of elements
 - Each output element is the sum of input elements within a radius
- If radius is 3, then each output element is the sum of 7 input elements:

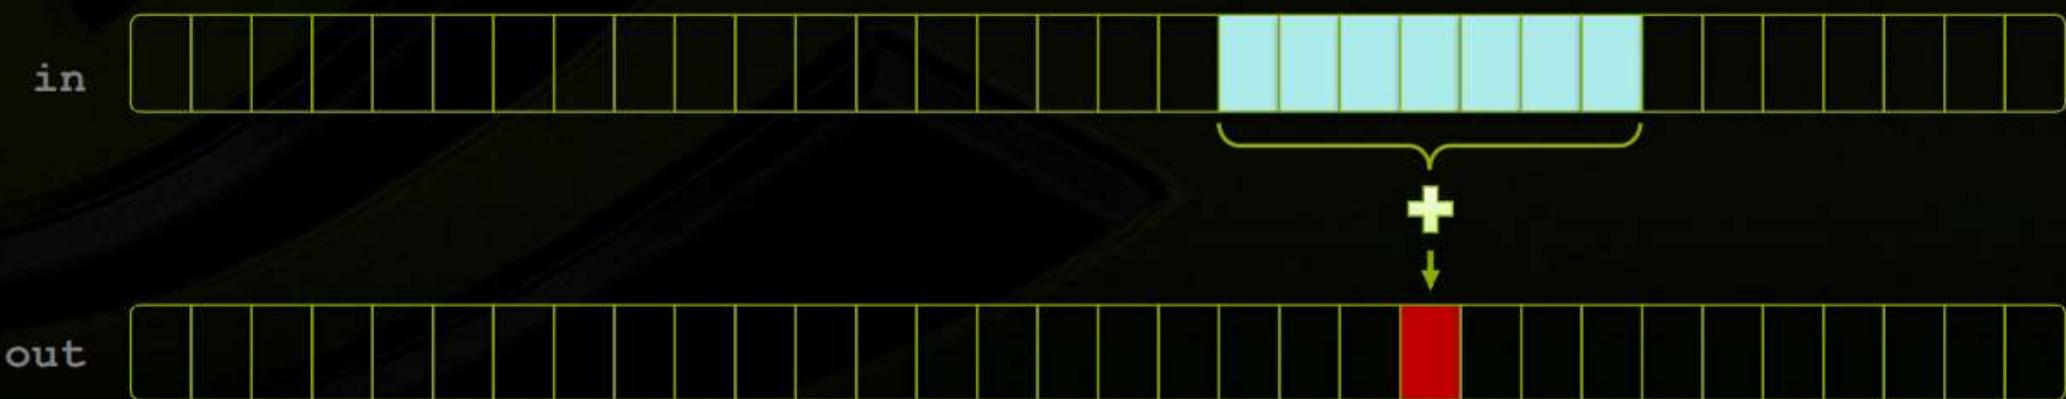

Implementing Within a Block

- Each thread processes one output element
 - `blockDim.x` elements per block
- Input elements are read several times
 - With radius 3, each input element is read seven times





Sharing Data Between Threads

- Terminology: within a block, threads share data via **shared memory**
- Extremely fast on-chip memory
 - By opposition to device memory, referred to as **global memory**
 - Like a user-managed cache
- Declare using **__shared__**, allocated per block
- Data is not visible to threads in other blocks

Implementing With Shared Memory

- Cache data in shared memory
 - Read $(\text{blockDim.x} + 2 * \text{radius})$ input elements from global memory to shared memory
 - Compute blockDim.x output elements
 - Write blockDim.x output elements to global memory
- Each block needs a halo of radius elements at each boundary




Stencil Kernel



```
__global__ void stencil_1d(int *in, int *out) {
    __shared__ int temp[BLOCK_SIZE + 2 * RADIUS];
    int gindex = threadIdx.x + blockIdx.x * blockDim.x;
    int lindex = threadIdx.x + RADIUS;

    // Read input elements into shared memory
    temp[lindex] = in[gindex];
    if (threadIdx.x < RADIUS) {
        temp[lindex - RADIUS] = in[gindex - RADIUS];
        temp[lindex + BLOCK_SIZE] = in[gindex + BLOCK_SIZE];
    }
}
```

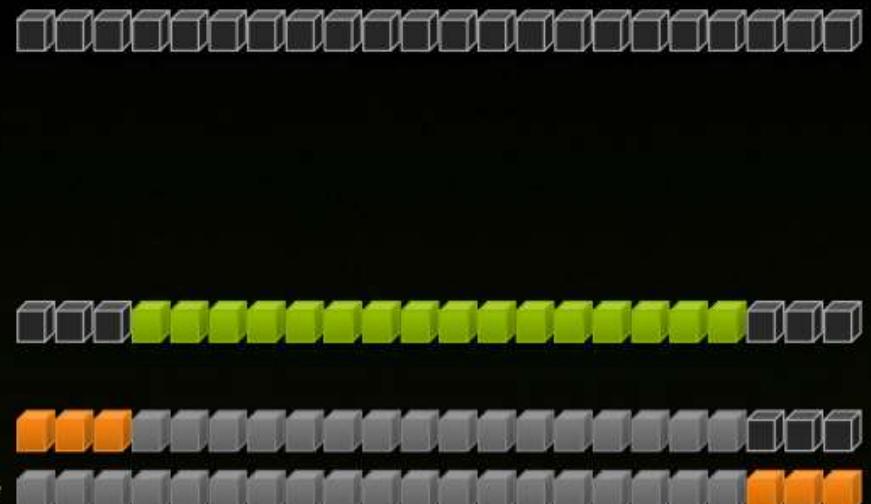

Stencil Kernel



```
// Apply the stencil
int result = 0;
for (int offset = -RADIUS ; offset <= RADIUS ; offset++)
    result += temp[lindex + offset];

// Store the result
out[gindex] = result;
}
```

Data Race!

- The stencil example will not work...
- Suppose thread 15 reads the halo before thread 0 has fetched it...

```
...
temp[lindex] = in[gindex];
if (threadIdx.x < RADIUS) {
    temp[lindex - RADIUS] = in[gindex - RADIUS];
    temp[lindex + BLOCK_SIZE] = in[gindex + BLOCK_SIZE];
}
int result = 0;
for (int offset = -RADIUS ; offset <= RADIUS ; offset++)
    result += temp[lindex + offset];
```

Store at temp[18]



Skipped since threadIdx.x > RADIUS





__syncthreads()

- `void __syncthreads();`
- Synchronizes all threads within a block
 - Used to prevent RAW / WAR / WAW hazards
- All threads must reach the barrier
 - In conditional code, the condition must be uniform across the block

Stencil Kernel



```
__global__ void stencil_1d(int *in, int *out) {
    __shared__ int temp[BLOCK_SIZE + 2 * RADIUS];
    int gindex = threadIdx.x + blockIdx.x * blockDim.x;
    int lindex = threadIdx.x + radius;

    // Read input elements into shared memory
    temp[lindex] = in[gindex];
    if (threadIdx.x < RADIUS) {
        temp[lindex - RADIUS] = in[gindex - RADIUS];
        temp[lindex + BLOCK_SIZE] = in[gindex + BLOCK_SIZE];
    }

    // Synchronize (ensure all the data is available)
    __syncthreads();
}
```

Stencil Kernel



```
// Apply the stencil
int result = 0;
for (int offset = -RADIUS ; offset <= RADIUS ; offset++)
    result += temp[lindex + offset];

// Store the result
out[gindex] = result;
}
```



Review (1 of 2)

- Launching parallel threads
 - Launch N blocks with M threads per block with `kernel<<<N, M>>>(...);`
 - Use `blockIdx.x` to access block index within grid
 - Use `threadIdx.x` to access thread index within block
- Allocate elements to threads:


```
int index = threadIdx.x + blockIdx.x * blockDim.x;
```



Review (2 of 2)

- Use `_shared_` to declare a variable/array in shared memory
 - Data is shared between threads in a block
 - Not visible to threads in other blocks

- Use `_syncthreads()` as a barrier
 - Use to prevent data hazards

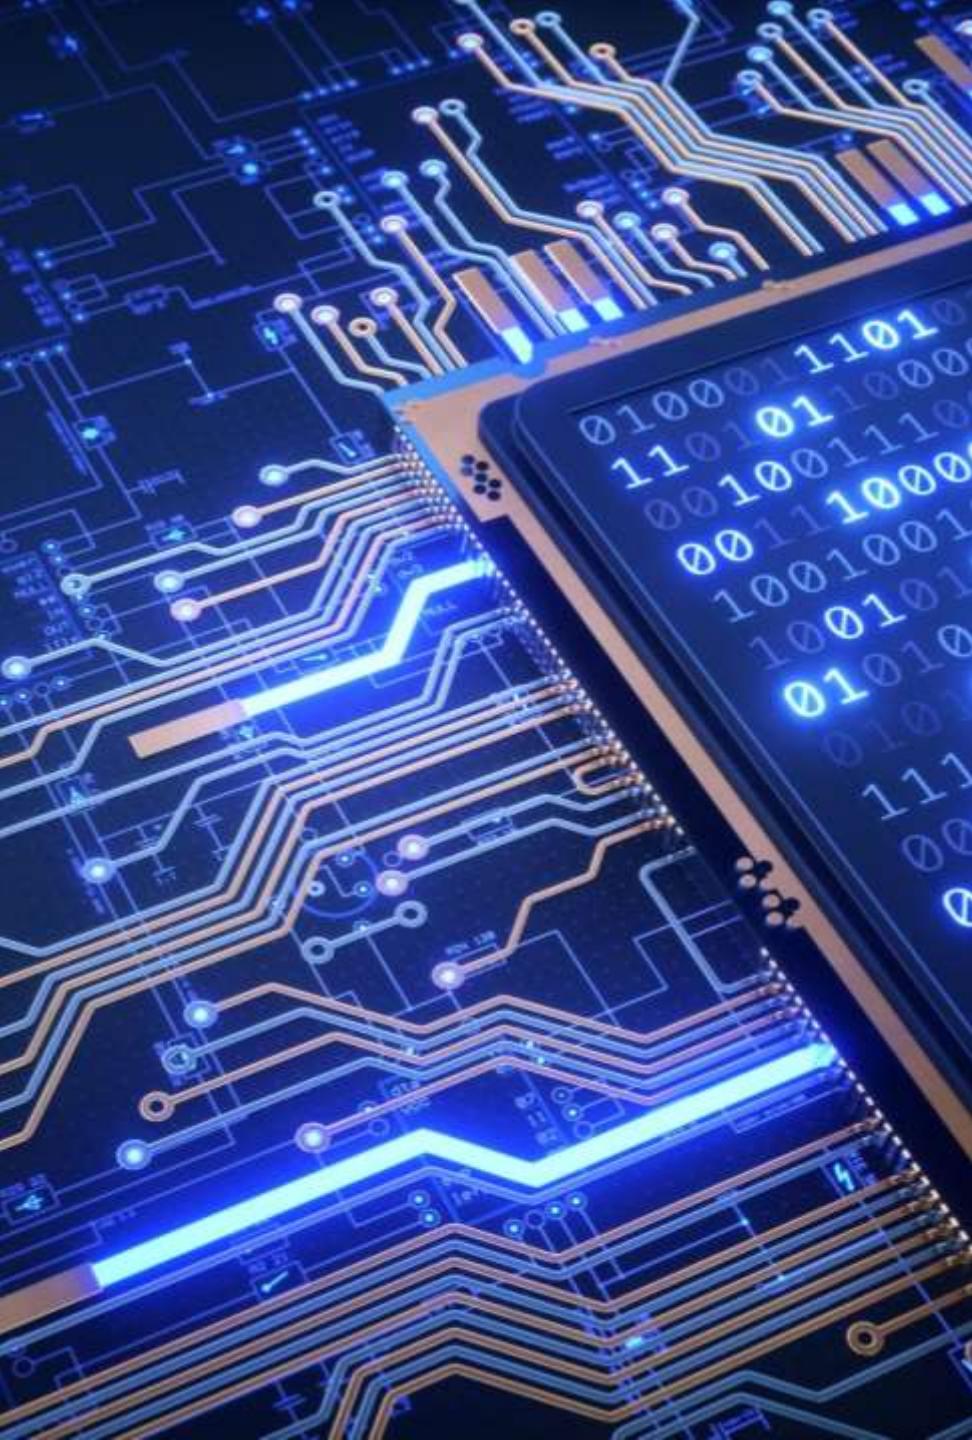


DAY 2

- CUDA Compilation
- CUDA Memory Model
- Shared Memory
- Unified Memory
- Memory Management
- Example – Matrix Multiplication using Shared Memory
- Introduction to Streams
- Occupancy
- Atomics

Get the updated training content from:
<https://github.com/kbvis3d/toshiba-cuda-2021>

CUDA Compilation

- See NVCC Reference for full options:
- [https://docs.nvidia.com/cuda/pdf/CUDA Compiler Driver NVCC.pdf](https://docs.nvidia.com/cuda/pdf/CUDA%20Compiler%20Driver%20NVCC.pdf)
- Compilation Phases
- GPU Compilation – binary compatibility within GPU generation
- Separate Compilation (since CUDA 5.0)
- See nvcc options:
 - --compile
 - --relocatable-device-code
 - --device-c

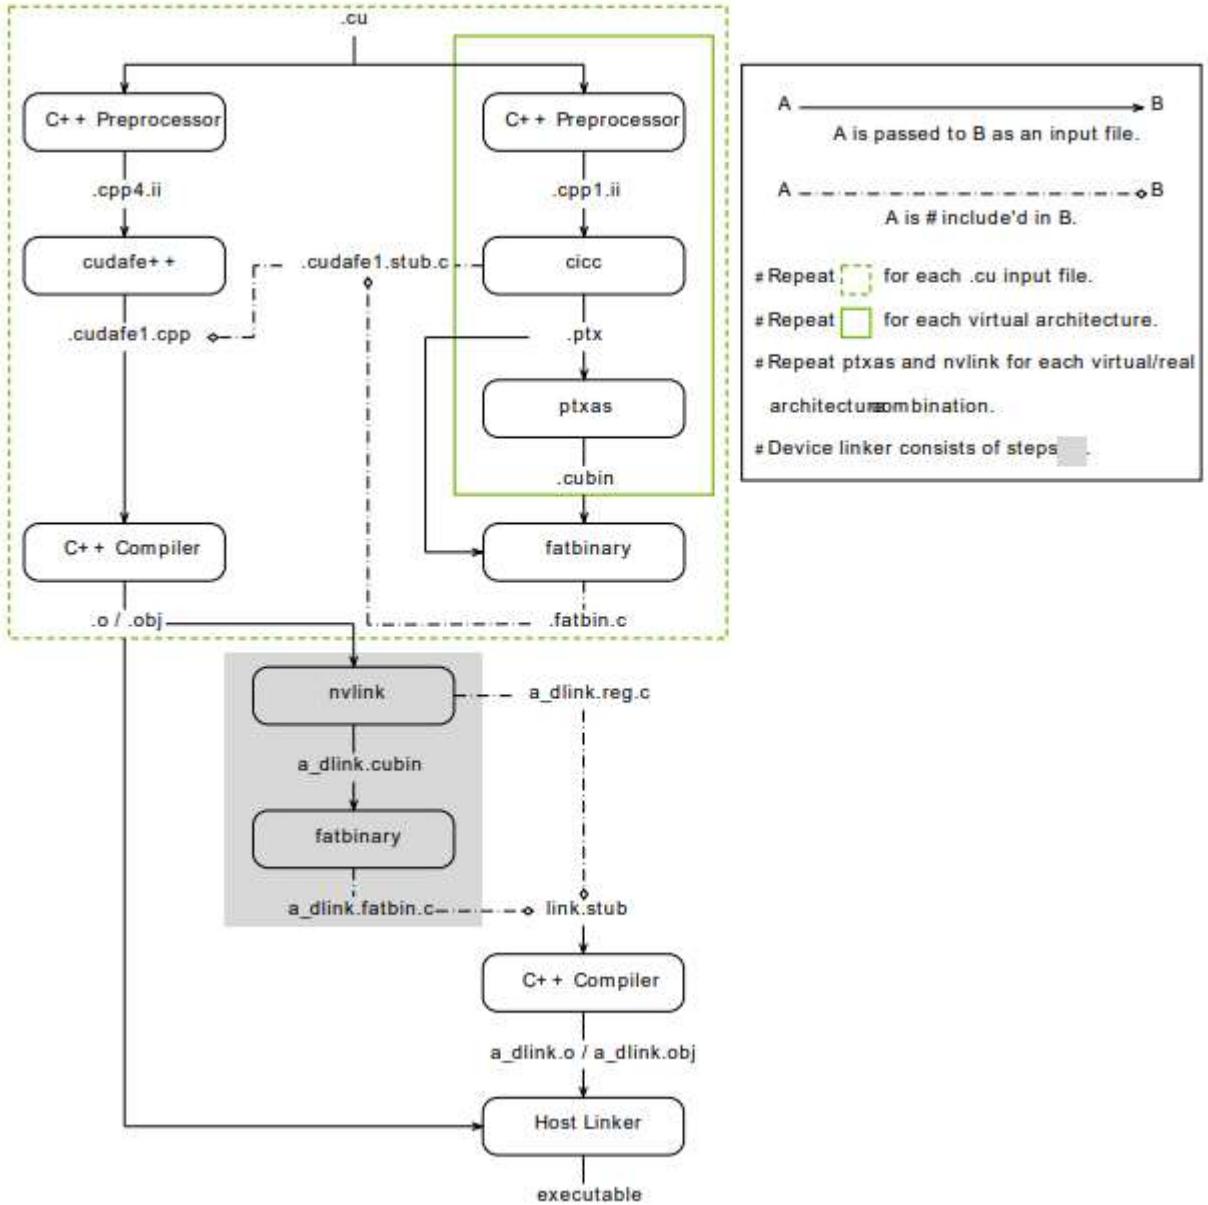


Supported Input File Types

Input File Prefix	Description
.cu	CUDA source file, containing host code and device functions
.c	C source file
.cc, .cxx, .cpp	C++ source file
.ptx	PTX intermediate assembly file
.cubin	CUDA device code binary file (CUBIN) for a single GPU architecture
.fatbin	CUDA fat binary file that may contain multiple PTX and CUBIN files
.o, .obj	Object file
.a, .lib	Library file
.res	Resource file
.so	Shared object file

Compilation Phases


Phase	nvcc Option		Default Output File Name
	Long Name	Short Name	
CUDA compilation to C/C++ source file	--cuda	-cuda	.cpp.ii appended to source file name, as in <code>x.cu.cpp.ii</code> . This output file can be compiled by the host compiler that was used by <code>nvcc</code> to preprocess the <code>.cu</code> file.
C/C++ preprocessing	--preprocess	-E	<result on standard output>
C/C++ compilation to object file	--compile	-c	Source file name with suffix replaced by <code>o</code> on Linux and Mac OS X, or <code>obj</code> on Windows
Cubin generation from CUDA source files	--cubin	-cubin	Source file name with suffix replaced by <code>cubin</code>
Cubin generation from PTX intermediate files.	--cubin	-cubin	Source file name with suffix replaced by <code>cubin</code>
PTX generation from CUDA source files	--ptx	-ptx	Source file name with suffix replaced by <code>ptx</code>
Fatbinary generation from source, PTX or cubin files	--fatbin	-fatbin	Source file name with suffix replaced by <code>fatbin</code>
Linking relocatable device code.	--device-link	-dlink	<code>a_dlink.obj</code> on Windows or <code>a_dlink.o</code> on other platforms
Cubin generation from linked relocatable device code.	--device-link --cubin	-dlink -cubin	<code>a_dlink.cubin</code>
Fatbinary generation from linked relocatable device code	--device-link --fatbin	-dlink -fatbin	<code>a_dlink.fatbin</code>
Linking an executable	<no phase option>		<code>a.exe</code> on Windows or <code>a.out</code> on other platforms
Constructing an object file archive, or library	--lib	-lib	<code>a.lib</code> on Windows or <code>a.a</code> on other platforms
make dependency generation	--generate-dependencies	-M	<result on standard output>
make dependency generation without headers in system paths.	--generate-nonsystem-dependencies	-MM	<result on standard output>
Running an executable	--run	-run	

No Separate Compilation in early releases

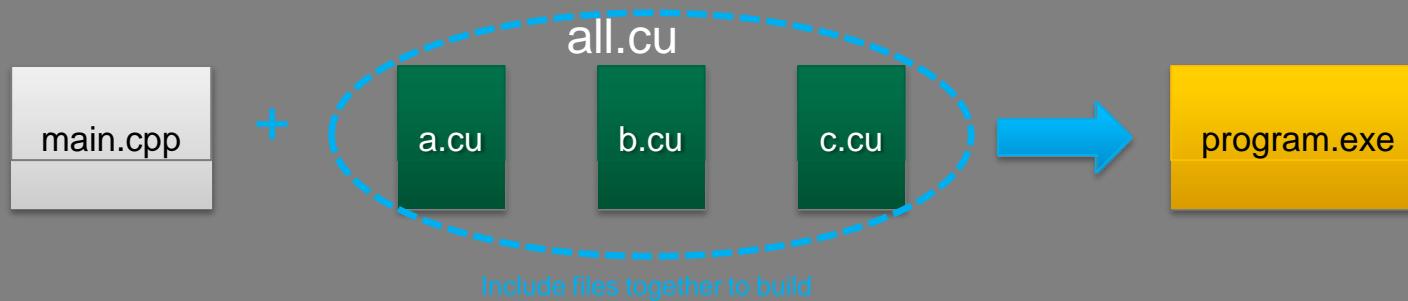

Earlier CUDA required single source file for a single kernel
No linking external device code

CUDA 5: Separate Compilation & Linking

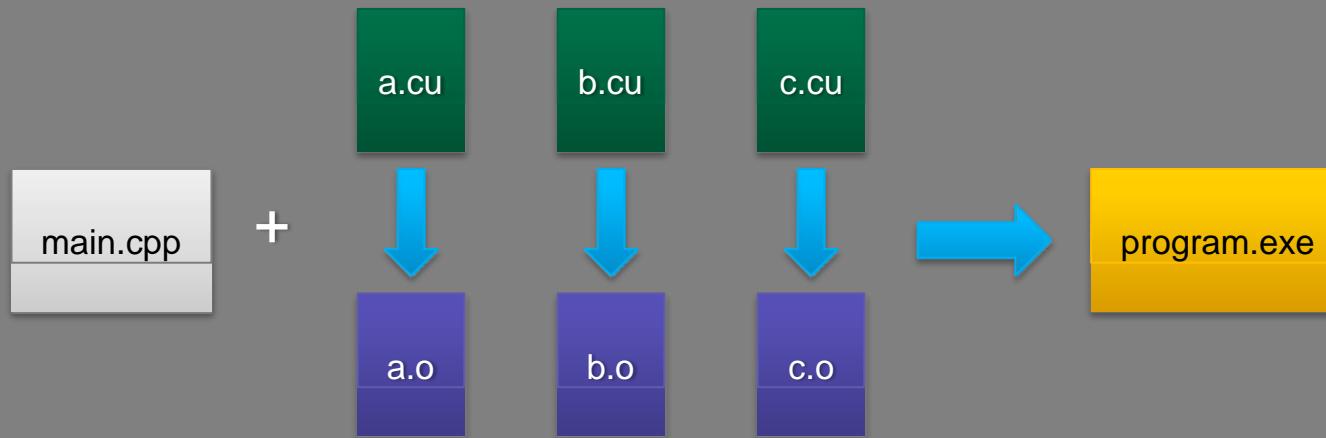


Separate compilation allows building independent object files

CUDA 5 can link multiple object files into one program

Benefits of Separate Compilation

- Eases porting code
 - no longer have to include files together
 - “extern” attribute is respected
- Incremental compilation reduces build time
 - e.g. 47000 line app used to take 50 seconds to build, now when split into multiple files takes 4 seconds to build if only one file changed
- Can create and use 3rd party libraries


CUDA 5: Library Support

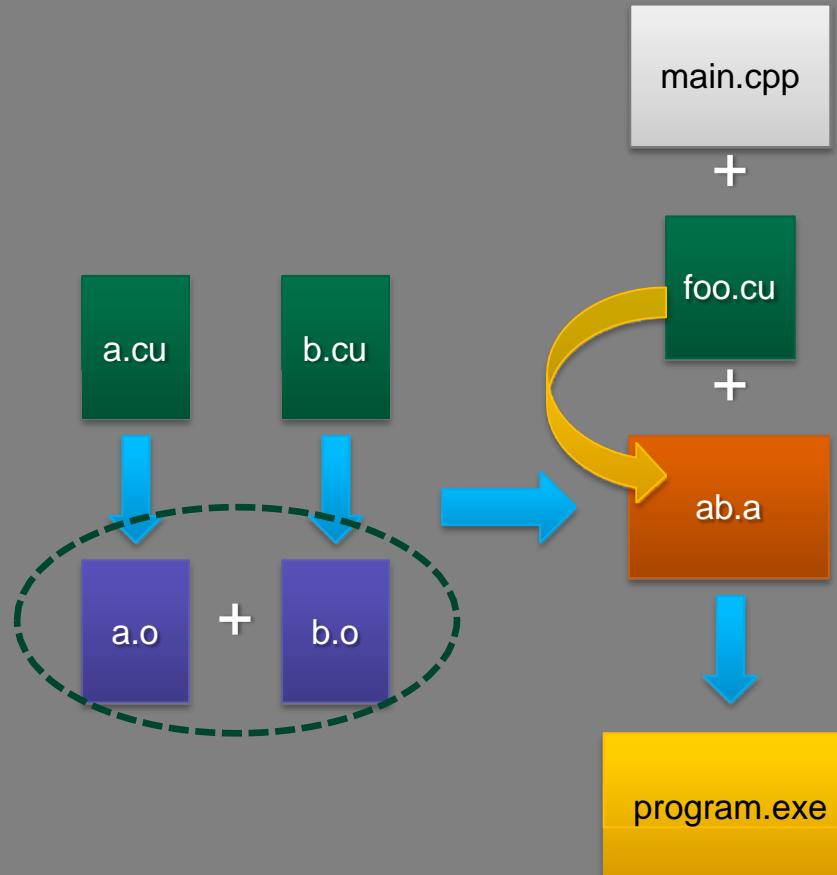

Can combine object files into static libraries

Link and externally call *device* code

CUDA 5: Library Support

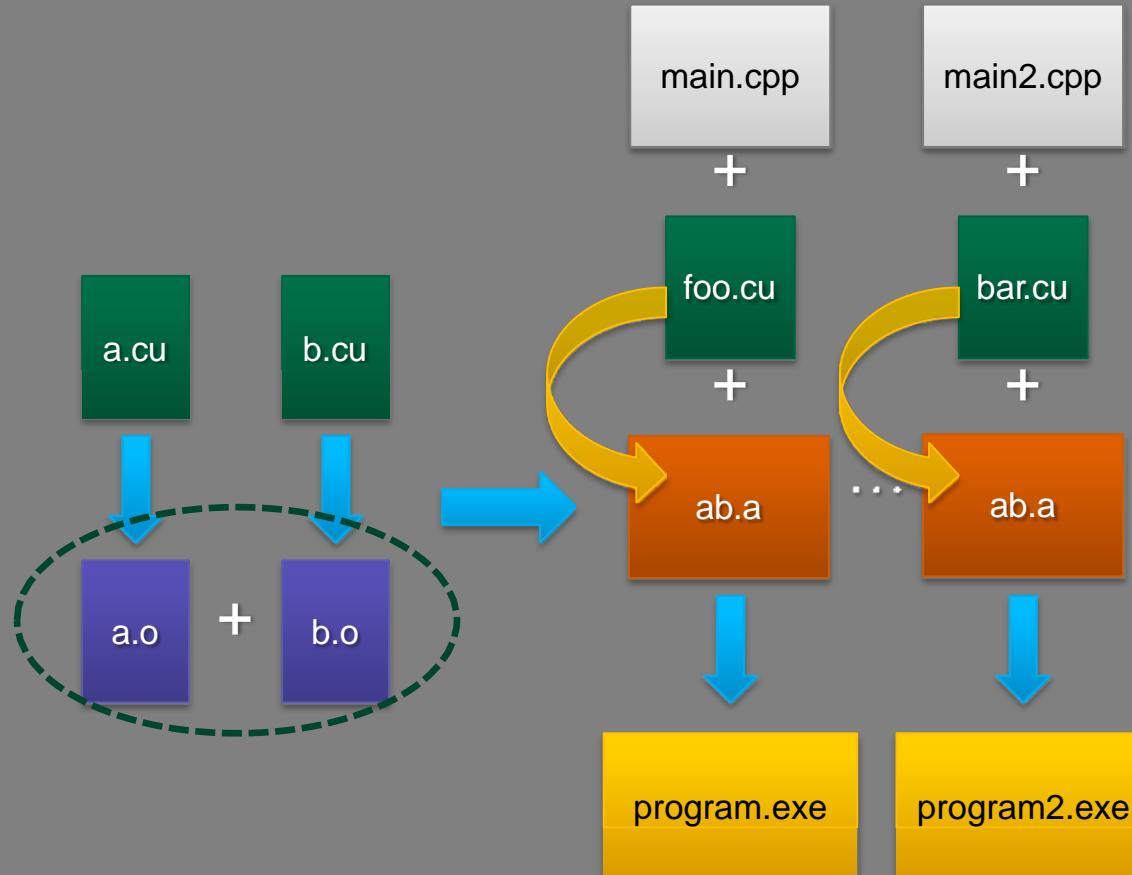


Can combine object files into static libraries

Link and externally call *device* code

Facilitates code reuse, reduces compile time

CUDA 5: Callbacks

Enables closed-source device libraries to call user-defined device callback functions

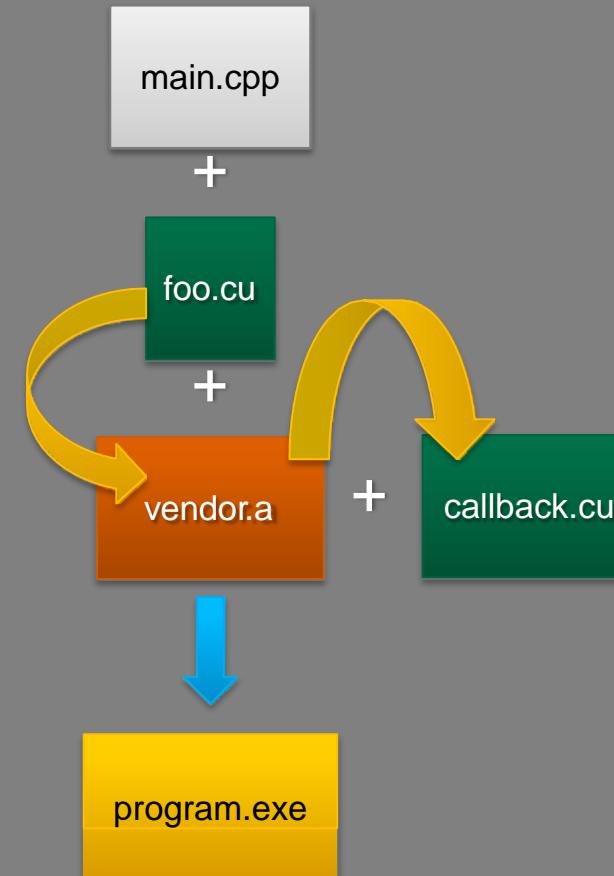

Summary

- Separate Compilation of device code is supported in CUDA 5.0
- Eases porting
- Incremental Recompilation
- Library Support
- For more info, see “Using Separate Compilation in CUDA” section at end of NVCC document.



CUDA Compiler Driver NVCC

Reference Guide

TRM-06721-001_v11.4 | August 2021

<https://docs.nvidia.com/cuda/cuda-compiler-driver-nvcc/index.html>
(PDF copy in docs folder)

Stencil 1D – Shared Memory

(samples\04-stencil-1d)

```
__global__ void stencil(const int N, int* in, int* out)
{
    __shared__ int temp[BLOCKSIZE + 2 * RADIUS];
    int gIndex = threadIdx.x + blockIdx.x * BLOCKSIZE;
    int lIndex = threadIdx.x + RADIUS;

    if (gIndex < N)
    {
        // read input data into shared memory
        temp[lIndex] = in[gIndex + RADIUS];
        if (threadIdx.x < RADIUS)
        {
            temp[lIndex - RADIUS] = in[gIndex];
            temp[lIndex + BLOCKSIZE] = in[gIndex + RADIUS + BLOCKSIZE];
        }
    }
}
```

Stencil 1D – Shared Memory


```
// ensure all reads are complete
__syncthreads();

if (gIndex < N - 2 * RADIUS)
{
    // apply the stencil
    int result = 0;
    for (int offset = -RADIUS; offset <= RADIUS; ++offset)
    {
        result += temp[lIndex + offset];
    }

    // output the filtered result
    out[gIndex + RADIUS] = result;
}
}
```

Exercise: Extend to 2D Filter
(To be revisited in Image Processing session)

CUDA Memory Model

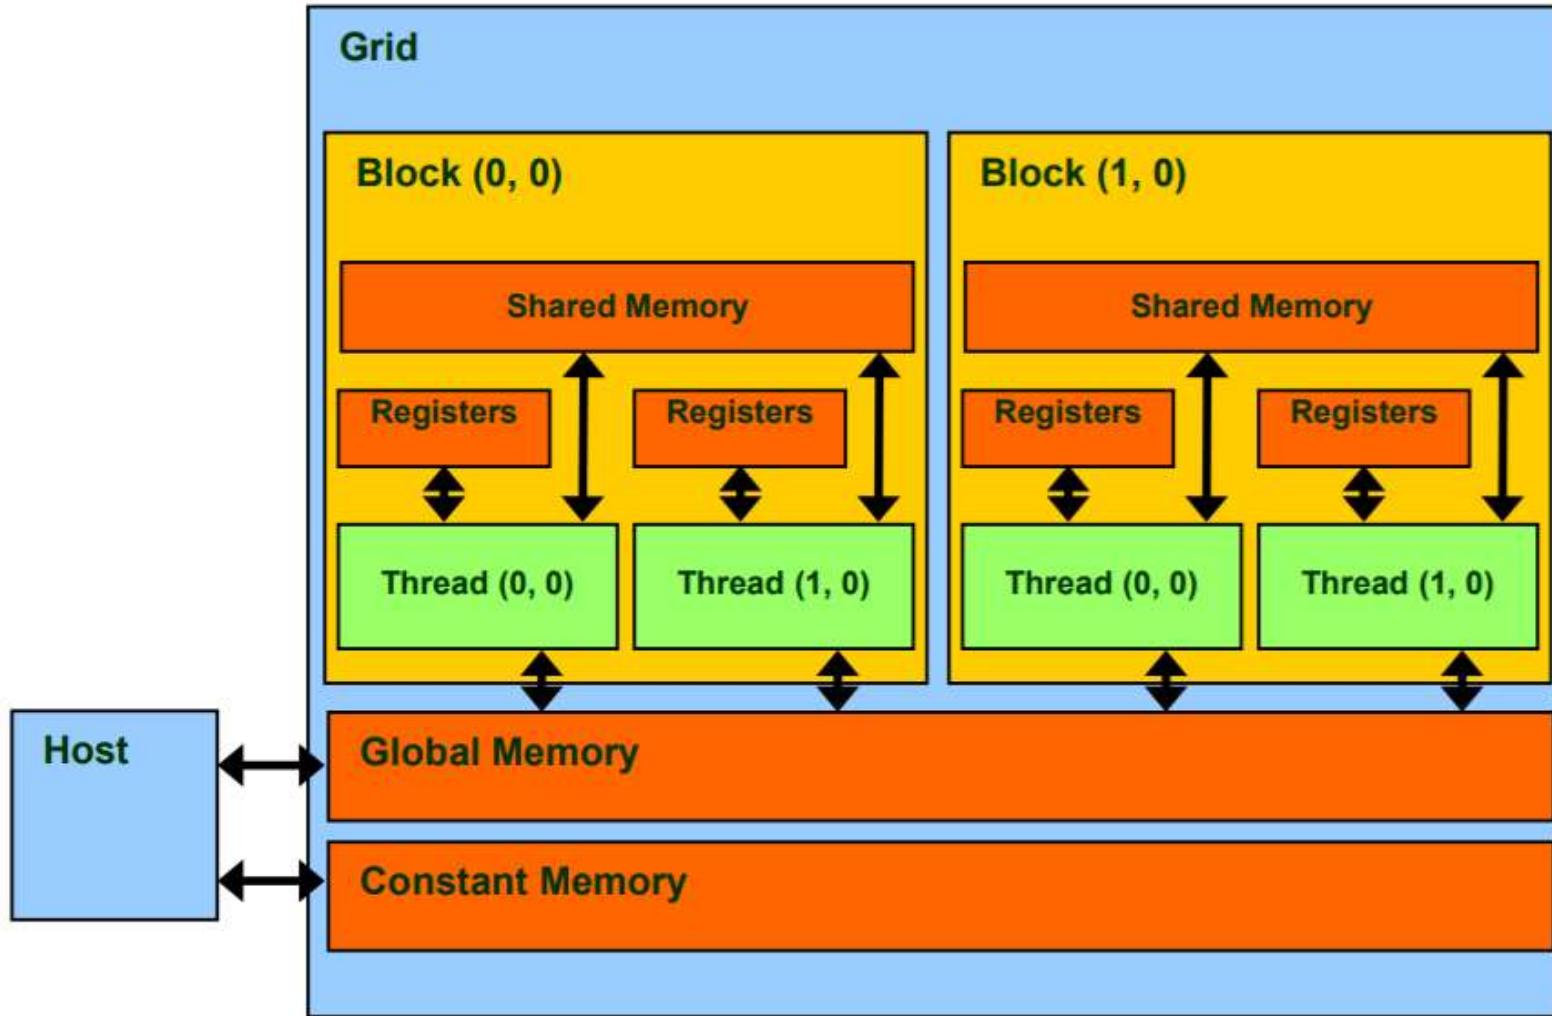

Declaring CUDA Variables

Variable declaration	Memory	Scope	Lifetime
int LocalVar;	register	thread	thread
<code>__device__ __shared__ int SharedVar;</code>	shared	block	block
<code>__device__ int GlobalVar;</code>	global	grid	application
<code>__device__ __constant__ int ConstantVar;</code>	constant	grid	application

- `__device__` is optional when used with `__shared__`, or `__constant__`
- **Automatic variables** reside in a `register`
 - Except per-thread arrays that reside in global memory

Optimize Algorithms for the GPU



- **Maximize independent parallelism**
- **Maximize arithmetic intensity (math/bandwidth)**
- **Sometimes it's better to recompute than to cache**
 - GPU spends its transistors on ALUs, not memory
- **Do more computation on the GPU to avoid costly data transfers**
 - Even low parallelism computations can sometimes be faster than transferring back and forth to host



Optimize Memory Access

- Coalesced vs. Non-coalesced = order of magnitude
 - Global/Local device memory
- Optimize for spatial locality in cached texture memory
- In shared memory, avoid high-degree bank conflicts



Take Advantage of Shared Memory

- Hundreds of times faster than global memory
- Threads can cooperate via shared memory
- Use one / a few threads to load / compute data shared by all threads
- Use it to avoid non-coalesced access
 - Stage loads and stores in shared memory to re-order non-coalesceable addressing




Use Parallelism Efficiently

- Partition your computation to keep the GPU multiprocessors equally busy
 - Many threads, many thread blocks
- Keep resource usage low enough to support multiple active thread blocks per multiprocessor
 - Registers, shared memory




Warps and Half Warps

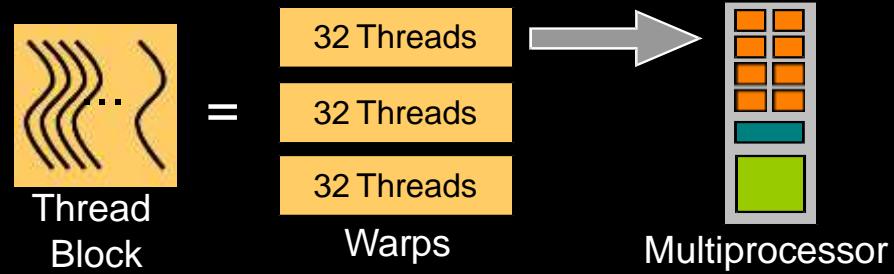

A thread block consists of 32-thread warps


A warp is executed physically in parallel (SIMD) on a multiprocessor

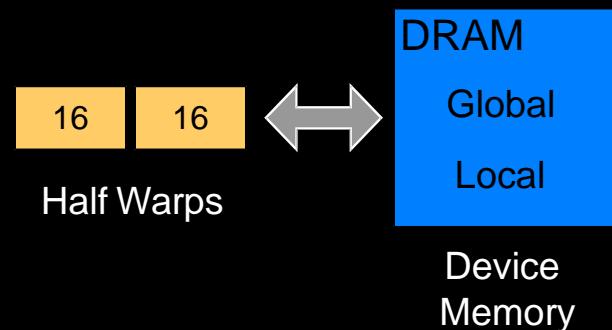

A half-warp of 16 threads can coordinate global memory accesses into a single transaction




Memory Architecture

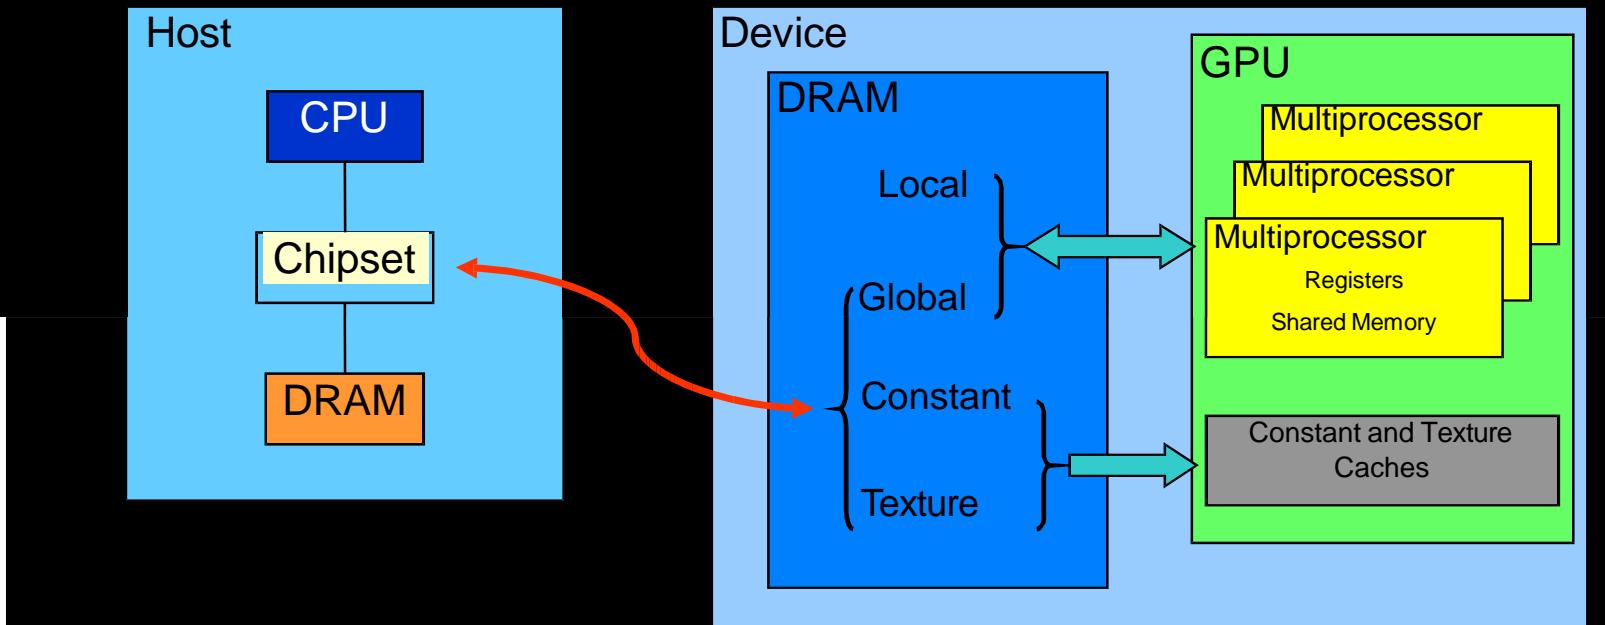

Coalescing




- Global memory access of 32, 64, or 128-bit words by a half-warp of threads can result in as few as one (or two) transaction(s) if certain access requirements are met
- Depends on compute capability
 - Older versions have stricter access requirements
- **Float (32-bit) data example:**

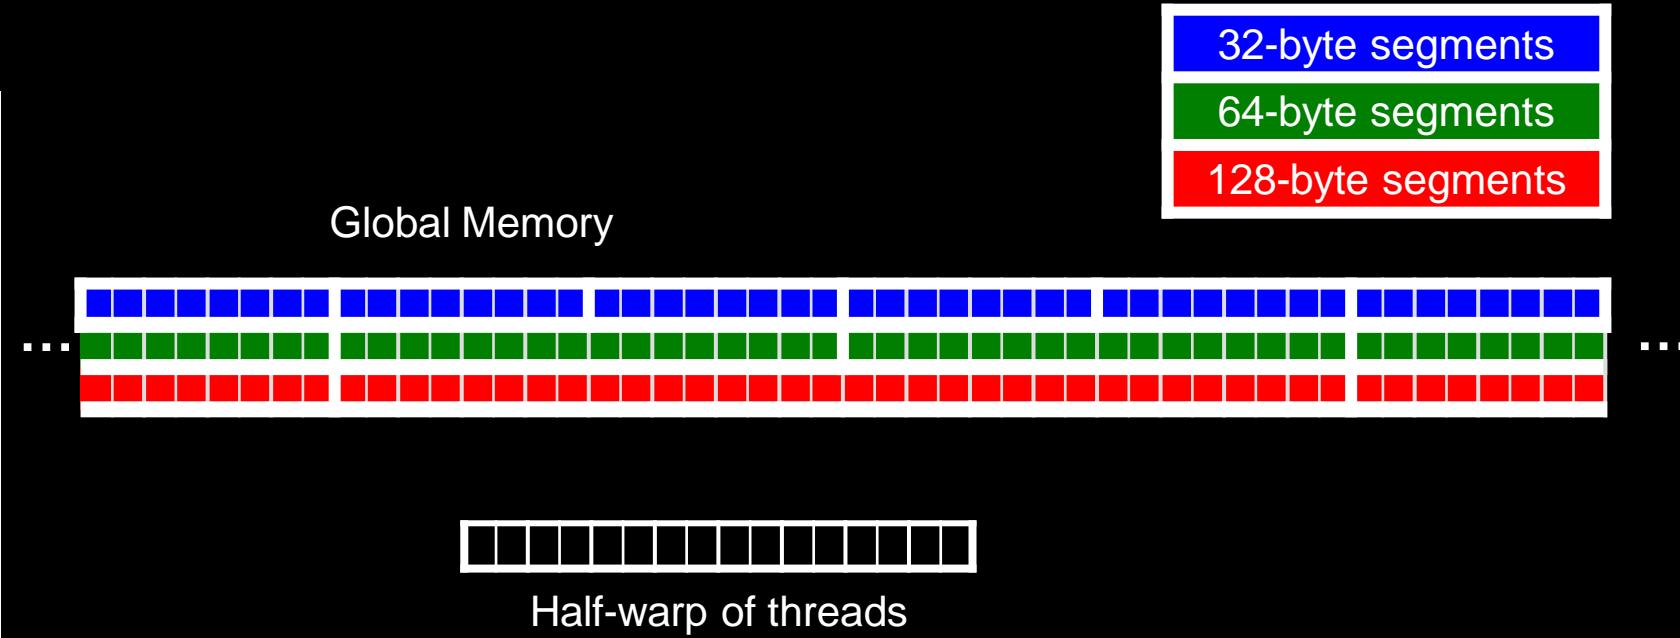

Coalescing

Compute capability 1.0 and 1.1

- K-th thread must access k-th word in the segment (or k-th word in 2 contiguous 128B segments for 128-bit words), not all threads need to participate

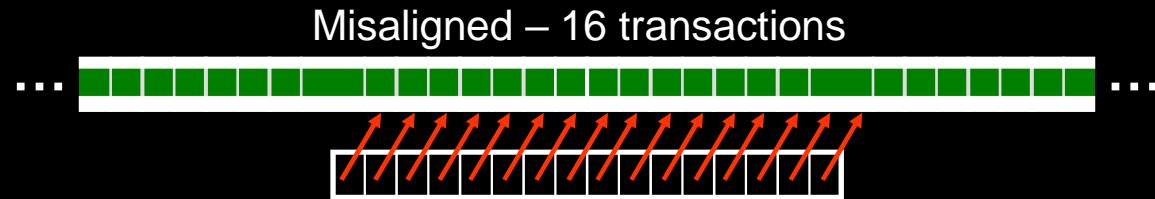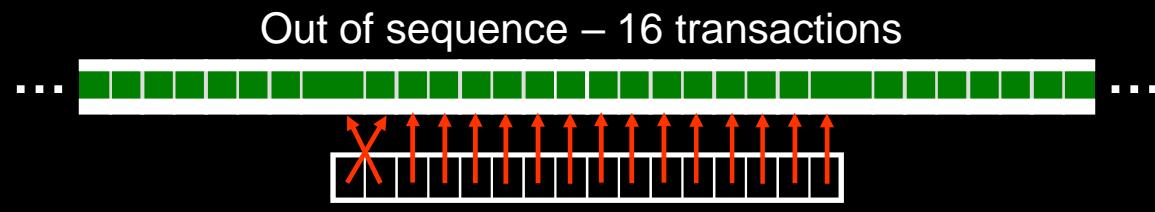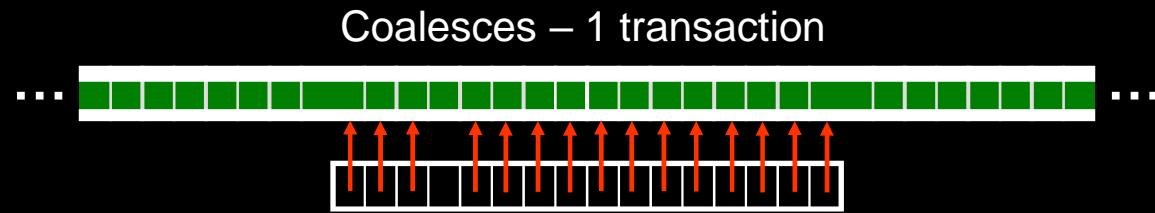


Coalescing


Compute capability 1.2 and higher

- Issues transactions for segments of 32B, 64B, and 128B
- Smaller transactions used to avoid wasted bandwidth


1 transaction - 64B segment

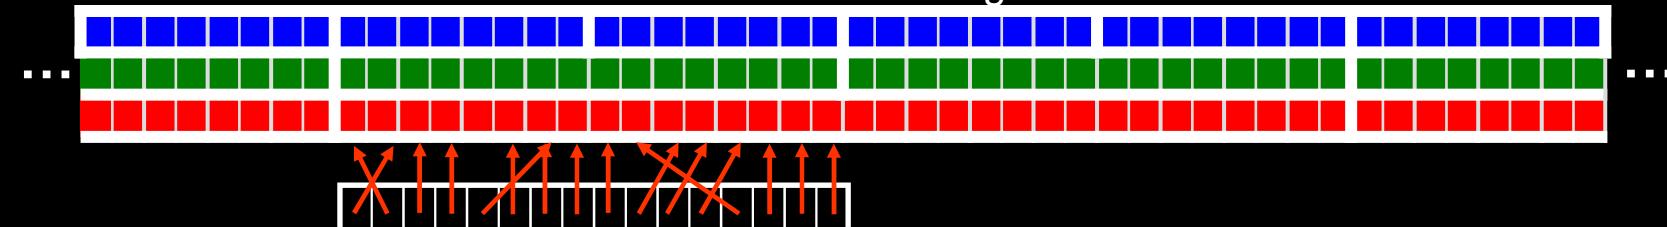

2 transactions - 64B and 32B segments

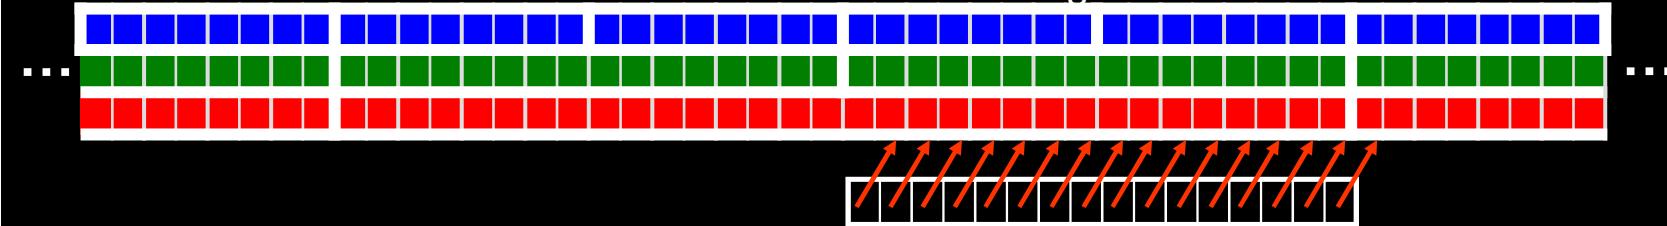

1 transaction - 128B segment

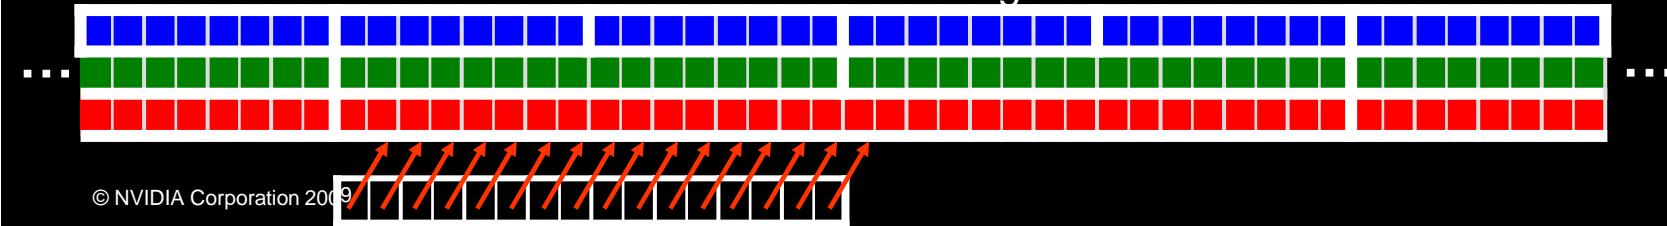




Shared Memory

- ~Hundred times faster than global memory
- Cache data to reduce global memory accesses
- Threads can cooperate via shared memory
- Use it to avoid non-coalesced access
 - Stage loads and stores in shared memory to re-order non-coalesceable addressing



Shared Memory Architecture


- Many threads accessing memory
 - Therefore, memory is divided into banks
 - Successive 32-bit words assigned to successive banks
- Each bank can service one address per cycle
 - A memory can service as many simultaneous accesses as it has banks
- Multiple simultaneous accesses to a bank result in a bank conflict
 - Conflicting accesses are serialized

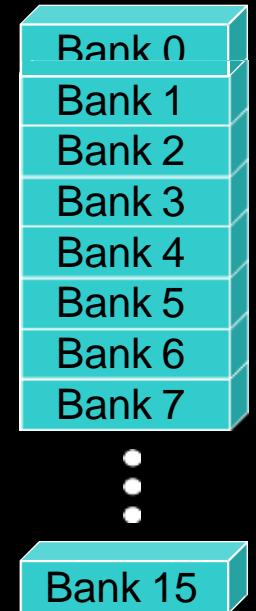

Bank Addressing Examples


- **No Bank Conflicts**

- Linear addressing
stride == 1

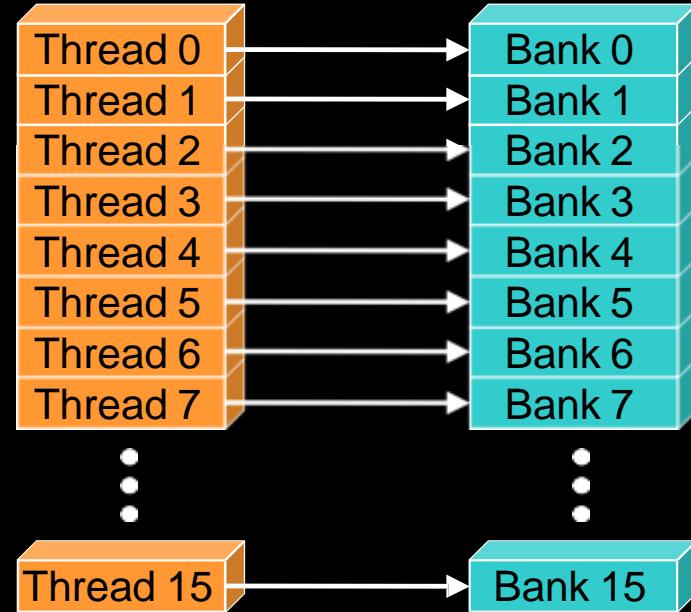


- **No Bank Conflicts**

- Random 1:1 Permutation

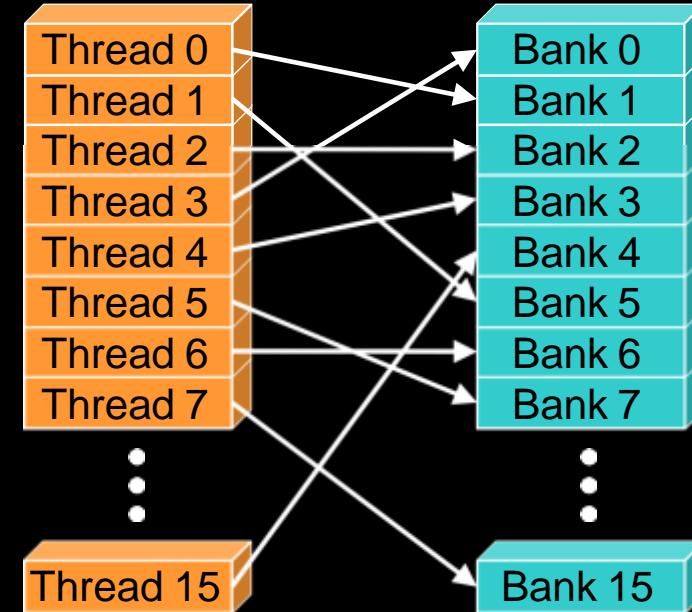


Bank Addressing Examples

- **2-way Bank Conflicts**
 - Linear addressing stride == 2

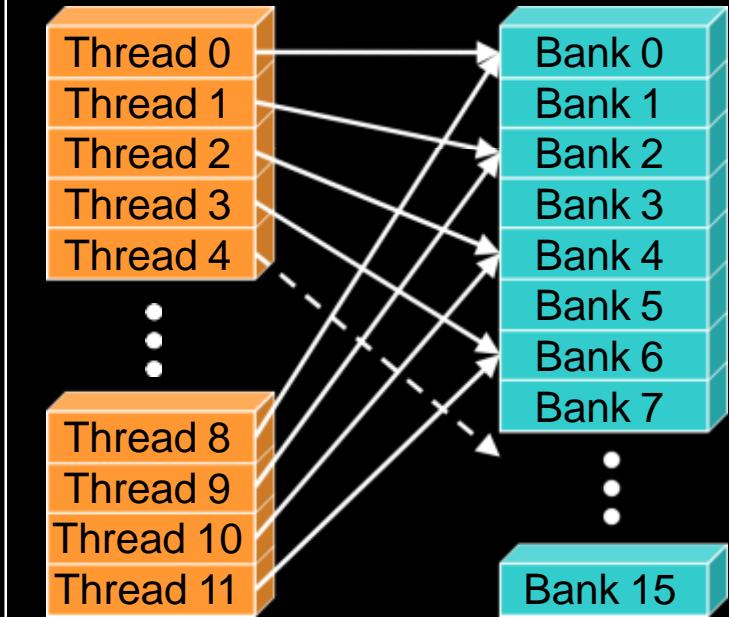

- **8-way Bank Conflicts**
 - Linear addressing stride == 8

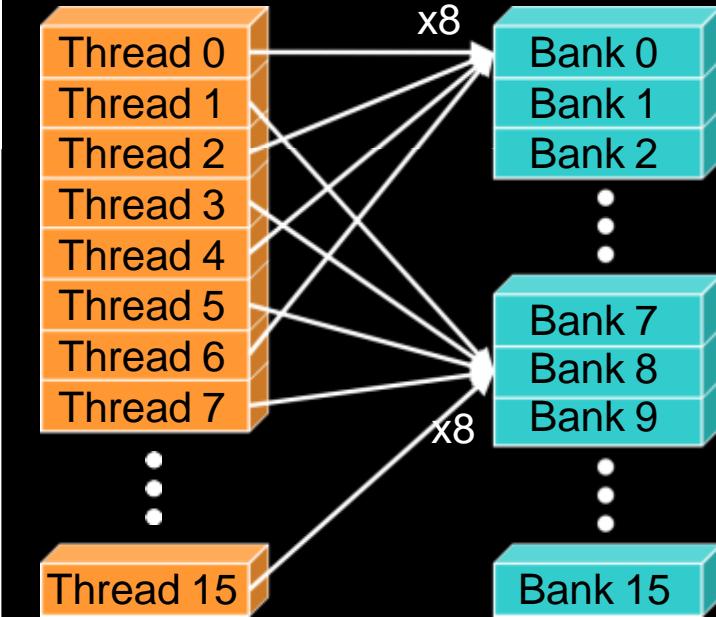




Shared memory bank conflicts

- Shared memory is ~ as fast as registers if there are no bank conflicts
- warp_serialize profiler signal reflects conflicts
- The fast case:
 - If all threads of a half-warp access different banks, there is no bank conflict
 - If all threads of a half-warp read the identical address, there is no bank conflict (broadcast)
- The slow case:
 - Bank Conflict: multiple threads in the same half-warp access the same bank
 - Must serialize the accesses
 - Cost = max # of simultaneous accesses to a single bank



Shared Memory Example: Transpose

- Each thread block works on a tile of the matrix
- Naïve implementation exhibits strided access to global memory

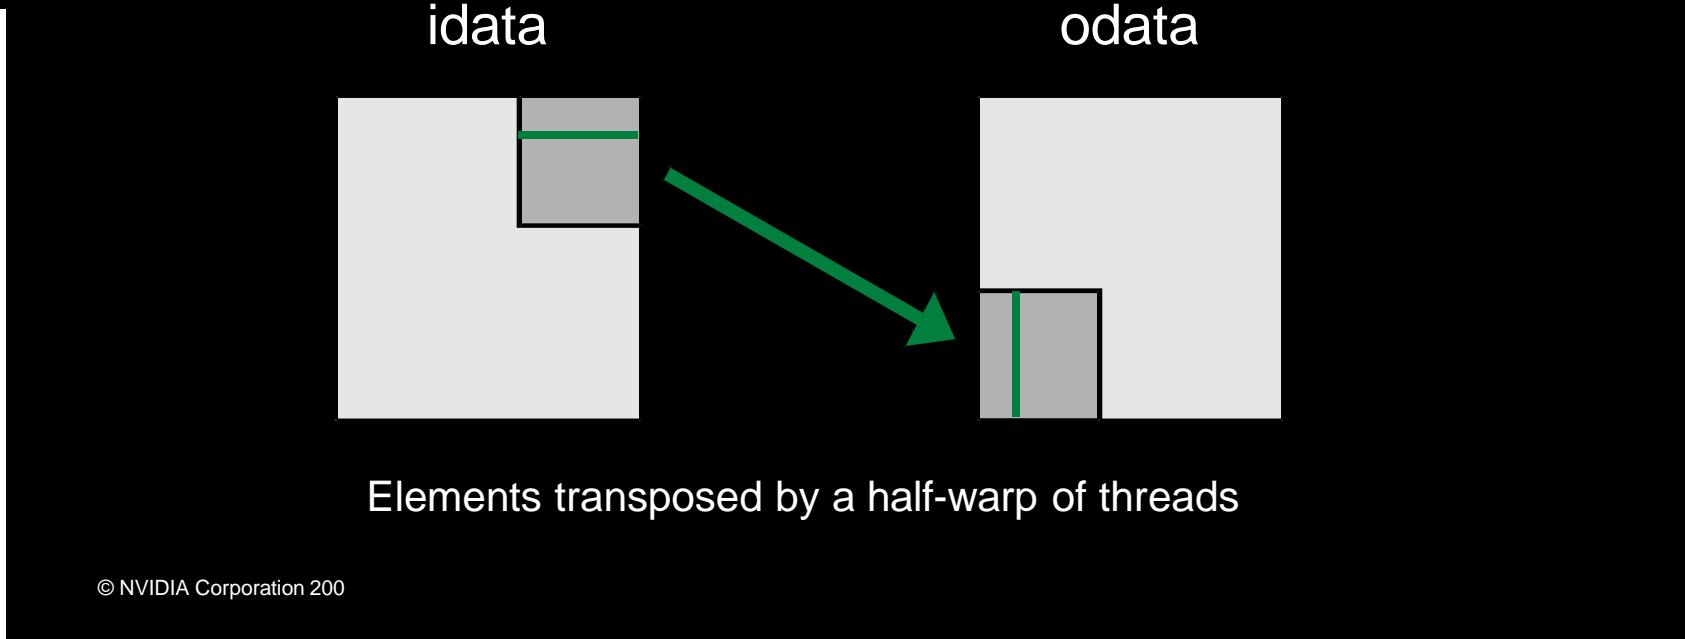

Naïve Transpose

- Loads are coalesced, stores are not (strided by height)

```
__global__ void transposeNaive(float *odata, float *idata,
                               int width, int height)
{
    int xIndex = blockIdx.x * TILE_DIM + threadIdx.x;
    int yIndex = blockIdx.y * TILE_DIM + threadIdx.y;

    int index_in  = xIndex + width * yIndex;
    int index_out = yIndex + height * xIndex;


    odata[index_out] = idata[index_in];
}
```



Coalescing through shared memory



- Access columns of a tile in shared memory to write contiguous data to global memory
- Requires `__syncthreads()` since threads access data in shared memory stored by other threads

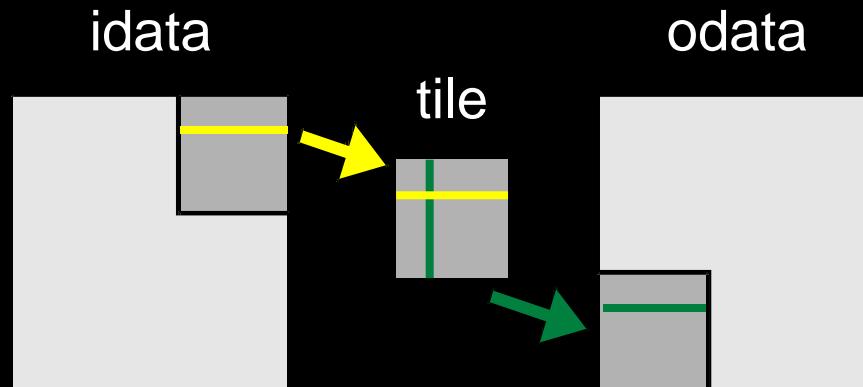

Elements transposed by a half-warp of threads

Coalescing through shared memory



```
__global__ void transposeCoalesced(float *odata, float *idata,
                                   int width, int height)
{
    __shared__ float tile[TILE_DIM][TILE_DIM];

    int xIndex = blockIdx.x * TILE_DIM + threadIdx.x;
    int yIndex = blockIdx.y * TILE_DIM + threadIdx.y;
    int index_in = xIndex + (yIndex)*width;

    xIndex = blockIdx.y * TILE_DIM + threadIdx.x;
    yIndex = blockIdx.x * TILE_DIM + threadIdx.y;
    int index_out = xIndex + (yIndex)*height;


    tile[threadIdx.y][threadIdx.x] = idata[index_in];

    __syncthreads();

    odata[index_out] = tile[threadIdx.x][threadIdx.y];
}
```

Bank Conflicts in Transpose

- 16x16 shared memory tile of floats
 - Data in columns are in the same bank
 - 16-way bank conflict reading columns in tile
- Solution - pad shared memory array
 - `__shared__ float tile[TILE_DIM] [TILE_DIM+1];`
 - Data in anti-diagonals are in same bank

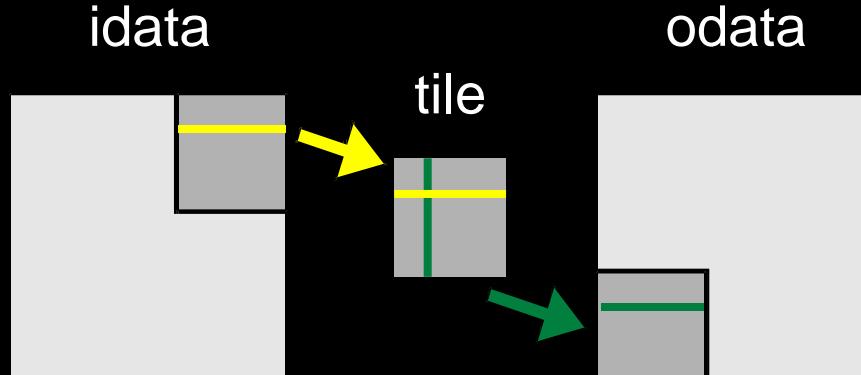

Elements transposed by a half-warp of threads



Memory Padding

Bank 0	Bank 1	Bank 2	Bank 3	Bank 4
0	1	2	3	4
0	1	2	3	4
0	1	2	3	4
0	1	2	3	4
0	1	2	3	4

Bank Conflict

Bank 0	Bank 1	Bank 2	Bank 3	Bank 4
0	1	2	3	4
4	0	1	2	3
3	4	0	1	2
2	3	4	0	1
1	2	3	4	0


No Bank Conflict



Textures in CUDA


- **Texture is an object for reading data**
- **Benefits:**
 - Data is cached
 - Helpful when coalescing is a problem
 - Filtering
 - Linear / bilinear / trilinear interpolation
 - Dedicated hardware
 - Wrap modes (for “out-of-bounds” addresses)
 - Clamp to edge / repeat
 - Addressable in 1D, 2D, or 3D
 - Using integer or normalized coordinates

Texture Addressing

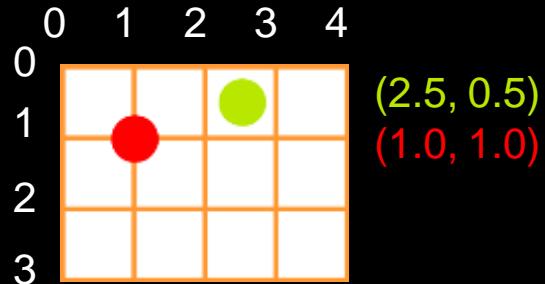


Wrap

- Out-of-bounds coordinate is wrapped (modulo arithmetic)

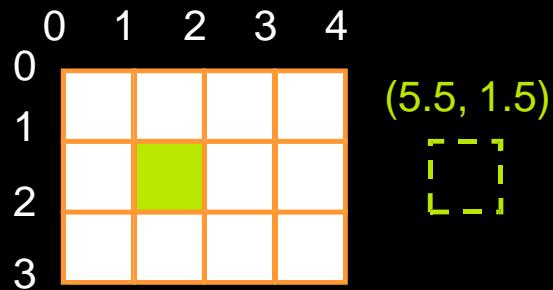

Clamp

- Out-of-bounds coordinate is replaced with the closest boundary

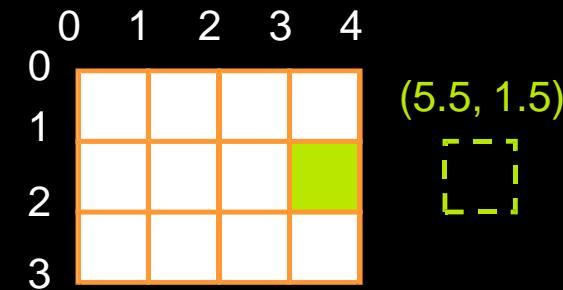



CUDA Texture Types

- **Bound to linear memory**
 - Global memory address is bound to a texture
 - Only 1D
 - Integer addressing
 - No filtering, no addressing modes
- **Bound to CUDA arrays**
 - Block linear CUDA array is bound to a texture
 - 1D, 2D, or 3D
 - Float addressing (size-based or normalized)
 - Filtering
 - Addressing modes (clamping, repeat)
- **Bound to pitch linear (CUDA 2.2)**
 - Global memory address is bound to a texture
 - 2D
 - Float/integer addressing, filtering, and clamp/repeat addressing modes similar to CUDA arrays




Summary

- GPU hardware can achieve great performance on data-parallel computations if you follow a few simple guidelines:
 - Use parallelism efficiently
 - Coalesce memory accesses if possible
 - Take advantage of shared memory
 - Explore other memory spaces
 - Texture
 - Constant
 - Reduce bank conflicts

Matrix Multiplication: Simple Host Version


```
void MatrixMulOnHost(float* M, float* N, float* P, int Width)
```

```
{  
    for (int i = 0; i < Width; ++i)  
        for (int j = 0; j < Width; ++j) {  
            double sum = 0;  
            for (int k = 0; k < Width; ++k) {  
                double a = M[i * width + k];  
                double b = N[k * width + j];  
                sum += a * b;  
            }  
            P[i * Width + j] = sum;  
        }  
}
```

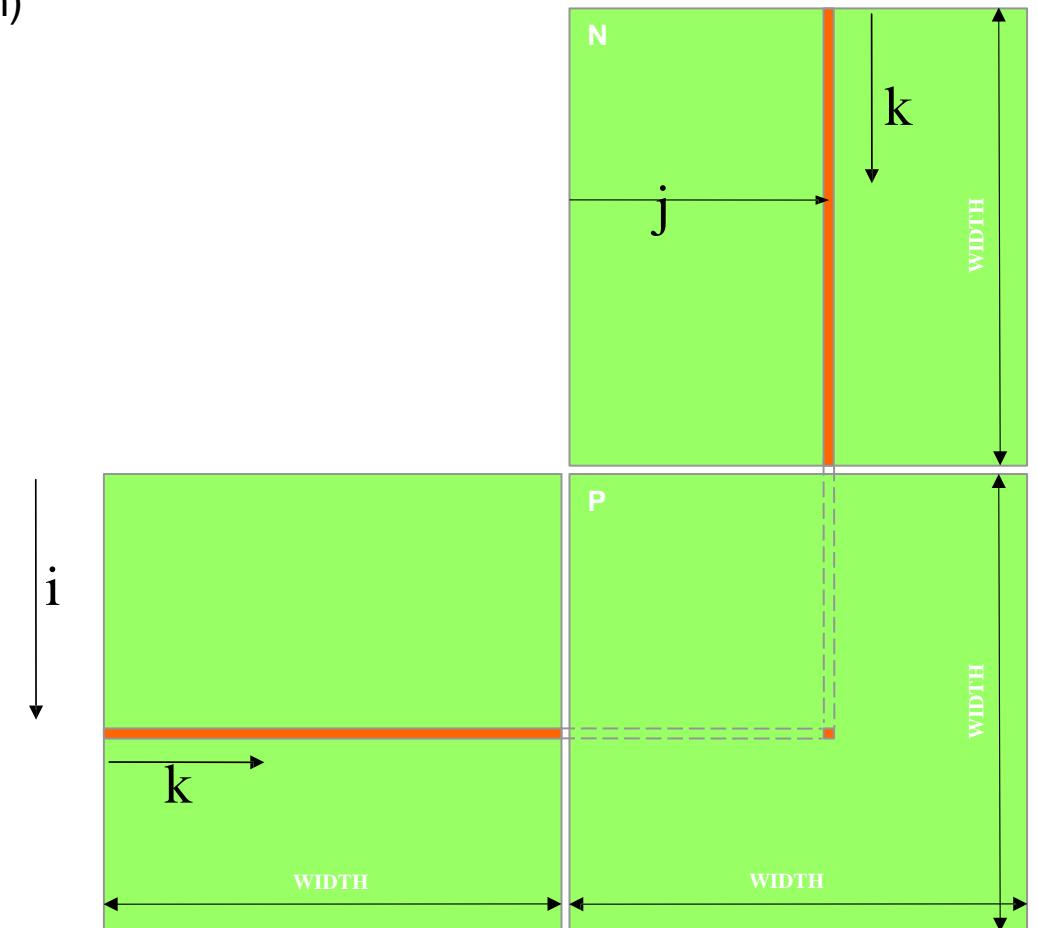

Simple Kernel


```
__global__ void simpleMultiply(float *a, float* b, float *c,  
                               int N)  
{  
    int row = blockIdx.y * blockDim.y + threadIdx.y;  
    int col = blockIdx.x * blockDim.x + threadIdx.x;  
    float sum = 0.0f;  
    for (int i = 0; i < w; i++) {  
        sum += a[row*w+i] * b[i*N+col];  
    }  
    c[row*N+col] = sum;  
}
```

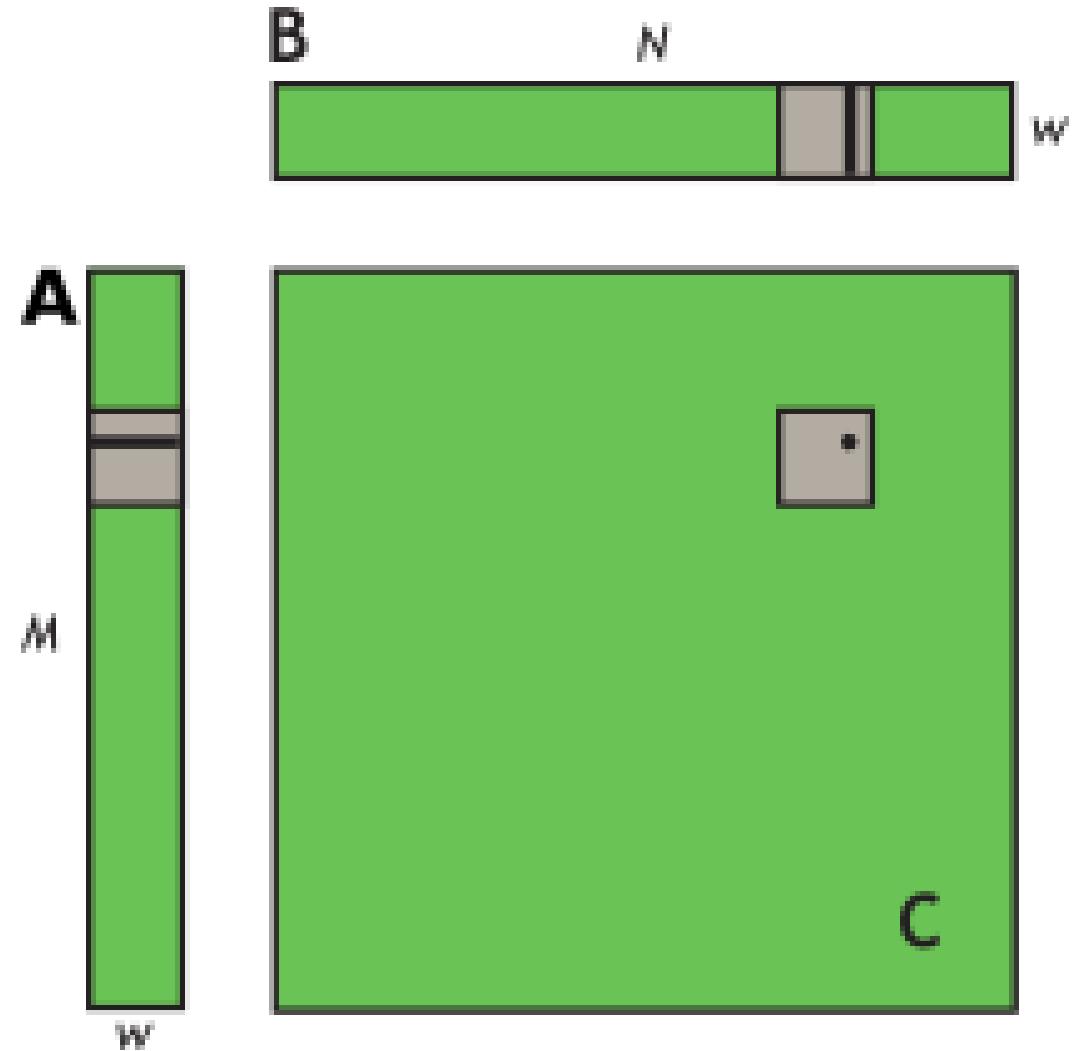


Kernel with Shared Memory

(CUDA Samples\matrixMul)

```
__global__ void coalescedMultiply(float *a, float* b, float *c,  
                                  int N)  
{  
    __shared__ float aTile[TILE_DIM][TILE_DIM];  
  
    int row = blockIdx.y * blockDim.y + threadIdx.y;  
    int col = blockIdx.x * blockDim.x + threadIdx.x;  
    float sum = 0.0f;  
    aTile[threadIdx.y][threadIdx.x] = a[row*TILE_DIM+threadIdx.x];  
    __syncwarp();  
    for (int i = 0; i < TILE_DIM; i++) {  
        sum += aTile[threadIdx.y][i]* b[i*N+col];  
    }  
    c[row*N+col] = sum;  
}
```

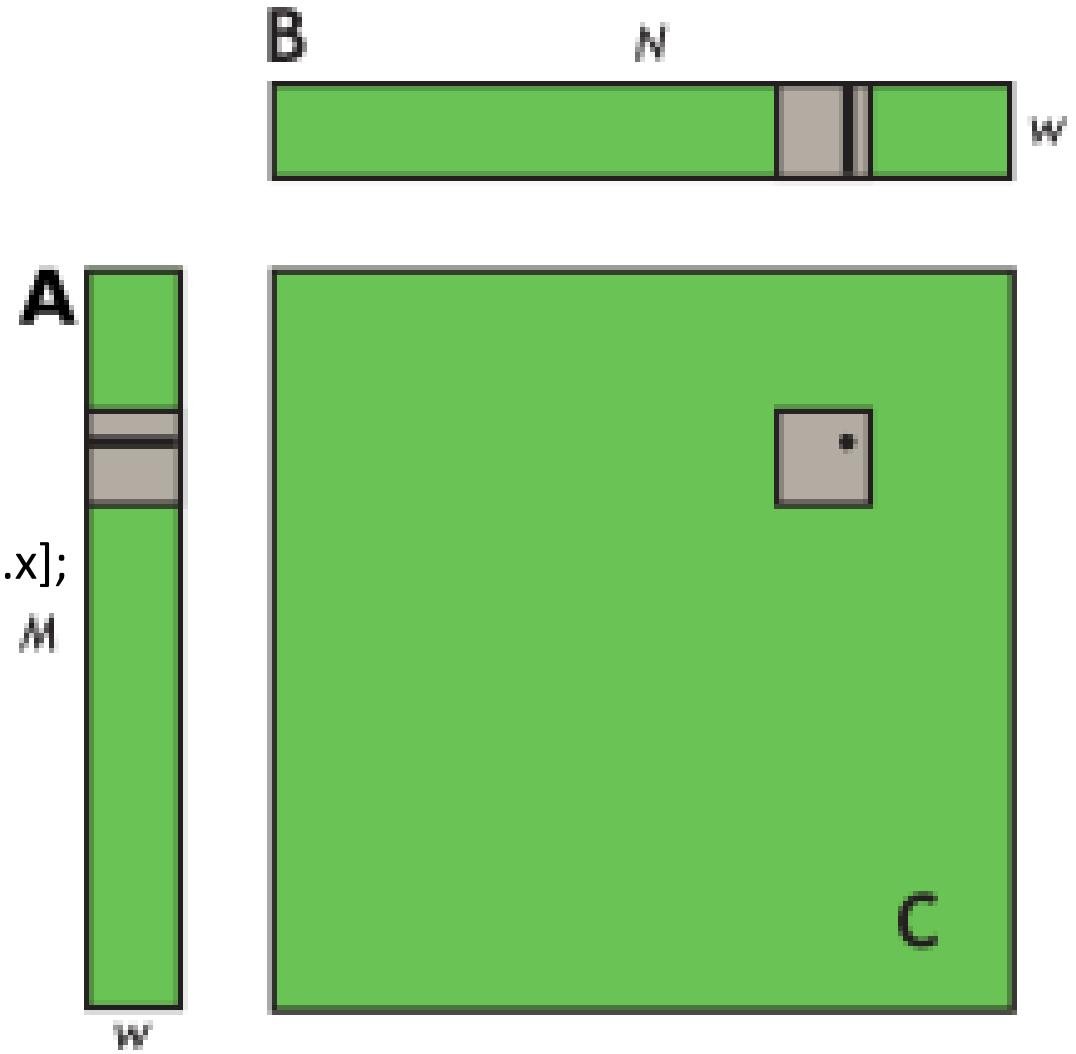


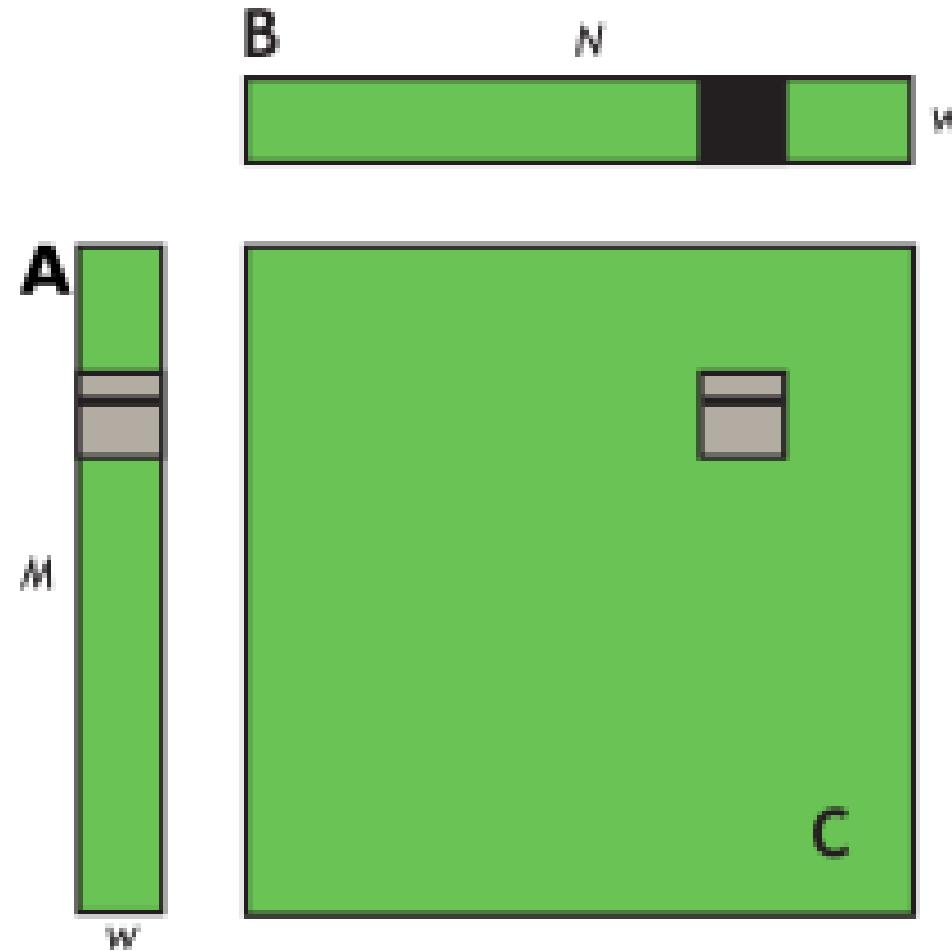

Computing a row of a tile in C using one row of A and an entire tile of B

Eliminate repeated reading of entire tile of B

```
__global__ void sharedABMultiply(float *a, float* b, float *c,
                                int N)
{
    __shared__ float aTile[TILE_DIM][TILE_DIM],
                 bTile[TILE_DIM][TILE_DIM];
    int row = blockIdx.y * blockDim.y + threadIdx.y;
    int col = blockIdx.x * blockDim.x + threadIdx.x;
    float sum = 0.0f;
    aTile[threadIdx.y][threadIdx.x] = a[row*TILE_DIM+threadIdx.x]; M
    bTile[threadIdx.y][threadIdx.x] = b[threadIdx.y*N+col]; W
    __syncthreads();
    for (int i = 0; i < TILE_DIM; i++) {
        sum += aTile[threadIdx.y][i]* bTile[i][threadIdx.x];
    }
    c[row*N+col] = sum;
}
```

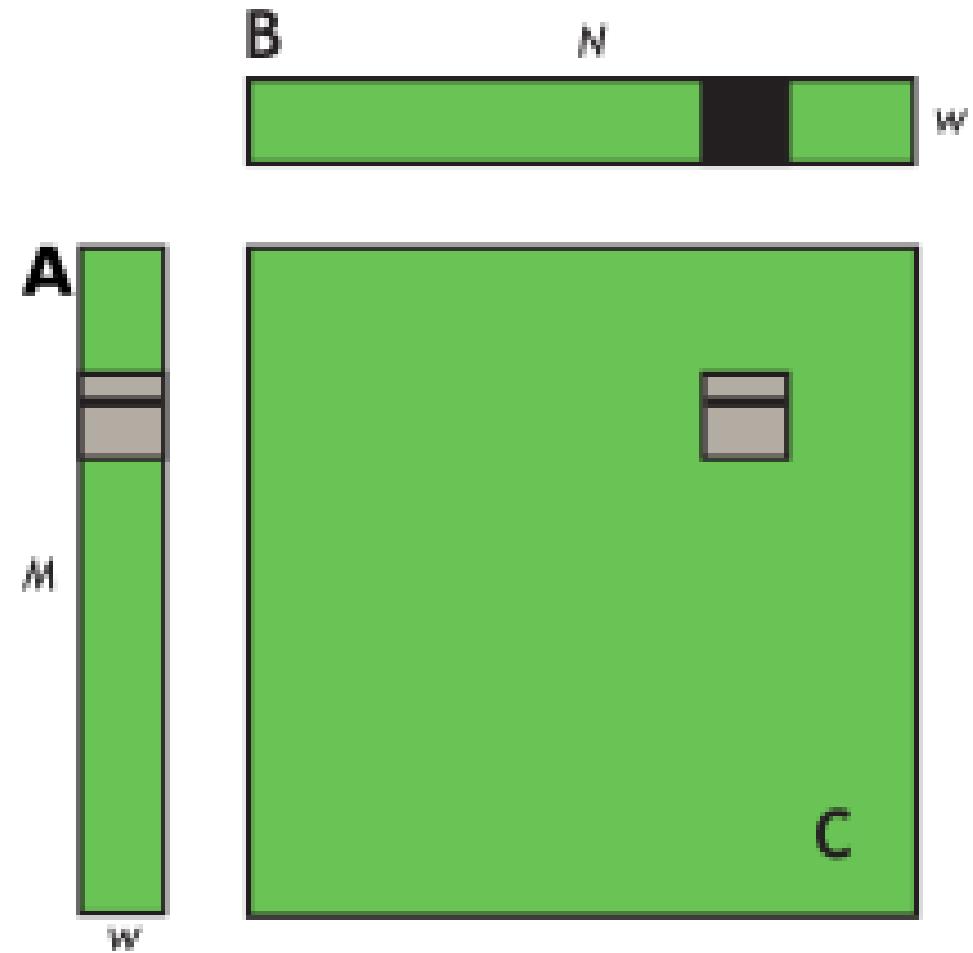

Communication via Shared Mem.

- Little question:

```
__global__race_condition()
{
    __shared__int shared_var = threadIdx.x;
    // What is the value of shared_var here???
}
```

Communication via Shared Mem.

- Answer:
 - Value of shared_var is undefined
 - This is a race condition
 - Multiple threads writing to one variable w/o explicit synchronization
 - Variable will have arbitrary (i.e. undefined) value
 - Need for synchronization/barriers
 - __syncthreads()
 - Atomic operations

Communication via Shared Mem.

- `__syncthreads()`
 - Point of synchronization for all threads in a block
 - Not always necessary
 - Half-warps are lock-stepped
- Common usage: make sure data is ready

```
__global__ void kernel(float * d_src)
{
    __shared__ float a_sh[BLOCK_SIZE];
    a_sh[threadIdx.x] = d_src[threadIdx.x];
    __syncthreads();
    // a_sh is now correctly filled by all
    // threads in the block
}
```

Communication via Shared Mem.

- Atomic operations
 - atomicAdd(), atomicSub(), atomicExch(), atomicMax(), ...
- Example

```
__global__ void sum(float * src, float * dst)
{
    atomicAdd(dst, src[threadIdx.x]);
}
```

Communication via Shared Mem.

- But: atomic operations are not cheap
- Serialized write access to a memory cell
- Better solution:
 - Partial sums within thread block
 - atomicAdd() on a `__shared__` variable
 - Global sum
 - atomicAdd() on global memory

Communication via Shared Mem.

- Better version of sum()

```
__global__ void sum(float * src, float * dst)
{
    int pos = blockDim.x*blockIdx.x + threadIdx.x;

    __shared__ float partial_sum;
    if (threadIdx.x == 0) partial_sum = 0.0f;
    __syncthreads();

    atomicAdd(&partial_sum, src[pos]);

    if (threadIdx.x == 0) atomicAdd(dst, partial_sum)
}
```

Communication via Shared Mem.

- General guidelines:
 - Do not synchronize or serialize if not necessary
 - Use `__syncthreads()` to wait until `__shared__` data is filled
 - Data access pattern is regular or predictable
→ `__syncthreads()`
 - Data access pattern is sparse or not predictable
→ atomic operations
 - Atomic operations are much faster for shared variables than for global ones

Atomic Memory Operations

(CUDA Samples / simpleAtomicIntrinsics)

What Is an Atomic Memory Operation?

- Uninterruptable read-modify-write memory operation
 - Requested by threads
 - Updates a value at a specific address
- Serializes contentious updates from multiple threads
- Enables co-ordination among >1 threads
- Limited to specific functions & data sizes

Precise Meaning of atomicAdd()


```
int atomicAdd(int *p, int v)
{
    int old;
exclusive_single_thread
    {
        // atomically perform LD; ADD; ST ops
        old = *p; // Load from memory
        *p = old + v; // Store after adding v
    }
    return old;
}
```

Simple Atomic Example


$x = x + 4.5;$




Simple Atomic Example

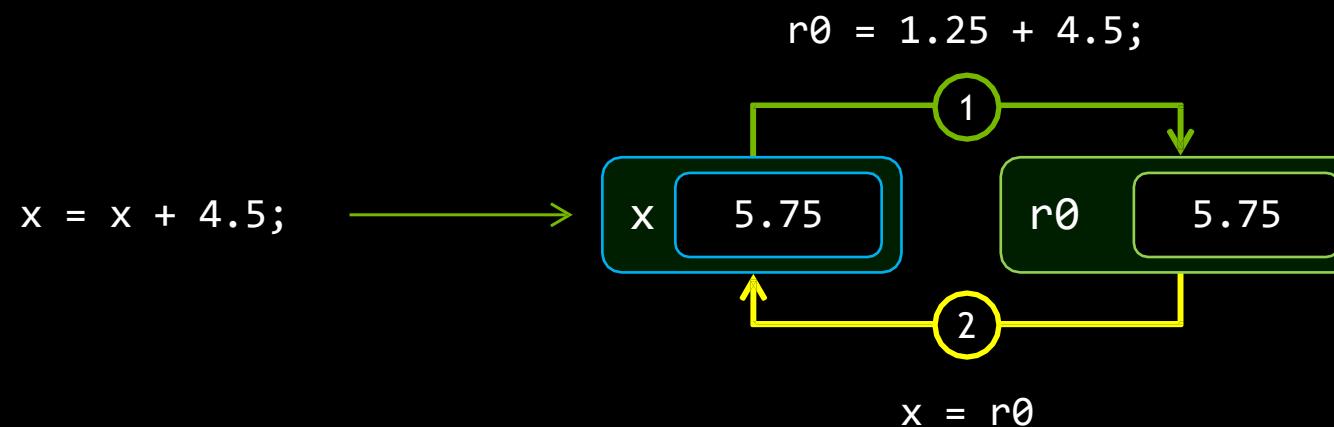


Simple Atomic Example

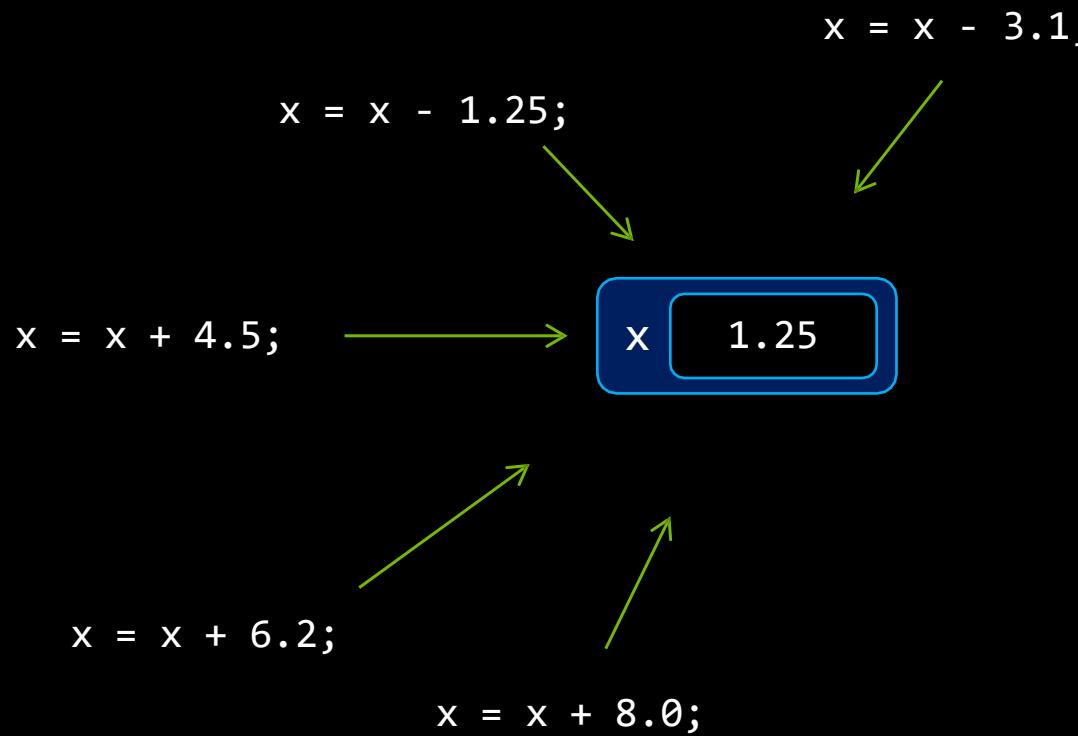


Simple Atomic Example

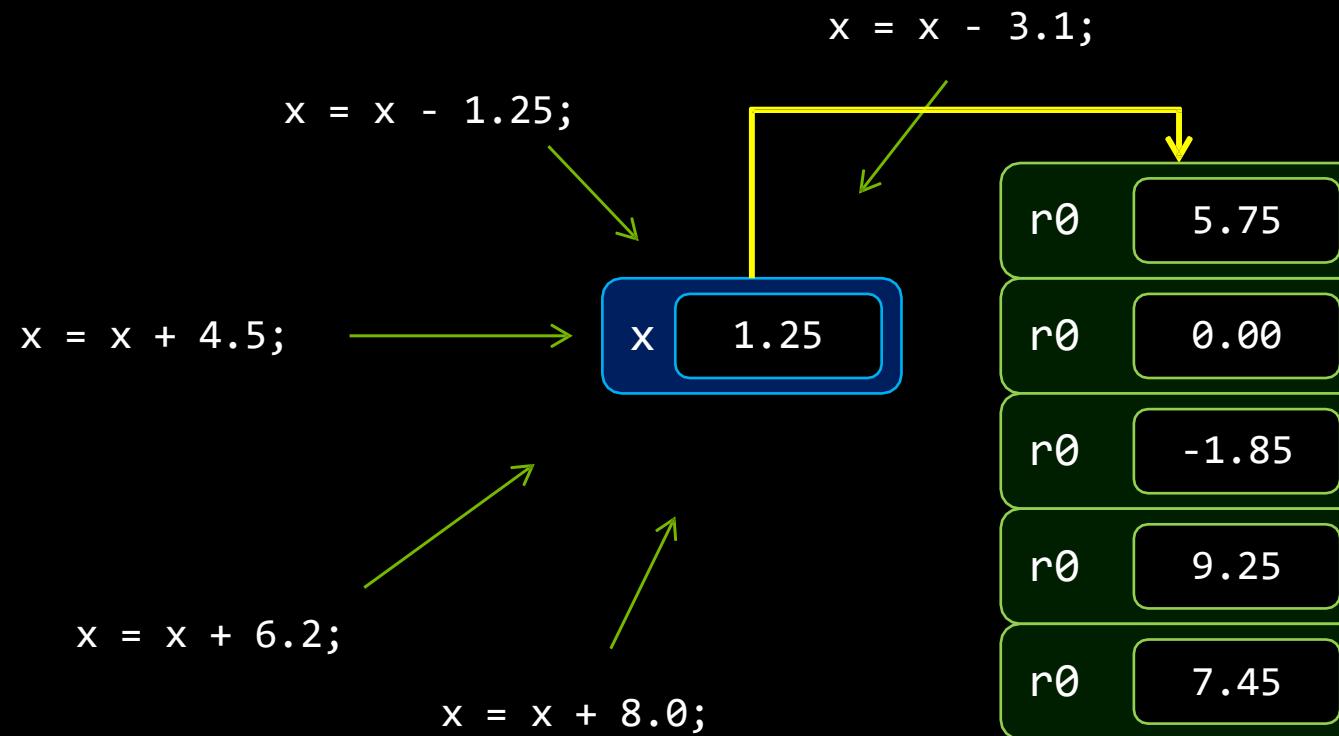


Simple Atomic Example

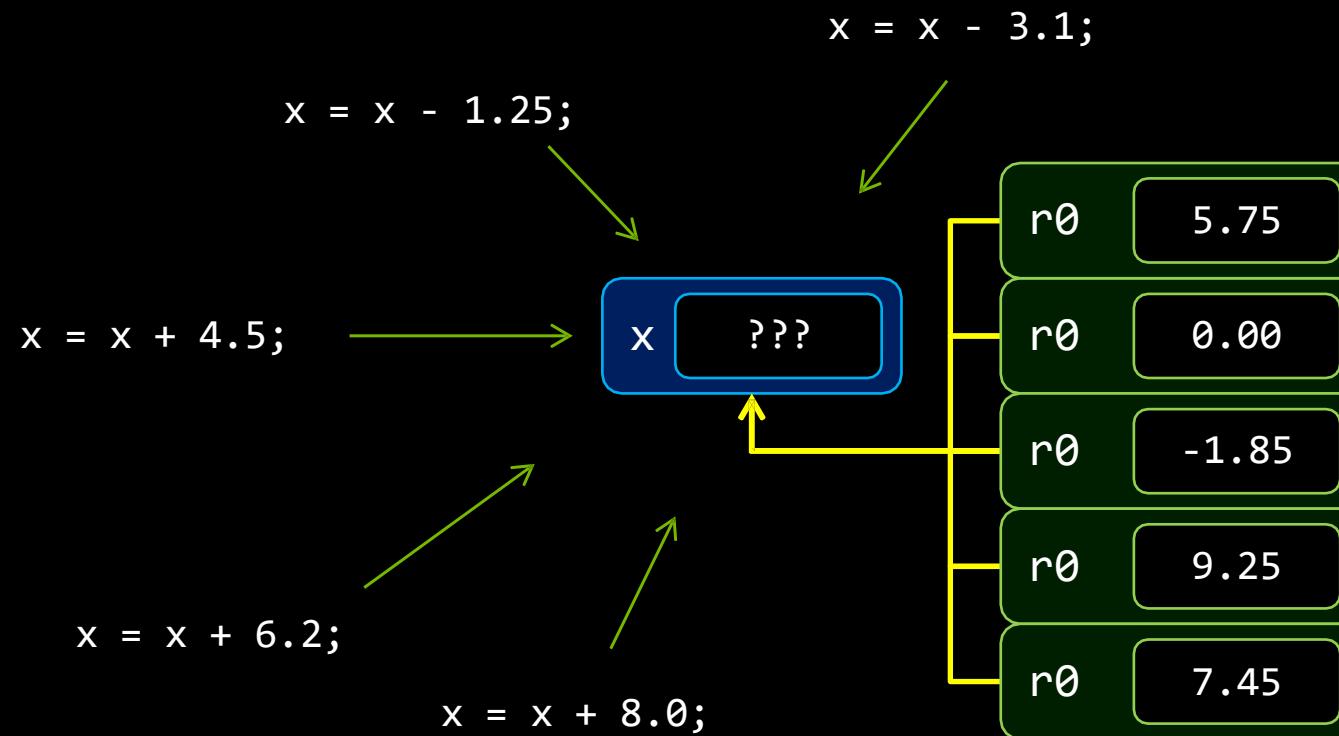

Simple Atomic Example

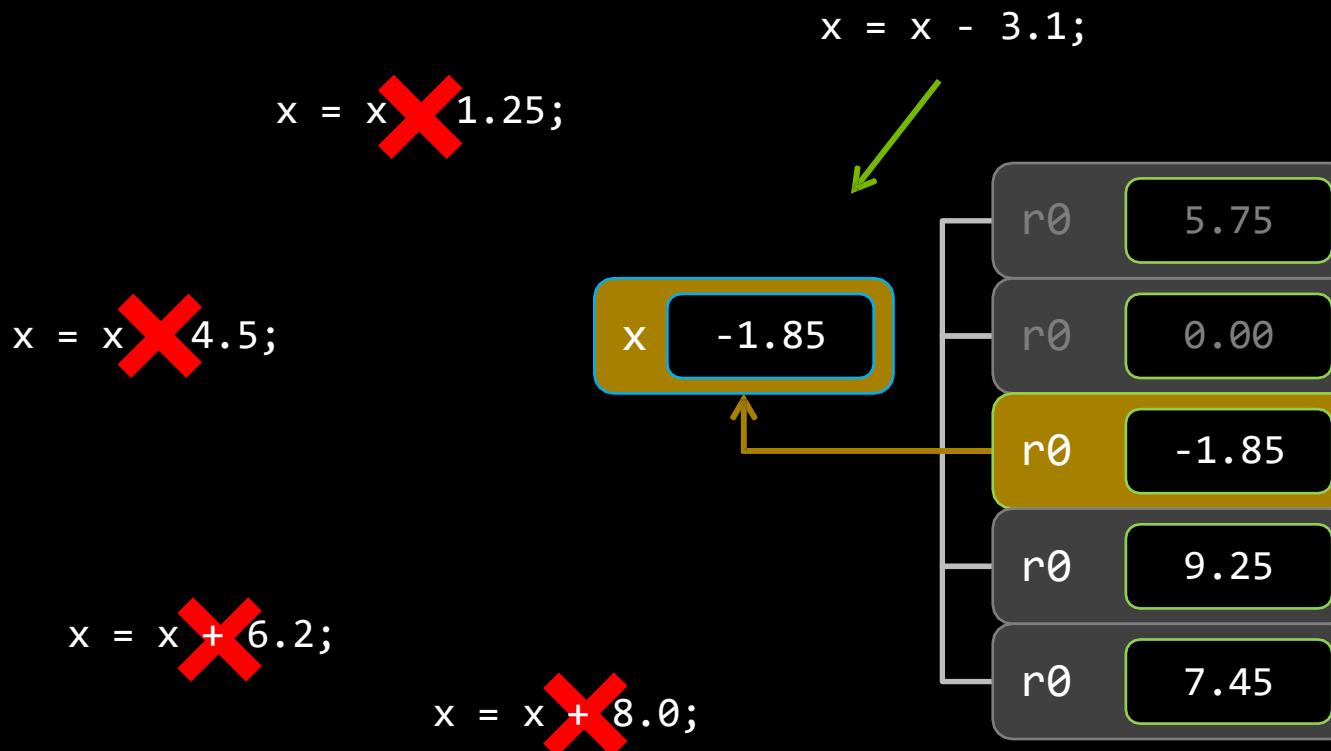


Simple Atomic Example

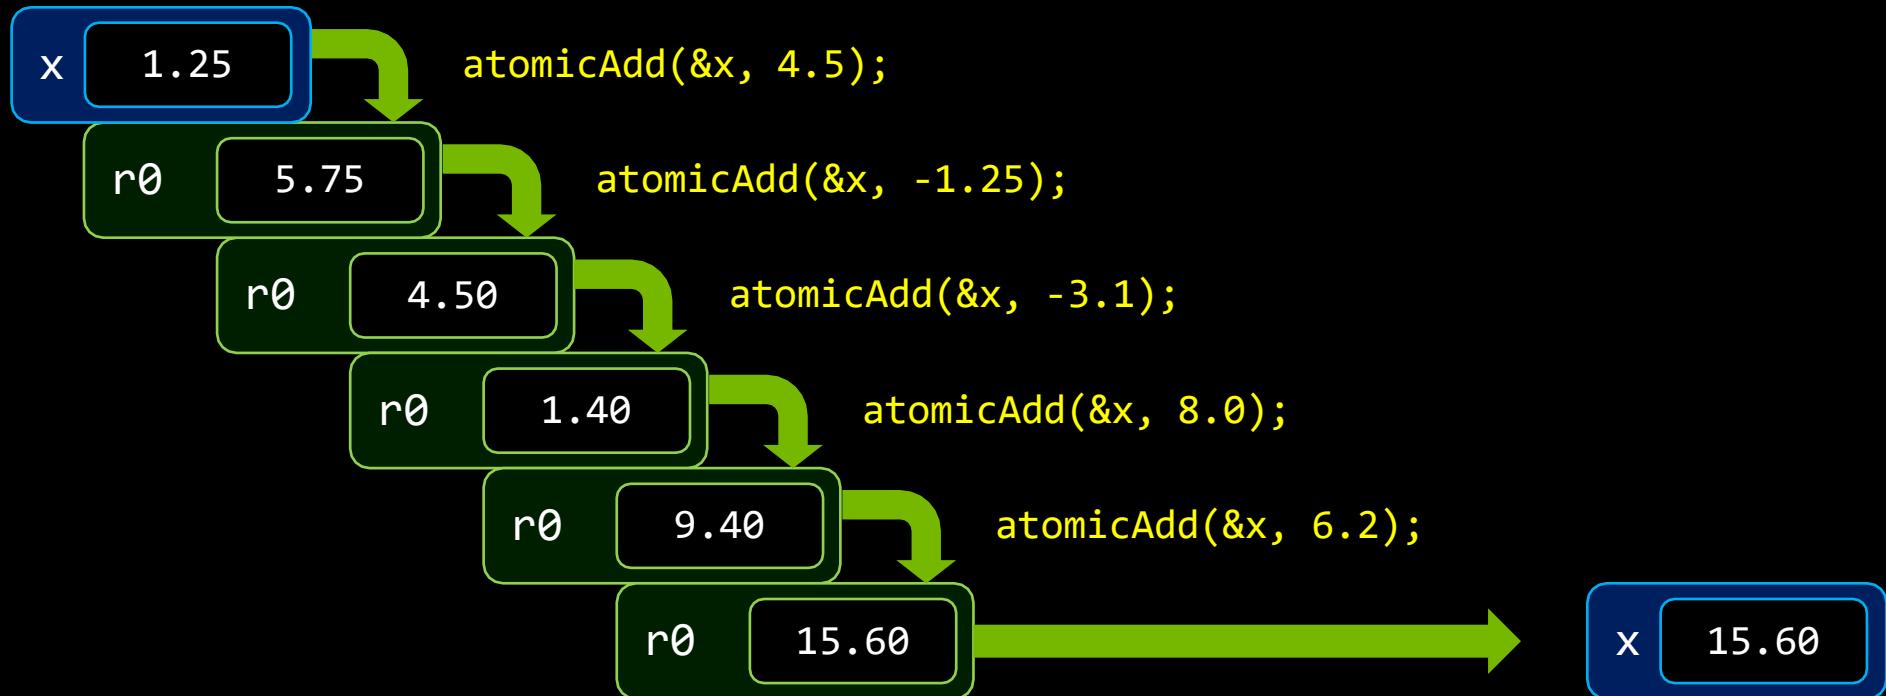

Why Use Atomics?

Common problem: races on read-modify-write of shared data


- Transactions & Data Access Control

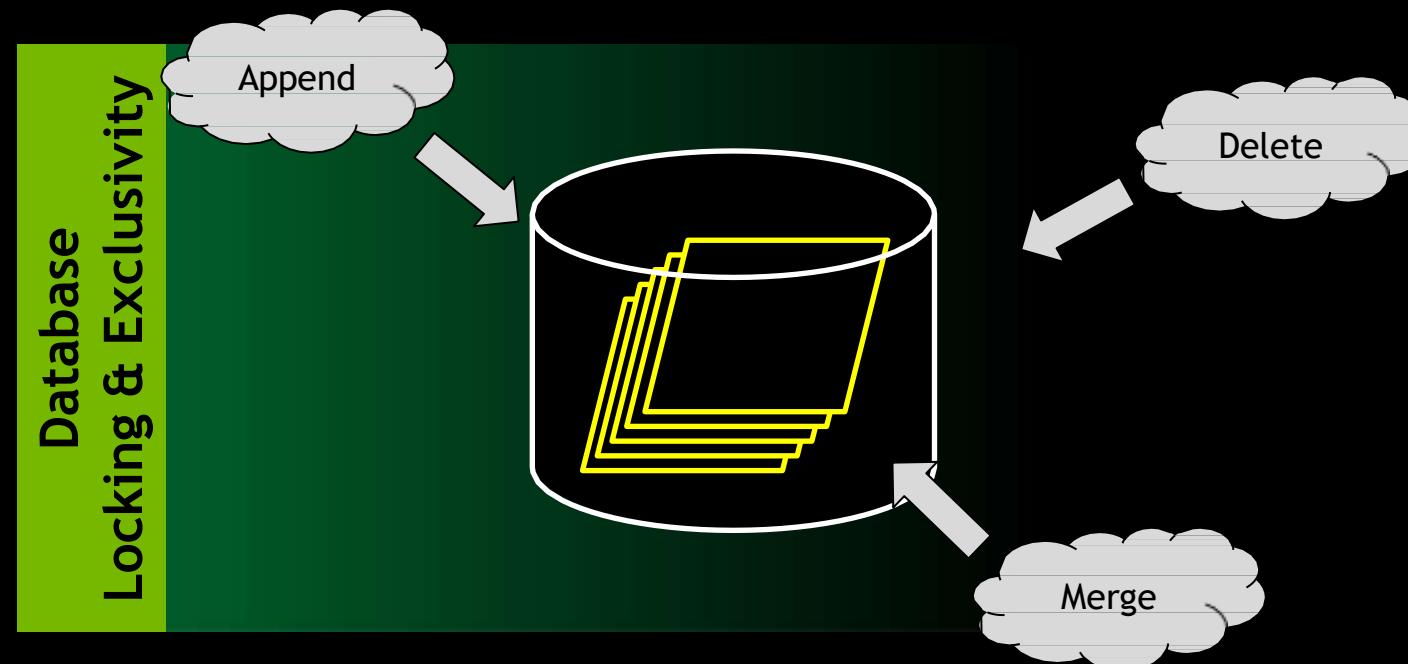

Why Use Atomics?

Common problem: races on read-modify-write of shared data


- Transactions & Data Access Control
- Data aggregation & enumeration

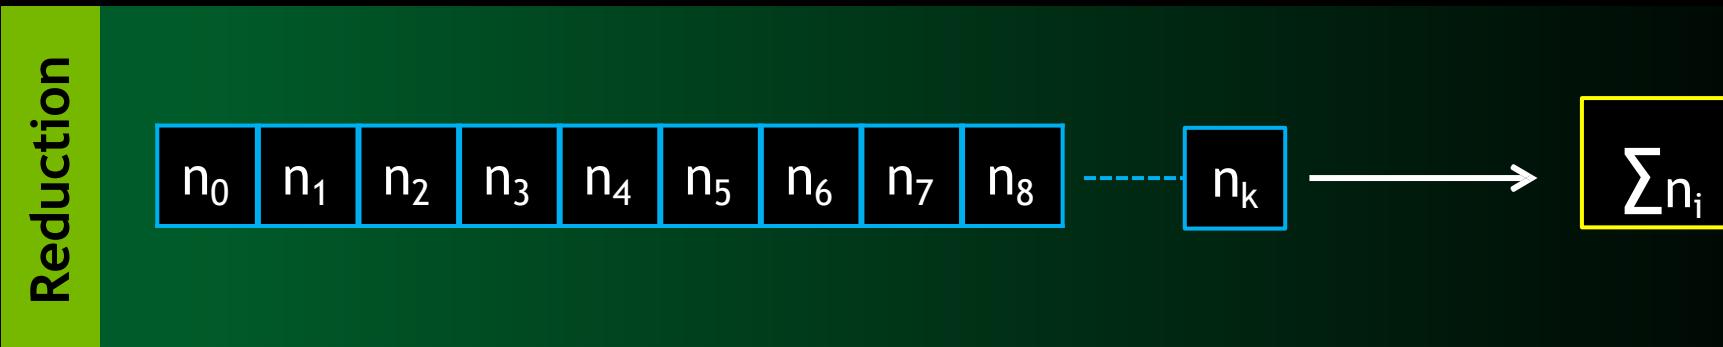


Why Use Atomics?

Common problem: races on read-modify-write of shared data

- Transactions & Data Access Control
- Data aggregation & enumeration
- Concurrent data structures

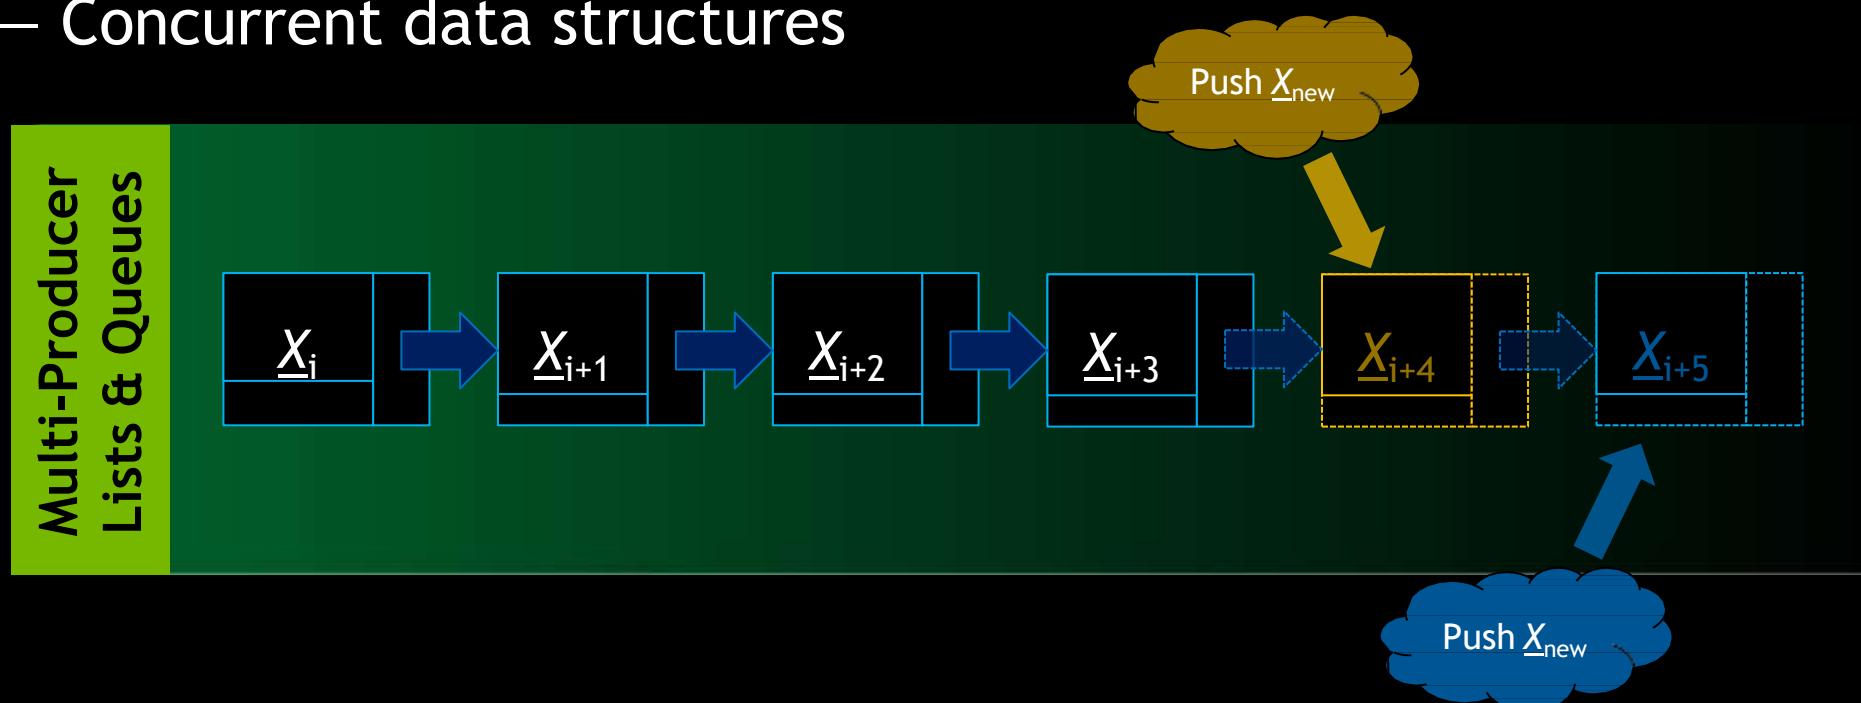


Compare-and-Swap

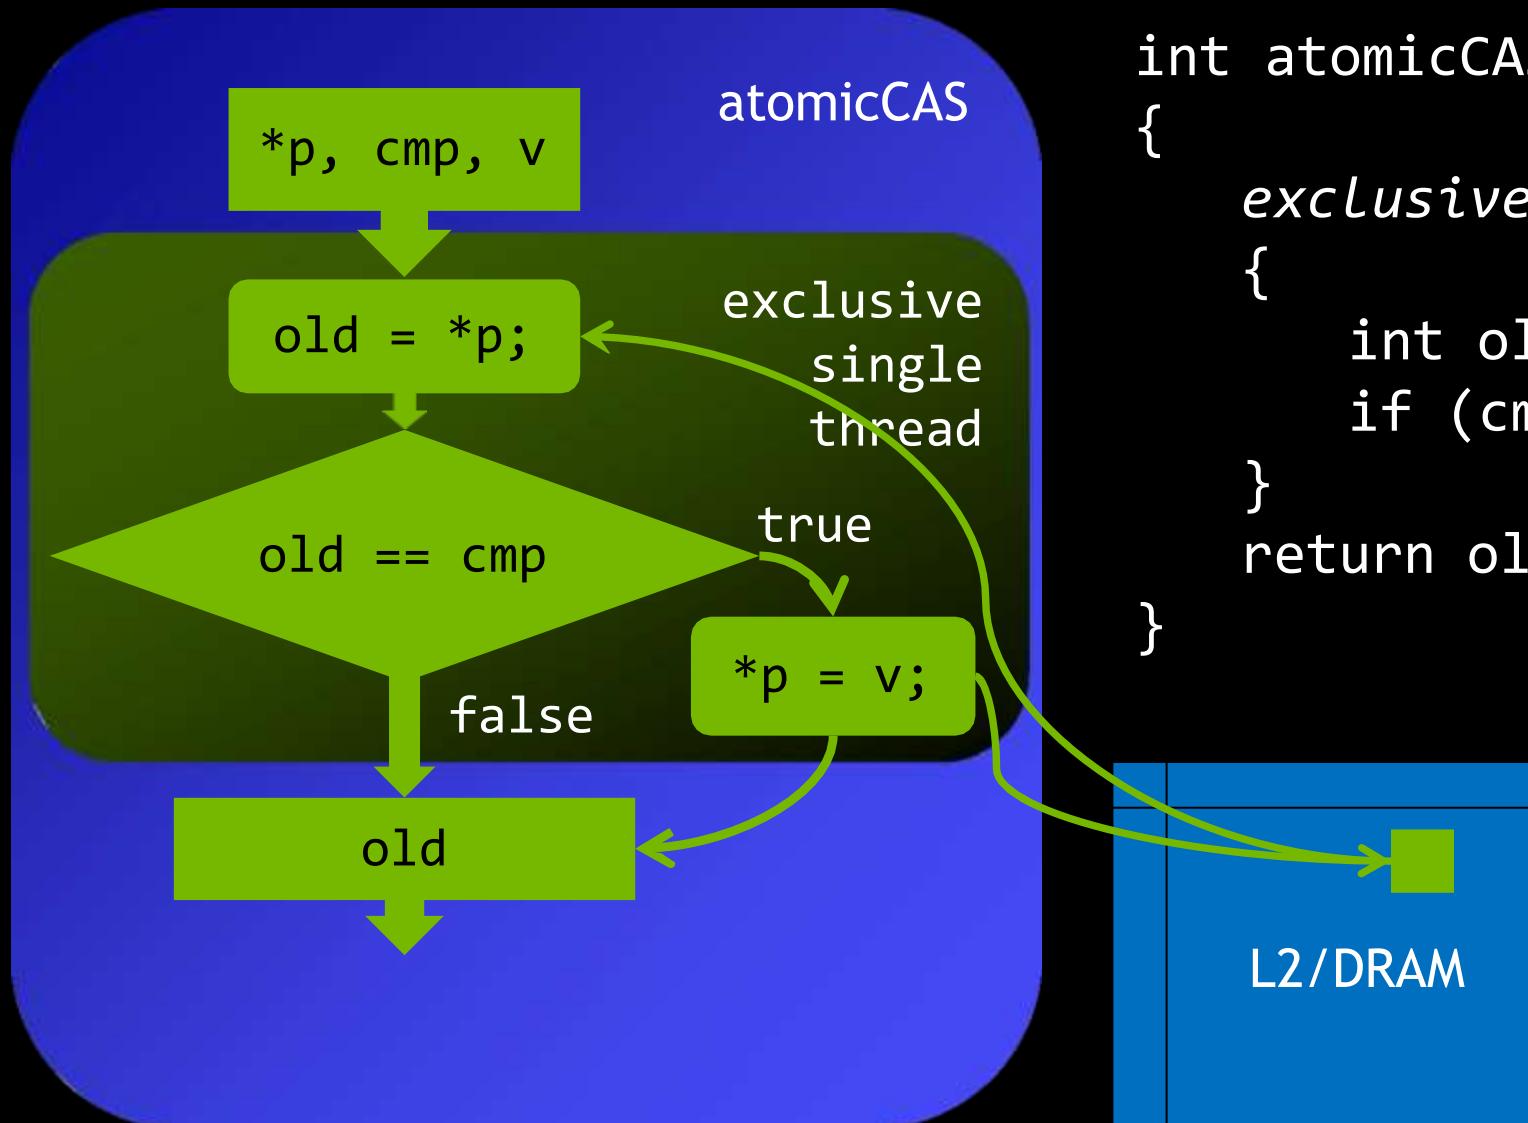


```
int atomicCAS(int *p, int cmp, int v
{
    exclusive_single_thread
    {
        int old = *p;
        if (cmp == old) *p = v;
    }
    return old;
}
```

Arithmetic/Logical Atomic Operations

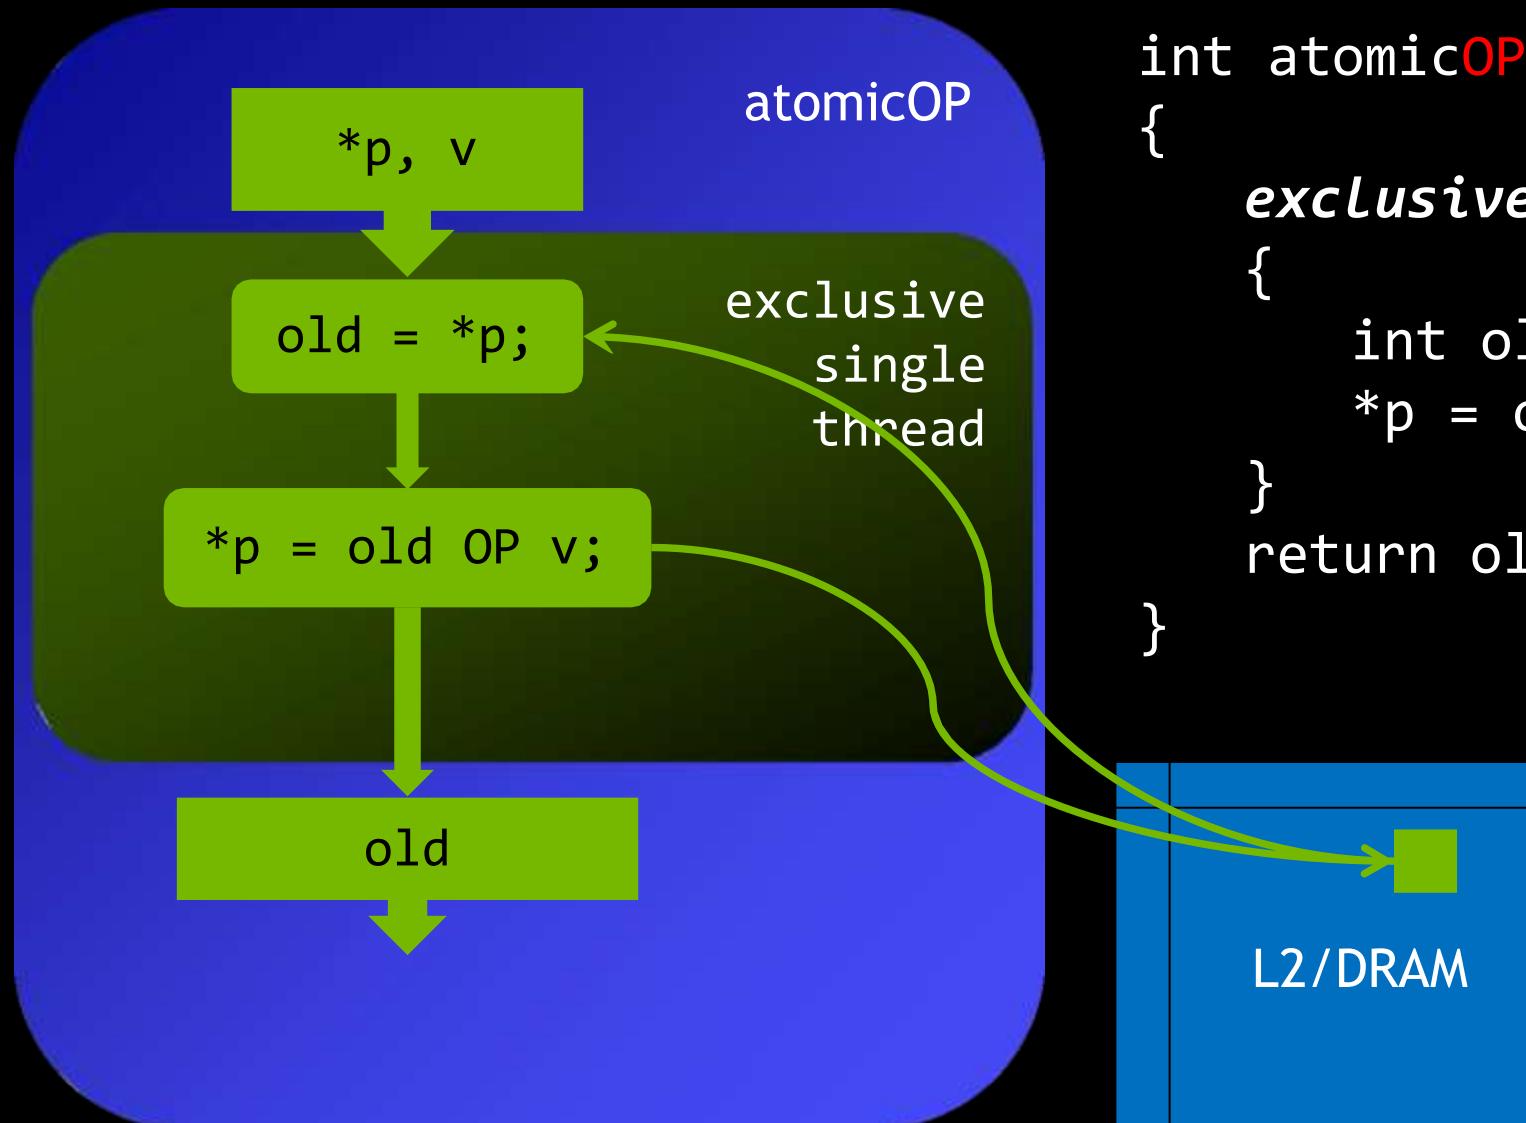

Overwriting Atomic Operations

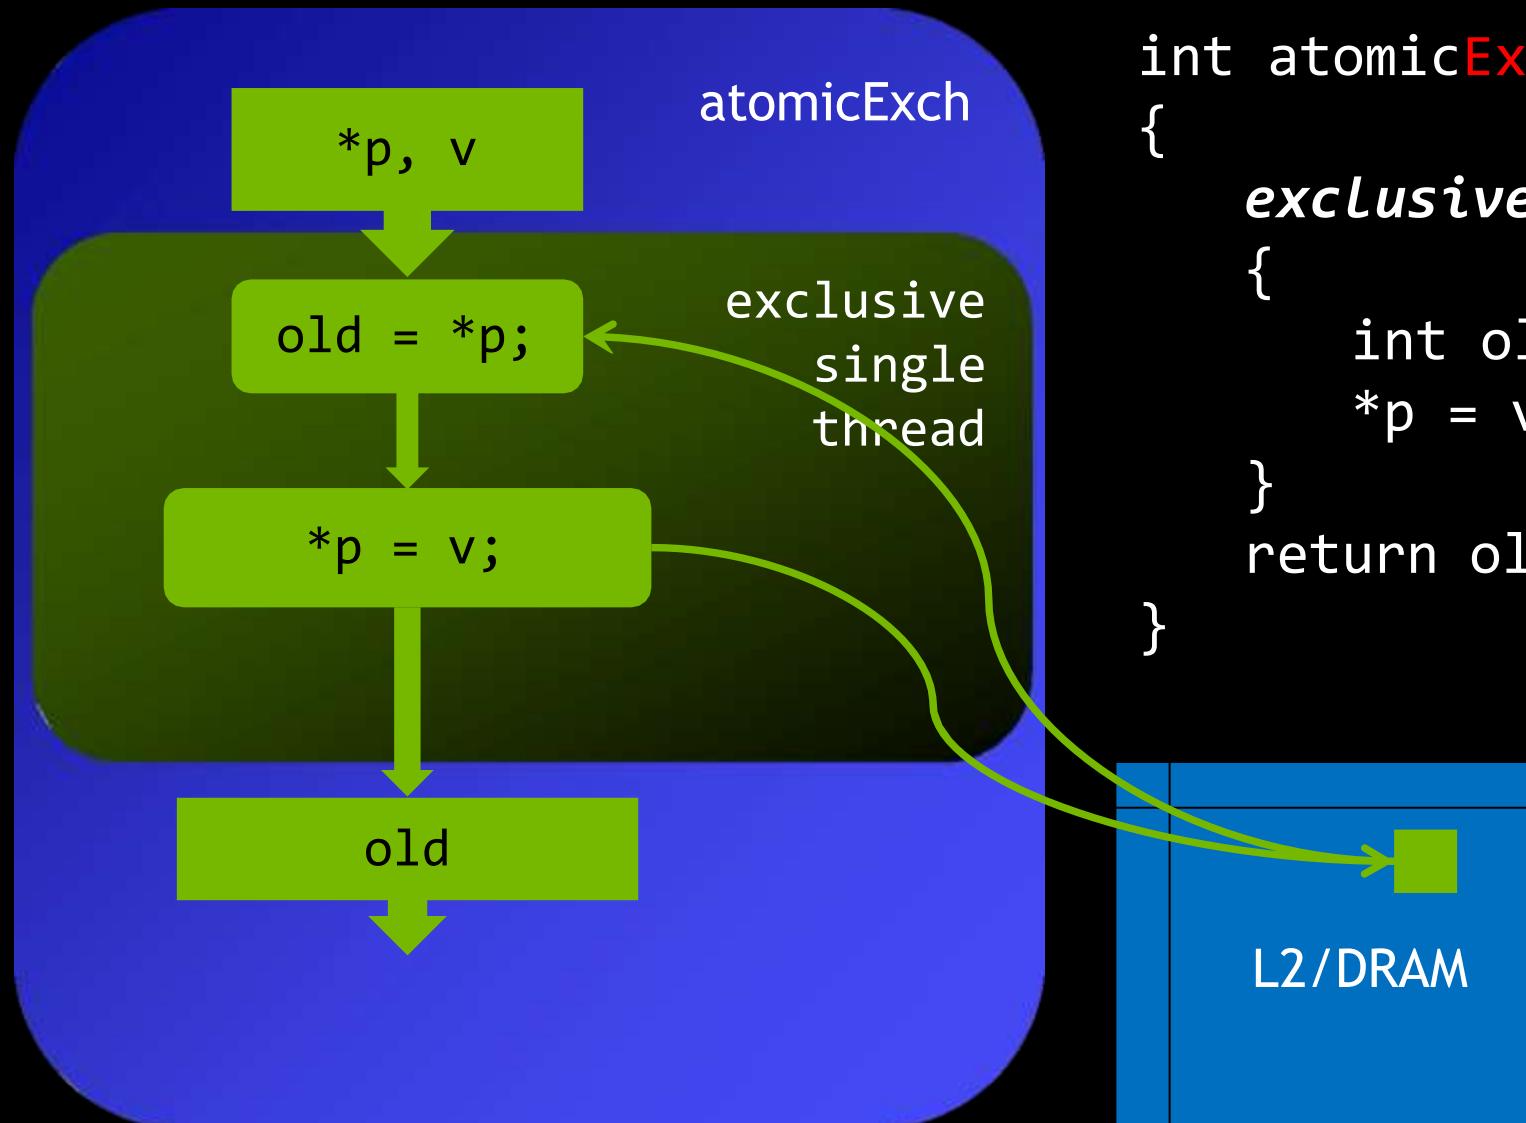

```
int atomicExch(int *p, int v)
{
    exclusive_single_thread
    {
        int old = *p;
        *p = v;
    }
    return old;
}
```

Programming Styles using Coordination


Locking

Lock-free

Wait-free


Locking Style of Programming

- All threads try to get the lock
- One does
 - Does its work
 - Releases the lock

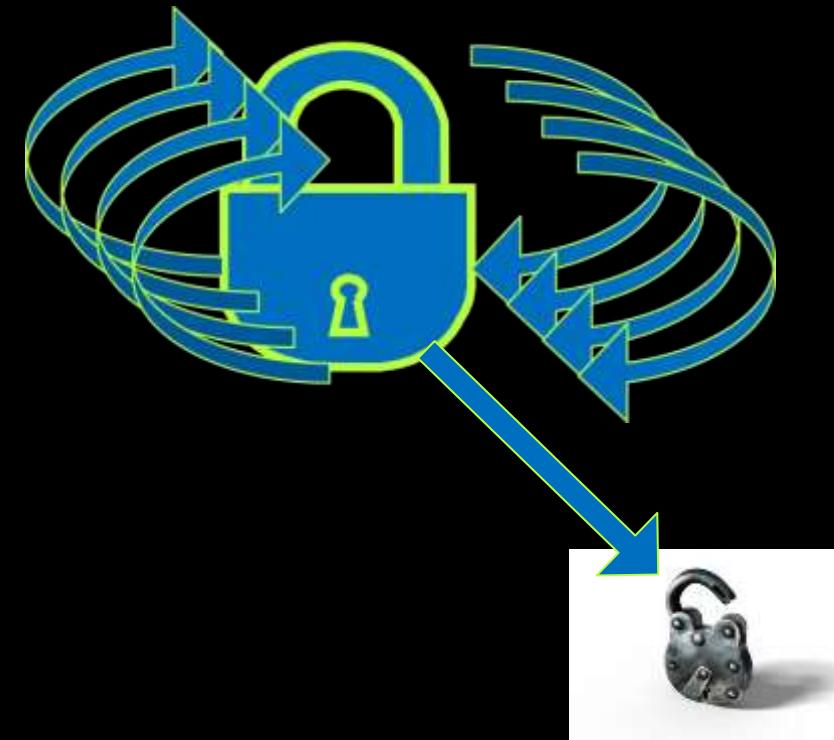


Lock-Free Style of Programming

- At least one thread always makes progress
- Try to write their result
 - On failure, repeat
- Usually atomicCAS
 - atomicExch, atomicAdd also used

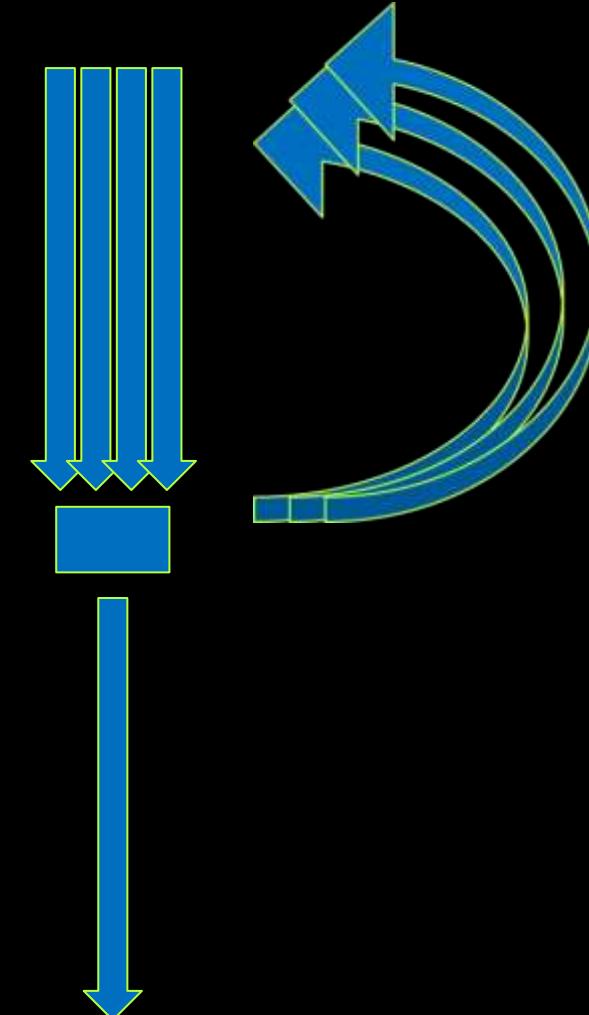


Wait-free Style of Programming


- All threads make progress
- Each updates memory atomically
- No thread blocked by other threads

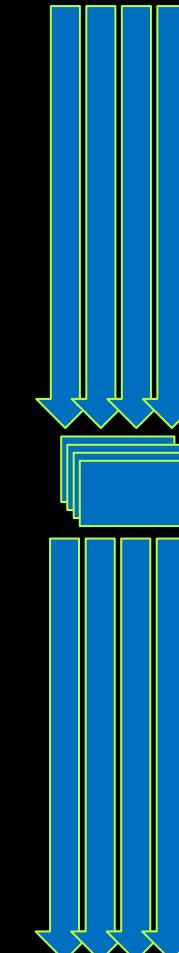


Atomic Arithmetical Operations

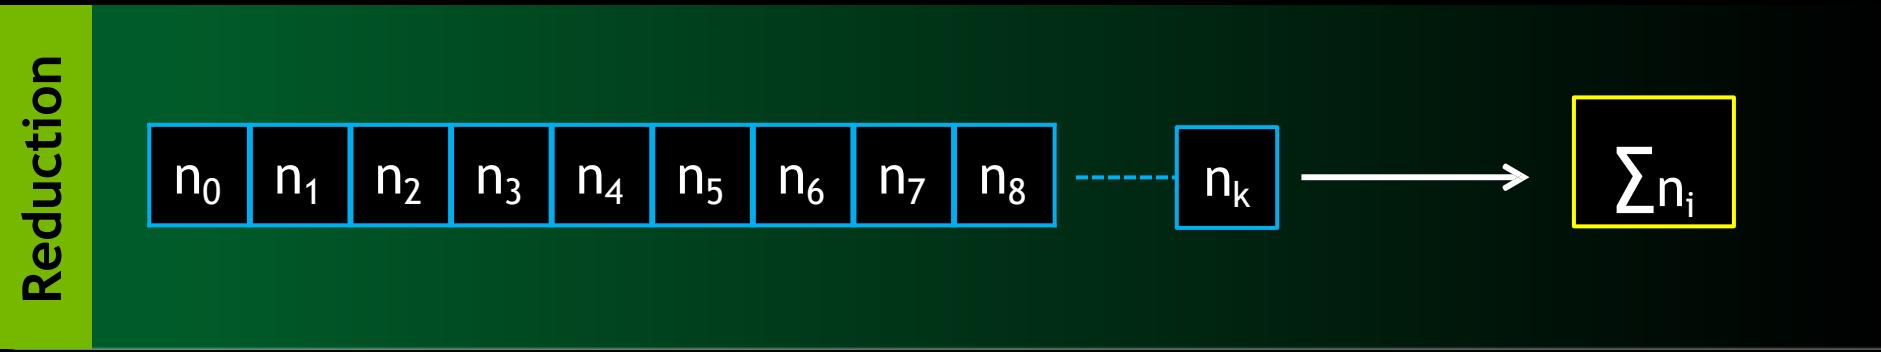

Atomic Arithmetical Operations

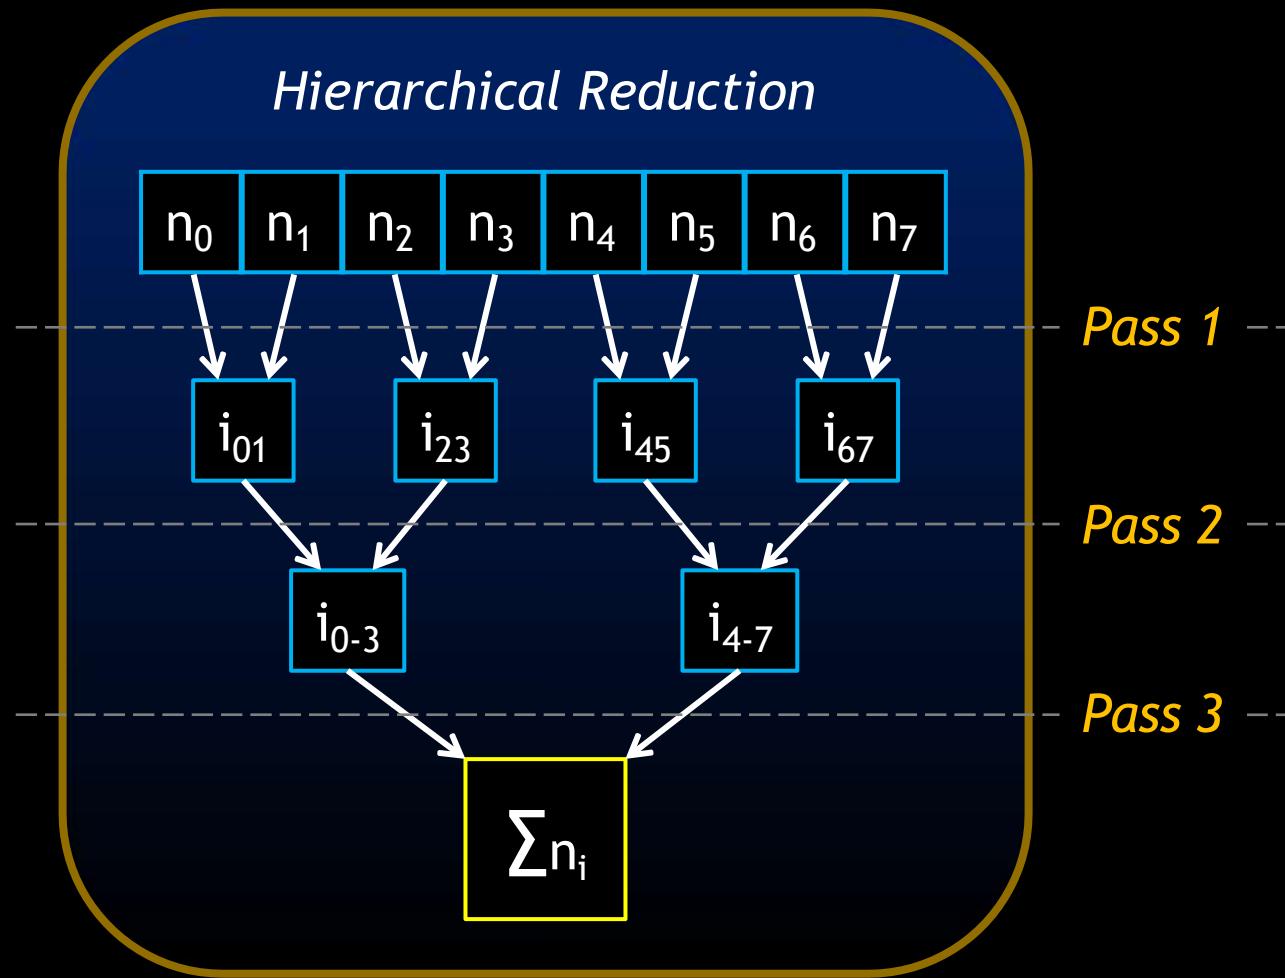


Atomic Arithmetical Operations

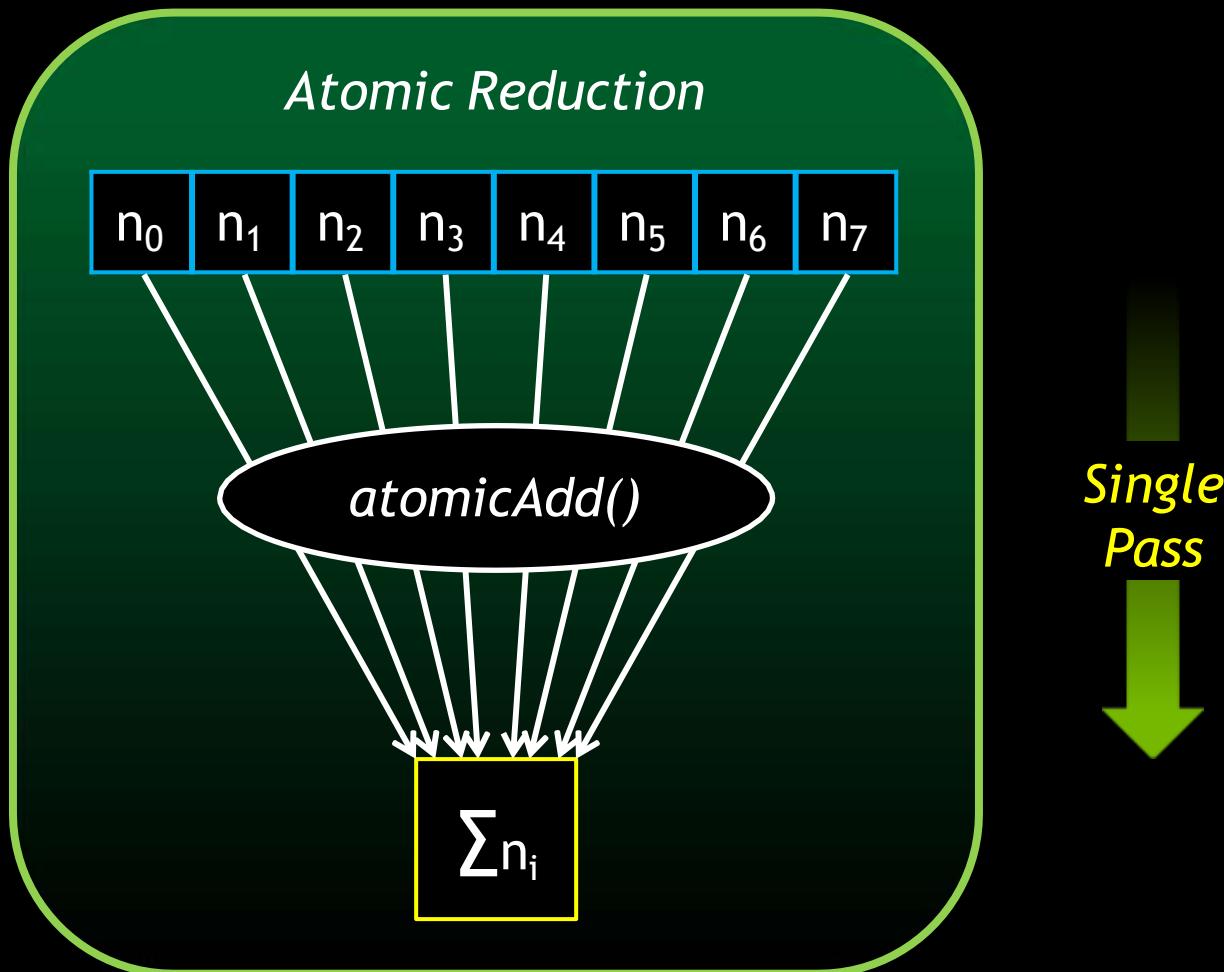


Single Pass

Atomic Arithmetical Operations

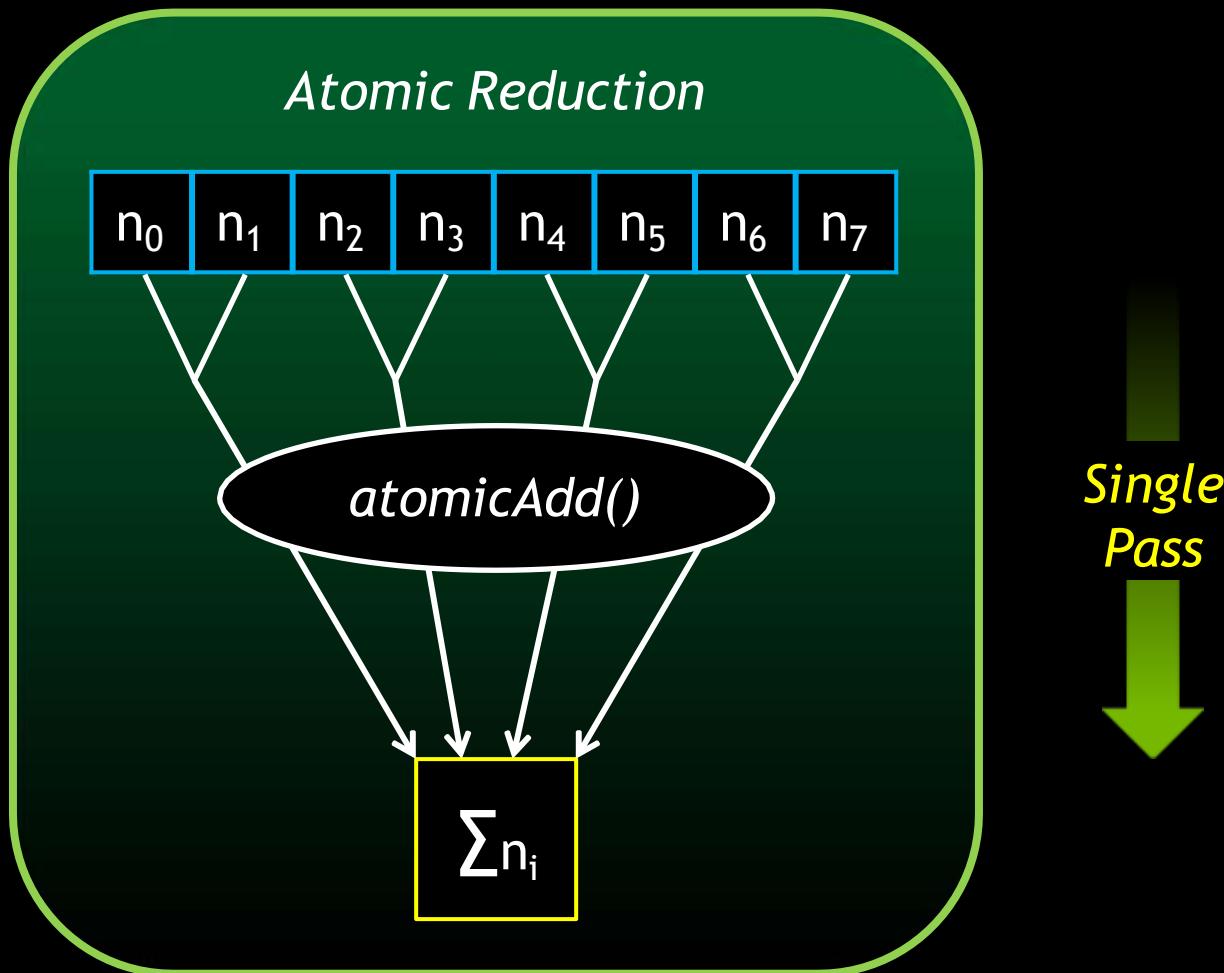


Atomic Access Patterns

Same Address

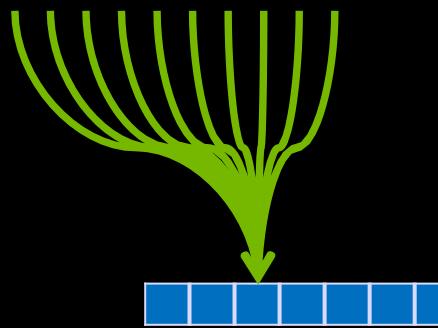


- 1 per clock

Same Cache Line

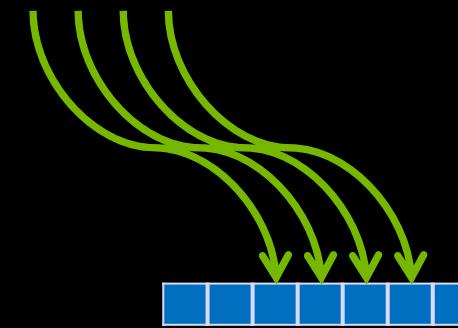

- Adjacent addresses
- Same issuing warp
- 8 per SM per clock


Scattered

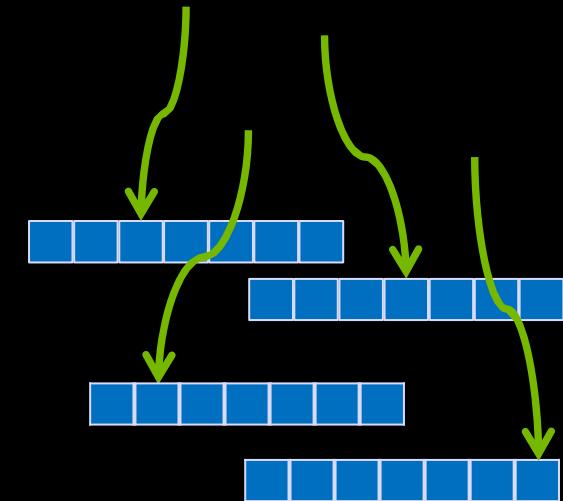


- Issued per cache-line
- 1 per SM per clock

Locks & Access Control

Locking guarantees exclusive access to data

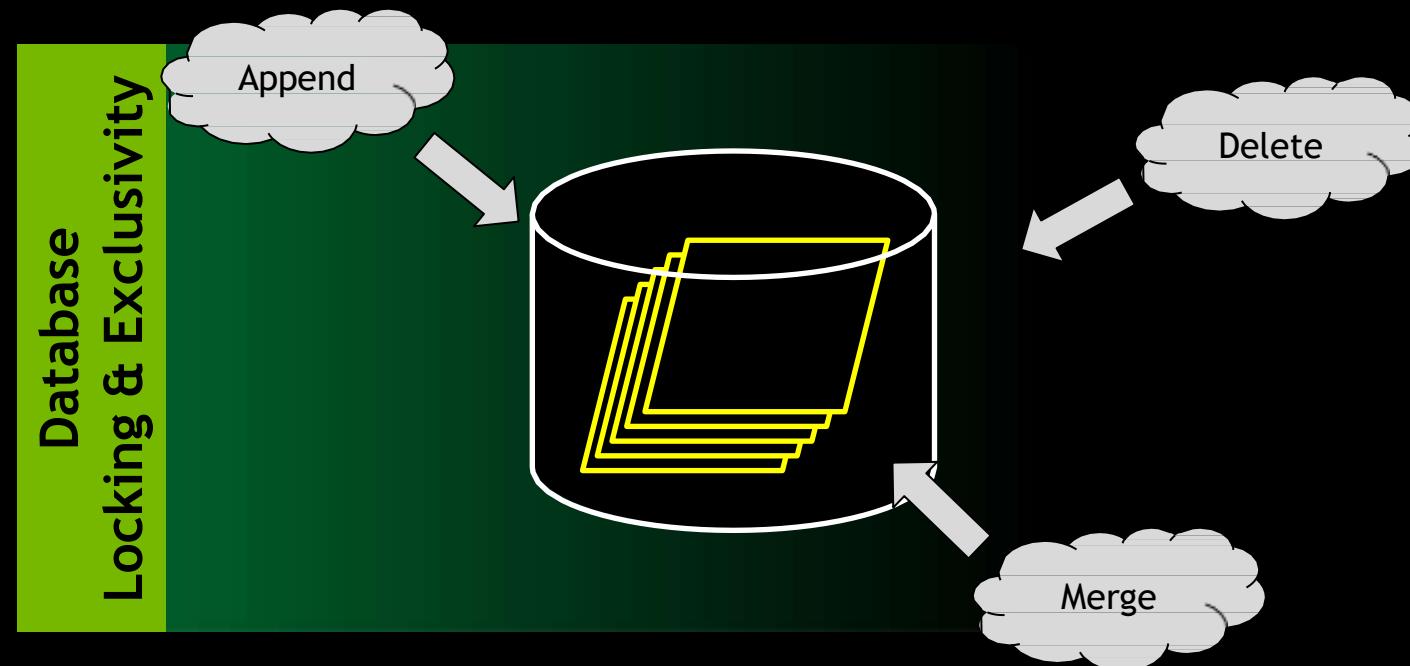

Locks & Access Control

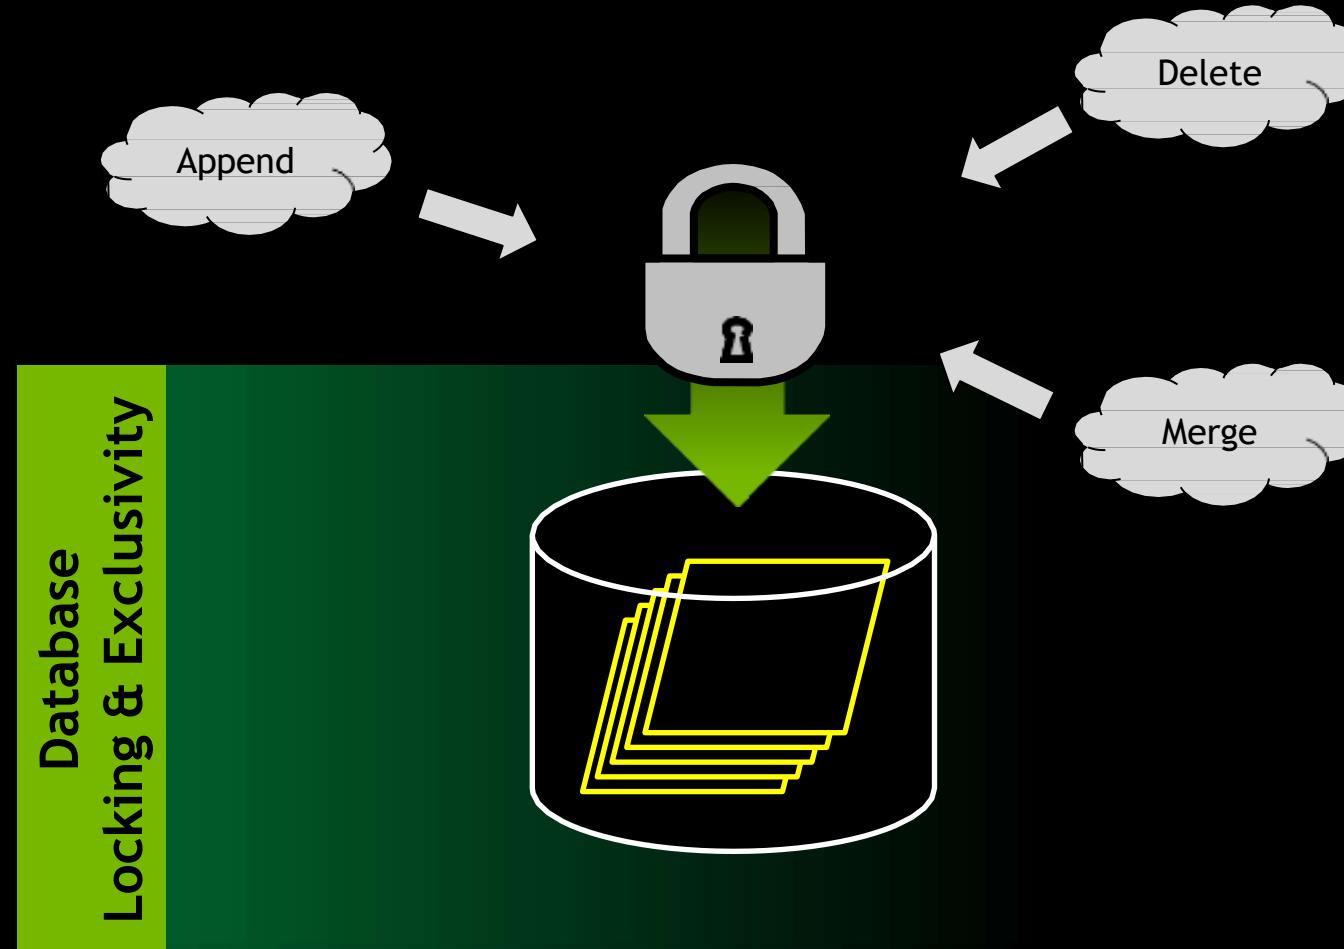

Locks & Access Control

Multi-threaded arithmetic

- Double precision addition
- Simple code is unsafe

```
// Add "val" to "*data". Return old value.  
double atomicAdd(double *data, double val)  
{  
  
    double old = *data;  
    *data = old + val;  
  
    return old;  
}
```

Locks & Access Control

Multi-threaded arithmetic

- Double precision addition
- Simple code is unsafe
- Add locks to protect critical section

```
// Add "val" to "*data". Return old value.  
double atomicAdd(double *data, double val)  
{  
    while(try_lock() == false)  
        ; // Retry lock  
  
    double old = *data;  
    *data = old + val;  
    unlock();  
  
    return old;  
}
```

Locks & Access Control

```
int locked = 0;
bool try_lock()
{
    if(locked == 0) {
        locked = 1;
        return true;
    }
    return false;
}
```

```
// Add “val” to “*data”. Return old value.
double atomicAdd(double *data, double val)
{
    while(try_lock() == false)
        ;      // Retry lock

    double old = *data;
    *data = old + val;
    unlock();

    return old;
}
```

Locks & Access Control

```
int locked = 0;
bool try_lock()
{
    int prev = atomicExch(&locked, 1);
    if(prev == 0)
        return true;

    return false;
}
```

*int atomicExch(int *data, int new)*

Atomically set (*data = new), and return
the previous value

```
// Add "val" to "*data". Return old value.
double atomicAdd(double *data, double val)
{
    while(try_lock() == false)
        ;      // Retry lock


    double old = *data;
    *data = old + val;
    unlock();

    return old;
}
```

Locks & Warp Divergence

A CUDA *warp*:


- A group of threads (32 on current GPUs) scheduled in lock-step
- All threads execute the same line of code
- Any thread not participating is idle

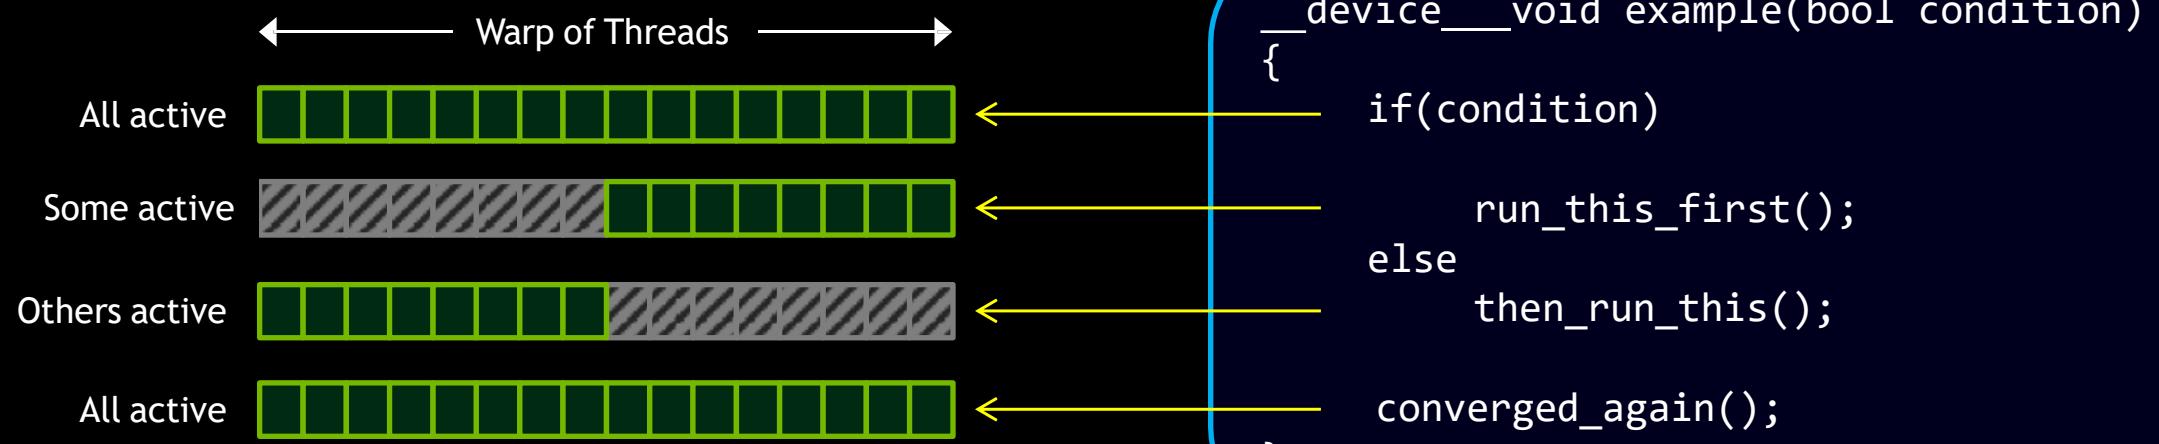

Locks & Warp Divergence

What does this mean for locks?


- Only one thread in the warp will lock
- We're okay so long as that's the thread which continues

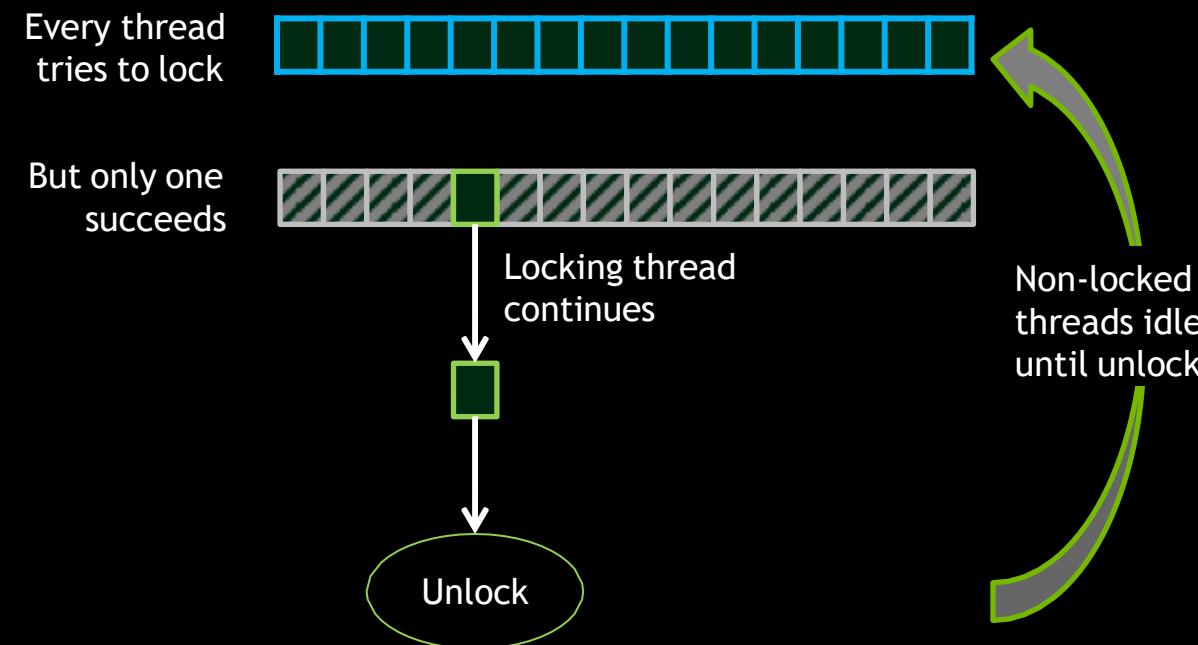

Locks & Warp Divergence

What does this mean for locks?

- BUT: If the wrong thread idles, we deadlock
- No way to predict which threads idle

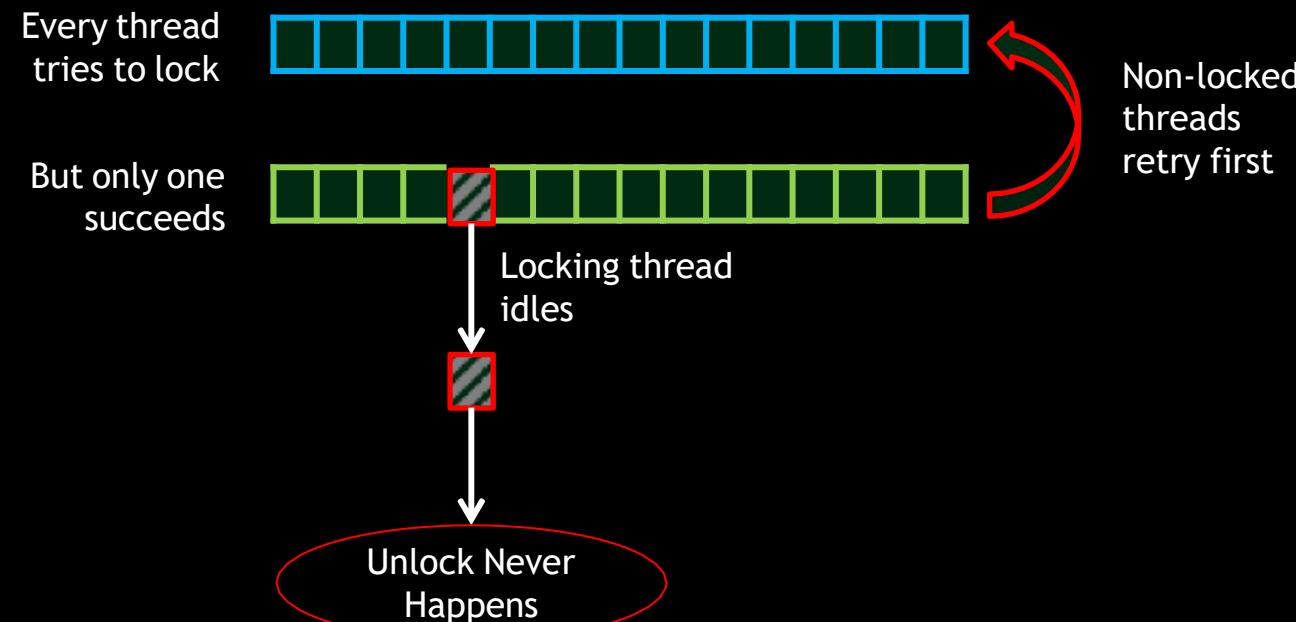

Locks & Warp Divergence

Working around divergence deadlock

1. Don't use locks between threads in a warp
2. Elect one thread to take the lock, then iterate
3. Use a lock-free algorithm...


Lock Free Algorithms: Better Than Locks

Use atomic compare-and-swap to combine read, modify, write

- Under contention, exactly one thread is guaranteed to succeed
- High throughput - less work in critical section
- Only applies if transaction is a single operation


```
uint64 atomicCAS(uint64 *data, uint64 oldval, uint64 newval);  
If “*data” is equal to “oldval”, replace it with “newval”  
Always returns original value of “*data”
```

Lock-Free Data Updates

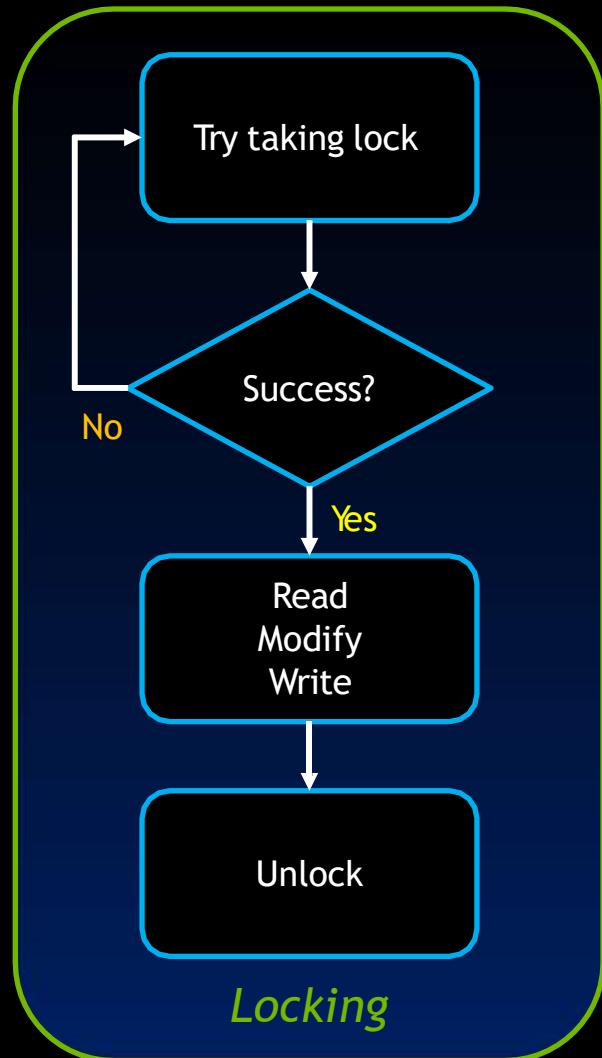


```
// Add "val" to "*data". Return old value.  
double atomicAdd(double *data, double val)  
{  
    while(atomicExch(&locked, 1) != 0)  
        ; // Retry lock  
  
    double old = *data;  
    *data = old + val;  
    locked = 0;  
  
    return old;  
}
```


Lock-Free Data Updates

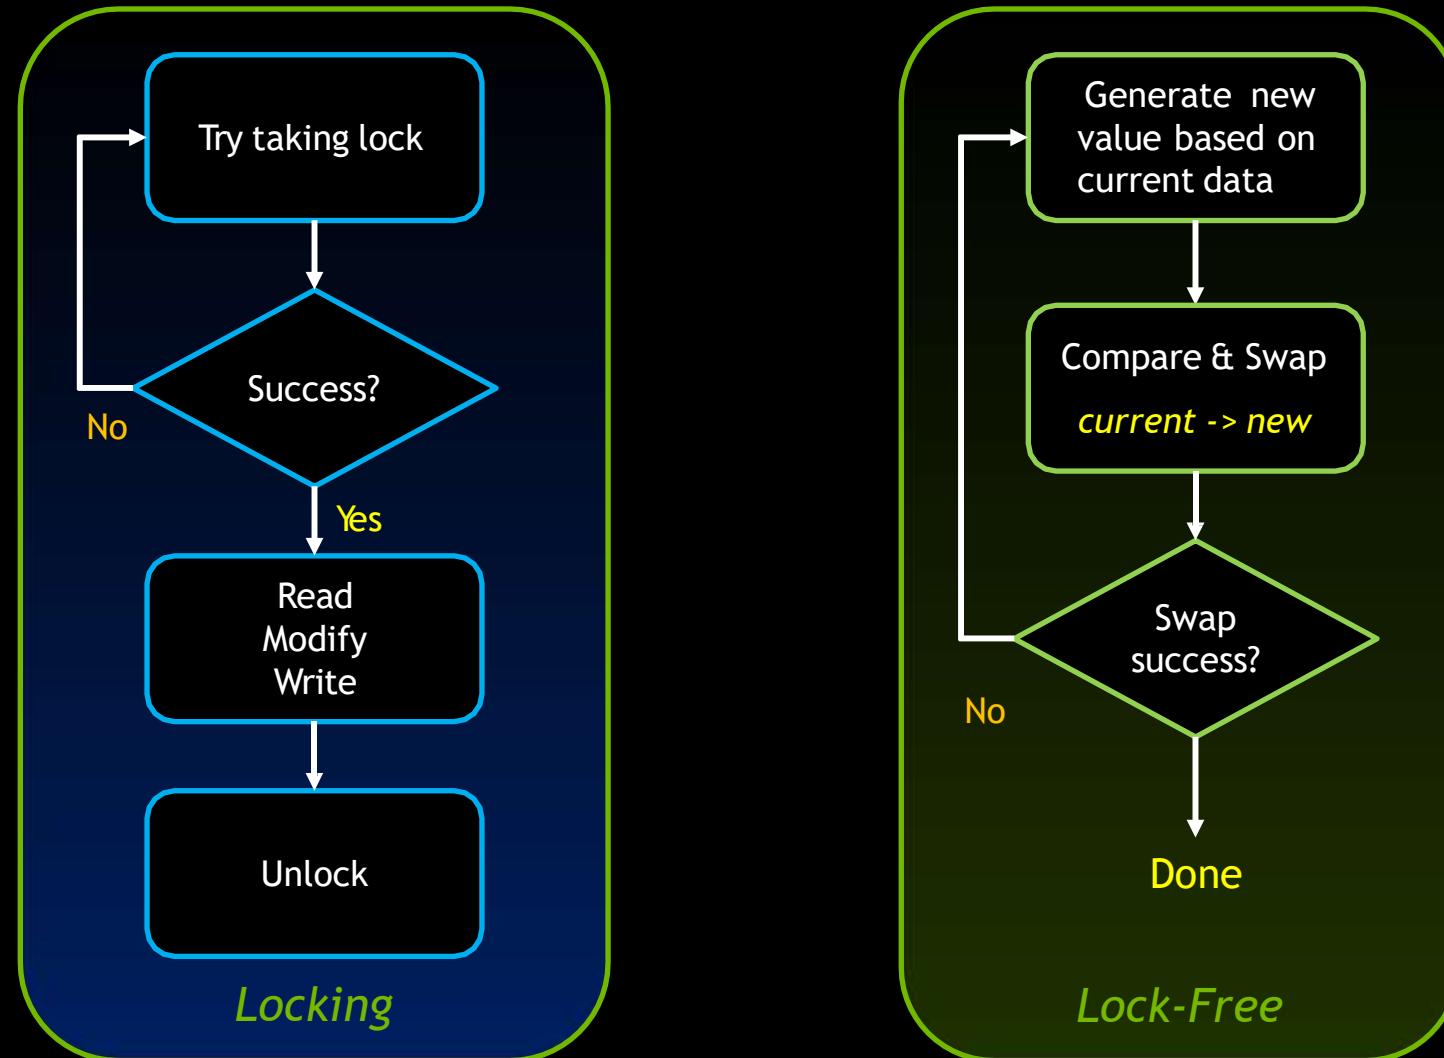


Lock-Free Parallel Data Structures

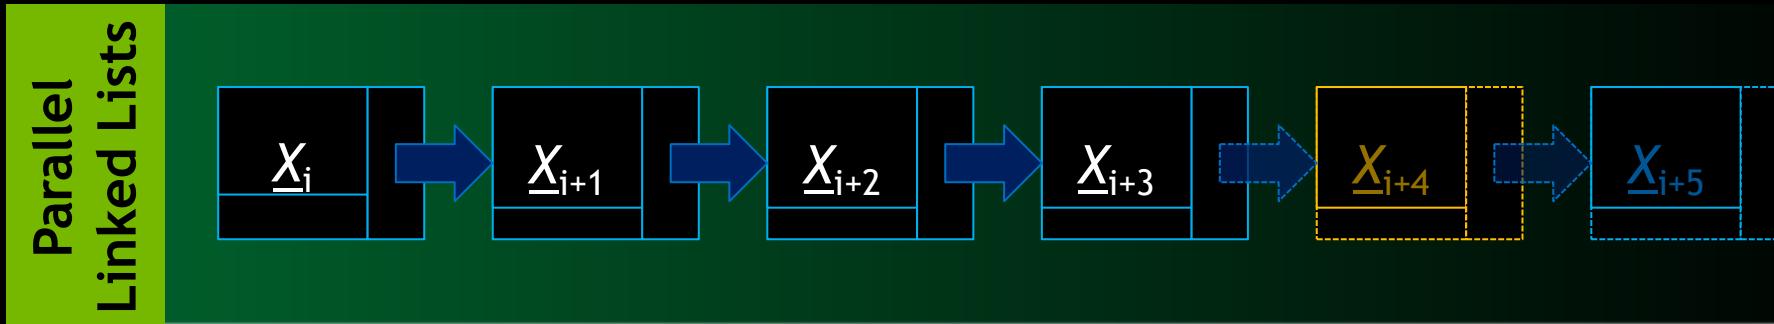


Lock-Free Parallel Data Structures

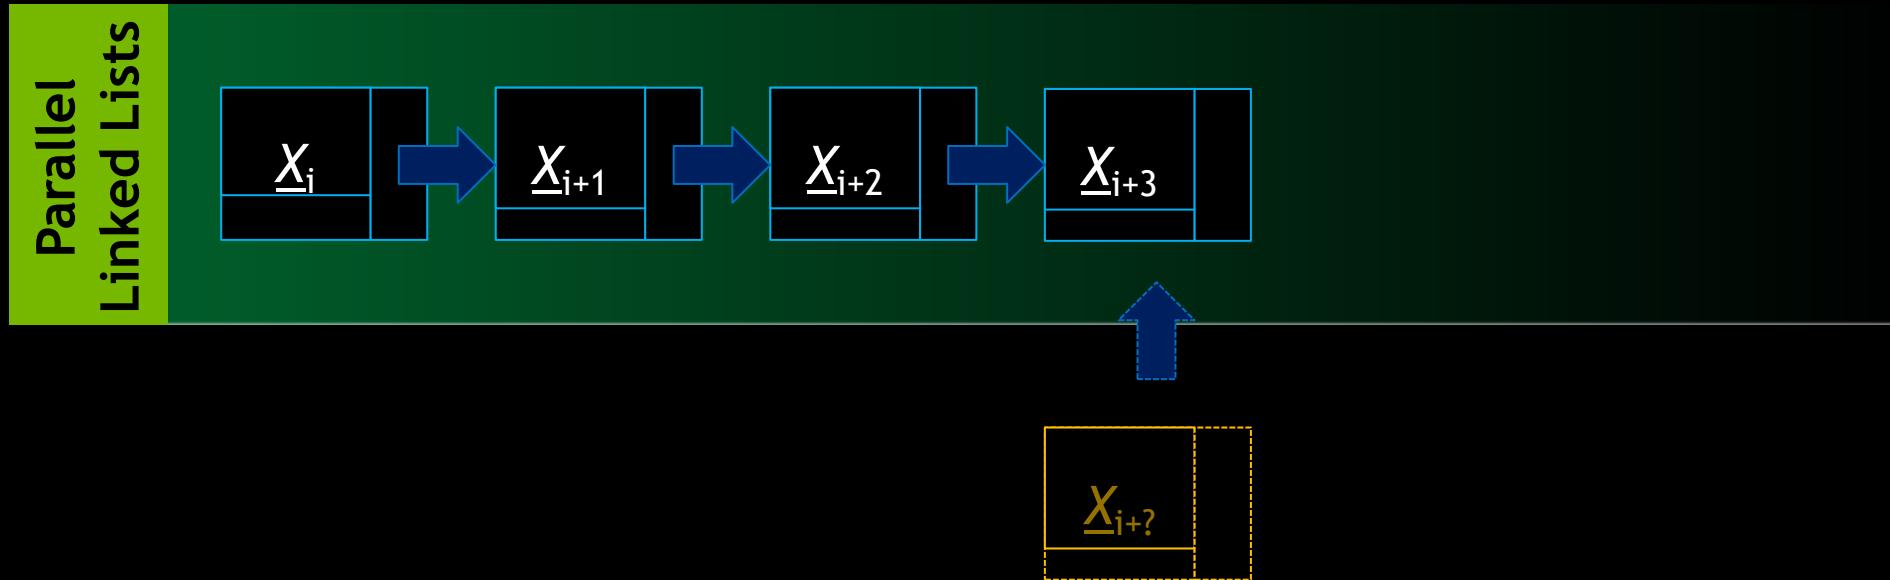


Lock-Free Parallel Data Structures

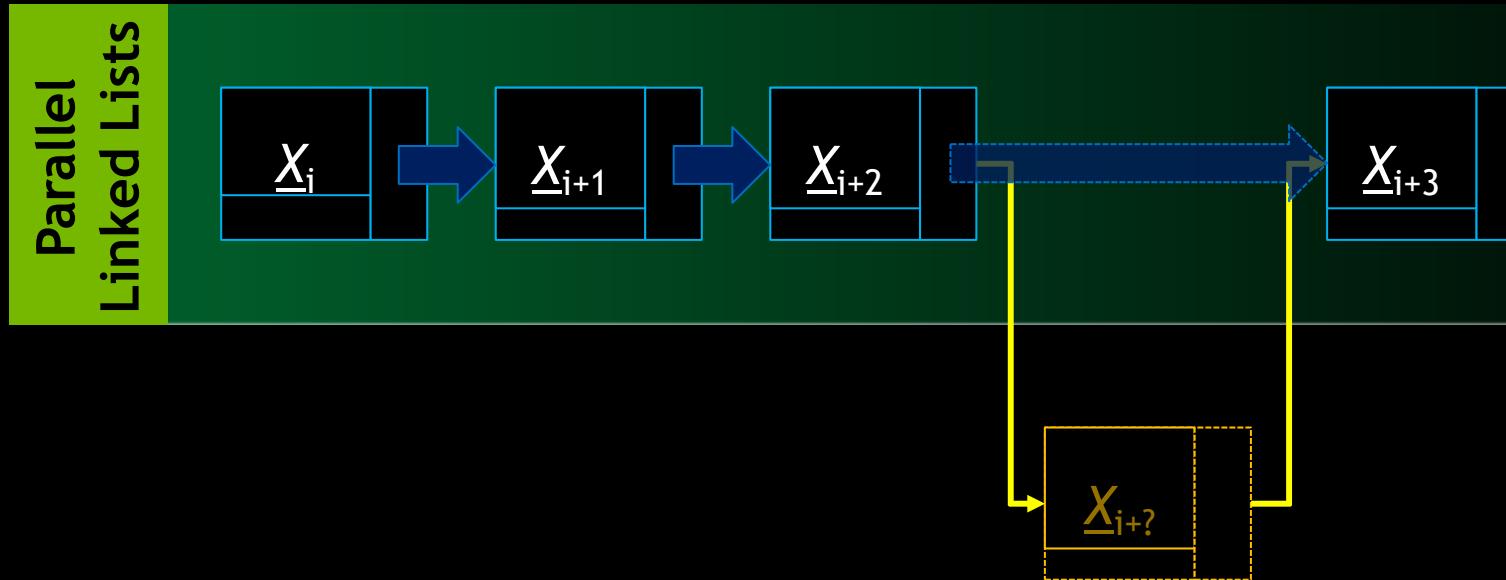


Lock-Free Parallel Data Structures

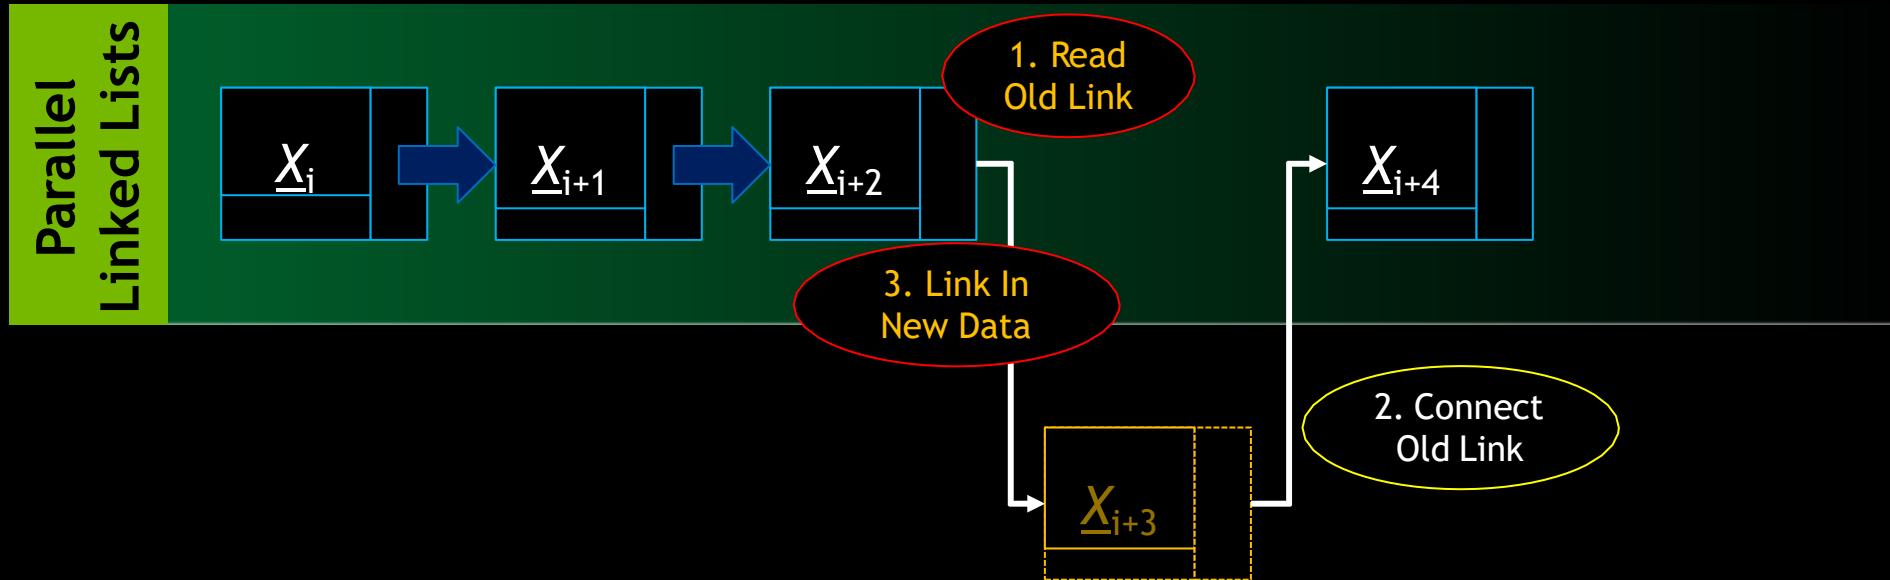


Lock-Free Parallel Data Structures

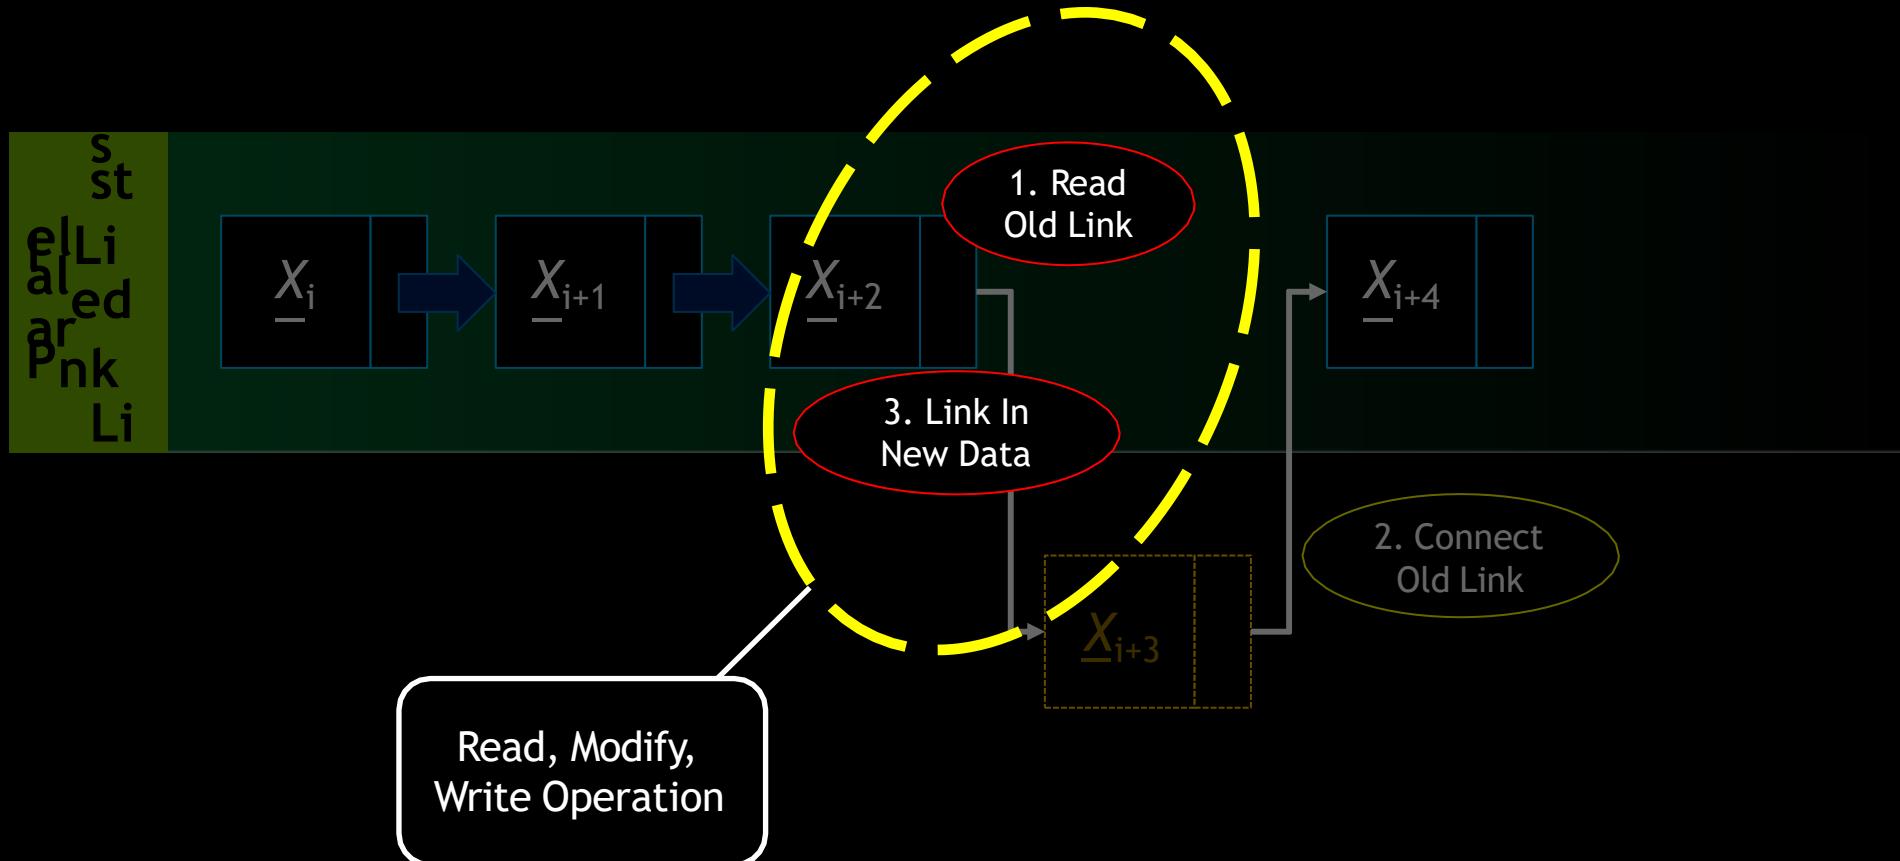


Lock-Free Parallel Data Structures

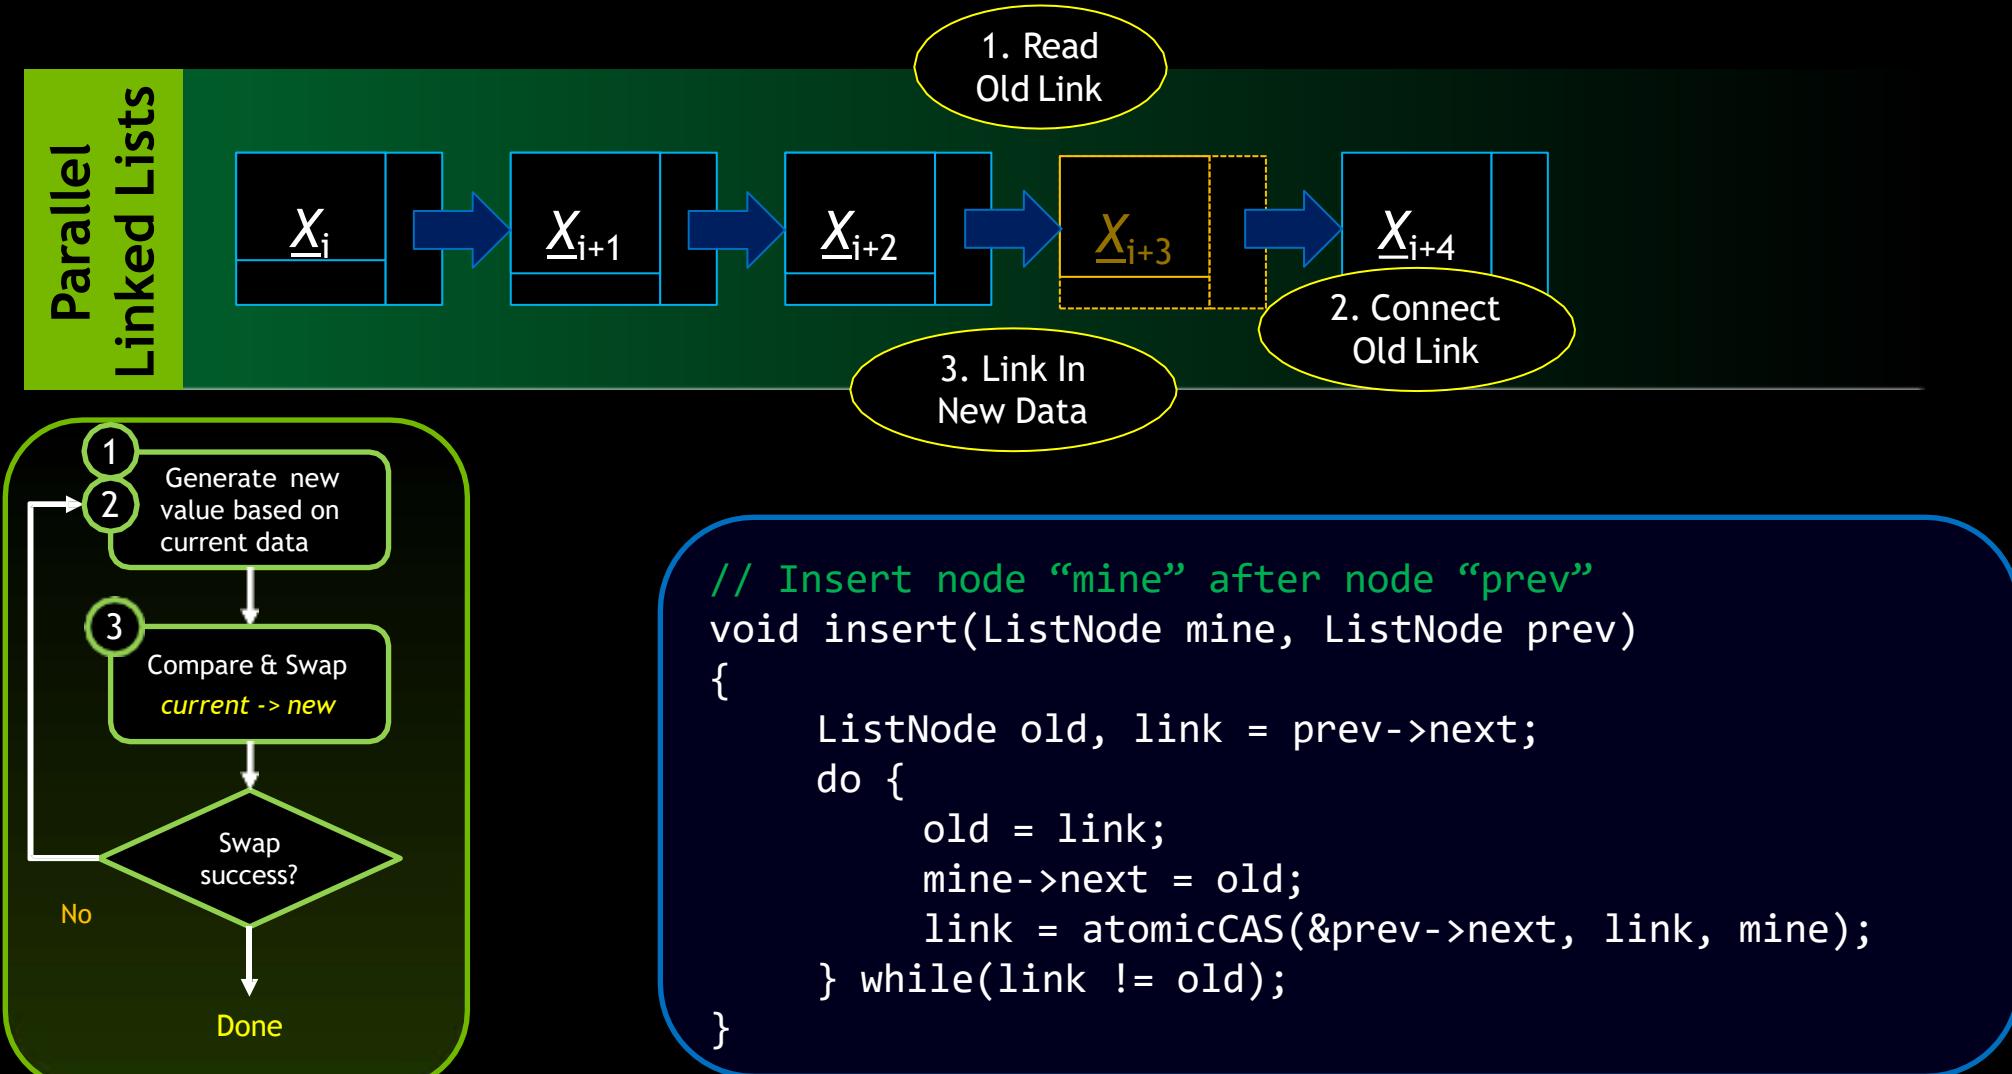


Lock-Free Parallel Data Structures

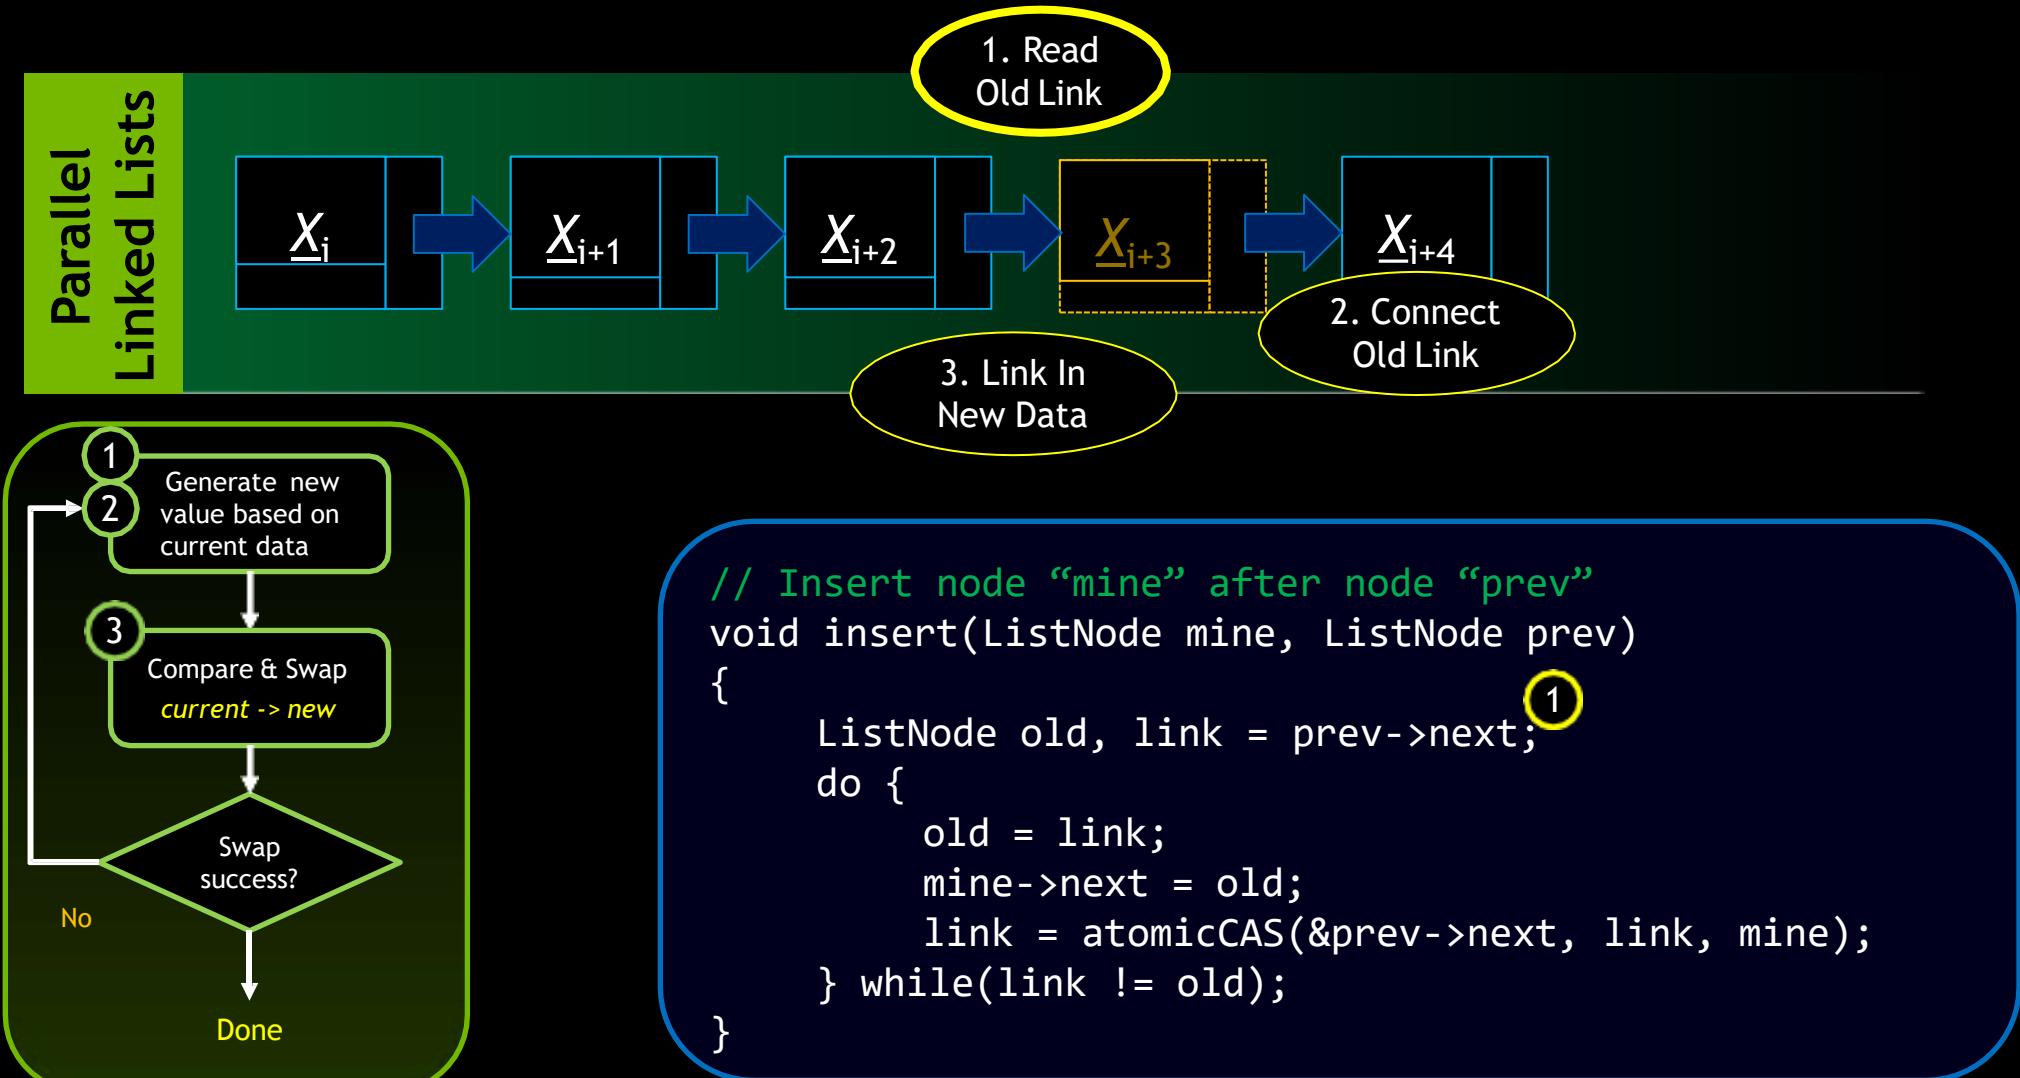


Lock-Free Parallel Data Structures

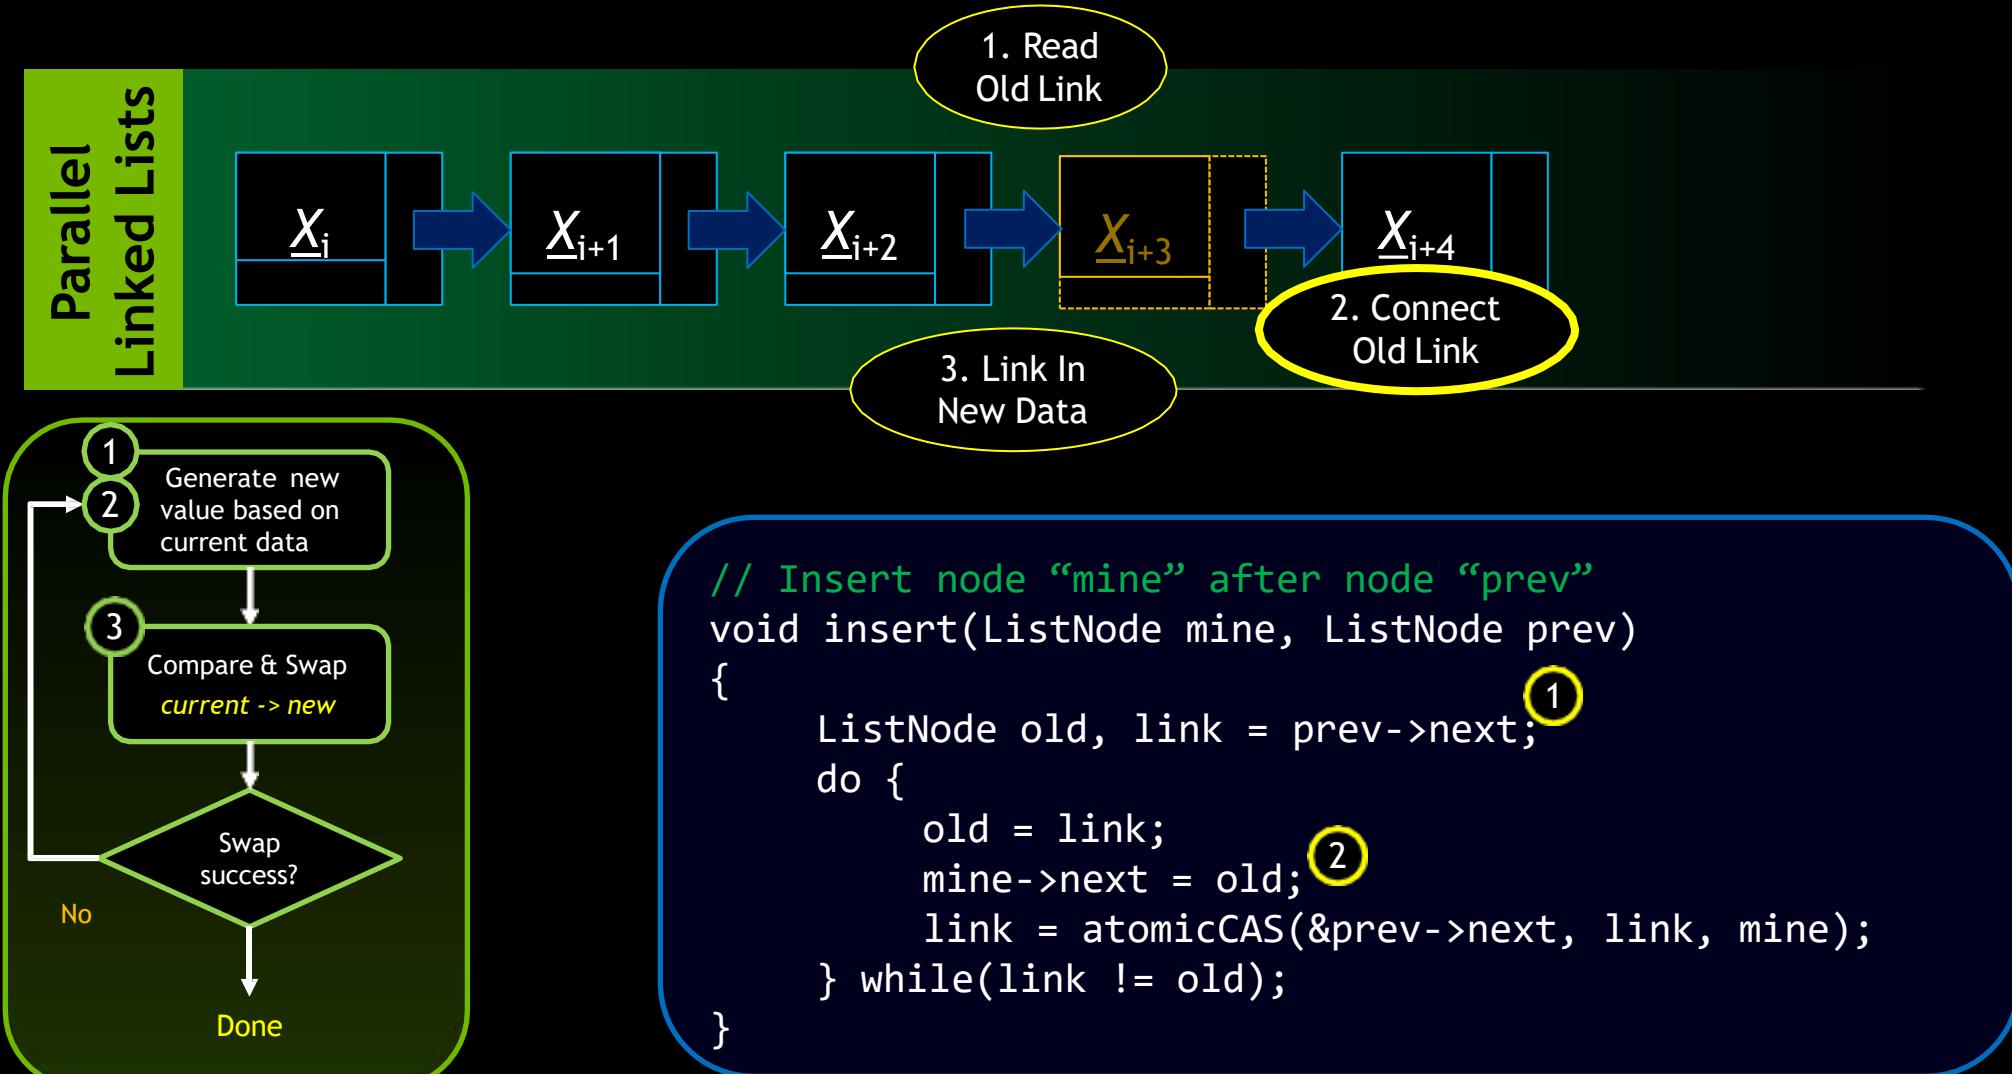

Lock-Free Parallel Data Structures

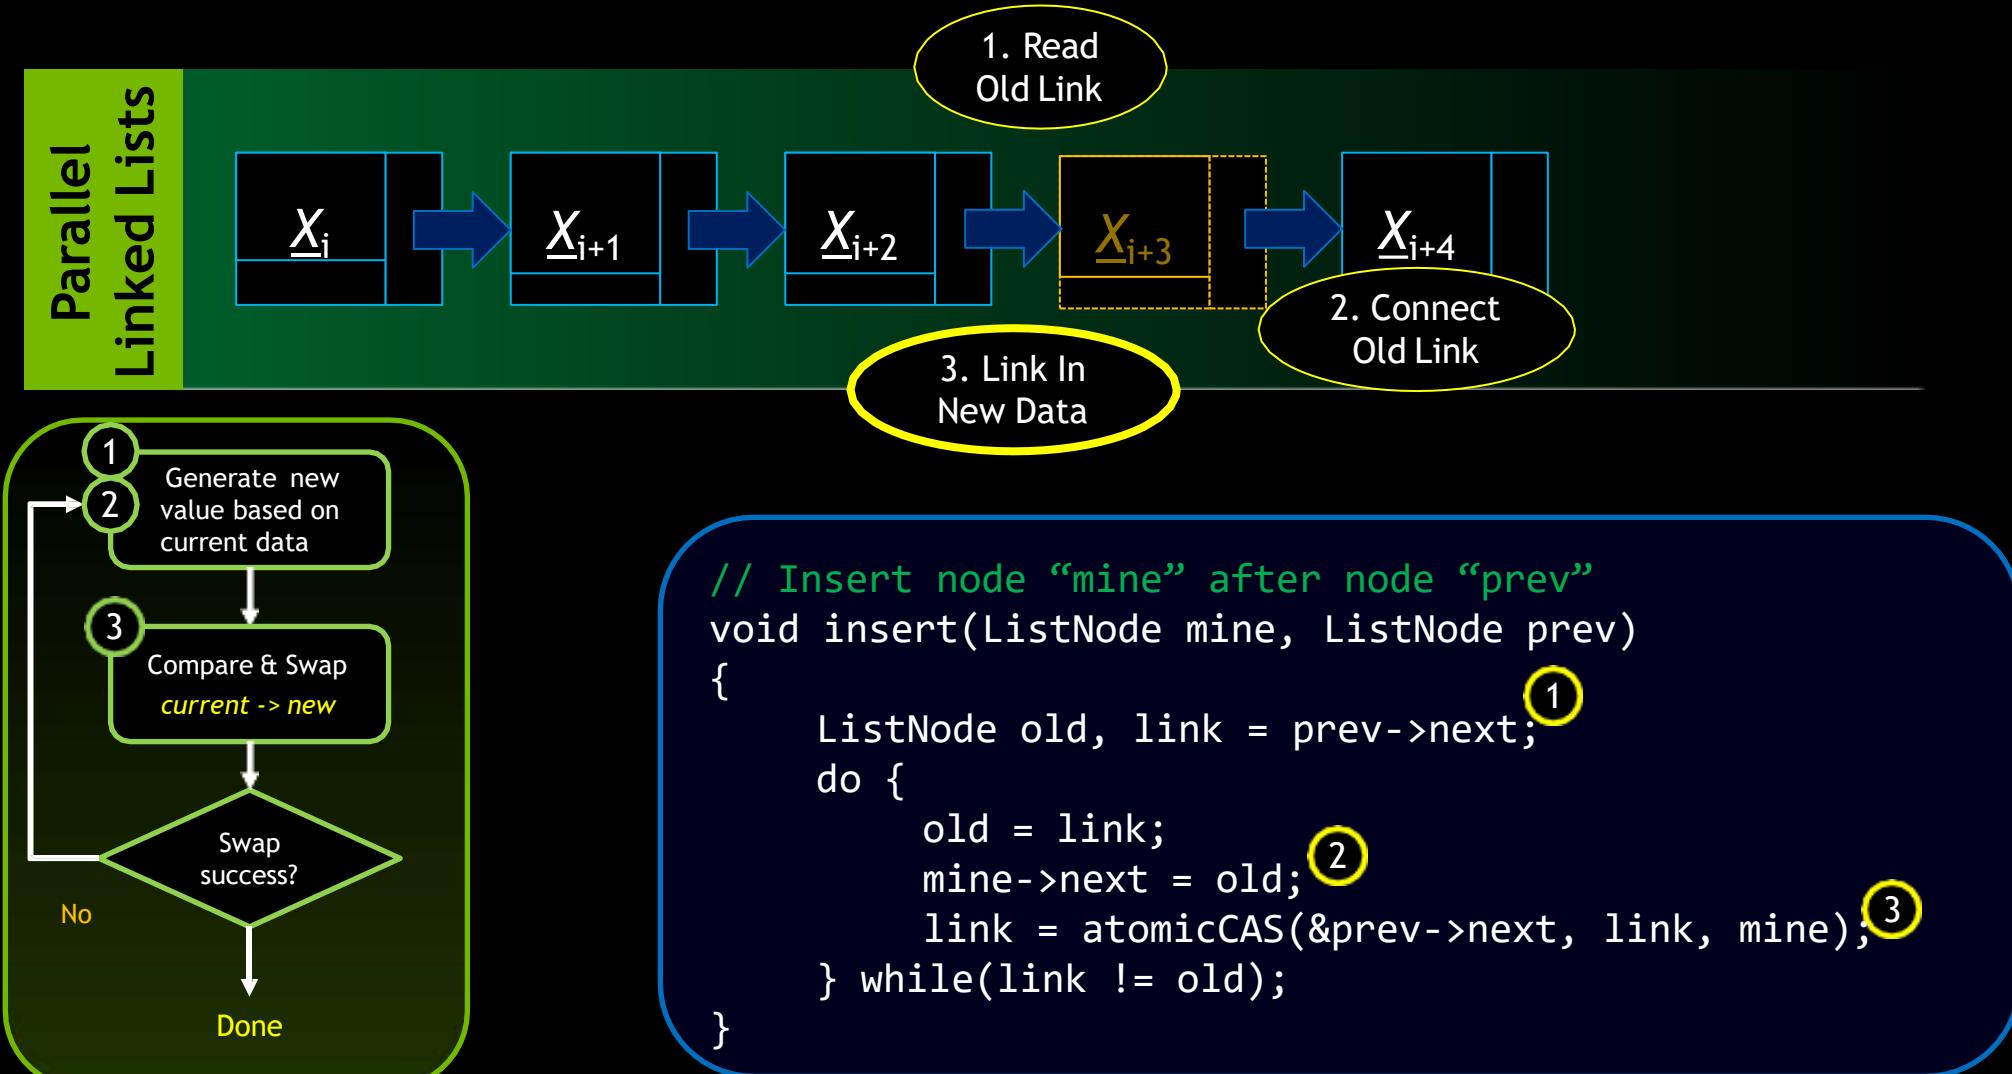



Lock-Free Parallel Data Structures

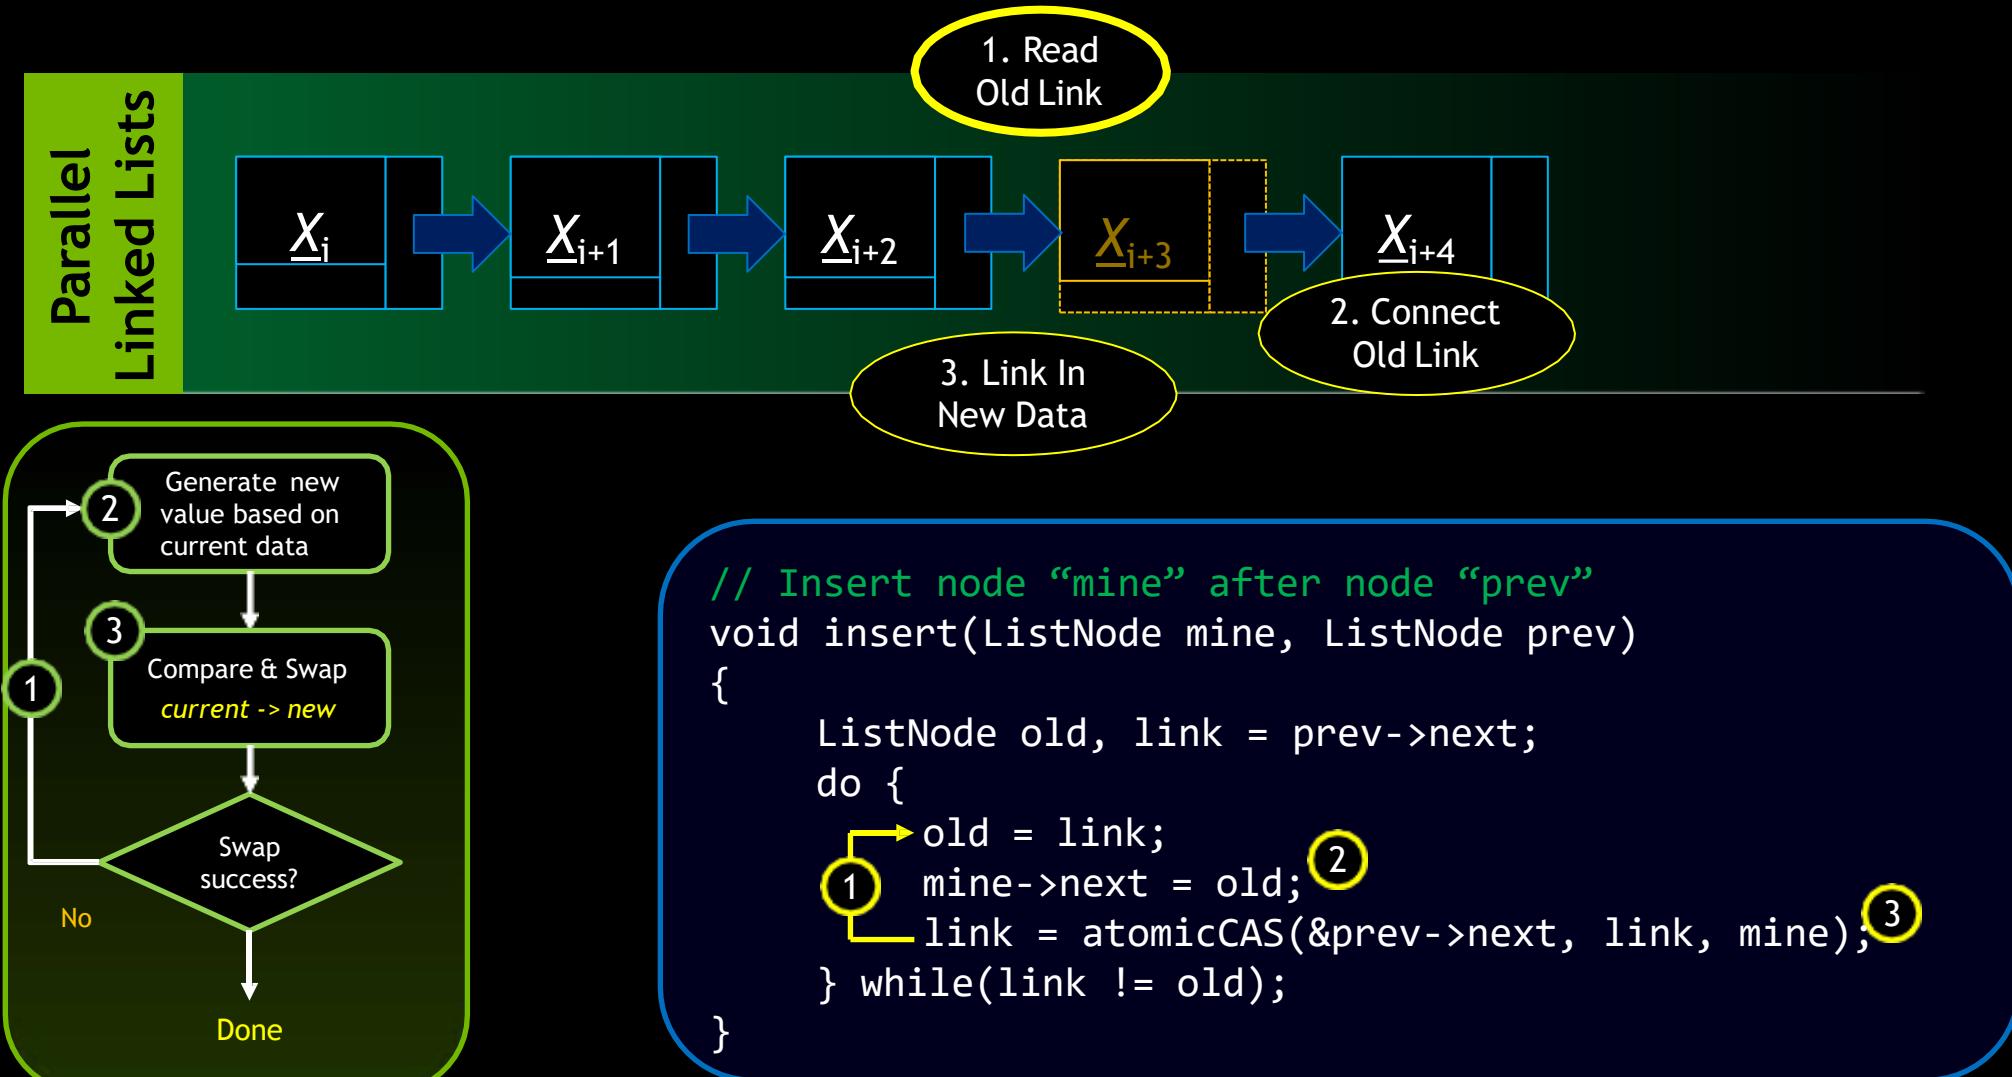

Conclusions

- Atomics allow the creation of much more sophisticated algorithms that have higher performance
- GPU has parallel hardware to execute atomics
- AtomicCAS can be used to mimic any coordination primitive
- Atomics force serialization
 - don't ask for serialization when you don't need it
 - or, perform concurrent reductions when possible


Streaming Multiprocessors

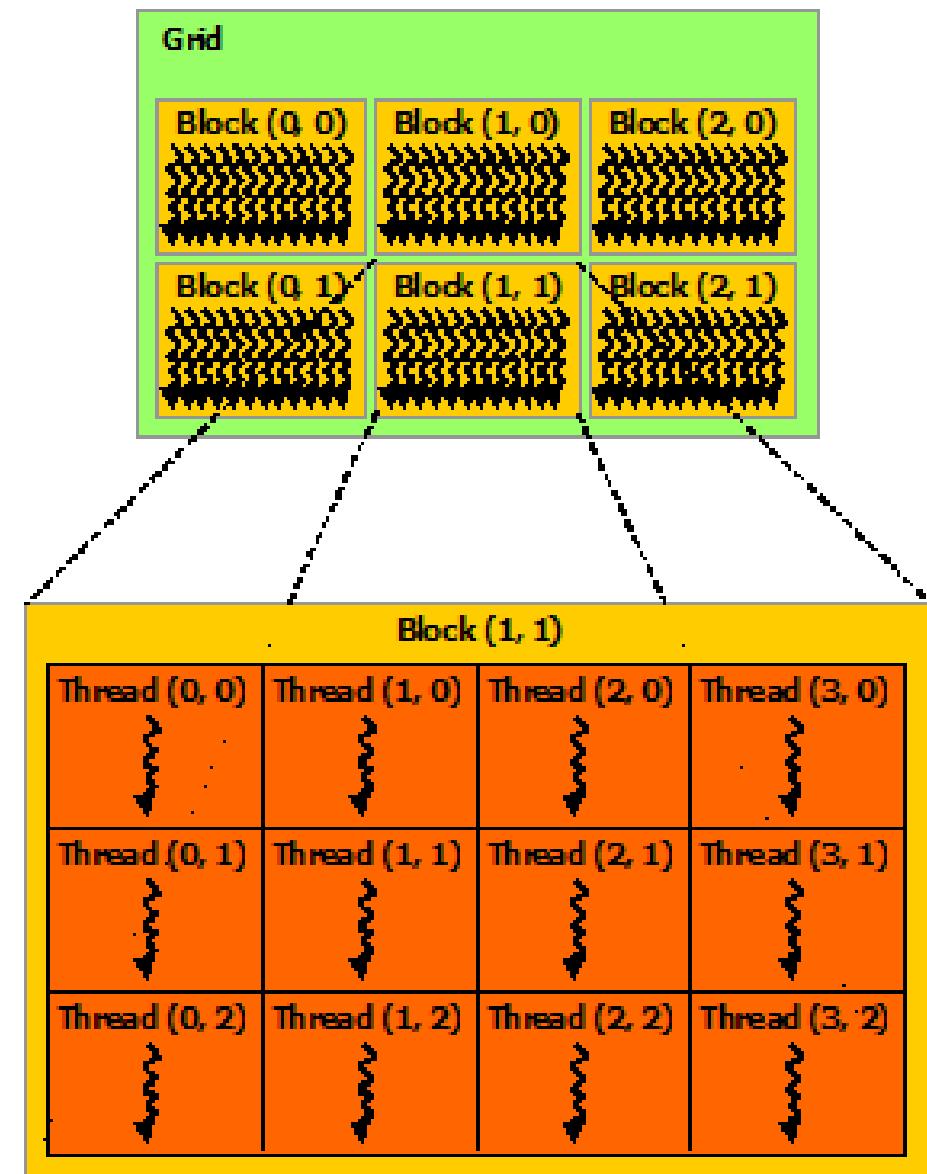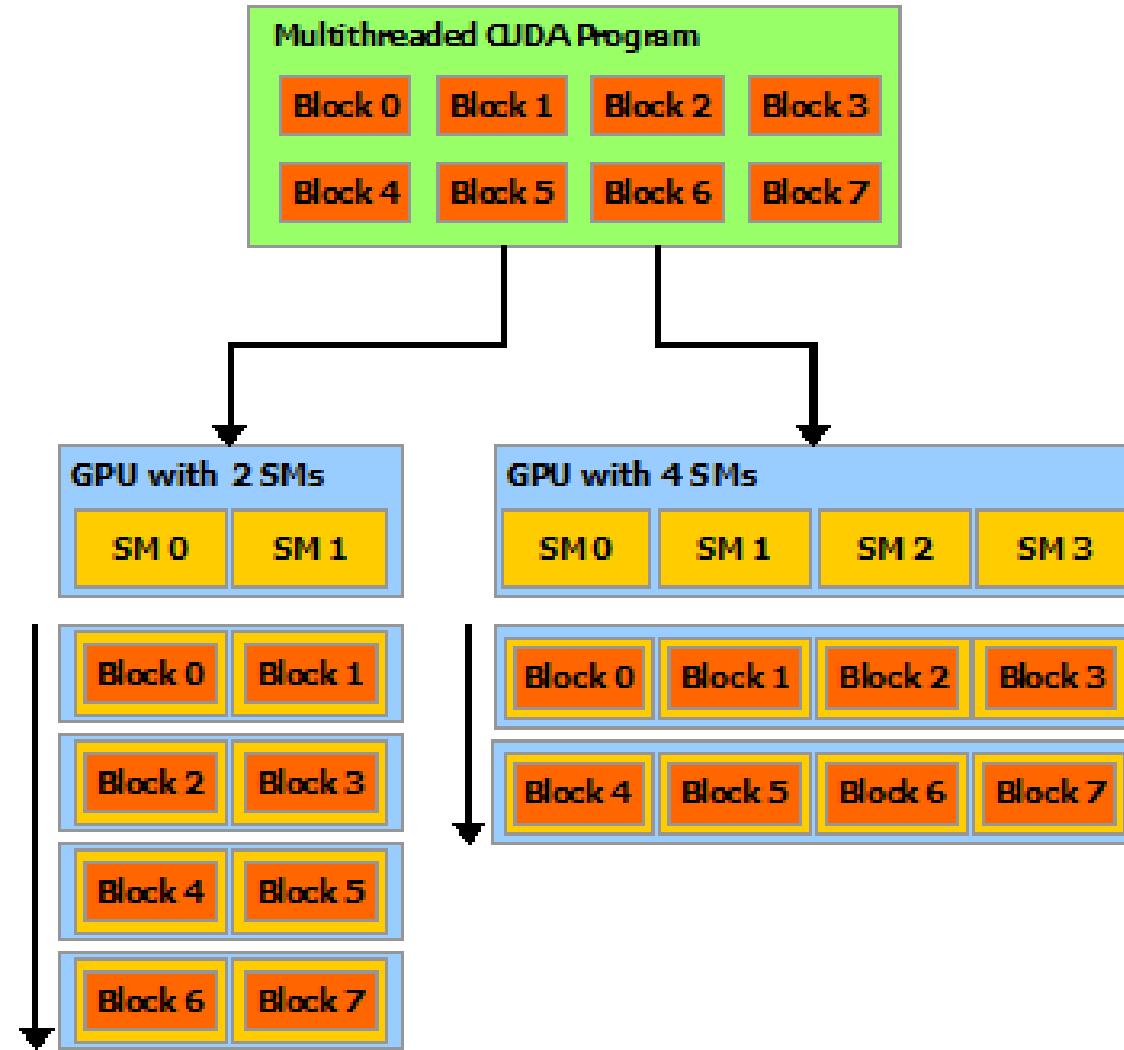

GPU



NVIDIA GPUs contain functional units called **Streaming Multiprocessors**, or **SMs**

GPU

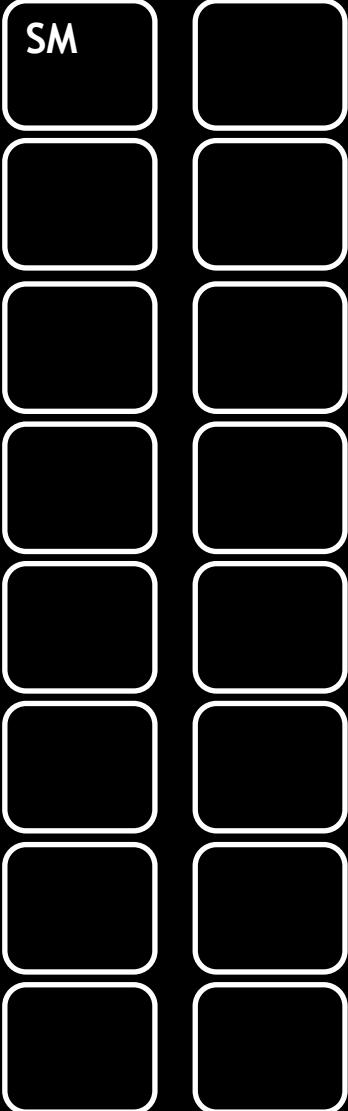


NVIDIA GPUs contain functional units called **Streaming Multiprocessors**, or **SMs**

GPU

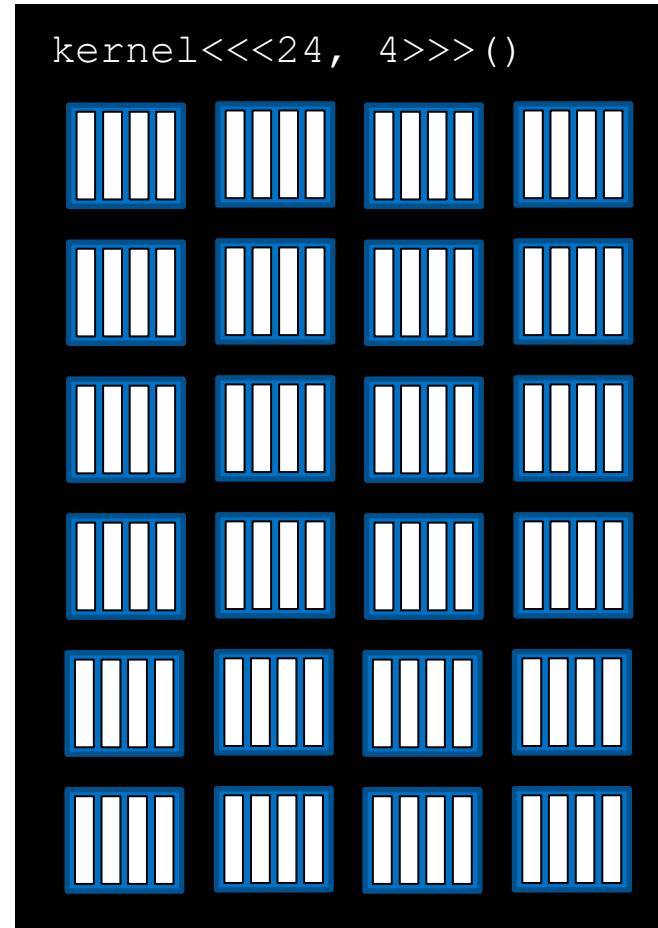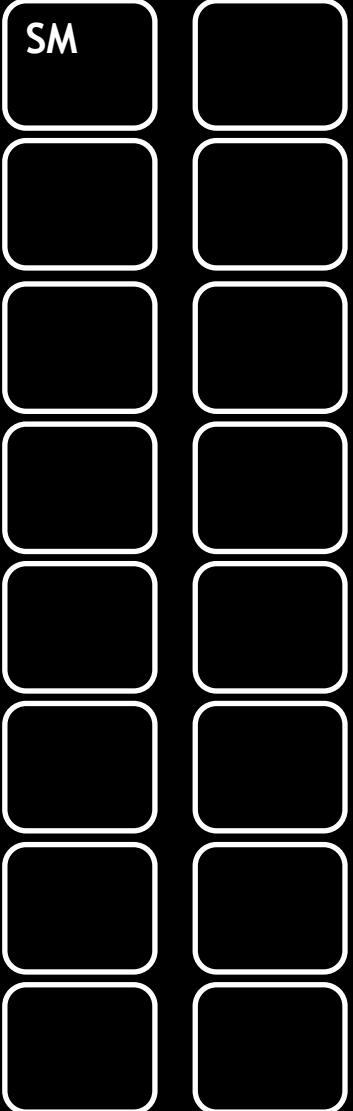


Blocks of threads are scheduled to run on SMs

GPU


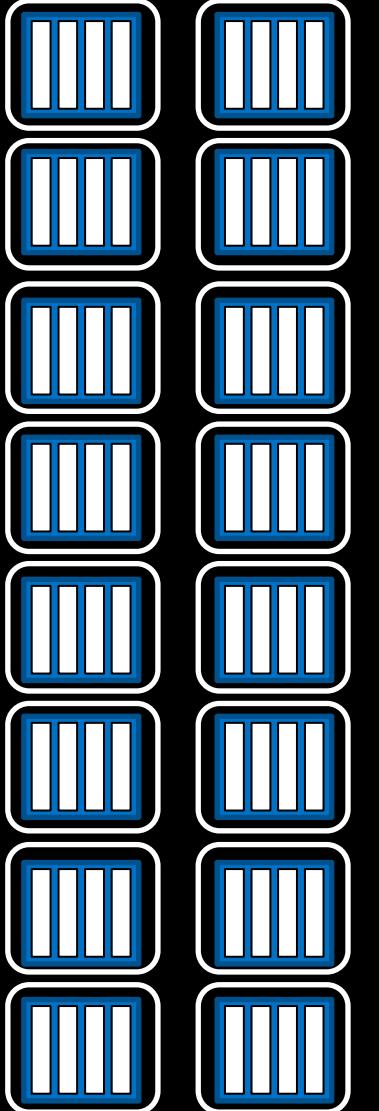


```
kernel<<<24, 4>>>()
```

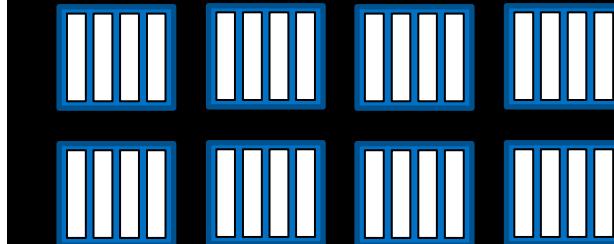



Depending on the number of SMs on a GPU, and the requirements of a block, more than one block can be scheduled on an SM

GPU

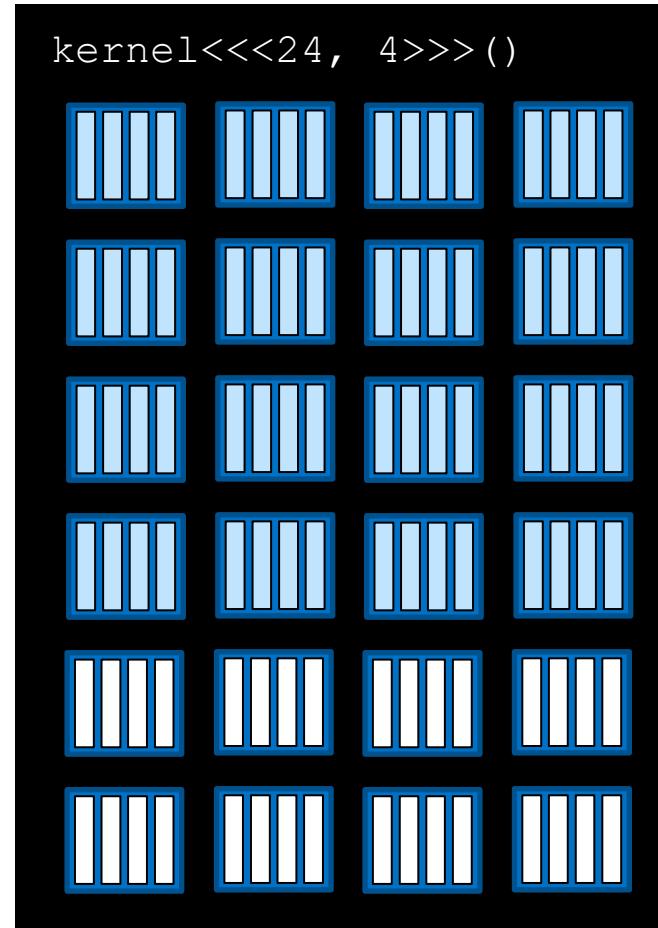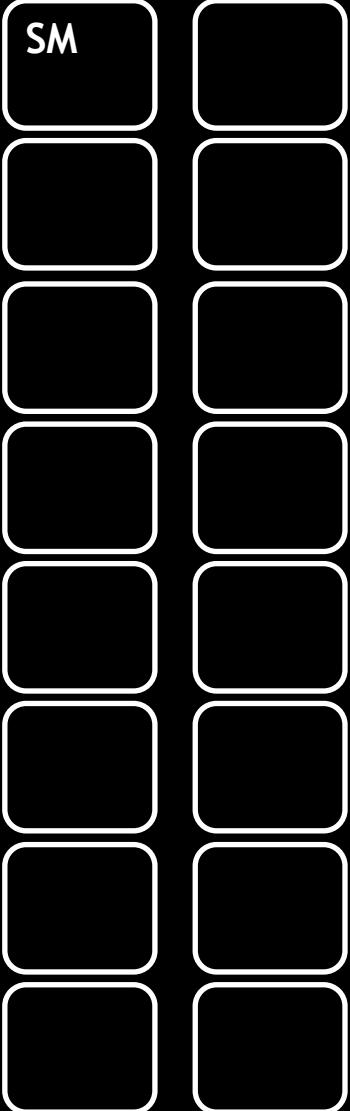



Depending on the number of SMs on a GPU, and the requirements of a block, more than one block can be scheduled on an SM

GPU

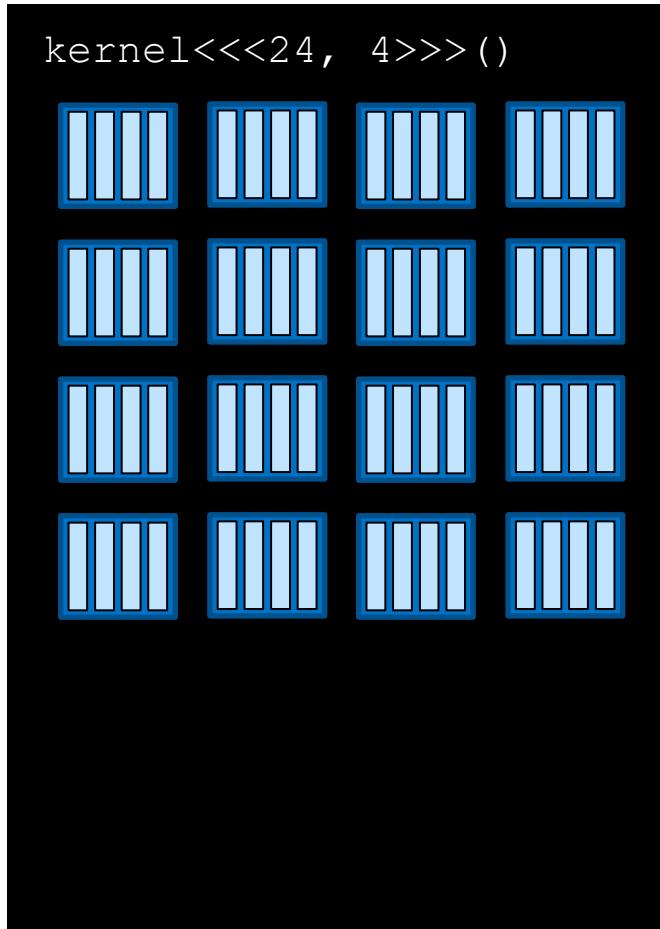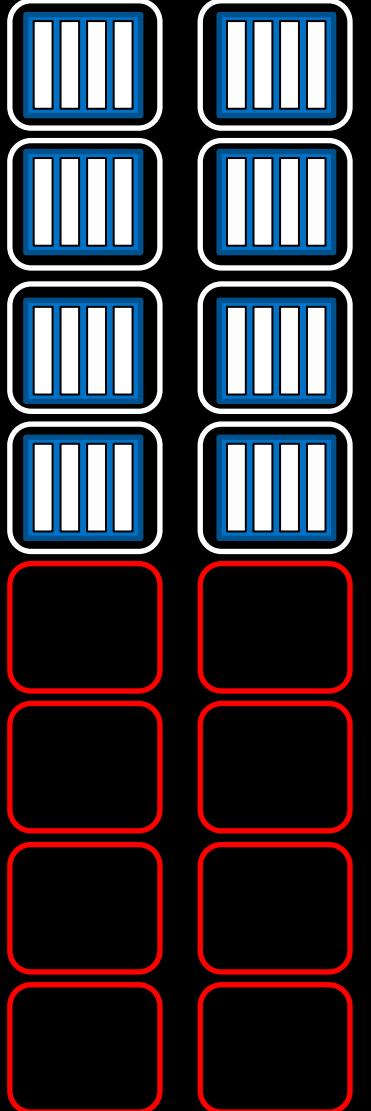

Grid dimensions divisible by the number of SMs on a GPU can promote full SM utilization


GPU

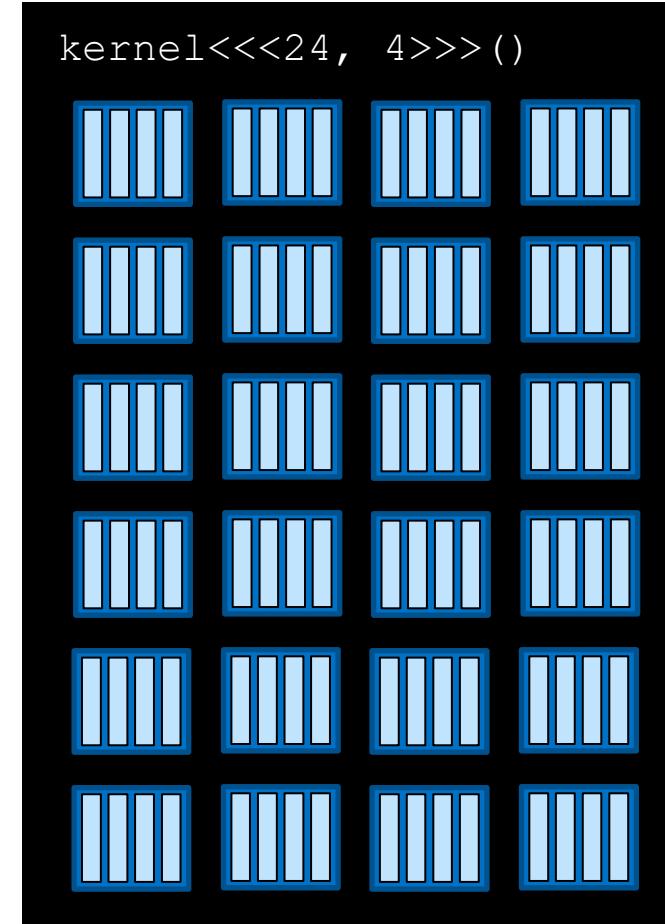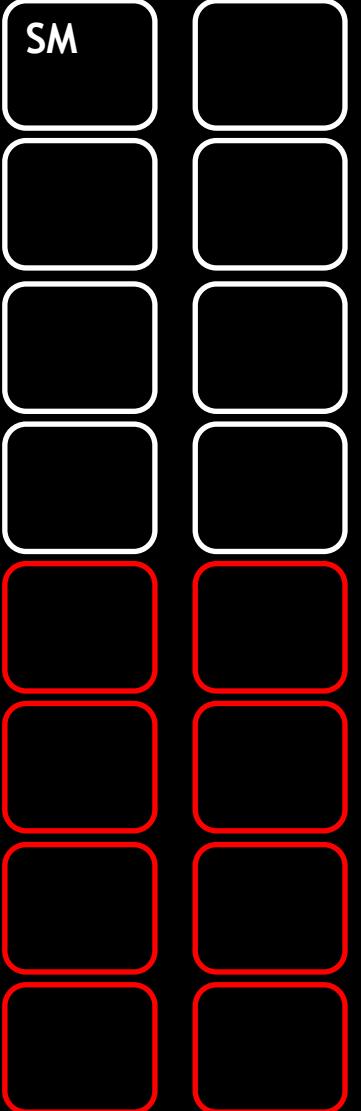

Here there are fallow SMs

MANAGING THE DEVICE

CONCEPTS

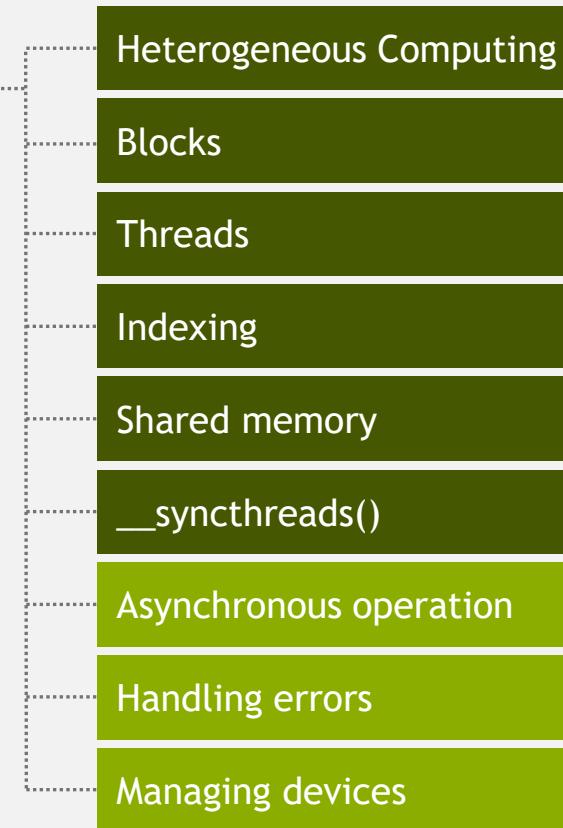

Coordinating Host & Device

- Kernel launches are **asynchronous**
 - Control returns to the CPU immediately
- CPU needs to synchronize before consuming the results

cudaMemcpy() Blocks the CPU until the copy is complete

Copy begins when all preceding CUDA calls have completed

cudaMemcpyAsync() Asynchronous, does not block the CPU

cudaDeviceSynchronize() Blocks the CPU until all preceding CUDA calls have completed

Reporting Errors

- All CUDA API calls return an error code (`cudaError_t`)
 - Error in the API call itself
 - OR
 - Error in an earlier asynchronous operation (e.g. kernel)
- Get the error code for the last error:
`cudaError_t cudaGetLastError(void)`
- Get a string to describe the error:
`char *cudaGetString(cudaError_t)`

`printf("%s\n", cudaGetString(cudaGetLastError()));`

Device Management

- Application can query and select GPUs

```
cudaGetDeviceCount(int *count)  
cudaSetDevice(int device)  
cudaGetDevice(int *device)  
cudaGetDeviceProperties(cudaDeviceProp *prop, int device)
```

- Multiple threads can share a device
- A single thread can manage multiple devices

```
cudaSetDevice(i) to select current device  
cudaMemcpy(...) for peer-to-peer copies†
```

[†] requires OS and device support



CUDA Runtime API

API Reference Manual

vRelease Version | July 2019

<https://docs.nvidia.com/cuda/cuda-runtime-api/index.html>
PDF copy included in docs folder

Managing Accelerated Application Memory with CUDA C/C++ Unified Memory (Nvidia courseware)

Streaming Multiprocessors and Warps

The GPUs that CUDA applications run on have processing units called **streaming multiprocessors**, or **SMs**. During kernel execution, blocks of threads are given to SMs to execute. In order to support the GPU's ability to perform as many parallel operations as possible, performance gains can often be had by *choosing a grid size that has a number of blocks that is a multiple of the number of SMs on a given GPU*.

Additionally, SMs create, manage, schedule, and execute groupings of 32 threads from within a block called **warps**. A more [in-depth coverage of SMs and warps](#) is beyond the scope of this course, however, it is important to know that performance gains can also be had by *choosing a block size that has a number of threads that is a multiple of 32*.

Programmatically Querying GPU Device Properties

In order to support portability, since the number of SMs on a GPU can differ depending on the specific GPU being used, the number of SMs should not be hard-coded into a codebase. Rather, this information should be acquired programmatically.

The following shows how, in CUDA C/C++, to obtain a C struct which contains many properties about the currently active GPU device, including its number of SMs:

```
int deviceId;
cudaGetDevice(&deviceId); // `deviceId` now points to the id of the currently
// active GPU.

cudaDeviceProp props;
cudaGetDeviceProperties(&props, deviceId); // `props` now has many useful properties about
// the active GPU device.
```

Managing Accelerated Application Memory with CUDA

C/C++ Unified Memory

(Nvidia courseware)

```
int main()
{
    /*
     * Device ID is required first to query the device.
     */

    int deviceId;
    cudaGetDevice(&deviceId);

    cudaDeviceProp props;
    cudaGetDeviceProperties(&props, deviceId);

    /*
     * `props` now contains several properties about the current device.
     */

    int computeCapabilityMajor = props.major;
    int computeCapabilityMinor = props.minor;
    int multiProcessorCount = props.multiProcessorCount;
    int warpSize = props.warpSize;

    printf("Device ID: %d\nNumber of SMs: %d\nCompute Capability Major: %d\nCompute Capability Minor: %d\nWarp Size: %d\n", deviceId, multiProcessorCount, computeCapabilityMajor, computeCapabilityMinor, warpSize);
}
```

Managing Accelerated Application Memory with CUDA

C/C++ Unified Memory

(Nvidia courseware)

```
In [1]: !nvcc -o get-device-properties 04-device-properties/01-get-device-properties.cu -run
```

```
Device ID: 0
Number of SMs: 40
Compute Capability Major: 7
Compute Capability Minor: 5
Warp Size: 32
```

Re-visiting vector-add

```
In [2]: !nvcc -o sm-optimized-vector-add 01-vector-add/01-vector-add.cu -run
```

Success! All values calculated correctly.

```
In [ ]: !nsys profile --stats=true ./sm-optimized-vector-add
```

Nsight on Windows

Note:

- For Pascal hardware, install Nsight 2019.5 or older
- Nsight 2020/2021 has dropped Pascal support.

Name	Date modified	Type	Size
nvtx	7/24/2021 1:46 PM	File folder	
python	7/24/2021 1:46 PM	File folder	
reports	7/24/2021 1:46 PM	File folder	
rules	7/24/2021 1:46 PM	File folder	
vulkan-layers	7/24/2021 1:46 PM	File folder	
bifrost_loader.dll	5/25/2021 12:46 AM	Application extension	282 KB
bifrost_plugin.dll	5/25/2021 12:46 AM	Application extension	119 KB
config.ini	5/25/2021 12:46 AM	Configuration settings	0 KB
cupti64_100.dll	5/25/2021 12:46 AM	Application extension	3,571 KB
cupti64_101.dll	5/25/2021 12:46 AM	Application extension	3,578 KB
cupti64_102.dll	5/25/2021 12:46 AM	Application extension	3,447 KB
cupti64_110.dll	5/25/2021 12:46 AM	Application extension	3,652 KB
cupti64_111.dll	5/25/2021 12:46 AM	Application extension	3,659 KB
cupti64_112.dll	5/25/2021 12:46 AM	Application extension	3,694 KB
cupti64_113.dll	5/25/2021 12:46 AM	Application extension	3,758 KB
cupti64_114.dll	5/25/2021 12:46 AM	Application extension	3,970 KB
etw_providers_template.json	5/25/2021 12:55 AM	JSON Source File	3 KB
GpuMetrics.config	5/25/2021 12:55 AM	Configuration Source File	56 KB
nsight-sys-service.exe	5/25/2021 12:53 AM	Application	129 KB
nsys.exe	5/25/2021 12:55 AM	Application	15,098 KB
NsysVslIntegration.xml	5/25/2021 12:47 AM	XML Document	2 KB
nvperf_host.dll	5/25/2021 12:49 AM	Application extension	13,298 KB
sqlite3.exe	5/25/2021 12:46 AM	Application	1,064 KB
targetsettings.xml	5/25/2021 12:46 AM	XML Document	4 KB
ToolsInjection64.dll	5/25/2021 12:52 AM	Application extension	11,433 KB

Profiling vector-add

CUDA API Statistics:

Time(%)	Total Time (ns)	Num Calls	Average	Minimum	Maximum	Name
90.5	2339293277	1	2339293277.0	2339293277	2339293277	cudaDeviceSynchronize
8.8	226837438	3	75612479.3	18059	226773774	cudaMallocManaged
0.7	18227575	3	6075858.3	5479985	7131312	cudaFree
0.0	53218	1	53218.0	53218	53218	cudaLaunchKernel

CUDA Kernel Statistics:

Time(%)	Total Time (ns)	Instances	Average	Minimum	Maximum	Name
100.0	2339281682	1	2339281682.0	2339281682	2339281682	addVectorsInto(float*, float*, float*, int)

CUDA Memory Operation Statistics (by time):

Time(%)	Total Time (ns)	Operations	Average	Minimum	Maximum	Operation
76.6	68387966	2304	29682.3	1855	181951	[CUDA Unified Memory memcpy HtoD]
23.4	20840704	768	27136.3	1119	159807	[CUDA Unified Memory memcpy DtoH]

CUDA Memory Operation Statistics (by size in KiB):

Total	Operations	Average	Minimum	Maximum	Operation
393216.000	2304	170.667	4.000	1020.000	[CUDA Unified Memory memcpy HtoD]
131072.000	768	170.667	4.000	1020.000	[CUDA Unified Memory memcpy DtoH]

Optimizing vector-add: Use SM count in kernel configuration

```
size_t numberOfBlocks = ceil(ceil(N/1024.0)/40.0)*40;
size_t threadsPerBlock = ceil(N/float(numberOfBlocks));

cudaError_t addVectorsErr;
cudaError_t asyncErr;

addVectorsInto<<<numberOfBlocks, threadsPerBlock>>>(c, a, b, N);
```

CUDA Kernel Statistics:

Time(%)	Total Time (ns)	Instances	Average	Minimum	Maximum	Name
100.0	133485799	1	133485799.0	133485799	133485799	addVectorsInto(float*, float*, float*, int)

Unified Memory and Page-faulting: CPU Only

```
> toshiba-cuda-2021 > docs > nvidia-courseware > page faults > 01-page-faults-solution-cpu-only.cu
__global__
void deviceKernel(int *a, int N)
{
    int idx = threadIdx.x + blockIdx.x * blockDim.x;
    int stride = blockDim.x * gridDim.x;

    for (int i = idx; i < N; i += stride)
    {
        a[i] = 1;
    }
}

void hostFunction(int *a, int N)
{
    for (int i = 0; i < N; ++i)
    {
        a[i] = 1;
    }
}

int main()
{
    int N = 2<<24;
    size_t size = N * sizeof(int);
    int *a;
    cudaMallocManaged(&a, size);
    hostFunction(a, N);
    cudaFree(a);
}
```

CUDA API Statistics:

Time(%)	Total Time (ns)	Num Calls	Average	Minimum	Maximum	Name
98.3	229814053	1	229814053.0	229814053	229814053	cudaMallocManaged
1.7	3914137	1	3914137.0	3914137	3914137	cudaFree

Unified Memory and Page-faulting: GPU Only

CUDA API Statistics:

Time(%)	Total Time (ns)	Num Calls	Average	Minimum	Maximum	Name
91.1	225642941	1	225642941.0	225642941	225642941	cudaMallocManaged
6.4	15883701	1	15883701.0	15883701	15883701	cudaDeviceSynchronize
2.5	6087696	1	6087696.0	6087696	6087696	cudaFree
0.0	34077	1	34077.0	34077	34077	cudaLaunchKernel

CUDA Kernel Statistics:

Time(%)	Total Time (ns)	Instances	Average	Minimum	Maximum	Name
100.0	15878955	1	15878955.0	15878955	15878955	deviceKernel(int*, int)

solution-gpu-only.cu

```
int main()
{
    int N = 2<<24;
    size_t size = N * sizeof(int);
    int *a;
    cudaMallocManaged(&a, size);

    deviceKernel<<<256, 256>>>(a, N);
    cudaDeviceSynchronize();

    cudaFree(a);
}
```

Unified Memory and Page-faulting: CPU then GPU

CUDA API Statistics:

Time(%)	Total Time (ns)	Num Calls	Average	Minimum	Maximum	Name
77.5	231322845	1	231322845.0	231322845	231322845	cudaMallocManaged
20.3	60595299	1	60595299.0	60595299	60595299	cudaDeviceSynchronize
2.1	6345710	1	6345710.0	6345710	6345710	cudaFree
0.0	57660	1	57660.0	57660	57660	cudaLaunchKernel

CUDA Kernel Statistics:

Time(%)	Total Time (ns)	Instances	Average	Minimum	Maximum	Name
100.0	60583520	1	60583520.0	60583520	60583520	deviceKernel(int*, int)

CUDA Memory Operation Statistics (by time):

Time(%)	Total Time (ns)	Operations	Average	Minimum	Maximum	Operation
100.0	29952964	4812	6224.6	2111	158112	[CUDA Unified Memory memcpy HtoD]

CUDA Memory Operation Statistics (by size in KiB):

Total	Operations	Average	Minimum	Maximum	Operation
131072.000	4812	27.239	4.000	948.000	[CUDA Unified Memory memcpy HtoD]

```
int main()
{
    int N = 2<<24;
    size_t size = N * sizeof(int);
    int *a;
    cudaMallocManaged(&a, size);

    hostFunction(a, N);
    deviceKernel<<<256, 256>>>(a, N);
    cudaDeviceSynchronize();

    cudaFree(a);
}
```

Unified Memory and Page-faulting: GPU then CPU

CUDA API Statistics:

Time(%)	Total Time (ns)	Num Calls	Average	Minimum	Maximum	Name
88.9	227260385	1	227260385.0	227260385	227260385	cudaMallocManaged
7.9	20221120	1	20221120.0	20221120	20221120	cudaDeviceSynchronize
3.2	8079876	1	8079876.0	8079876	8079876	cudaFree
0.0	46971	1	46971.0	46971	46971	cudaLaunchKernel

CUDA Kernel Statistics:

Time(%)	Total Time (ns)	Instances	Average	Minimum	Maximum	Name
100.0	20207169	1	20207169.0	20207169	20207169	deviceKernel(int*, int)

CUDA Memory Operation Statistics (by time):

Time(%)	Total Time (ns)	Operations	Average	Minimum	Maximum	Operation
100.0	21122068	768	27502.7	1631	159743	[CUDA Unified Memory memcpy DtoH]

CUDA Memory Operation Statistics (by size in KiB):

Total	Operations	Average	Minimum	Maximum	Operation
131072.000	768	170.667	4.000	1020.000	[CUDA Unified Memory memcpy DtoH]

```
int main()
{
    int N = 2<<24;
    size_t size = N * sizeof(int);
    int *a;
    cudaMallocManaged(&a, size);
    deviceKernel<<<256, 256>>>(a, N);
    cudaDeviceSynchronize();
    hostFunction(a, N);
    cudaFree(a);
}
```

Unified Memory and Page-faulting: Initialize Vector in Kernel

```
t > toshiba-cuda-2021 > docs > nvidia-courseware > page faults > 01-vector-add-init-in-kernel-solution.cu
```

```
* Refactor host function to run as CUDA kernel
*/
```

```
__global__
void initwith(float num, float *a, int N)
{
    int index = threadIdx.x + blockIdx.x * blockDim.x;
    int stride = blockDim.x * gridDim.x;

    for(int i = index; i < N; i += stride)
    {
        | a[i] = num;
    }
}
```

```
__global__
void addArraysInto(float *result, float *a, float *b, int N)
{
    int index = threadIdx.x + blockIdx.x * blockDim.x;
    int stride = blockDim.x * gridDim.x;

    for(int i = index; i < N; i += stride)
    {
        | result[i] = a[i] + b[i];
    }
}
```

CUDA Kernel Statistics:

Time(%)	Total Time (ns)	Instances	Average	Minimum	Maximum	Name
95.7	38433915	3	12811305.0	12502560	13266204	initWith(float, float*, int)
4.3	1706359	1	1706359.0	1706359	1706359	addArraysInto(float*, float*, float*, int)

CUDA Memory Operation Statistics (by time):

Time(%)	Total Time (ns)	Operations	Average	Minimum	Maximum	Operation
100.0	21119182	768	27498.9	1630	159839	[CUDA Unified Memory memcpy DtoH]

CUDA Memory Operation Statistics (by size in KiB):

Total	Operations	Average	Minimum	Maximum	Operation
131072.000	768	170.667	4.000	1020.000	[CUDA Unified Memory memcpy DtoH]


s PC > Storage (E:) > git > toshiba-cuda-2021 > docs > nvidia-courseware >



Name	Date modified	Type	Size
page faults	8/6/2021 1:19 PM	File folder	
01-get-device-properties-solution.cu	8/6/2021 12:31 PM	CU File	1 KB
01-heat-conduction-solution.cu	8/4/2021 8:06 PM	CU File	4 KB
01-vector-add-block-count-sm-multiple.cu	8/5/2021 2:22 PM	CU File	2 KB
AC_CUDA_C-whole.pptx	8/4/2021 12:22 AM	Microsoft PowerPo...	2,359 KB
NVPROF_UM_all.pptx	8/4/2021 8:08 PM	Microsoft PowerPo...	1,842 KB
NVVP-Streams-all.pptx	8/4/2021 11:13 PM	Microsoft PowerPo...	1,893 KB


Multiprocessor Occupancy

- Higher occupancy is often a goal in GPU optimization
- Greater occupancy can hide instruction latency
 - Read-after-write register latency
 - Latency in reading data from global memory
 - While threads in one warp waiting for data, another warp can run on multiprocessor

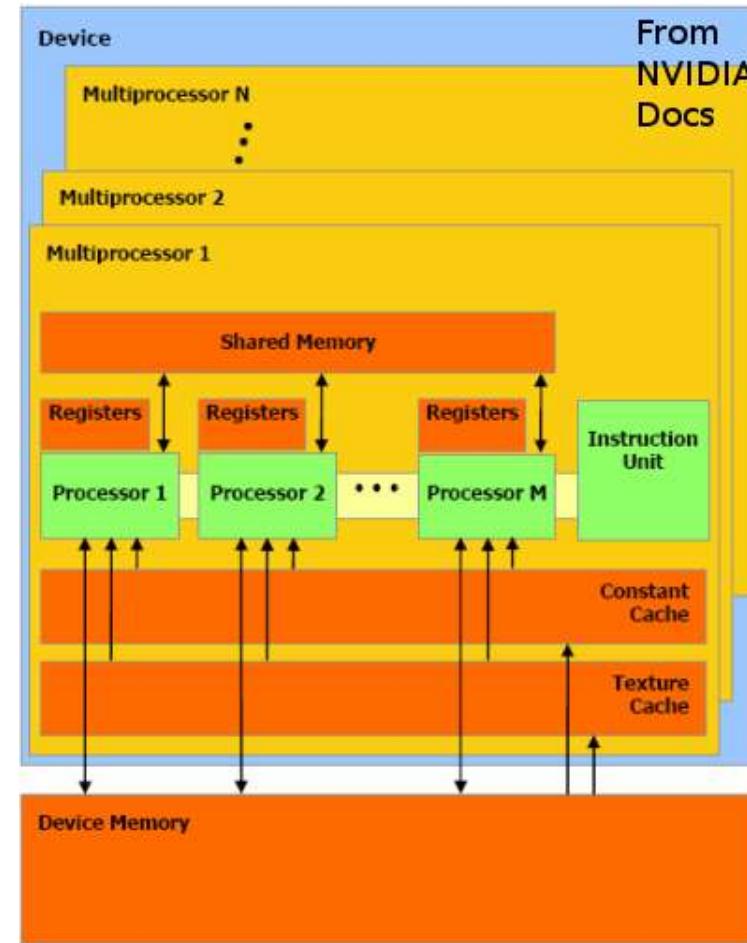


Multiprocessor Occupancy

- However, maximizing occupancy does not always result in best performance
- Increased multiprocessor occupancy can be at expense of faster register/shared memory accesses

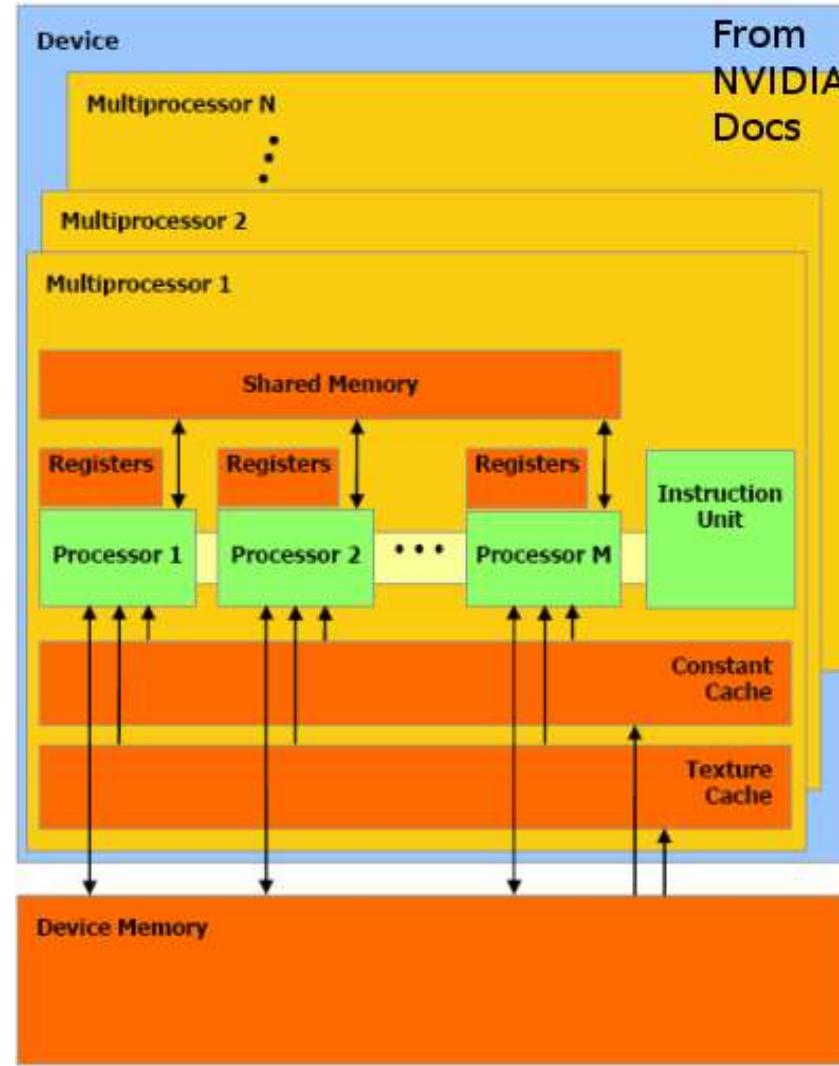

Multiprocessor Occupancy Factors

- Thread block dimensions
- Register usage per thread
- Shared memory usage per thread block
- Target GPU architecture

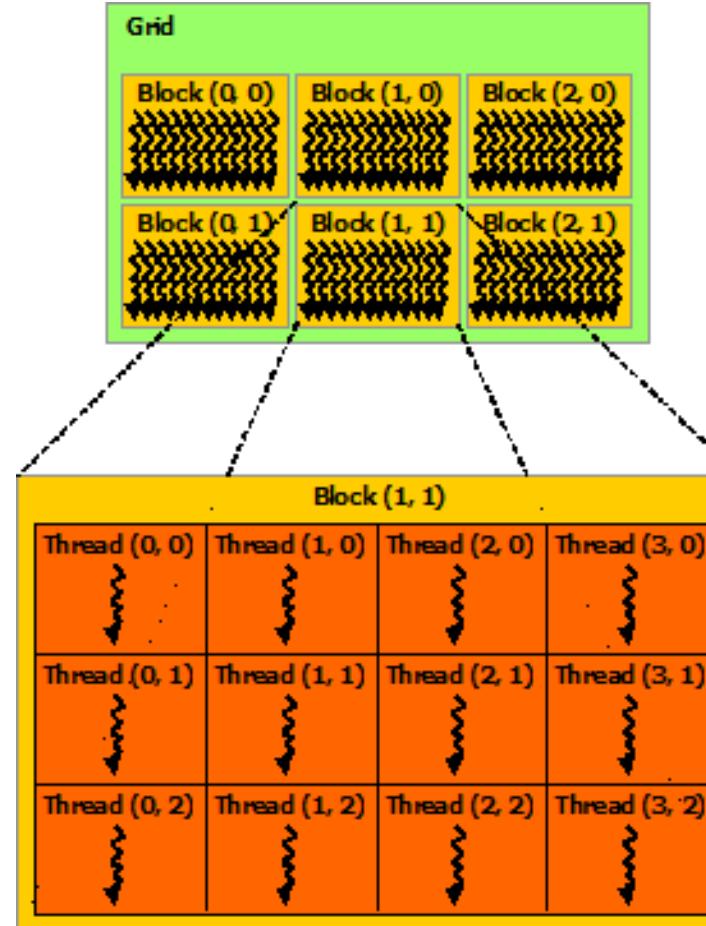

CUDA Occupancy Calculator

- Provided by NVIDIA to compute occupancy of CUDA kernel
- User enters GPU compute capability and resource usage
- Occupancy calculator computes occupancy
- Shows impact of...
 - Adjusting thread block size
 - Adjusting register usage
 - Adjusting shared memory usage
- Can be used as a tool to tweak CUDA program to improve multiprocessor occupancy

CUDA Occupancy Calculator

Available at http://developer.download.nvidia.com/compute/cuda/CUDA_Occupancy_calculator.xls

CUDA GPU Occupancy Calculator

Just follow steps 1, 2, and 3 below! (or click here for help)

1.) Select Compute Capability (click): 1.3 [\(Help\)](#)

2.) Enter your resource usage:

Threads Per Block 256 [\(Help\)](#)

Registers Per Thread 16 [\(Help\)](#)

Shared Memory Per Block (bytes) 4096 [\(Help\)](#)

(Don't edit anything below this line)

3.) GPU Occupancy Data is displayed here and in the graphs:

Active Threads per Multiprocessor 1024 [\(Help\)](#)

Active Warps per Multiprocessor 32 [\(Help\)](#)

Active Thread Blocks per Multiprocessor 4 [\(Help\)](#)

Occupancy of each Multiprocessor 100% [\(Help\)](#)

Physical Limits for GPU Compute Capability: 1.3

Threads per Warp 32

Warps per Multiprocessor 32

Threads per Multiprocessor 1024

Thread Blocks per Multiprocessor 8

Total # of 32-bit registers per Multiprocessor 16384


CUDA Occupancy Calculator

Available at http://developer.download.nvidia.com/compute/cuda/CUDA_Occupancy_calculator.xls

[Click Here for detailed instructions on how to use this occupancy calculator.](#)

[For more information on NVIDIA CUDA, visit http://developer.nvidia.com/cuda](#)

Your chosen resource usage is indicated by the red triangle on the graphs. The other data points represent the range of possible block sizes, register counts, and shared memory allocation.

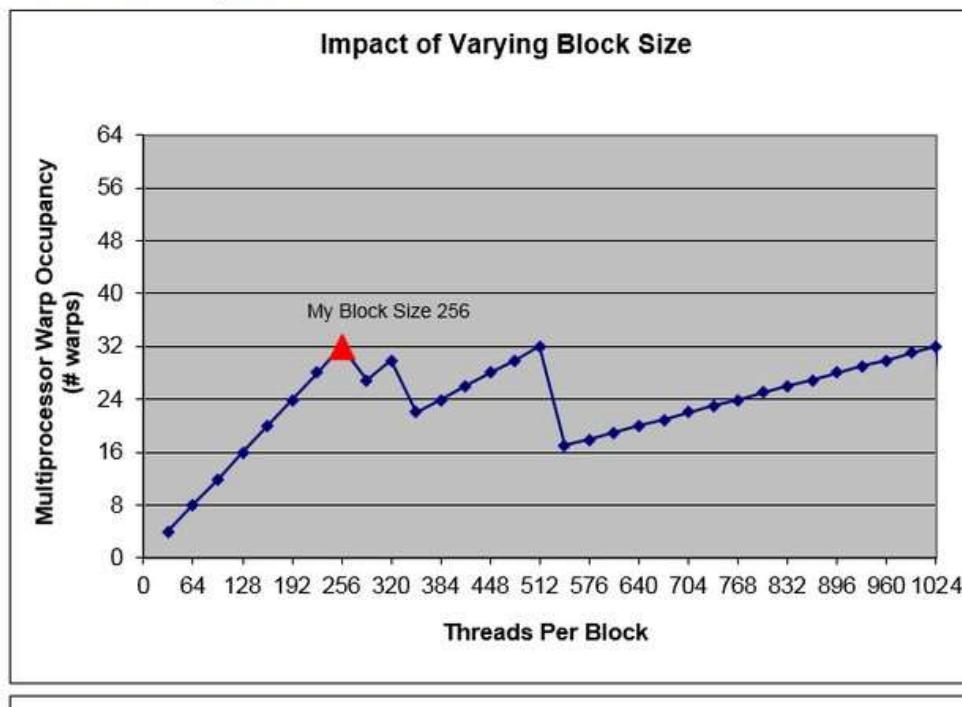

CUDA Occupancy Considerations

- All things equal, same program with higher occupancy should run faster
- However, may be necessary to sacrifice register / shared memory usage to increase occupancy
 - May increase necessary memory transfers from global memory
 - May slow program more than reduced occupancy

Other Optimization Considerations

- Thread block dimensions
- Global memory load/store pattern
- Register usage
- Local memory usage
- Branches within kernel
- Shared memory
- Constant memory
- Texture memory

Thread Block Dimensions

- CUDA threads grouped together in thread block structure
 - Run on same multiprocessor
 - Have access to common pool of fast shared memory
 - Can synchronize between threads in same thread block
- On Pascal, maximum of 64 concurrent warps, and 32 active thread blocks / SM
- Max thread block size on Pascal is 1024

Optimizing Thread Block Dimensions

- Use multiple of warp size (32)
 - Otherwise will be partially full warp --> wasted resources
- Different thread block dimensions work best for different programs
- Experiment and see what works best
 - Common thread block sizes: 128, 192, 256, 384, 512
 - If 2D thread block, common dimensions are 32X4, 32X6, 32X8, 32X12, 32X18



Tuning CUDA Applications for Pascal

Application Note

DA-08134-001_v11.4 | August 2021

<https://docs.nvidia.com/cuda/pascal-tuning-guide/index.html>
PDF copy in docs folder



Tuning CUDA Applications for Volta

Application Note

DA-08647-001_v11.4 | August 2021

<https://docs.nvidia.com/cuda/volta-tuning-guide/index.html>
PDF copy in docs folder



Tuning CUDA Applications for Turing

Application Note


DA-09073-001_v11.4 | August 2021

<https://docs.nvidia.com/cuda/turing-tuning-guide/index.html>
PDF copy in docs folder


CUDA Samples / simpleOccupancy

Pinned Memory

Pageable Data Transfer

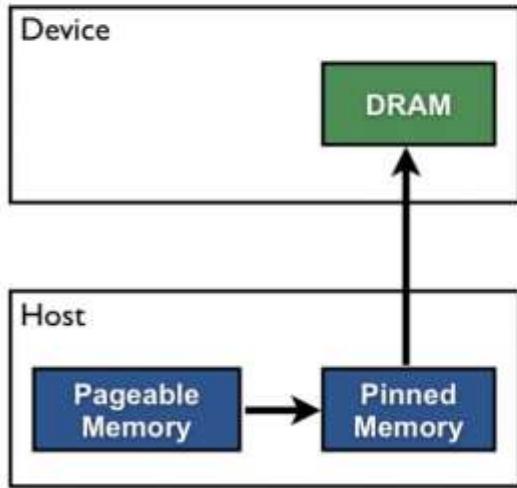

Pinned Data Transfer

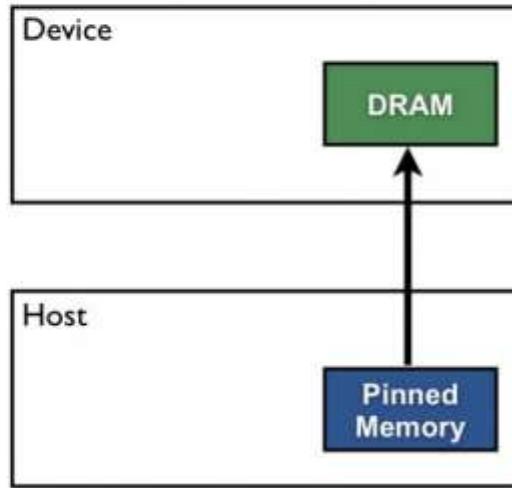


- Using pinned memory speeds up `cudaMemcpy()` calls.
- Pinned memory is a limited resource.
- Pinning memory “removes” it from the host paged virtual memory system.
- Less useful since Over-subscription introduced for Unified Memory in CUDA 8.

samples / zeroCopy


- **cudaHostAlloc** – Allocates page-locked memory on host.
- **cudaHostRegister** – Registers (page-locks) an existing host memory range for use by CUDA.
- Just use Unified Memory with **cudaMallocManaged()** and async prefetch/copy (to be discussed) unless there is a clear case for explicit memory management.

Unified Memory Behavior


When **UM** is allocated, it may not be resident initially on the CPU or the GPU

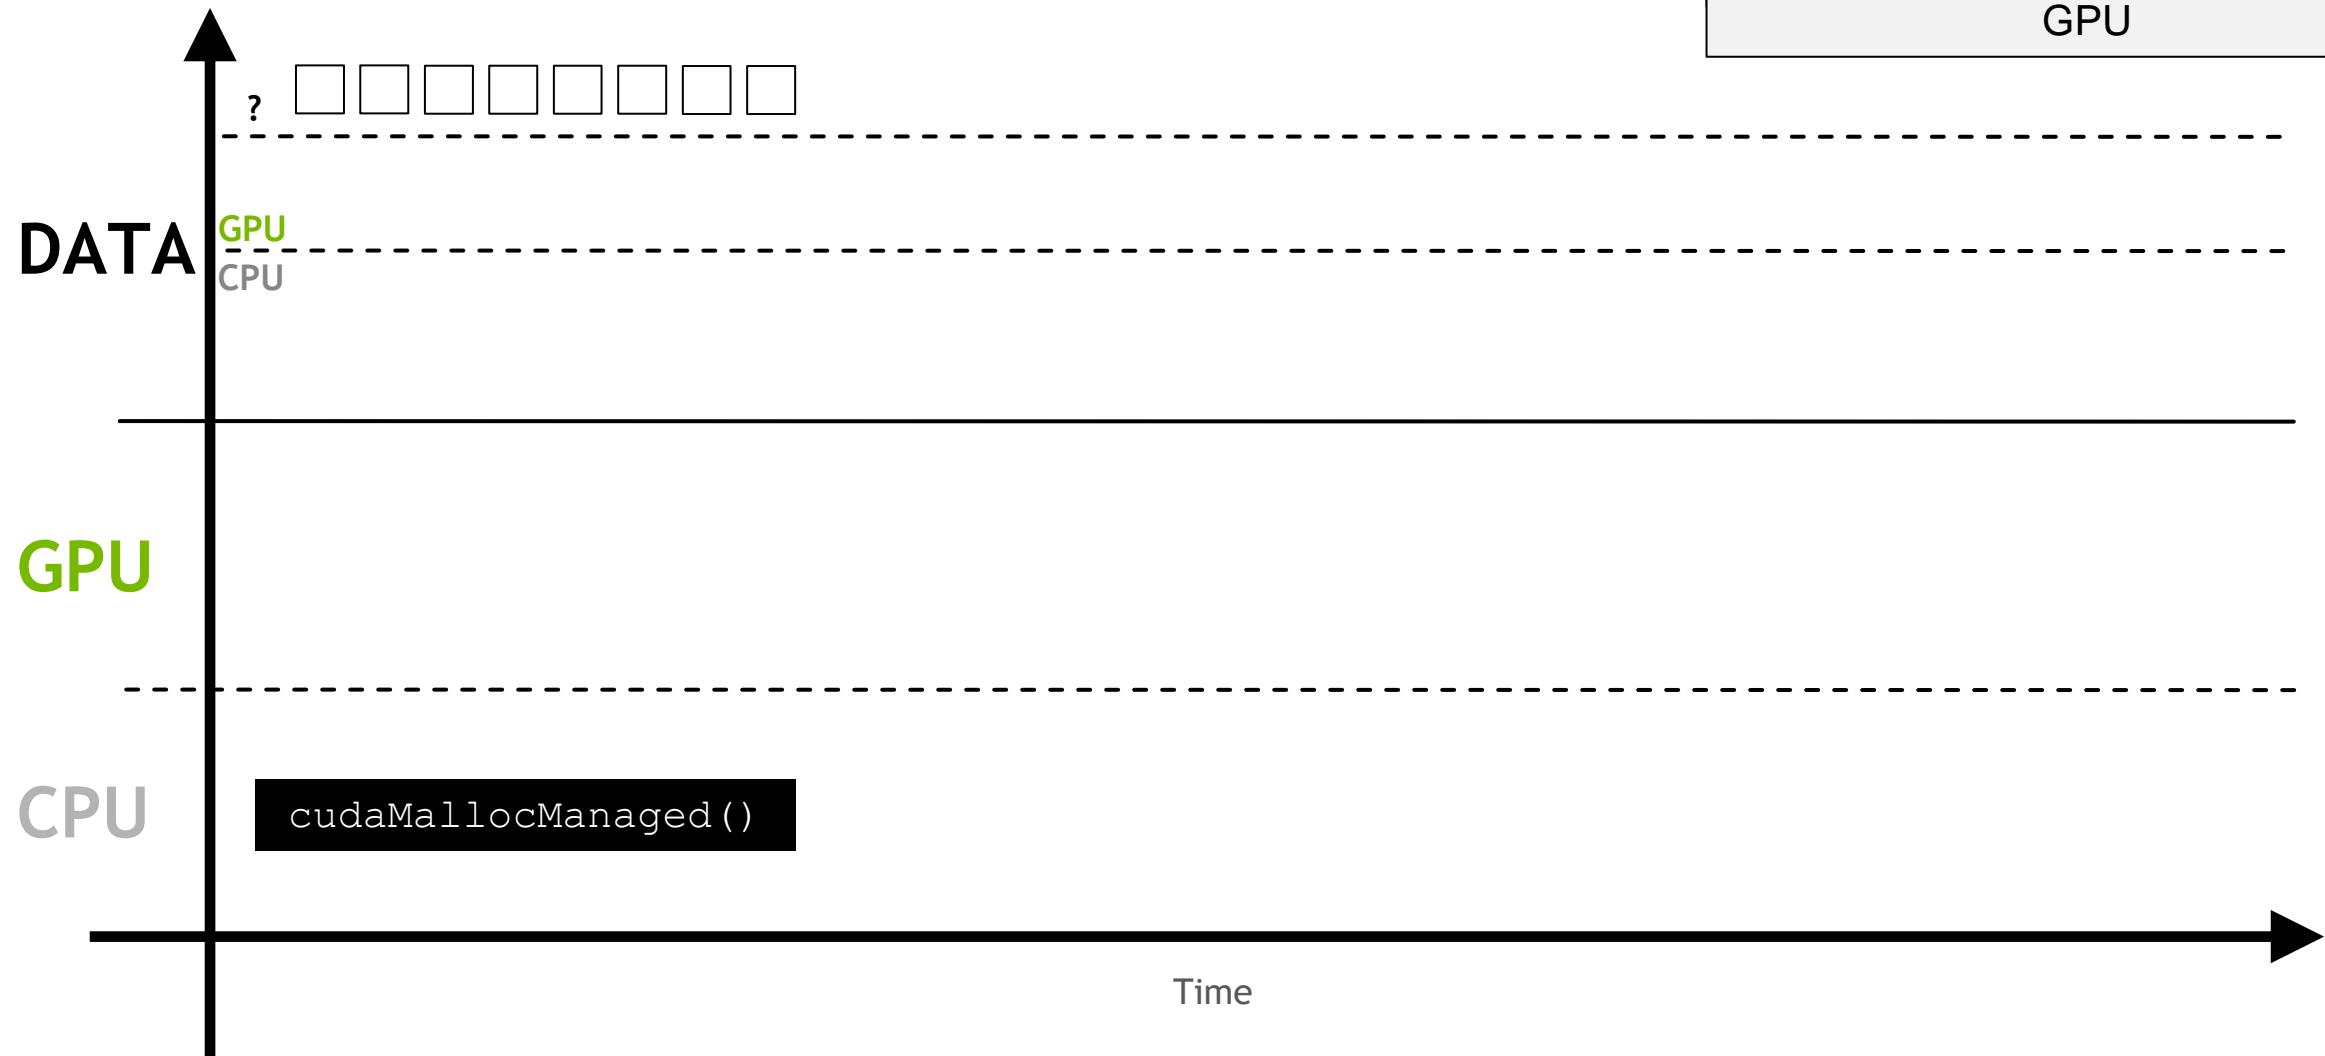


When some work asks for the memory
for the first time, a **page fault** will
occur

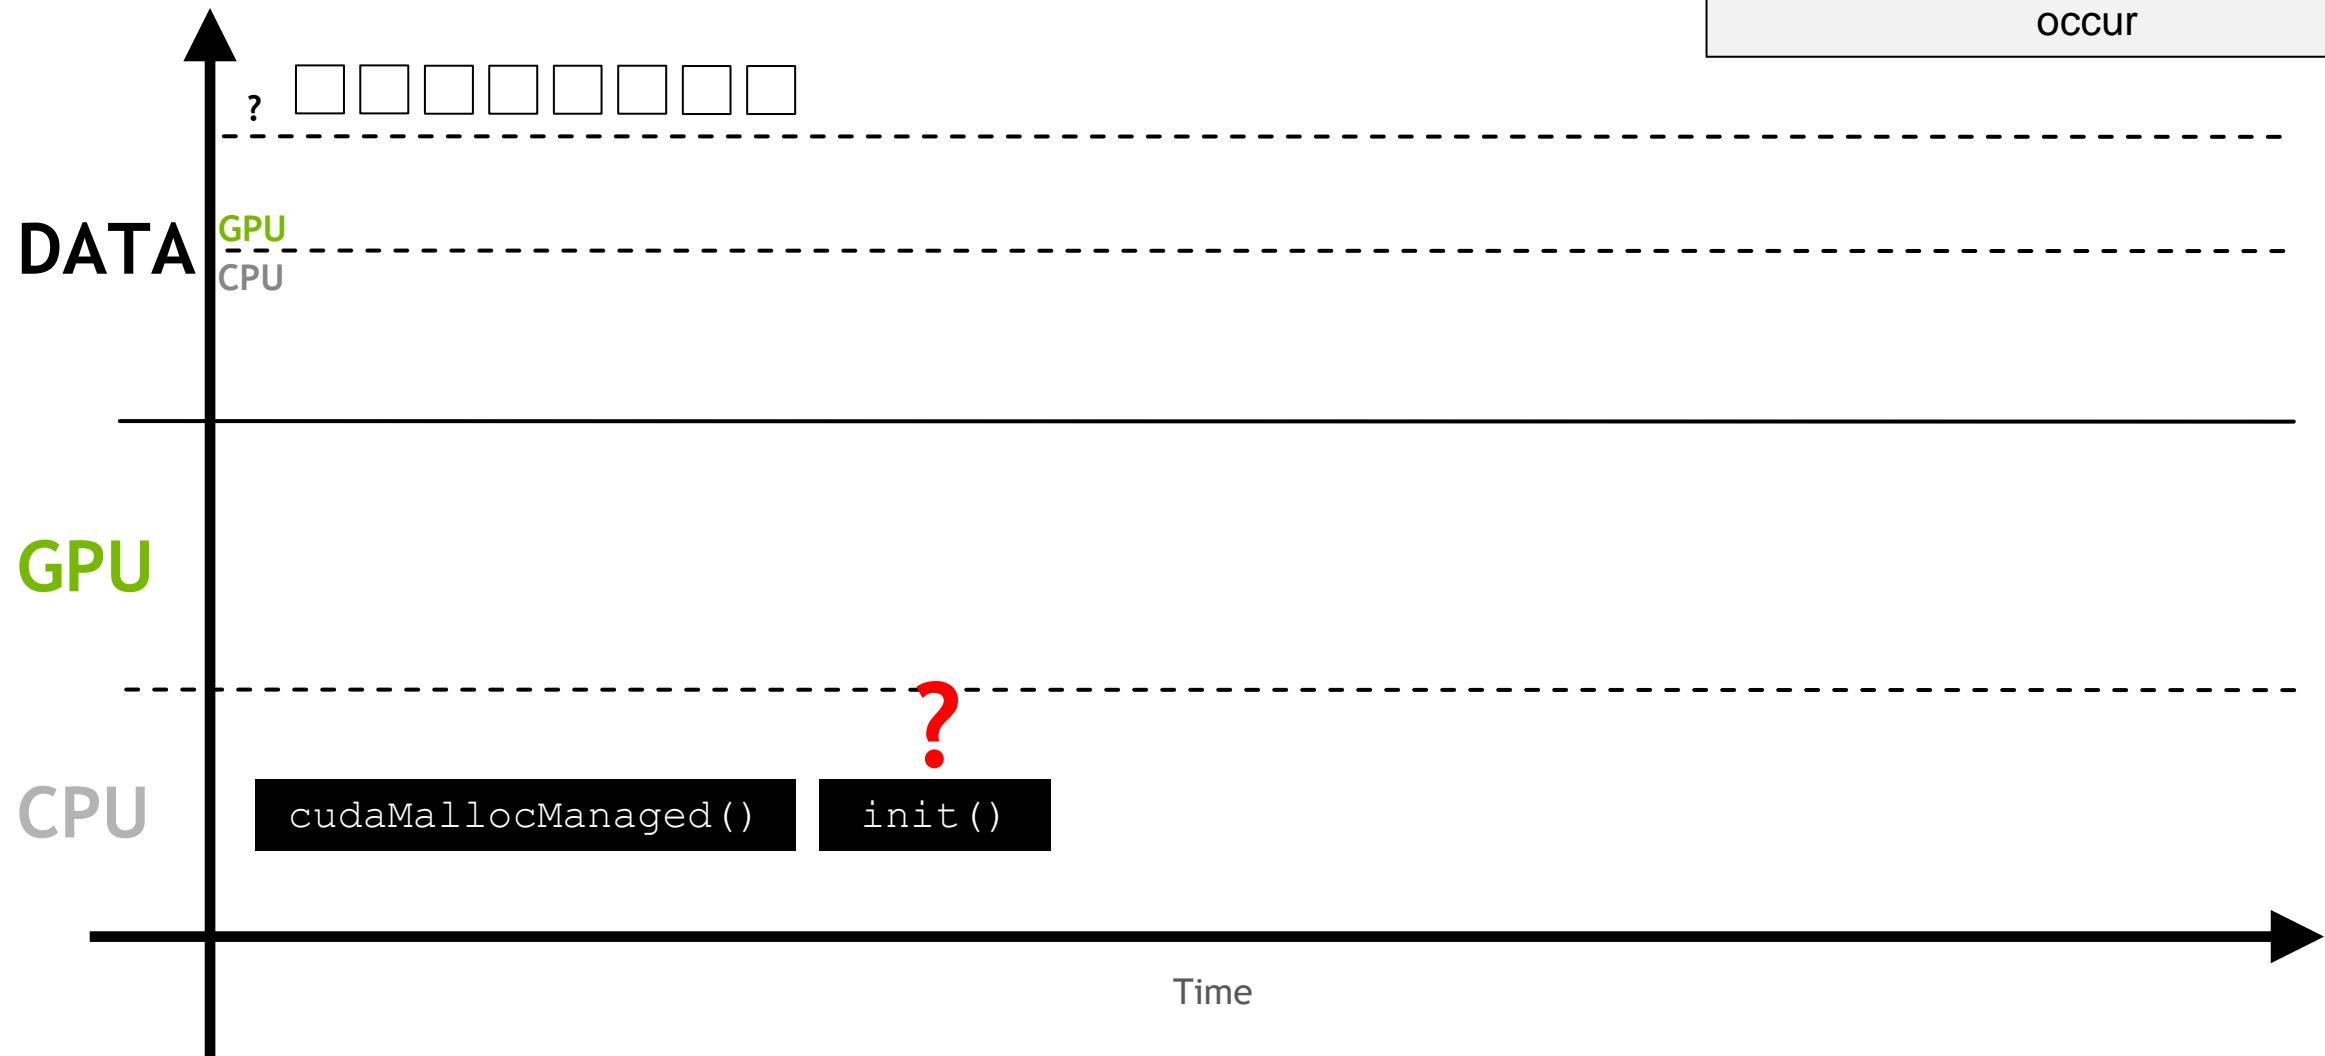


The page fault will trigger the migration
of the demanded memory

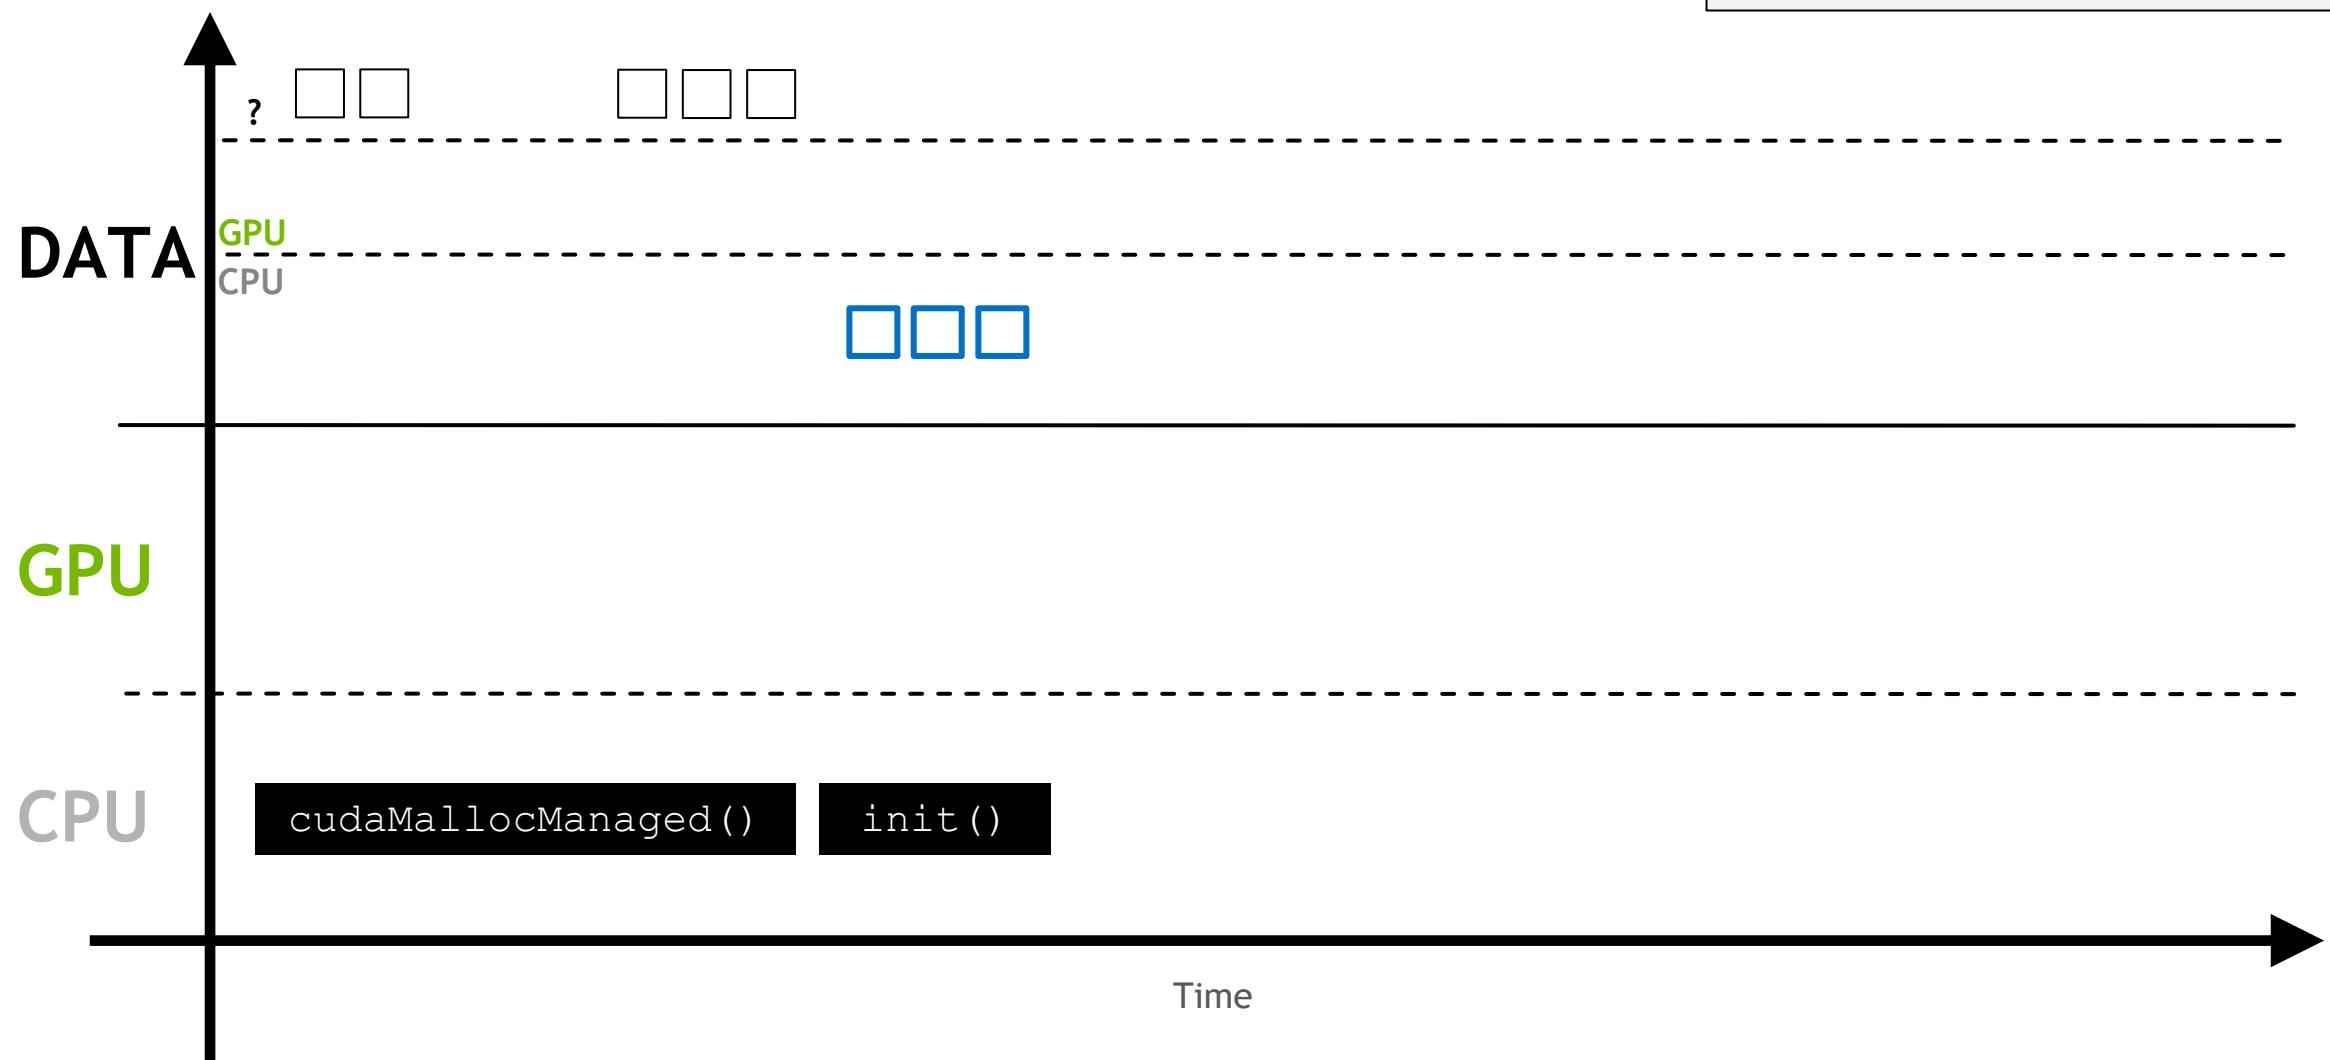


This process repeats anytime the memory is requested somewhere in the system where it is not resident

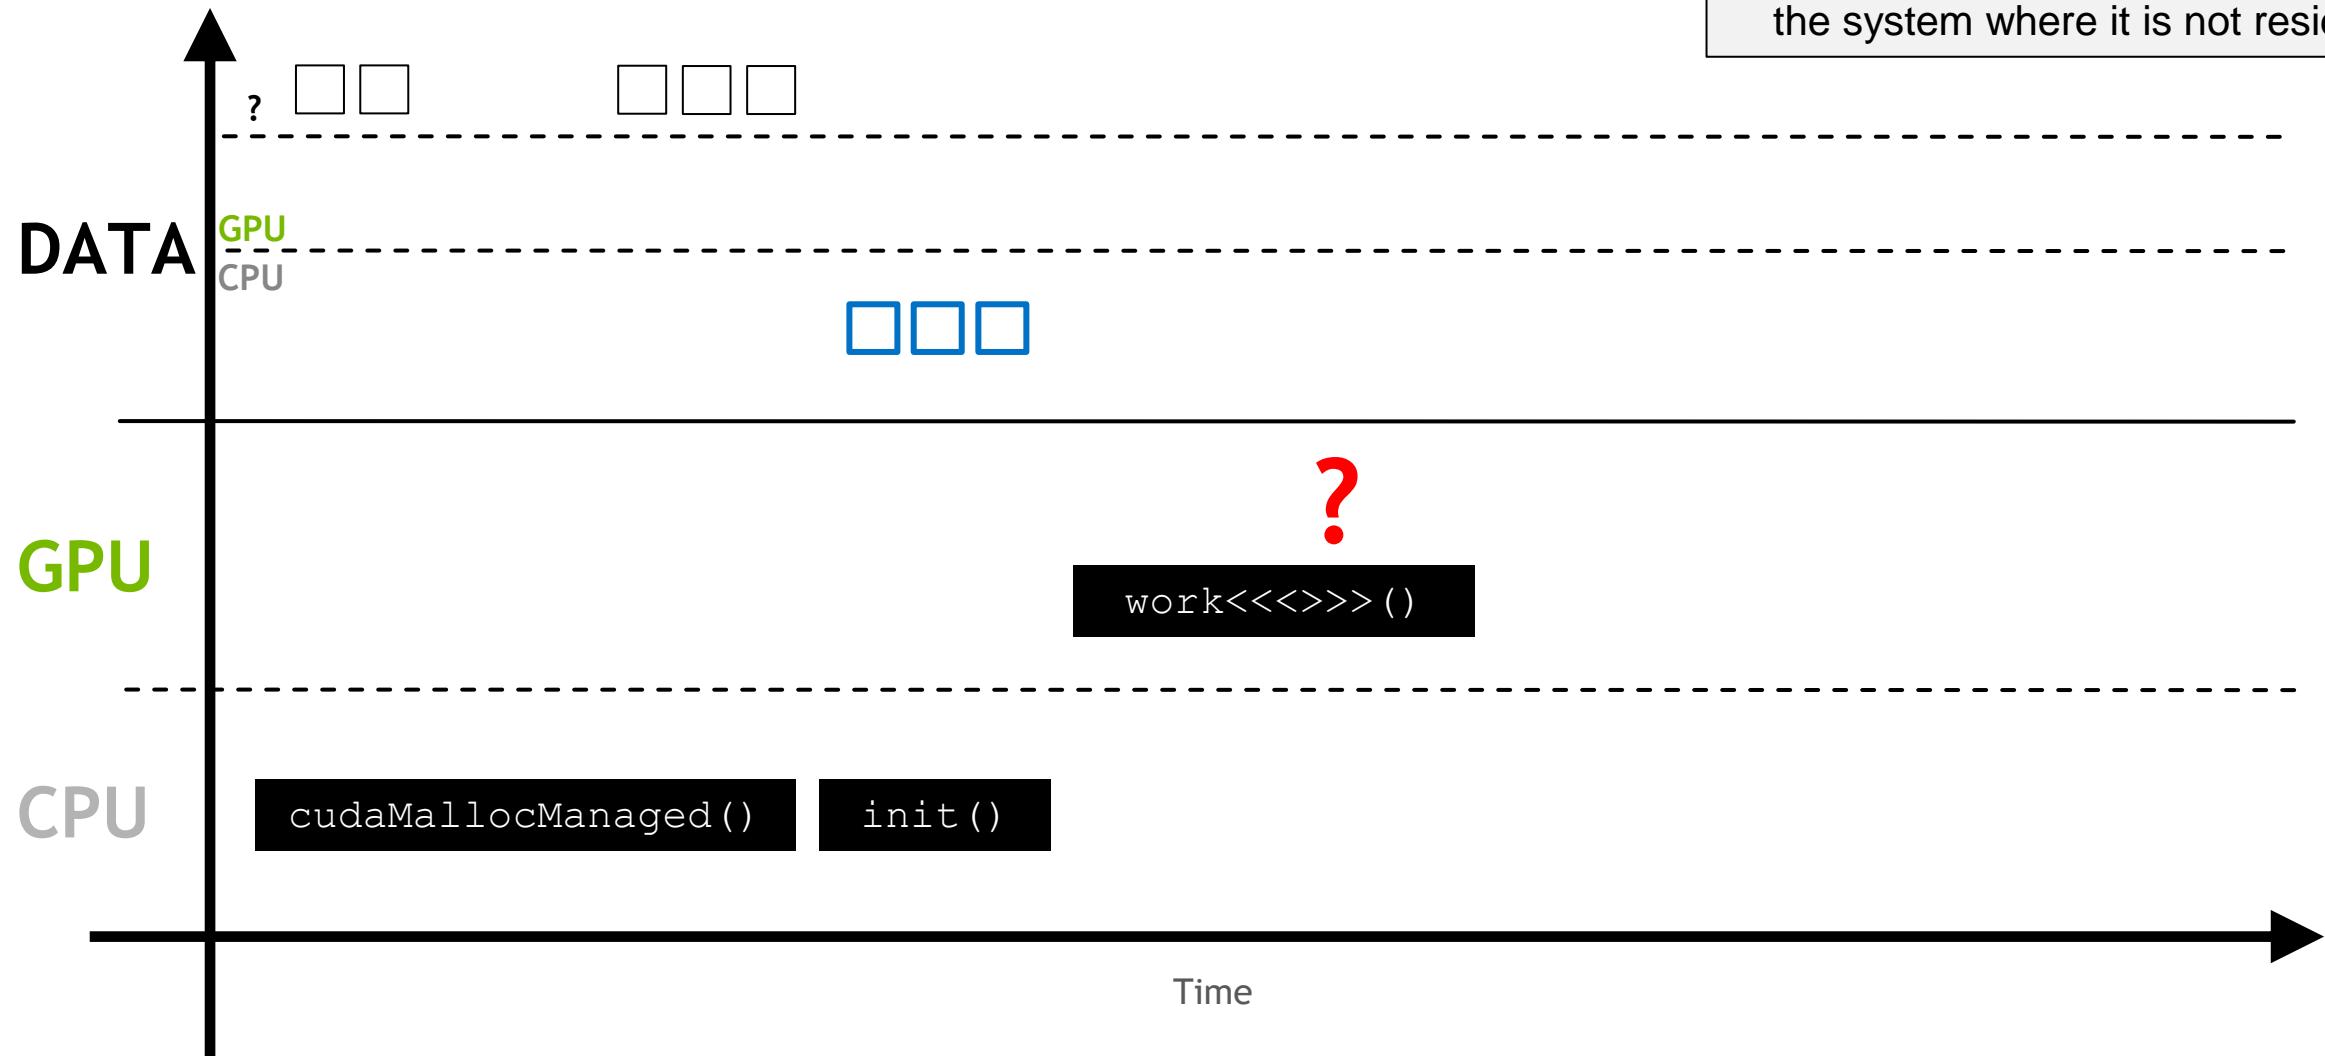


This process repeats anytime the memory is requested somewhere in the system where it is not resident

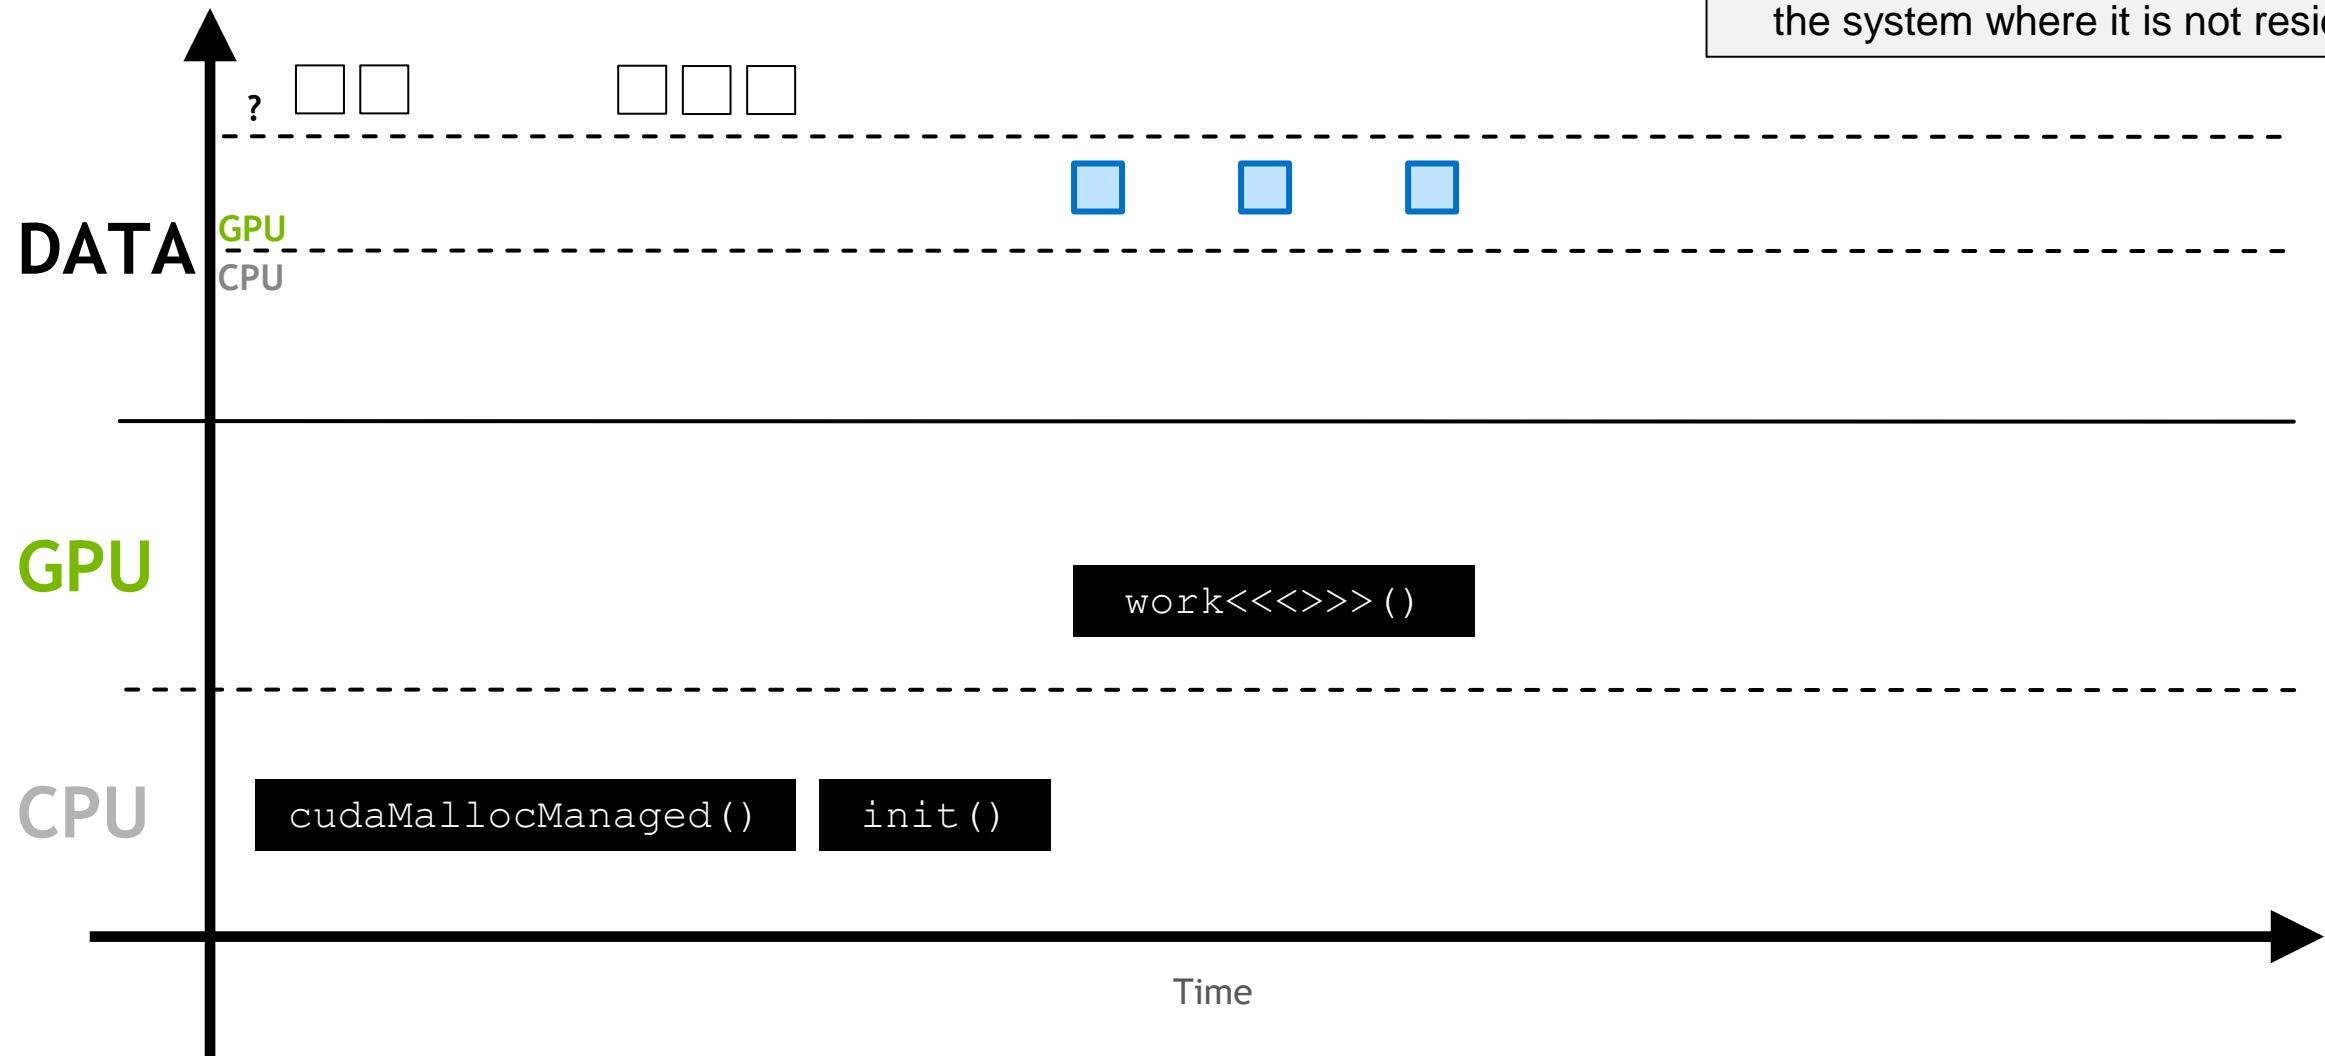


If it is known that the memory **will be** accessed somewhere it is not resident, asynchronous prefetching can be used

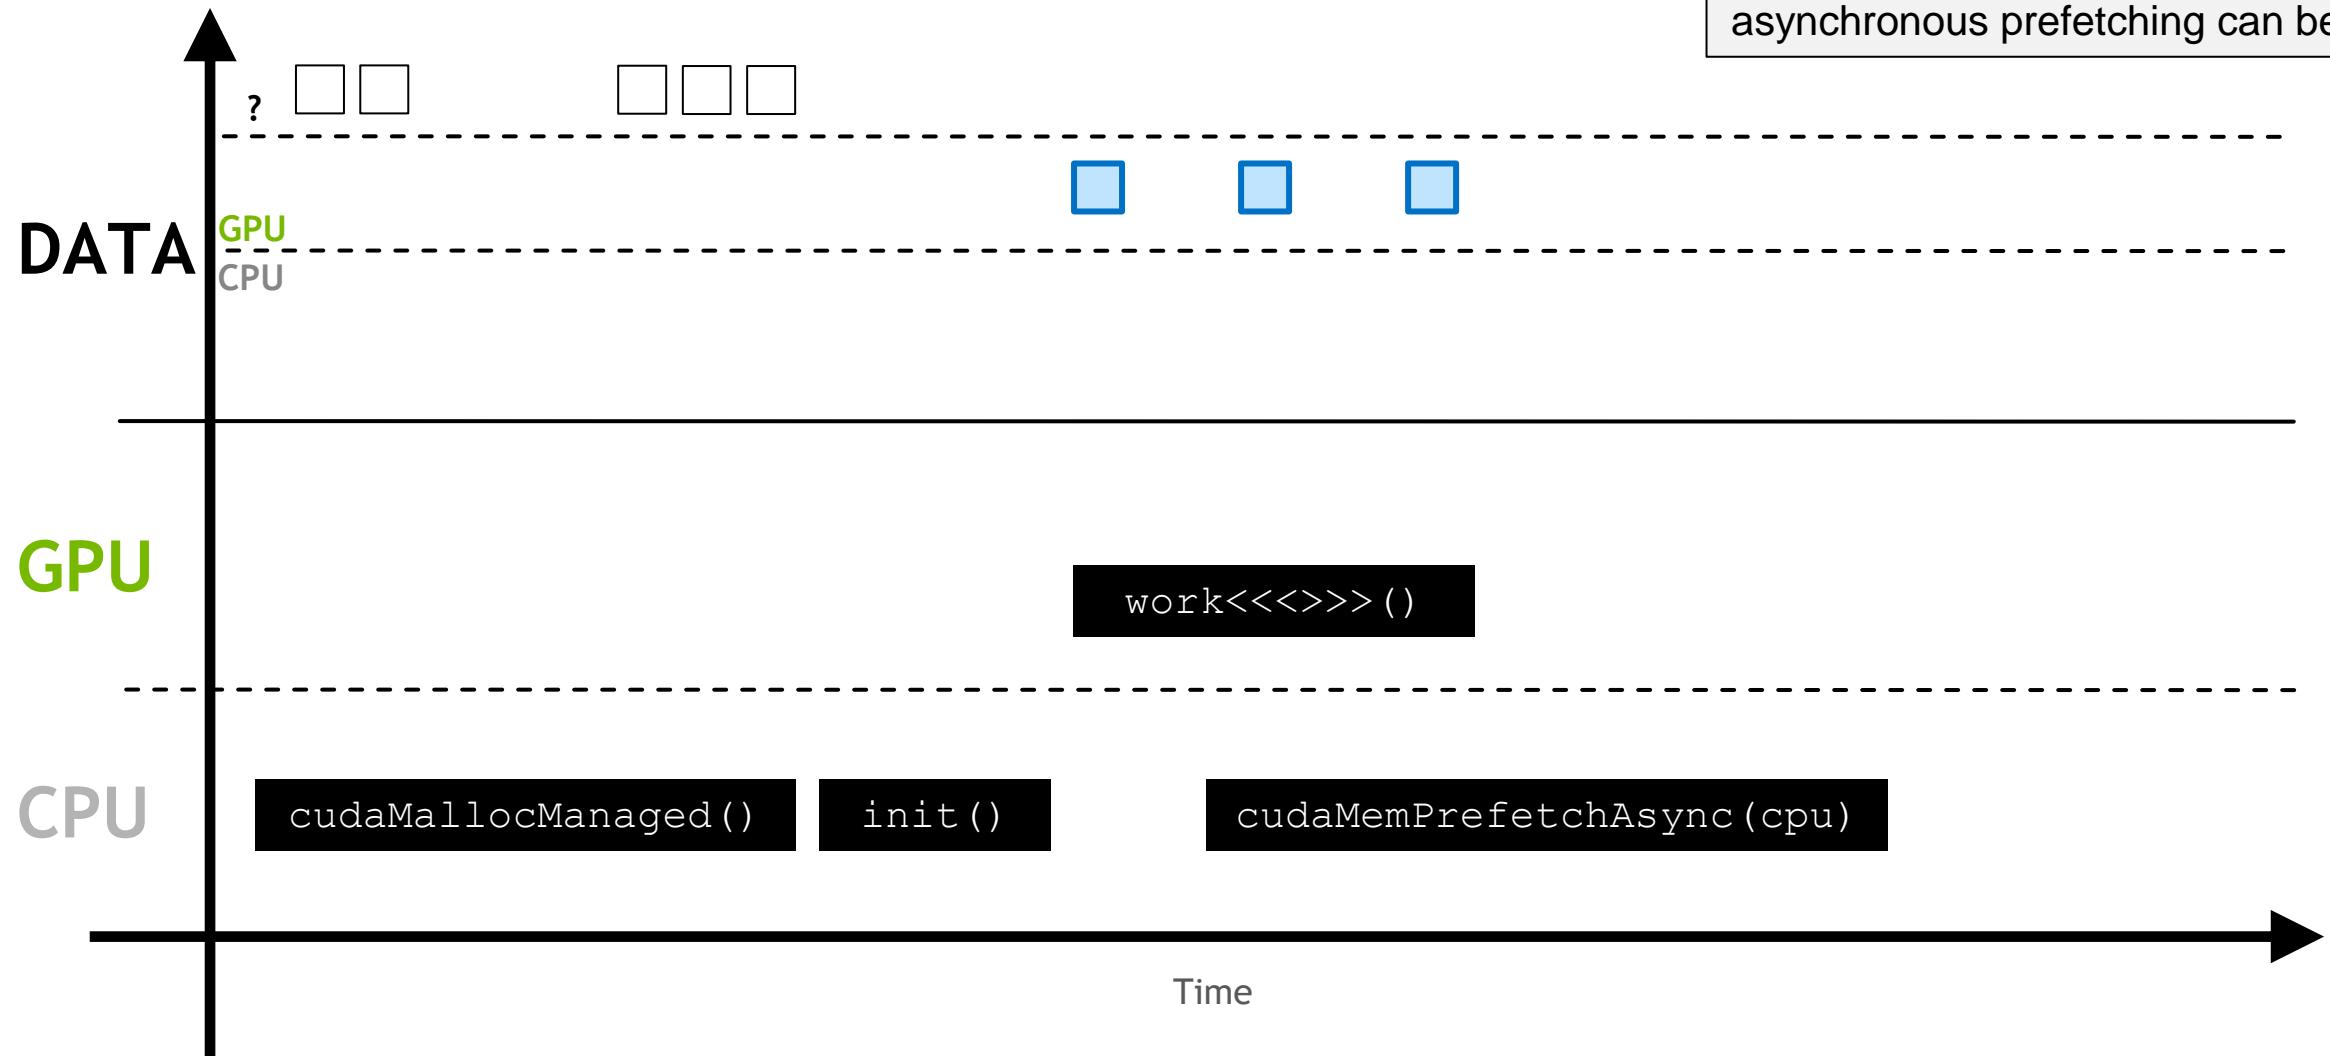

This moves the memory in larger batches, and prevents page faulting

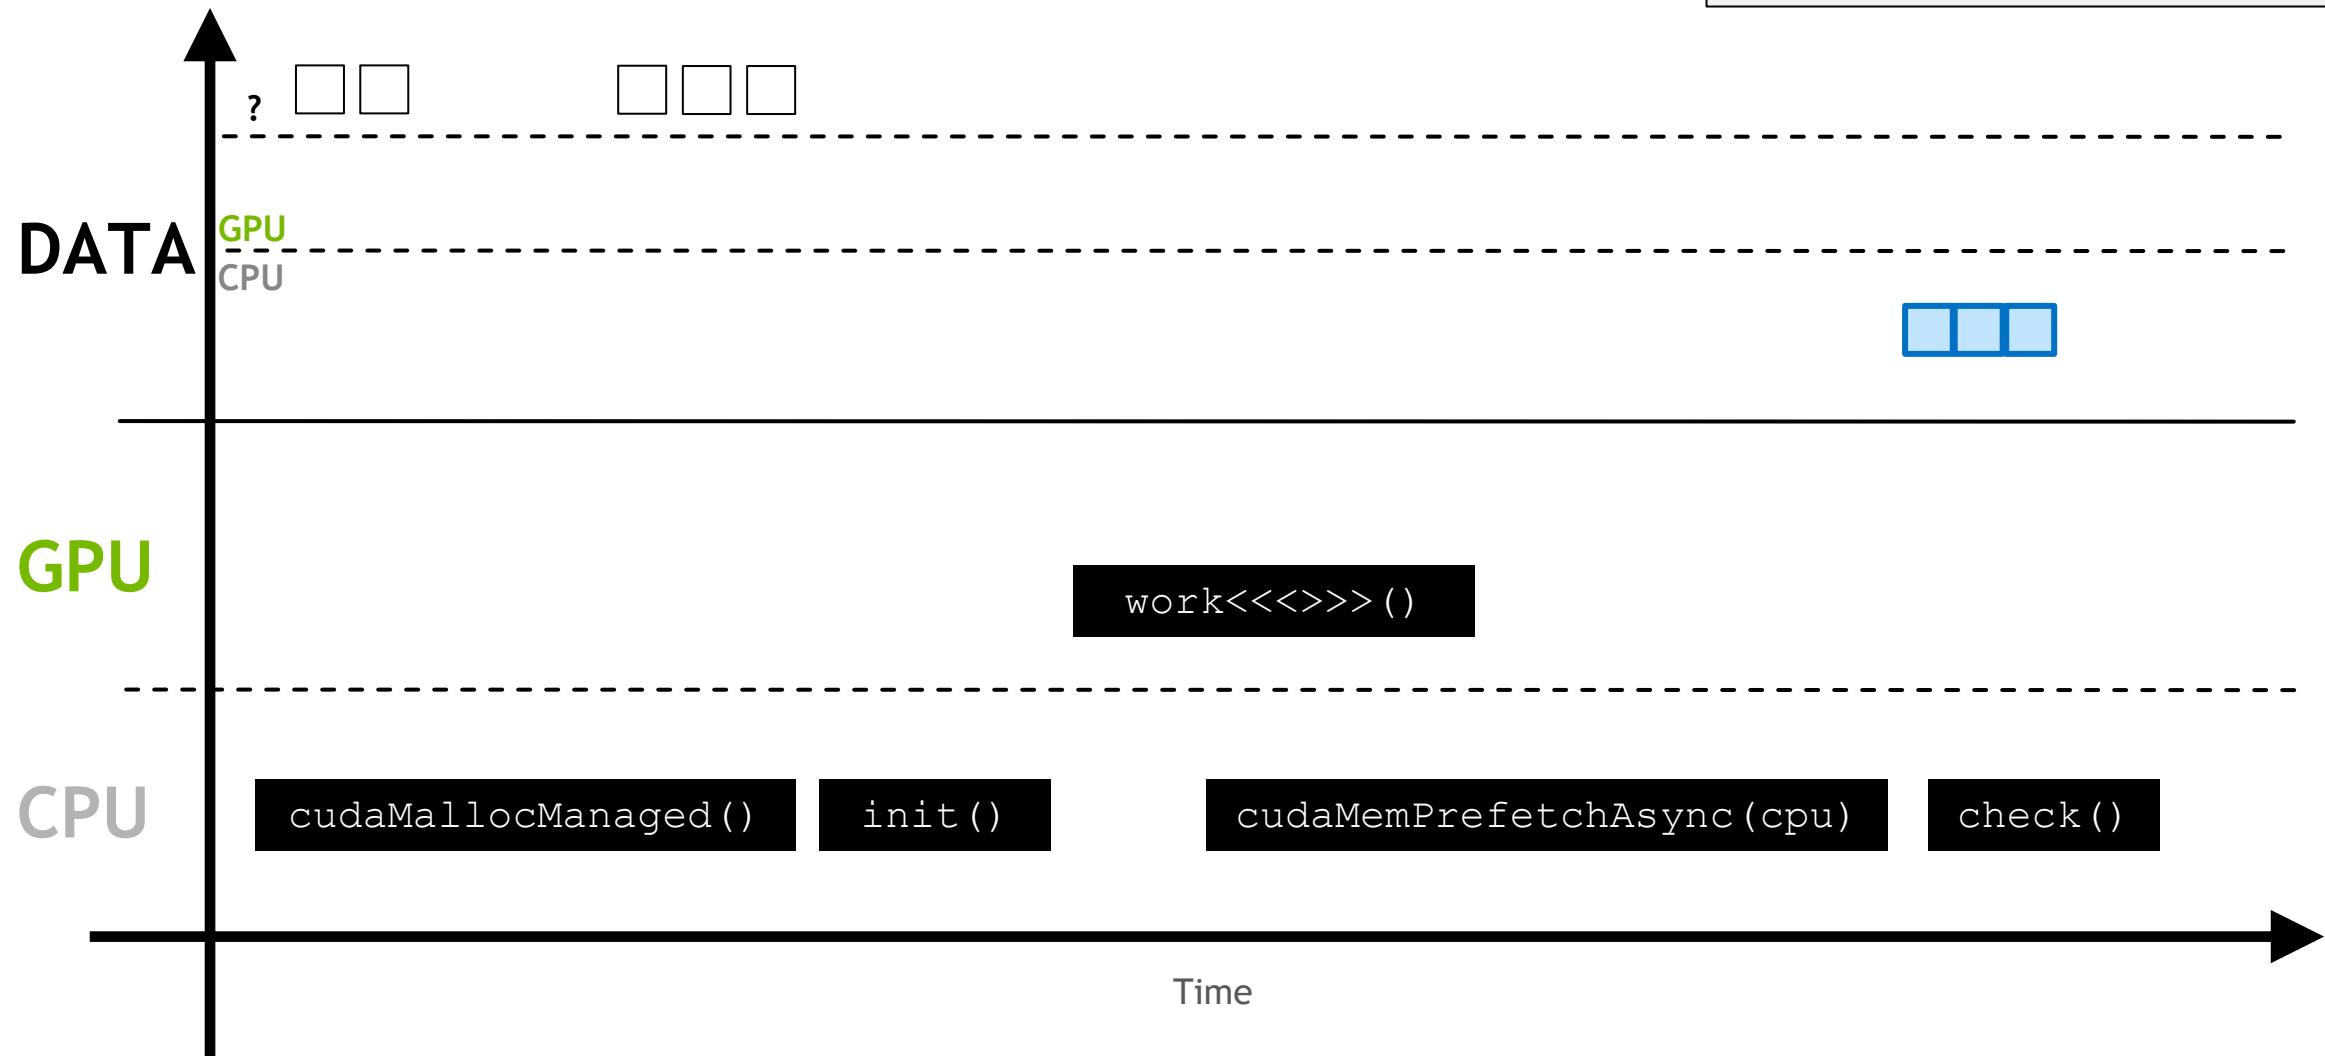

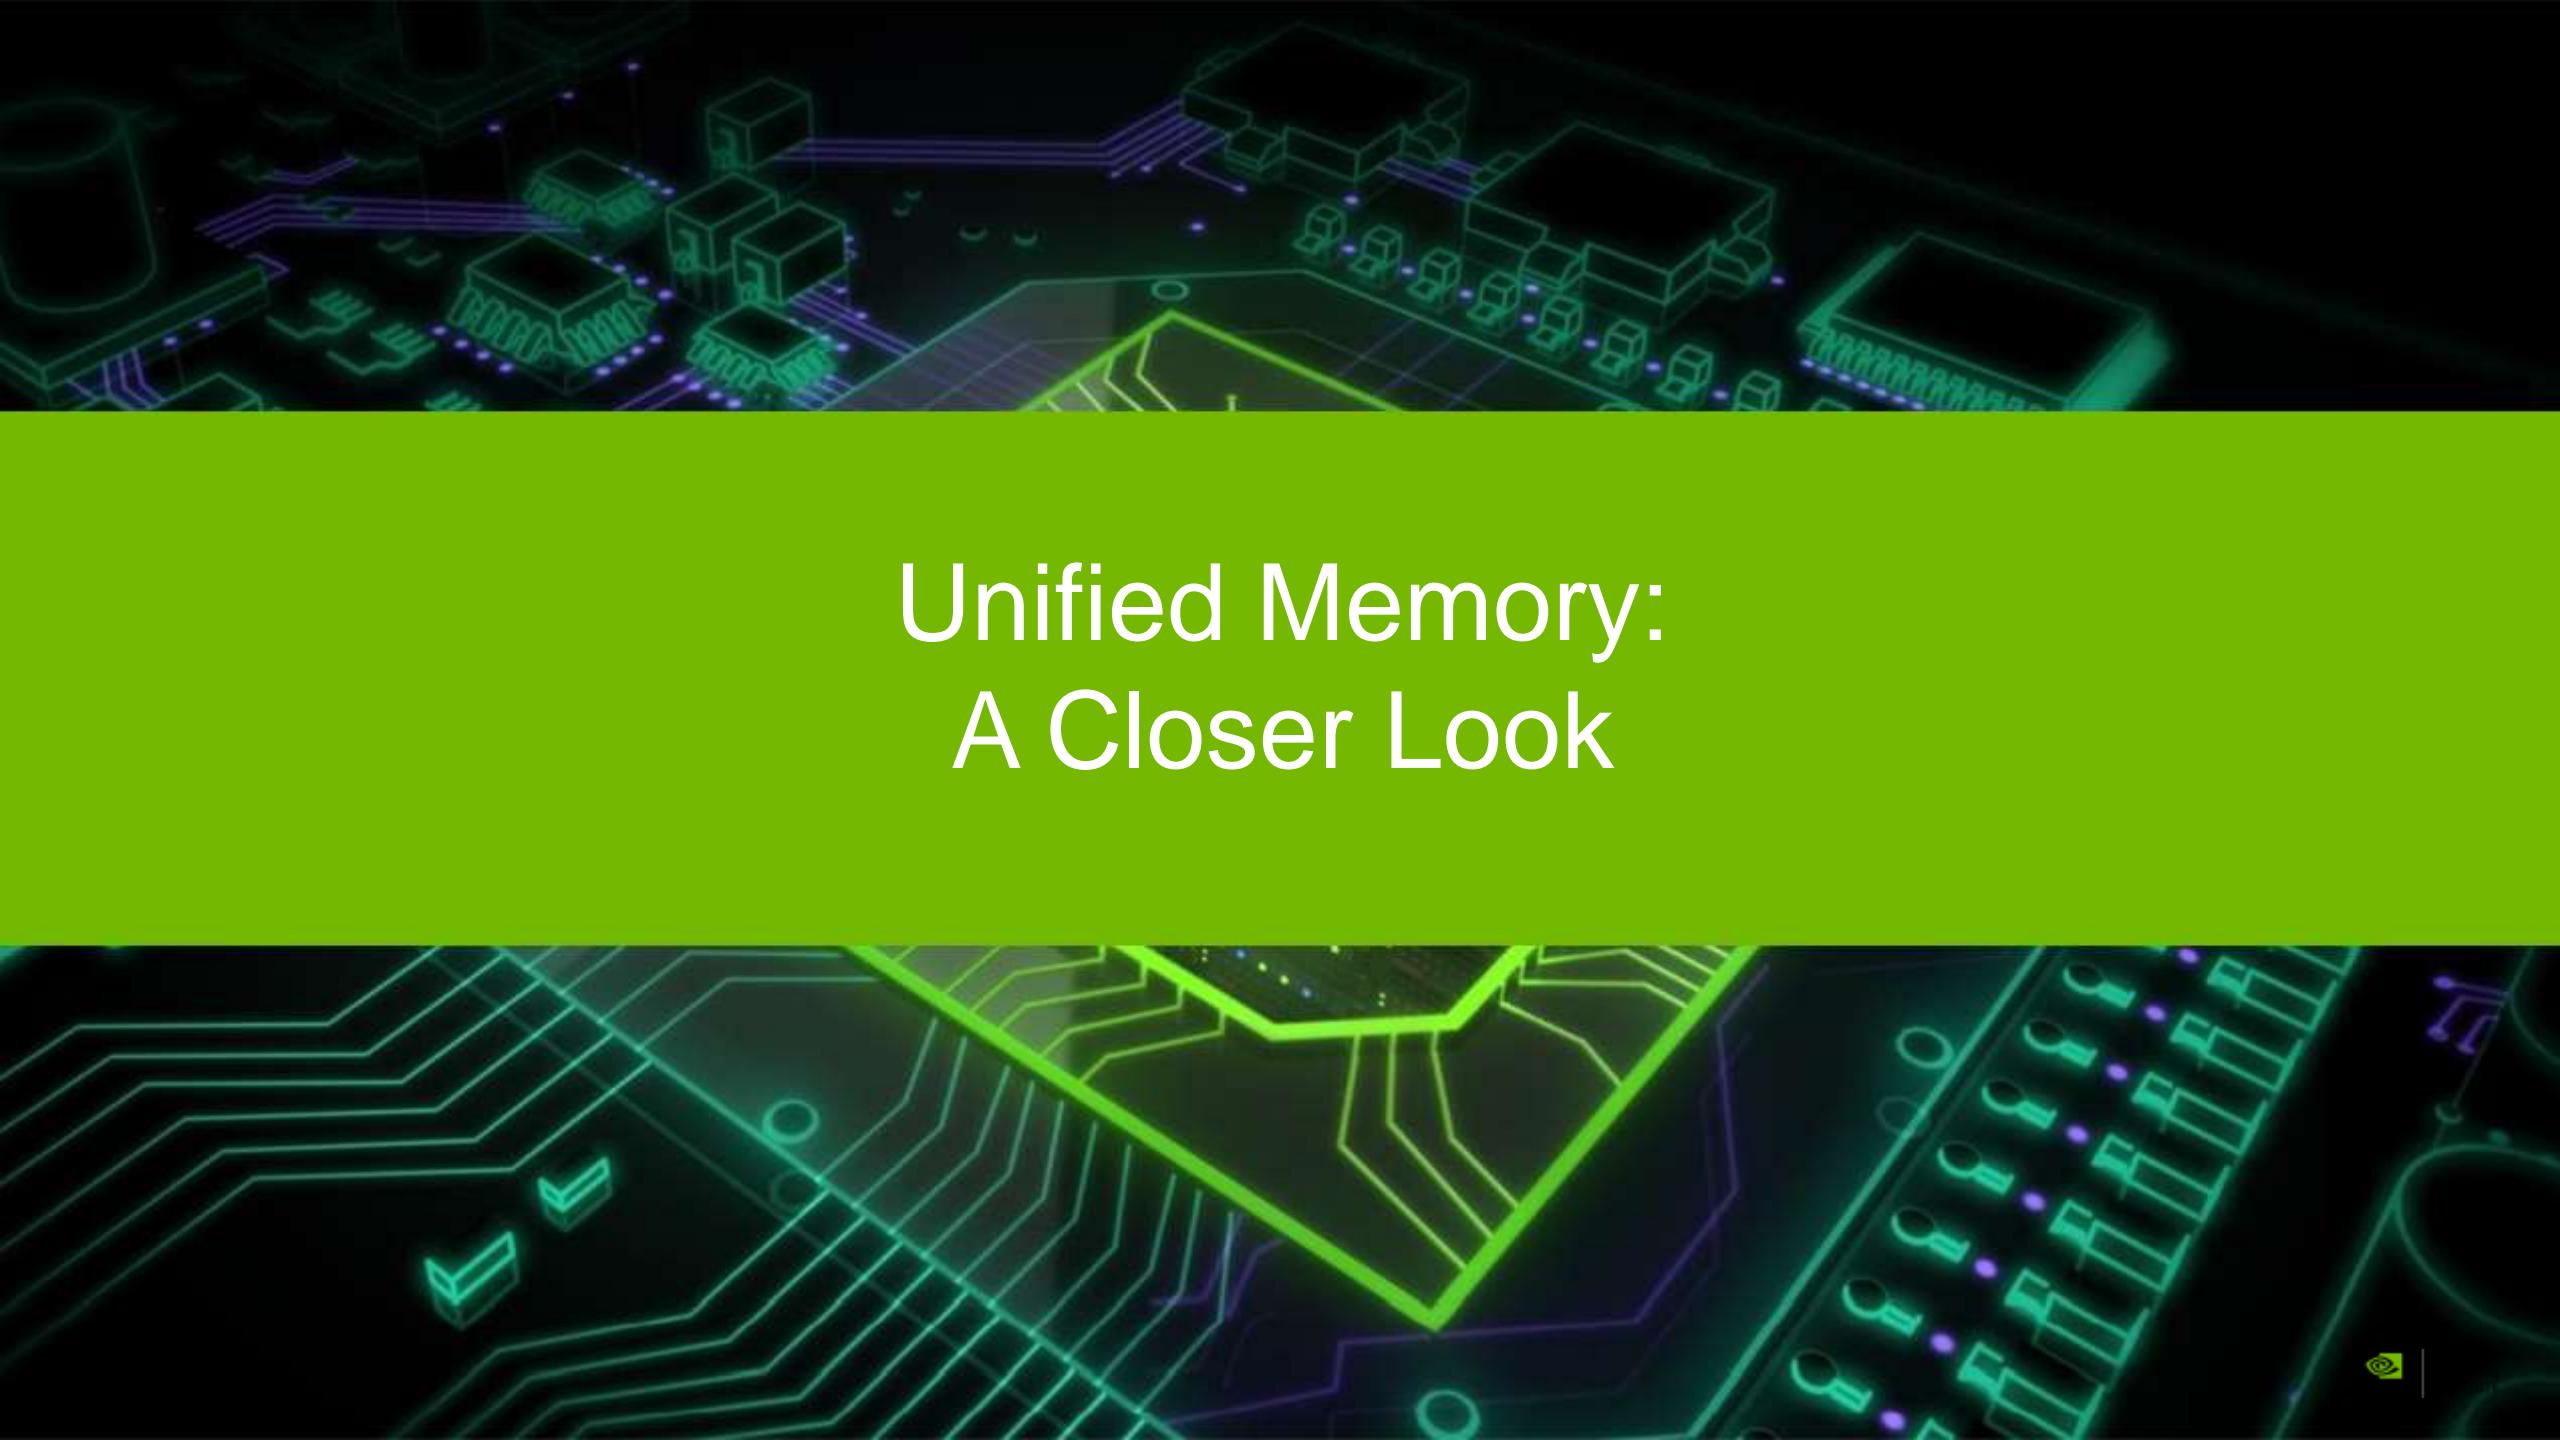

Unified Memory: A Closer Look

SINGLE POINTER

CPU vs GPU

CPU code

```
void *data;  
data = malloc(N);  
  
cpu_func1(data, N);  
  
cpu_func2(data, N);  
  
cpu_func3(data, N);  
  
free(data);
```

GPU code w/ Unified Memory

```
void *data;  
data = malloc(N);  
  
cpu_func1(data, N);  
  
gpu_func2<<<...>>>(data, N);  
cudaDeviceSynchronize();  
  
cpu_func3(data, N);  
  
free(data);
```

SINGLE POINTER

Explicit vs Unified Memory

Explicit Memory Management

```
void *data, *d_data;  
data = malloc(N);  
cudaMalloc(&d_data, N);  
cpu_func1(data, N);  
cudaMemcpy(d_data, data, N, ...)  
gpu_func2<<<...>>>(d_data, N);  
cudaMemcpy(data, d_data, N, ...)  
cudaFree(d_data);  
cpu_func3(data, N);  
  
free(data);
```

GPU code w/ Unified Memory

```
void *data;  
data = malloc(N);  
  
cpu_func1(data, N);  
  
gpu_func2<<<...>>>(data, N);  
cudaDeviceSynchronize();  
  
cpu_func3(data, N);  
  
free(data);
```

SINGLE POINTER

Full Control with Prefetching

Explicit Memory Management

```
void *data, *d_data;  
data = malloc(N);  
cudaMalloc(&d_data, N);  
cpu_func1(data, N);  
cudaMemcpy(d_data, data, N, ...)  
gpu_func2<<<...>>>(d_data, N);  
cudaMemcpy(data, d_data, N, ...)  
cudaFree(d_data);  
cpu_func3(data, N);  
  
free(data);
```

Unified Memory + Prefetching

```
void *data;  
data = malloc(N);  
  
cpu_func1(data, N);  
cudaMemPrefetchAsync(data, N, GPU)  
gpu_func2<<<...>>>(data, N);  
cudaMemPrefetchAsync(data, N, CPU)  
cudaDeviceSynchronize();  
cpu_func3(data, N);  
  
free(data);
```

SINGLE POINTER

Deep Copy

Explicit Memory Management


```
char **data;  
// allocate and initialize data on the CPU  
  
char **d_data;  
char **h_data = (char**)malloc(N*sizeof(char*));  
for (int i = 0; i < N; i++) {  
    cudaMalloc(&h_data[i], N);  
    cudaMemcpy(h_data[i], data[i], N, ...);  
}  
cudaMalloc(&d_data, N*sizeof(char*));  
cudaMemcpy(d_data, h_data, N*sizeof(char*), ...);  
  
gpu_func<<<...>>>(d_data, N);
```

GPU code w/ Unified Memory



```
char **data;  
// allocate and initialize data on the CPU  
  
gpu_func<<<...>>>(data, N);
```

UNIFIED MEMORY BASICS

GPU A




GPU B

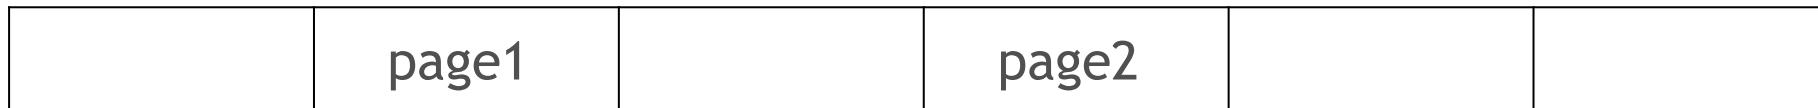


Single virtual memory shared between processors

UNIFIED MEMORY BASICS

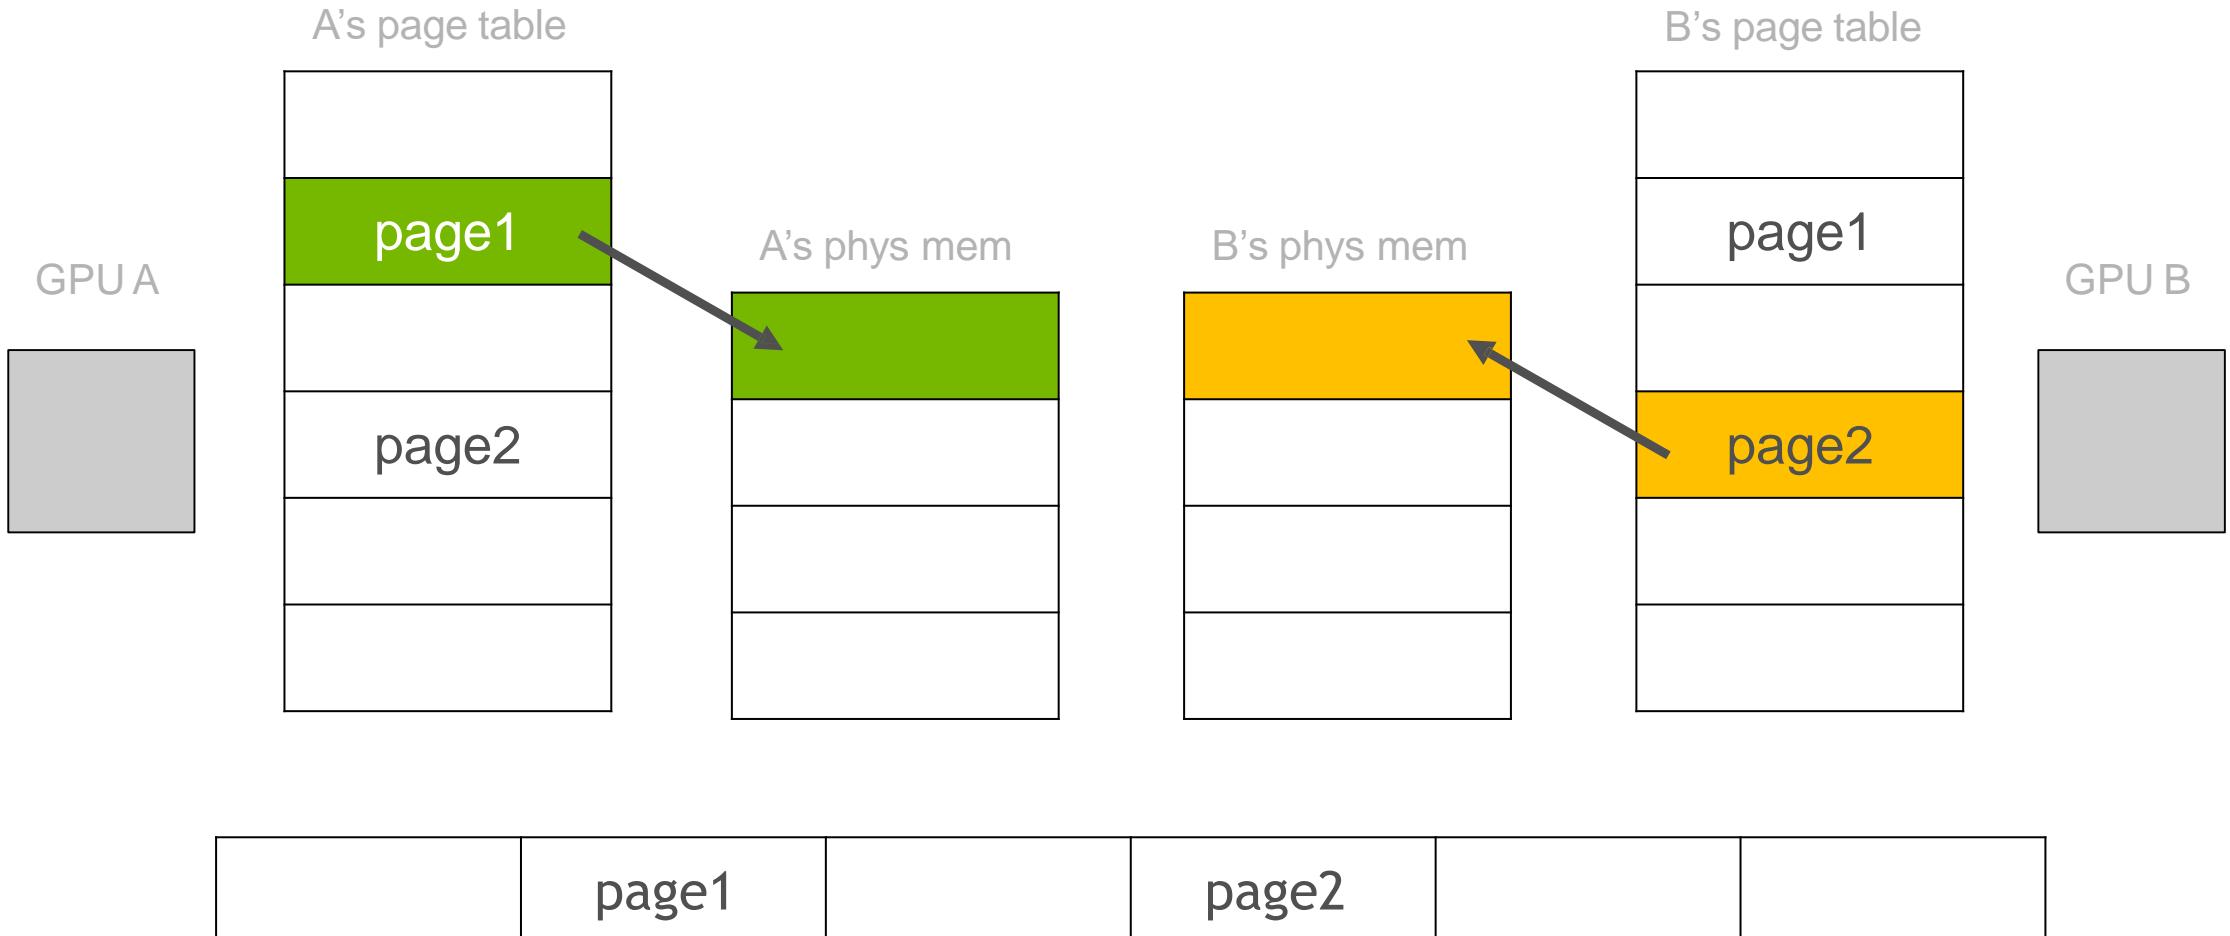


UNIFIED MEMORY BASICS

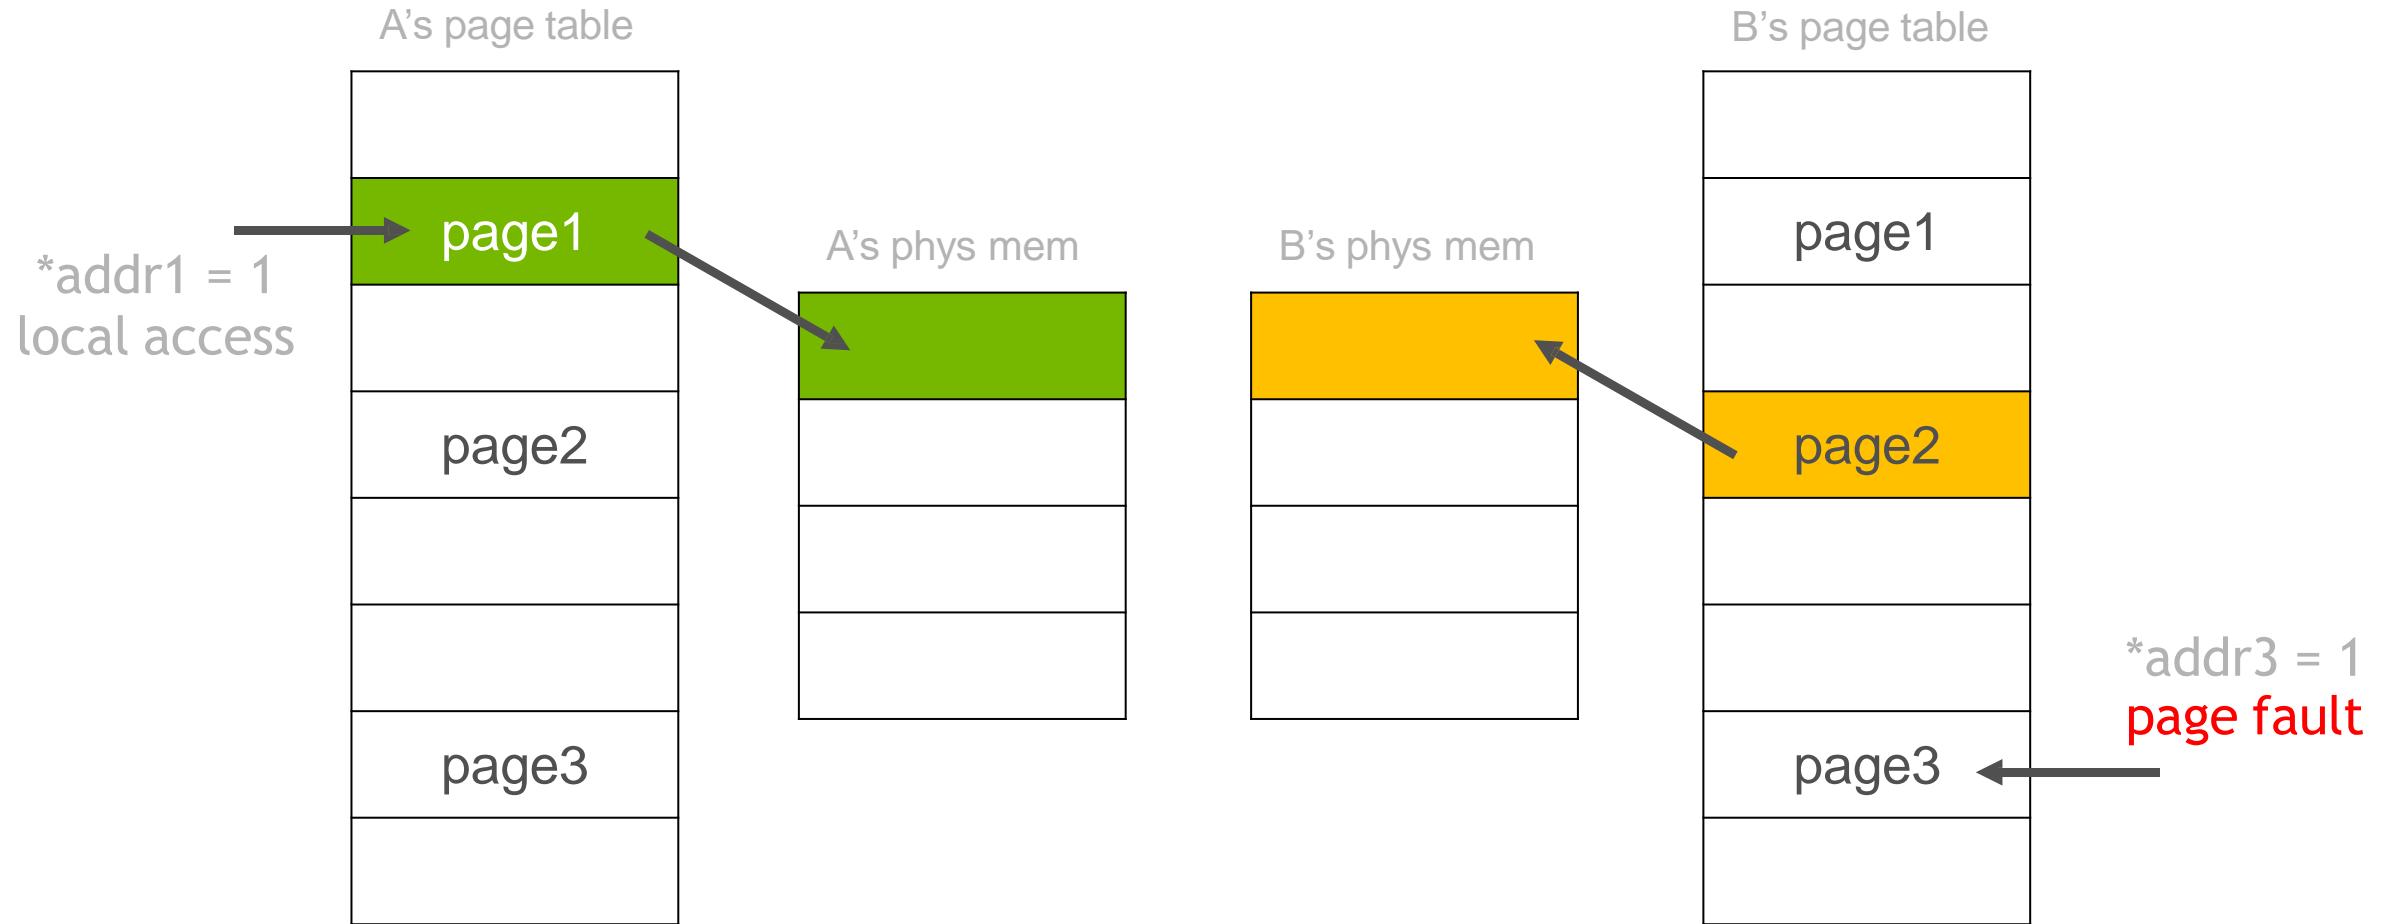


UNIFIED MEMORY BASICS

A's page table

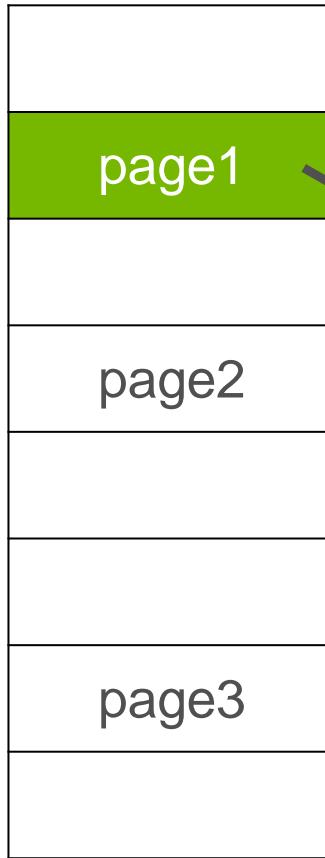


A's phys mem

B's page table

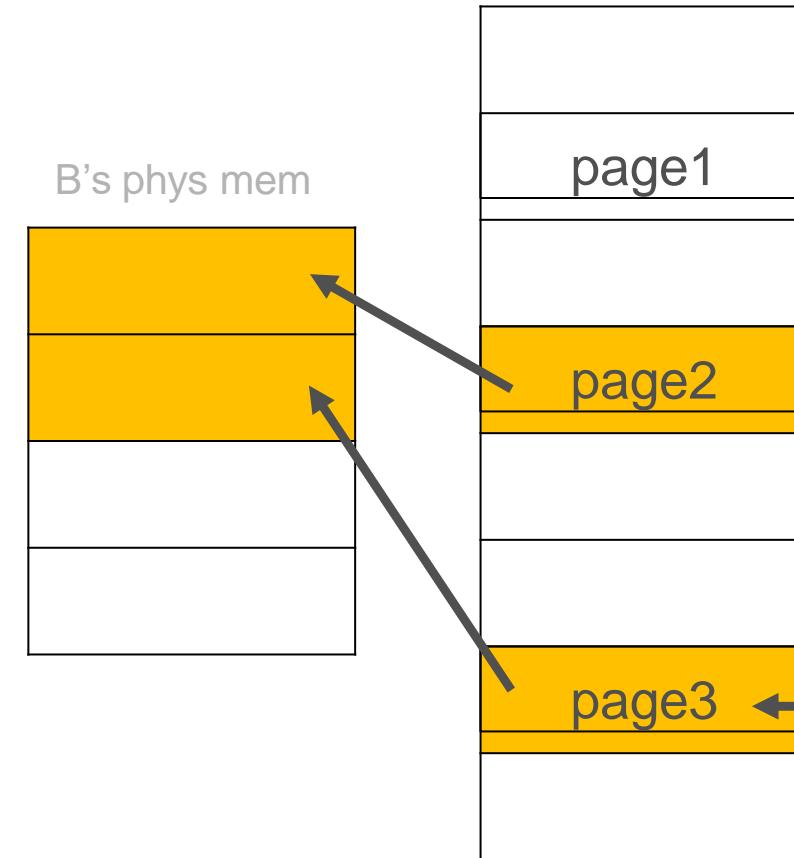


page3 populated and mapped into B's memory


UNIFIED MEMORY BASICS

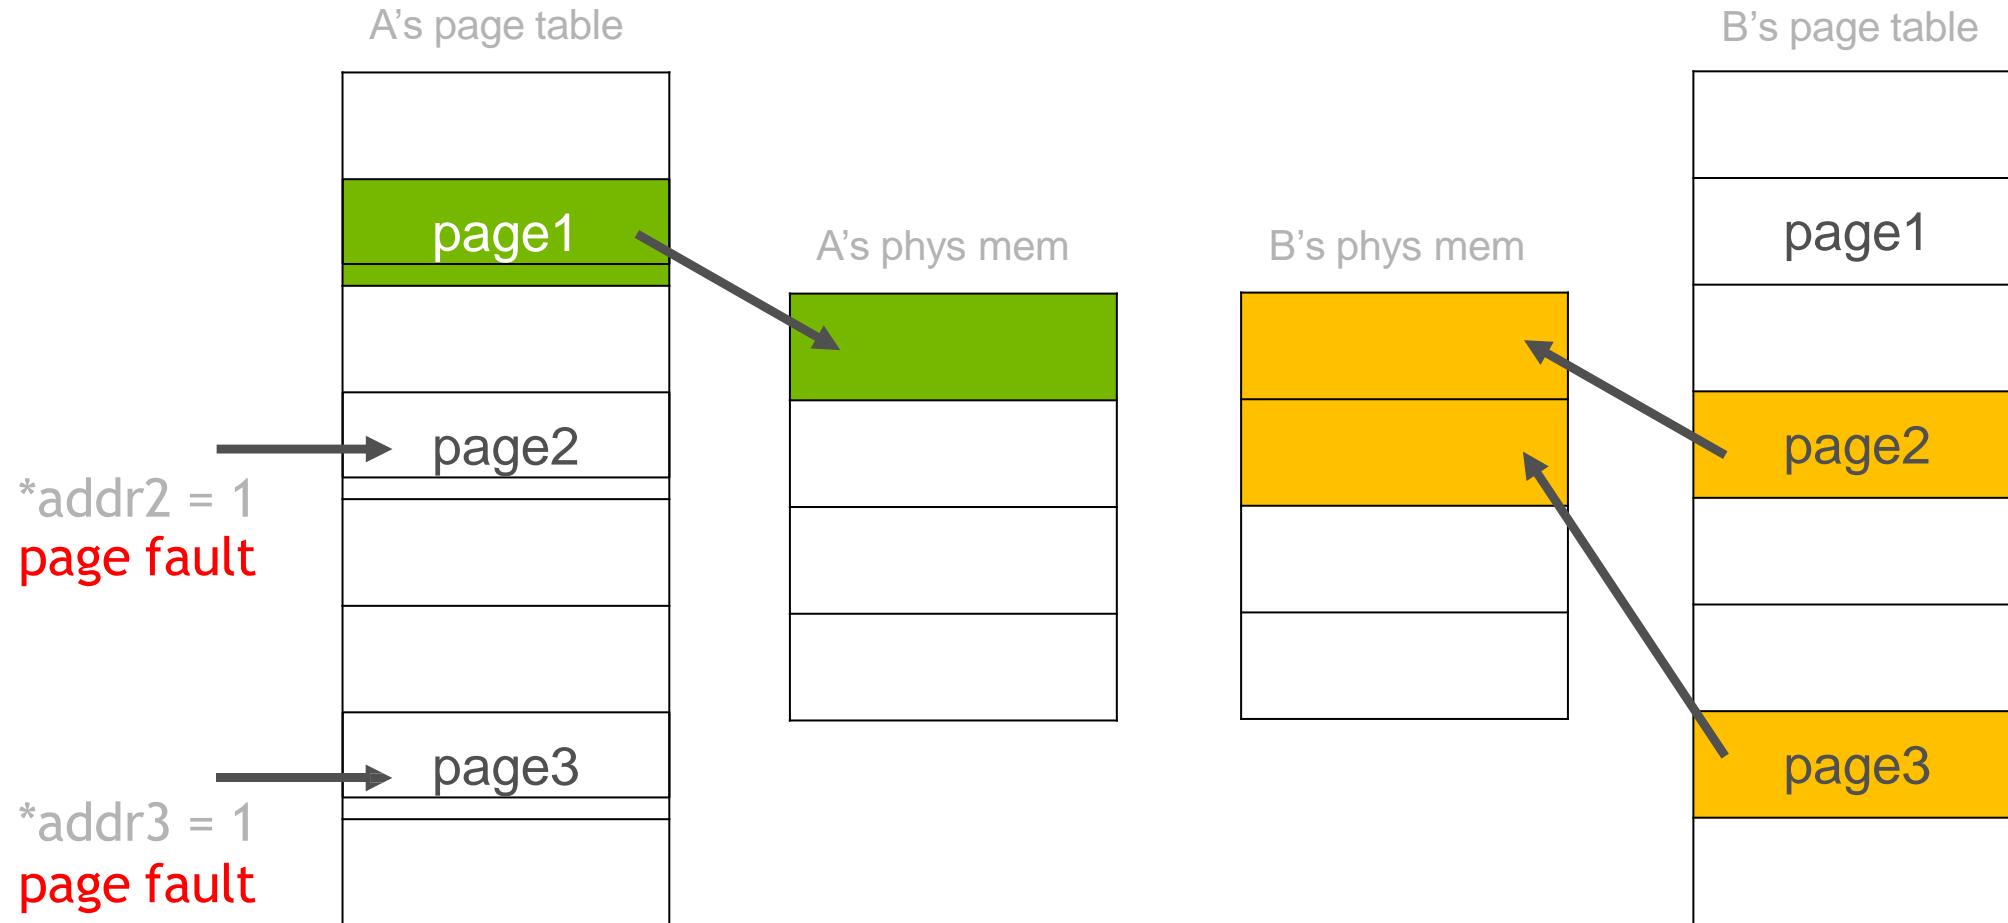


UNIFIED MEMORY BASICS

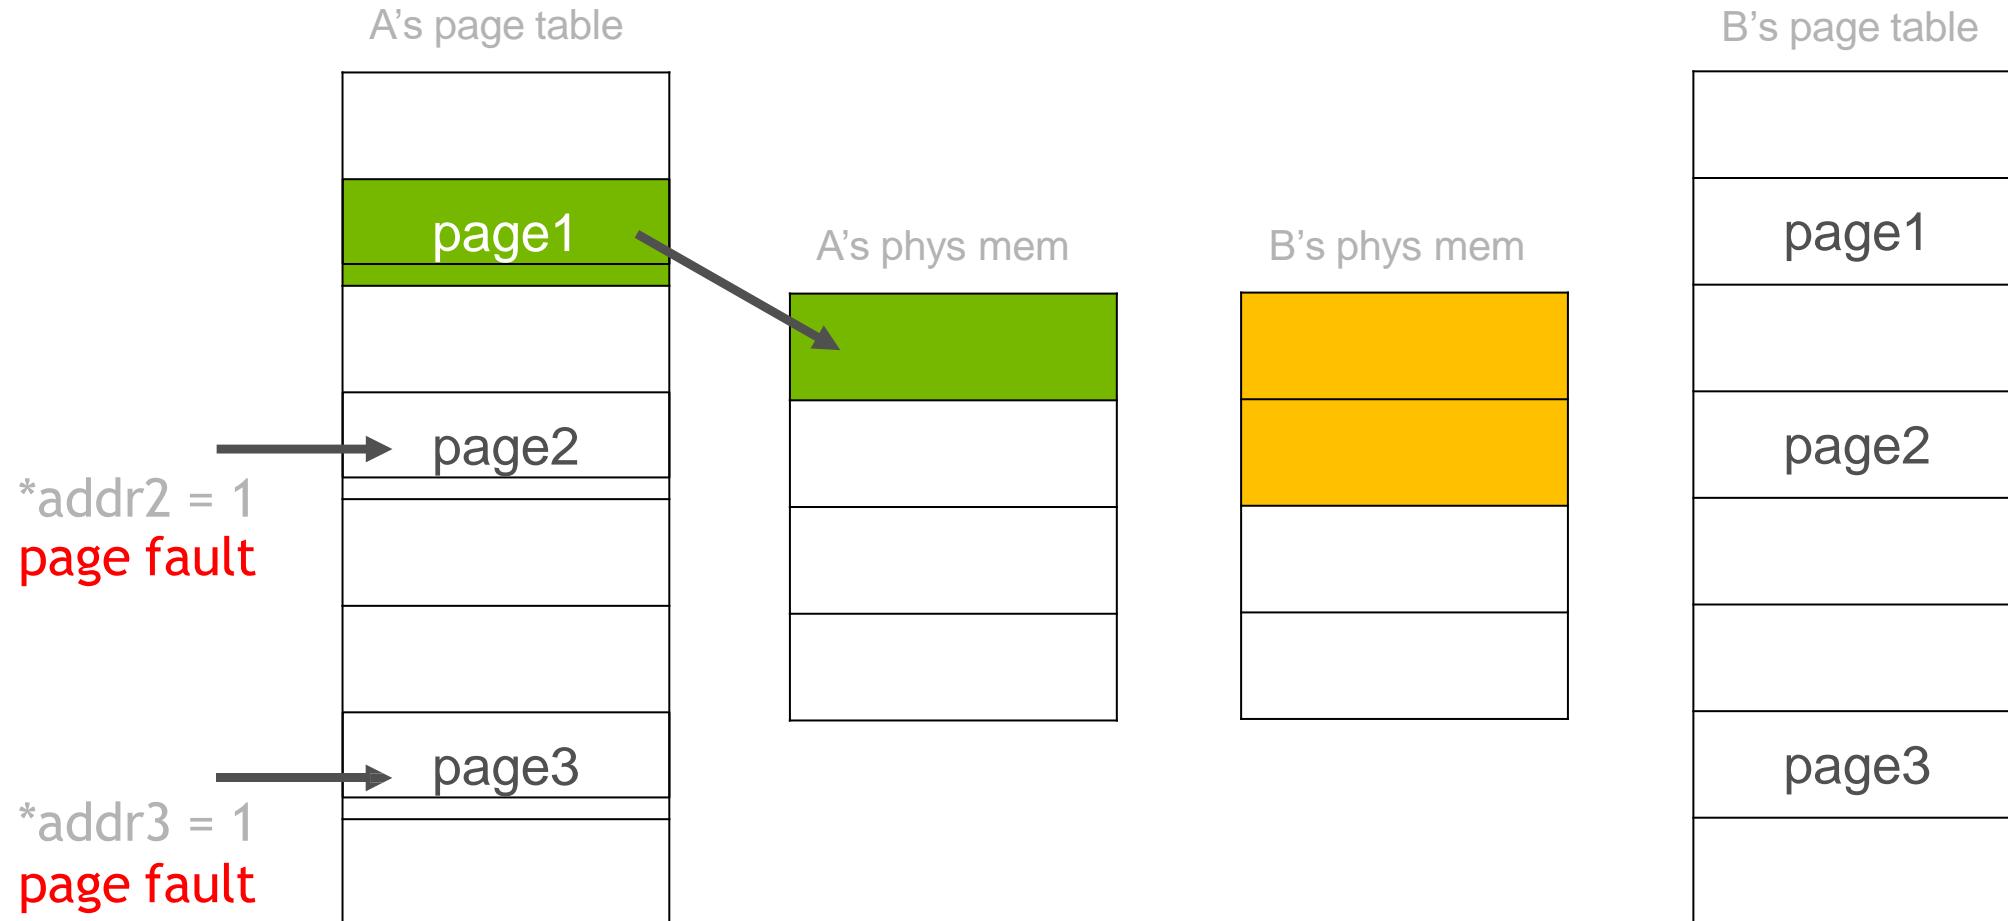


UNIFIED MEMORY BASICS

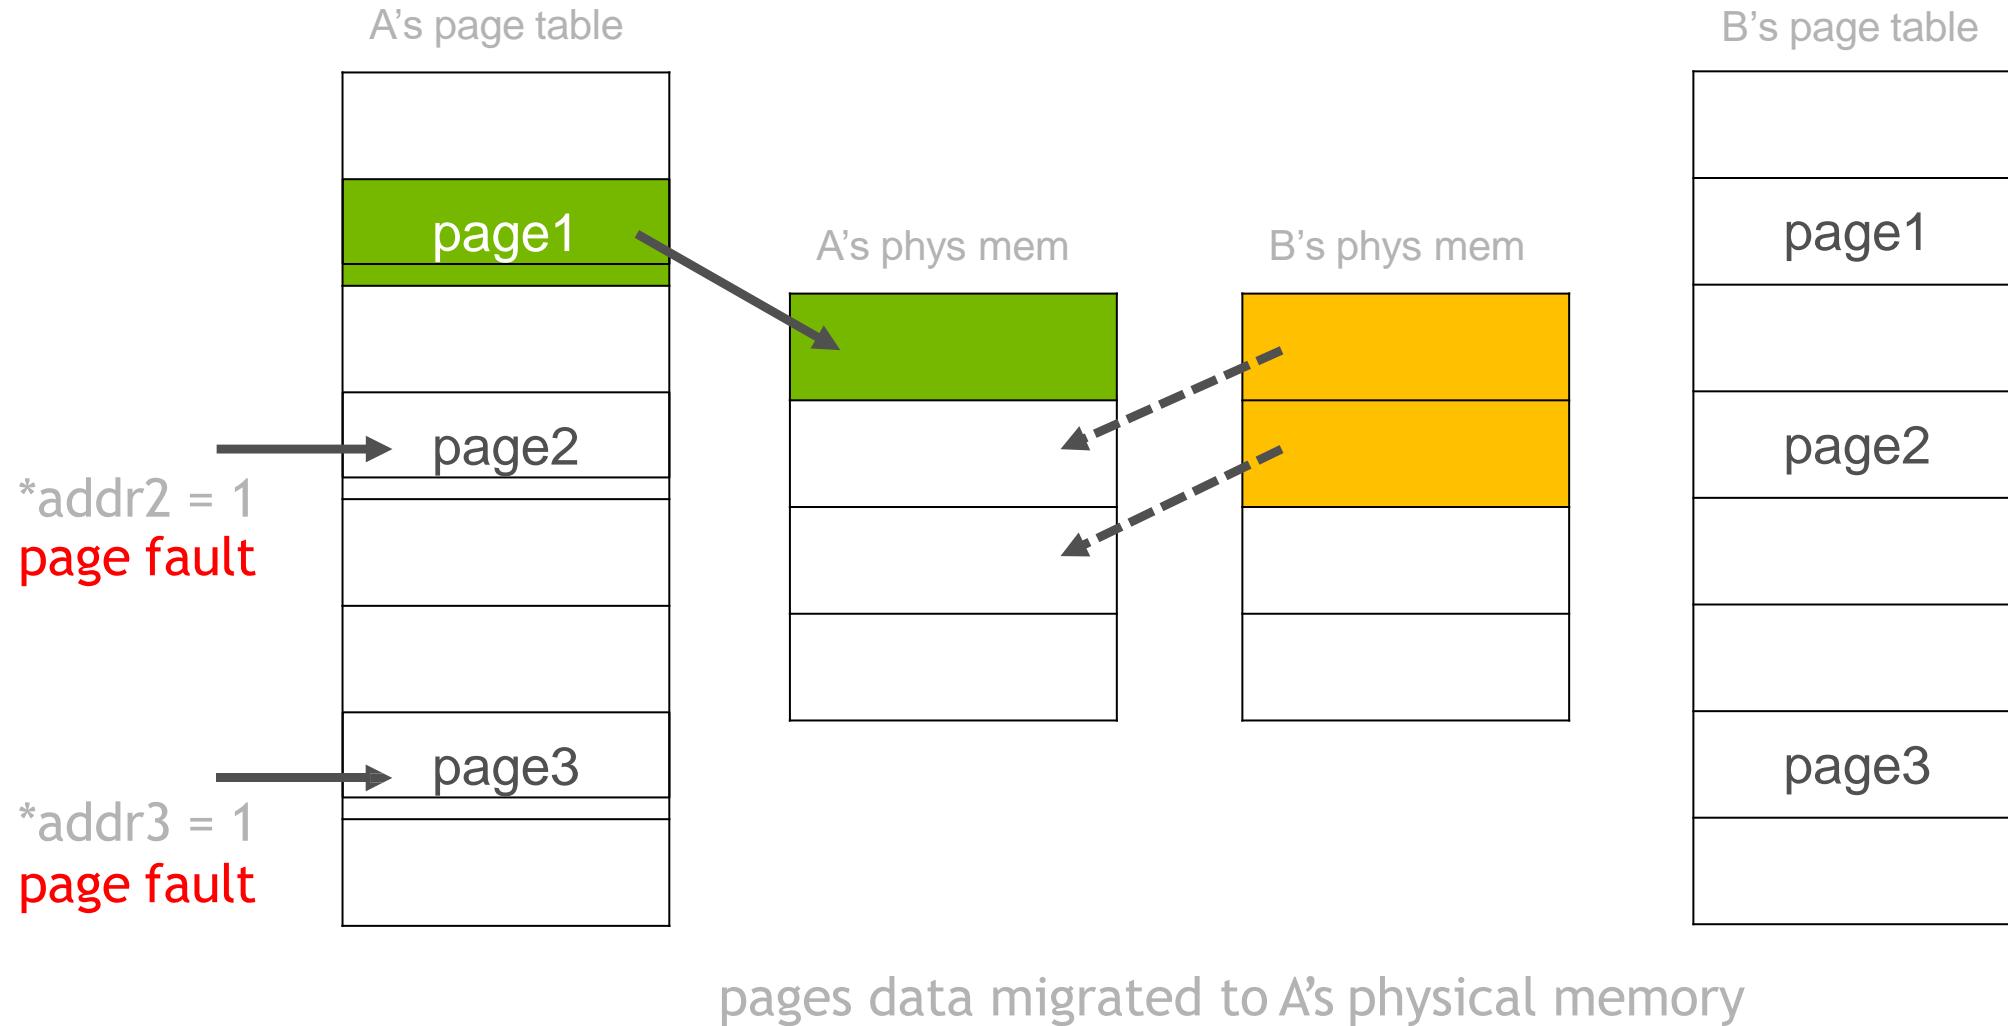


UNIFIED MEMORY BASICS

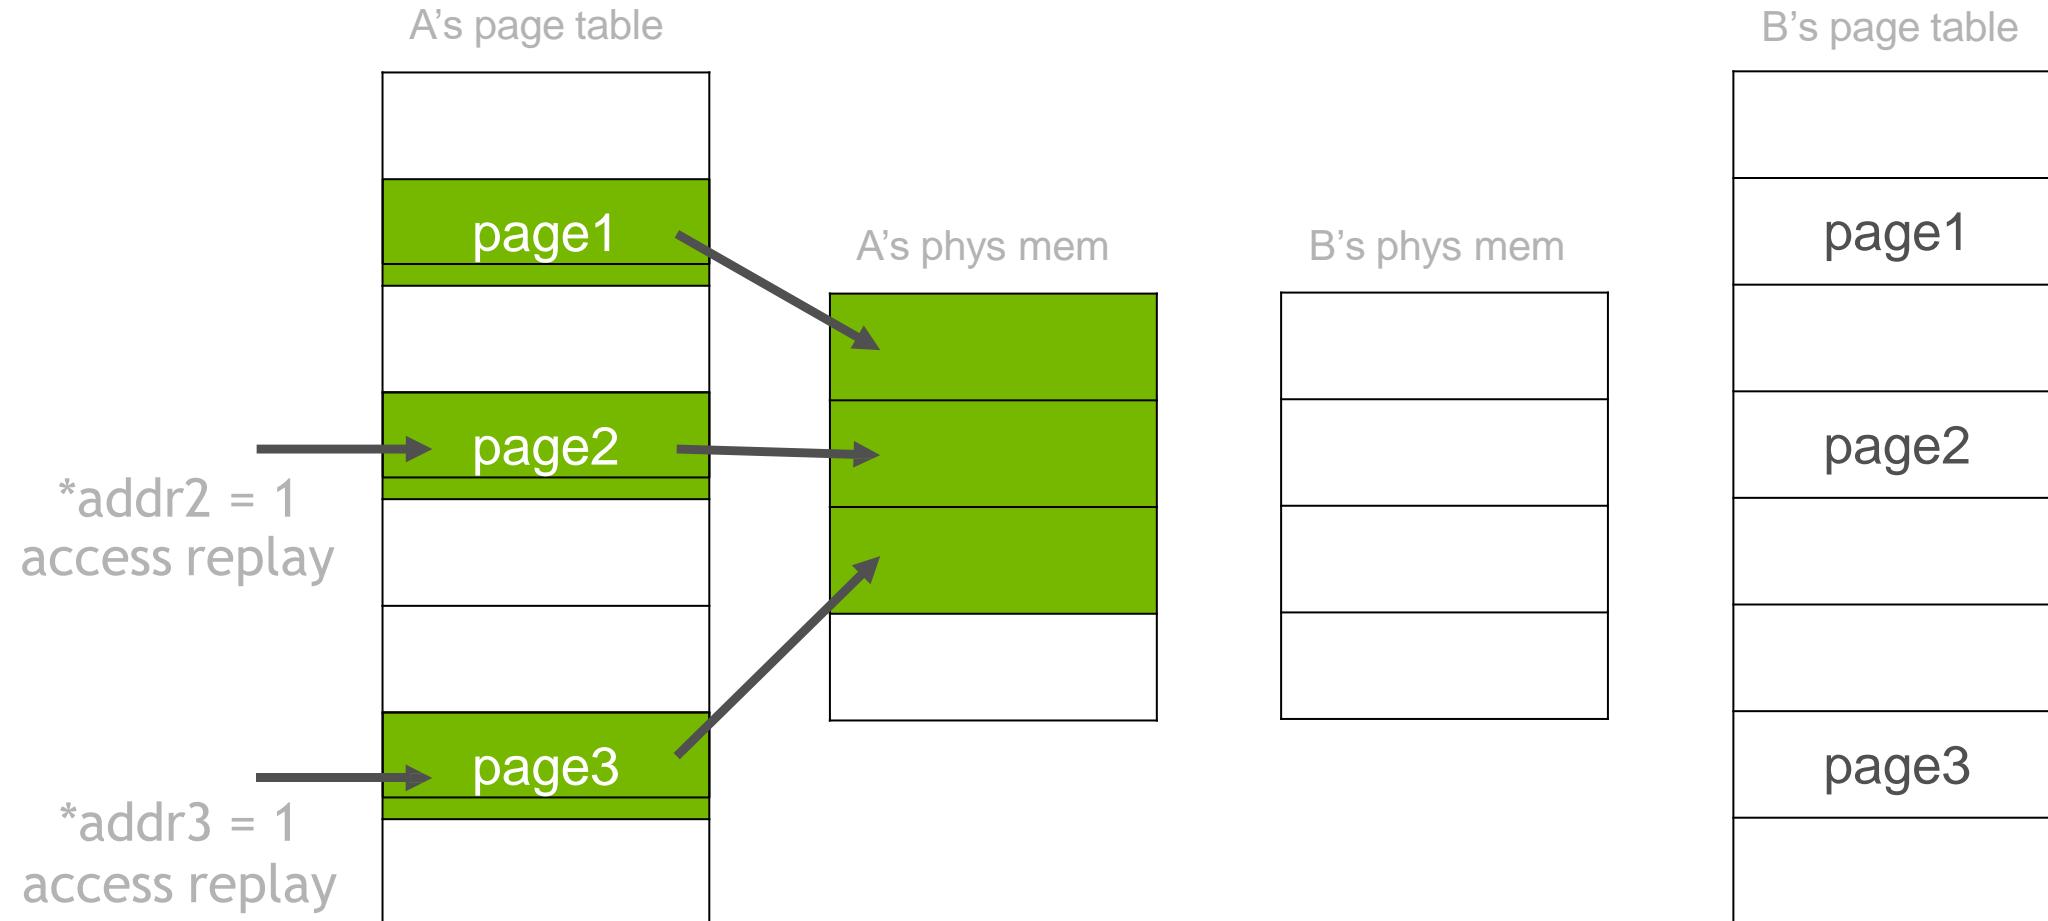


MEMORY OVERSUBSCRIPTION

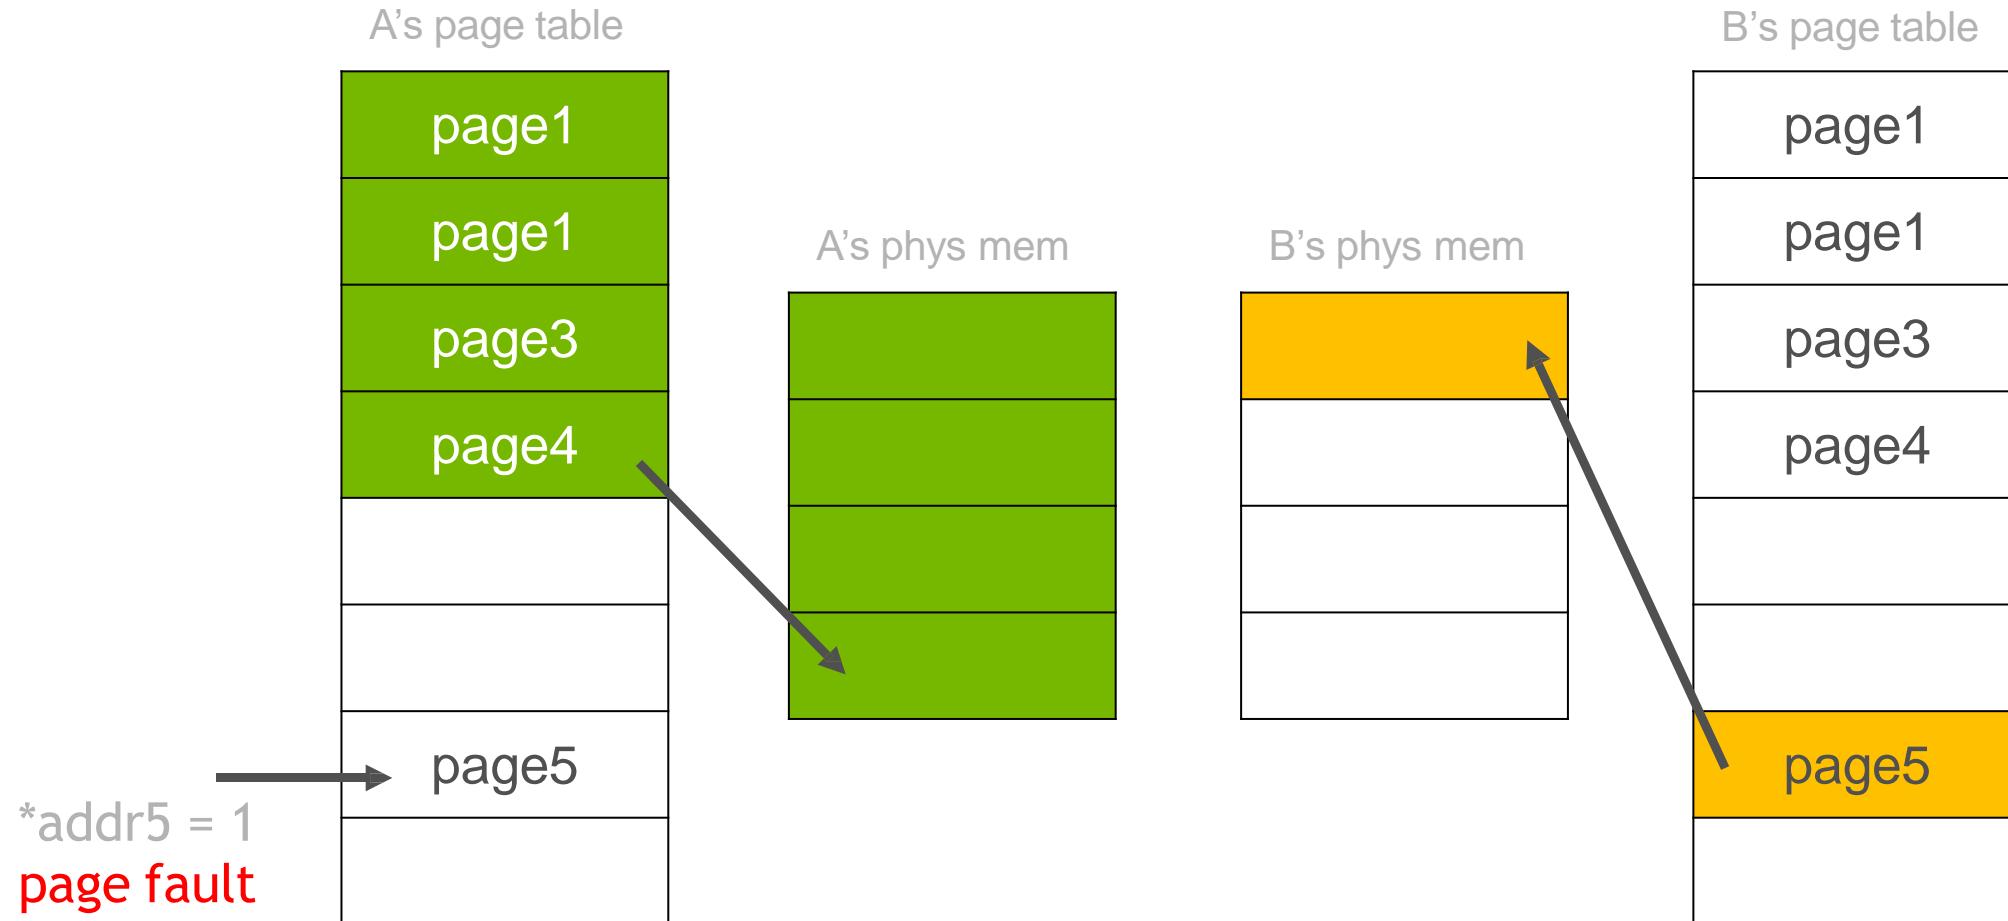

MEMORY OVERSUBSCRIPTION

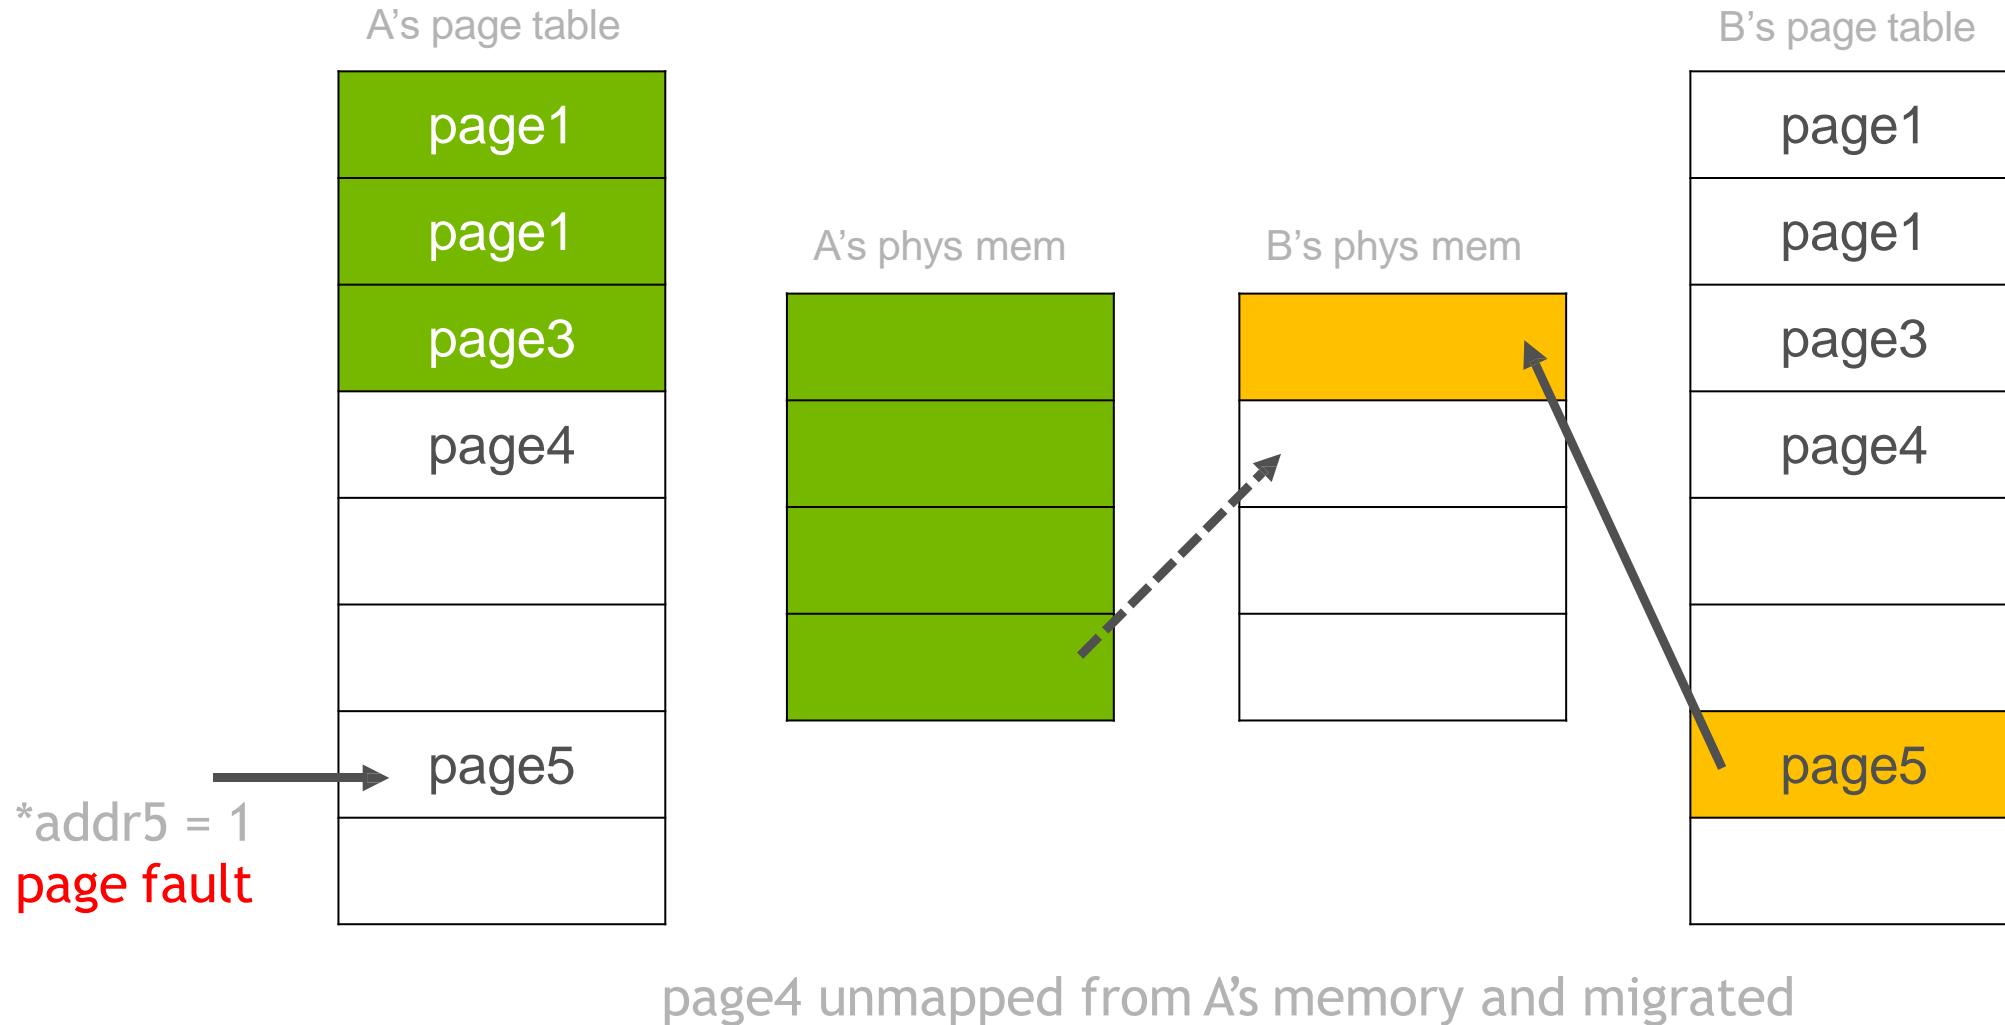


MEMORY OVERSUBSCRIPTION

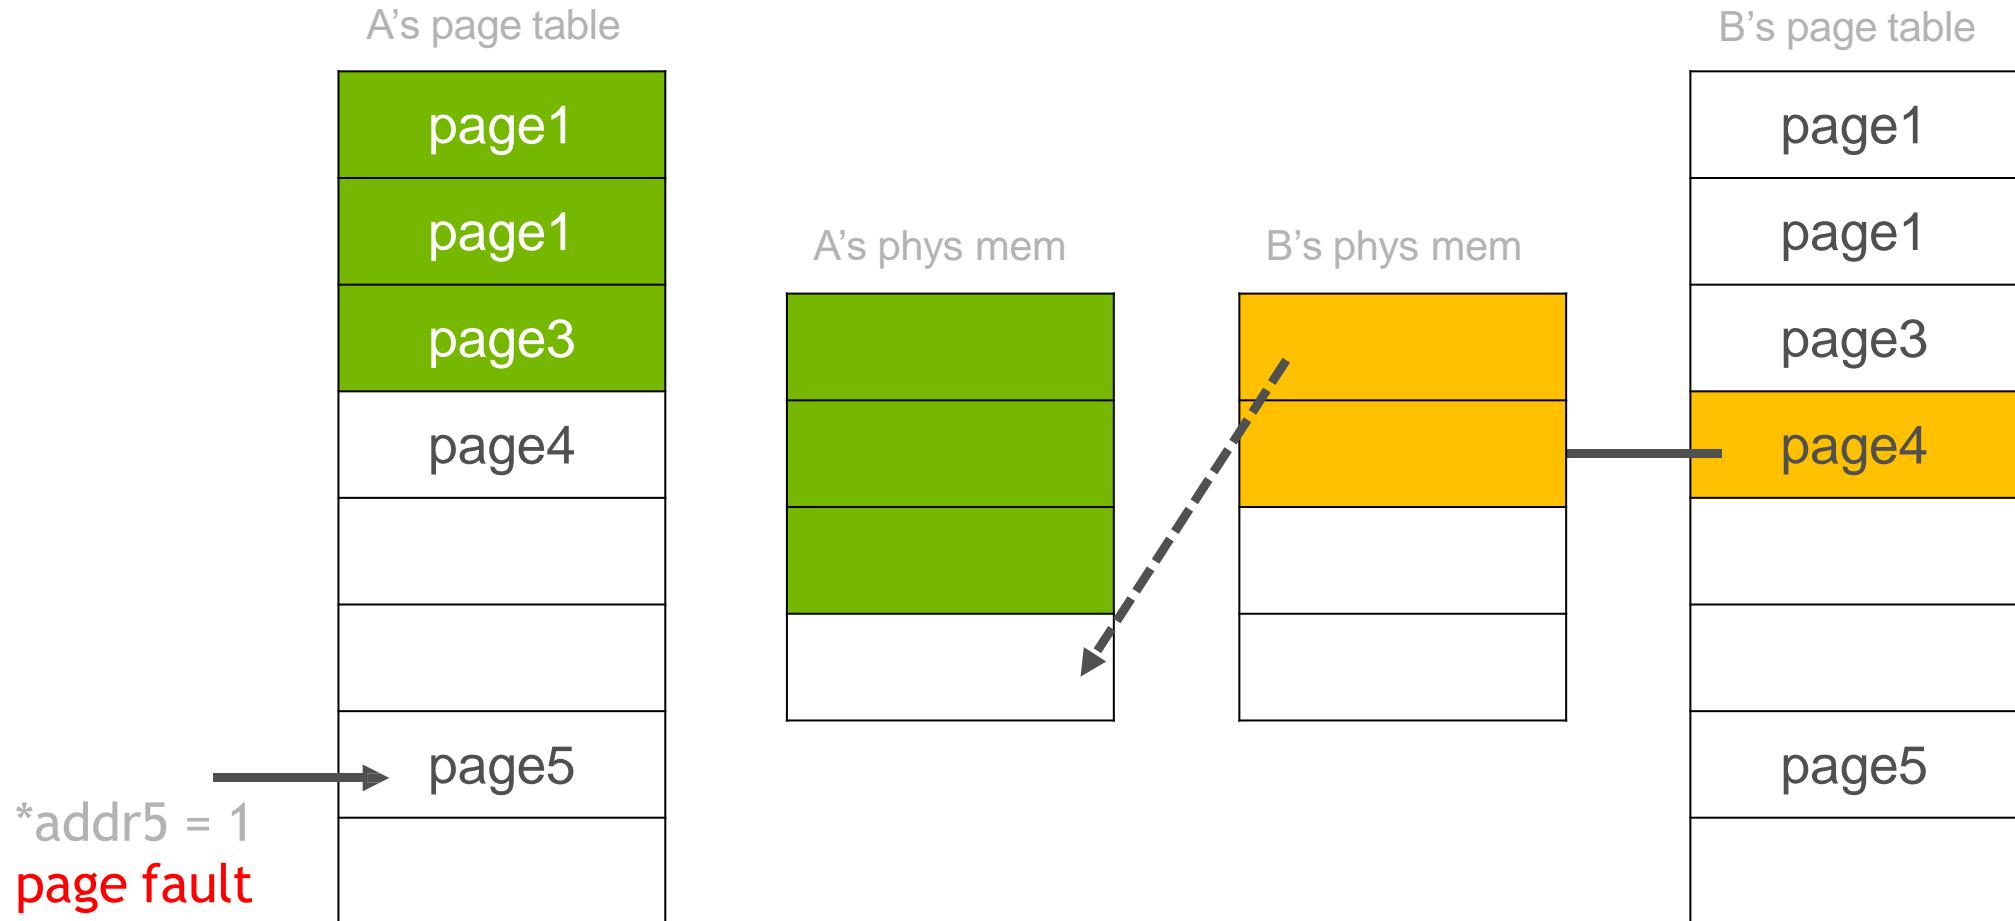


page4 mapped in B's memory, page5 unmapped and migrated to A

MEMORY OVERSUBSCRIPTION

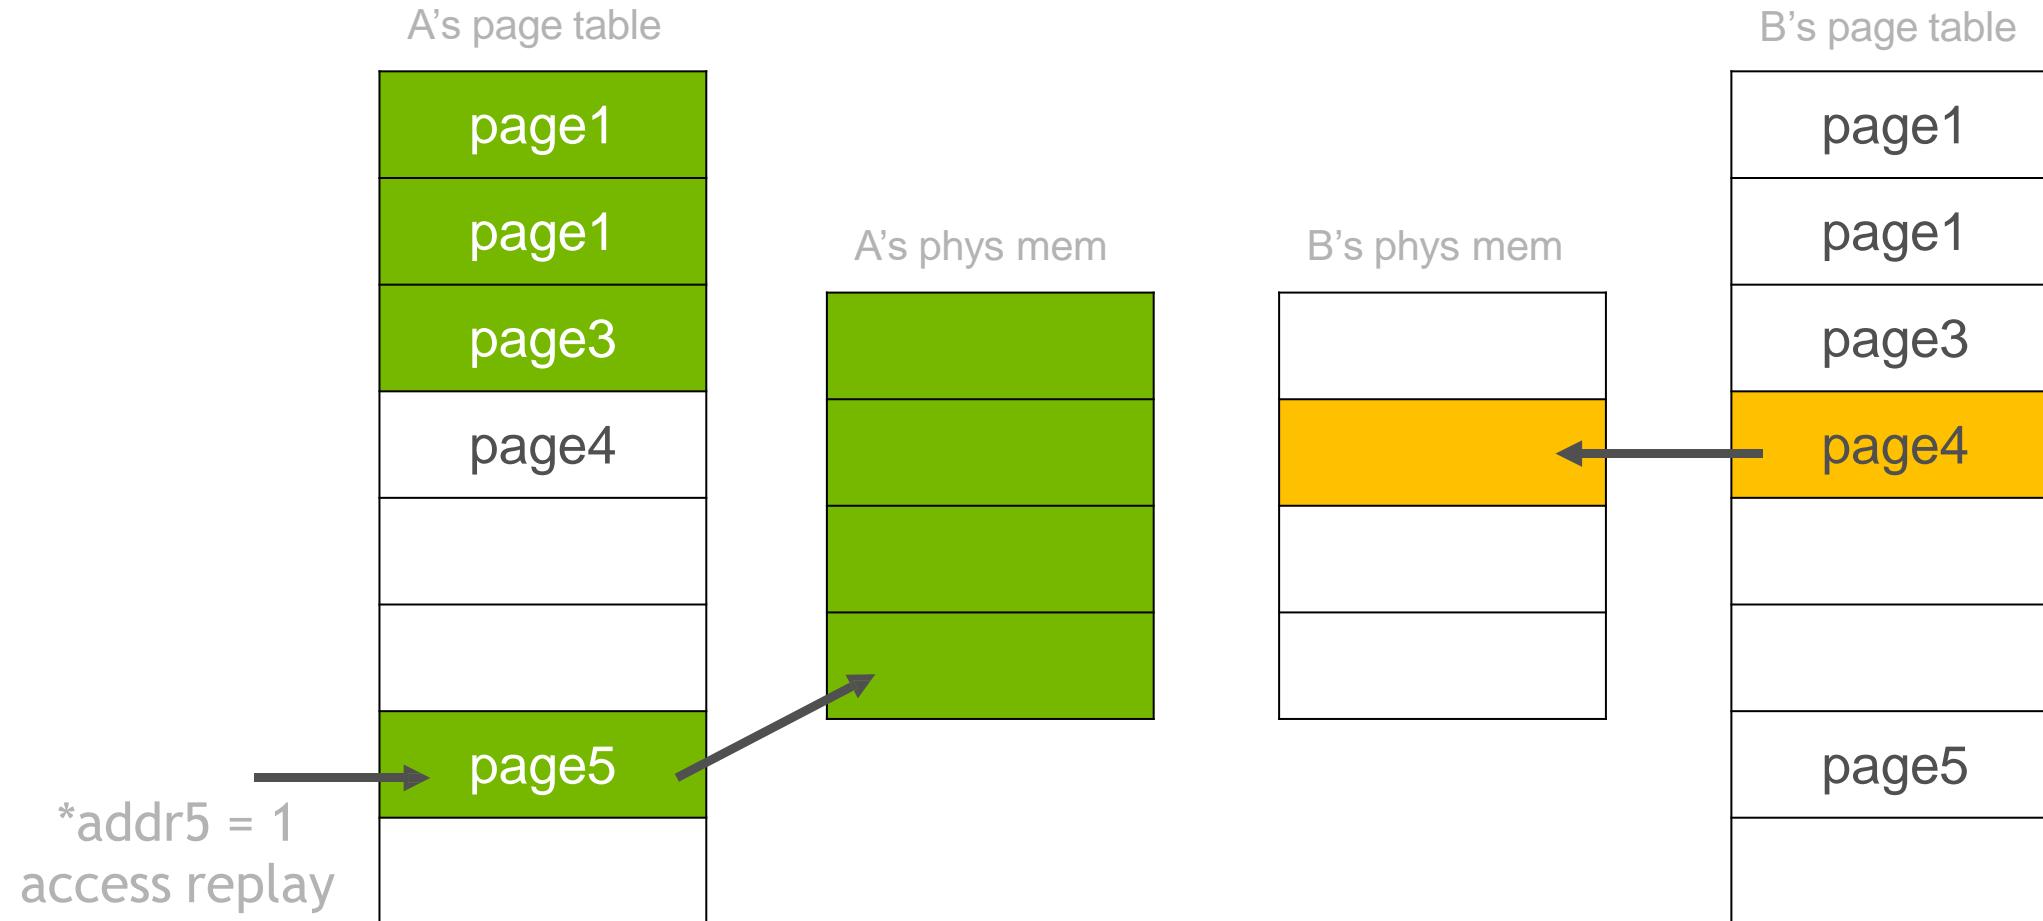

CONCURRENT ACCESS

A's page table


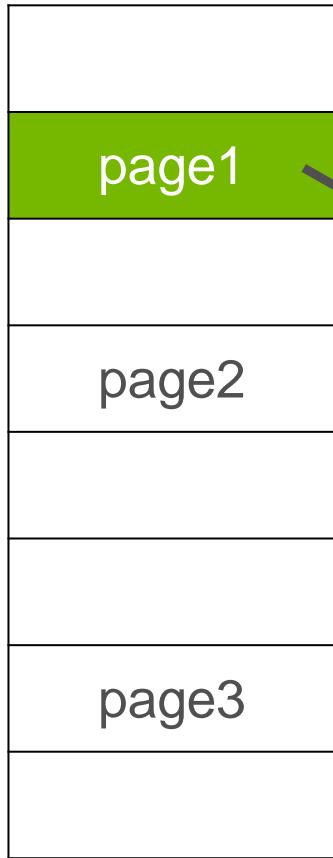


A's phys mem




B's page table

B's phys mem

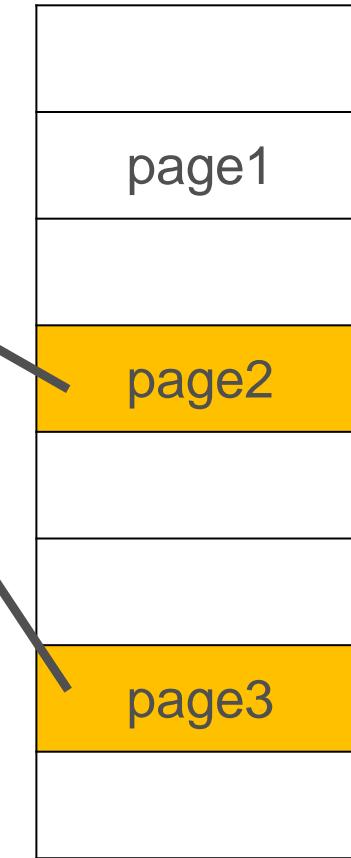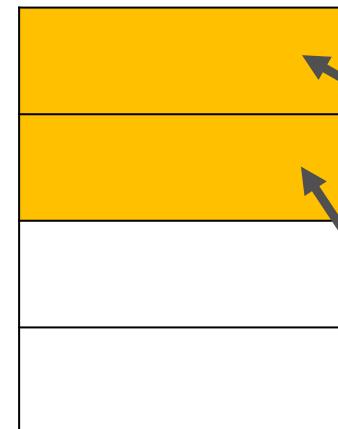

CONCURRENT ACCESS


Exclusive Access*

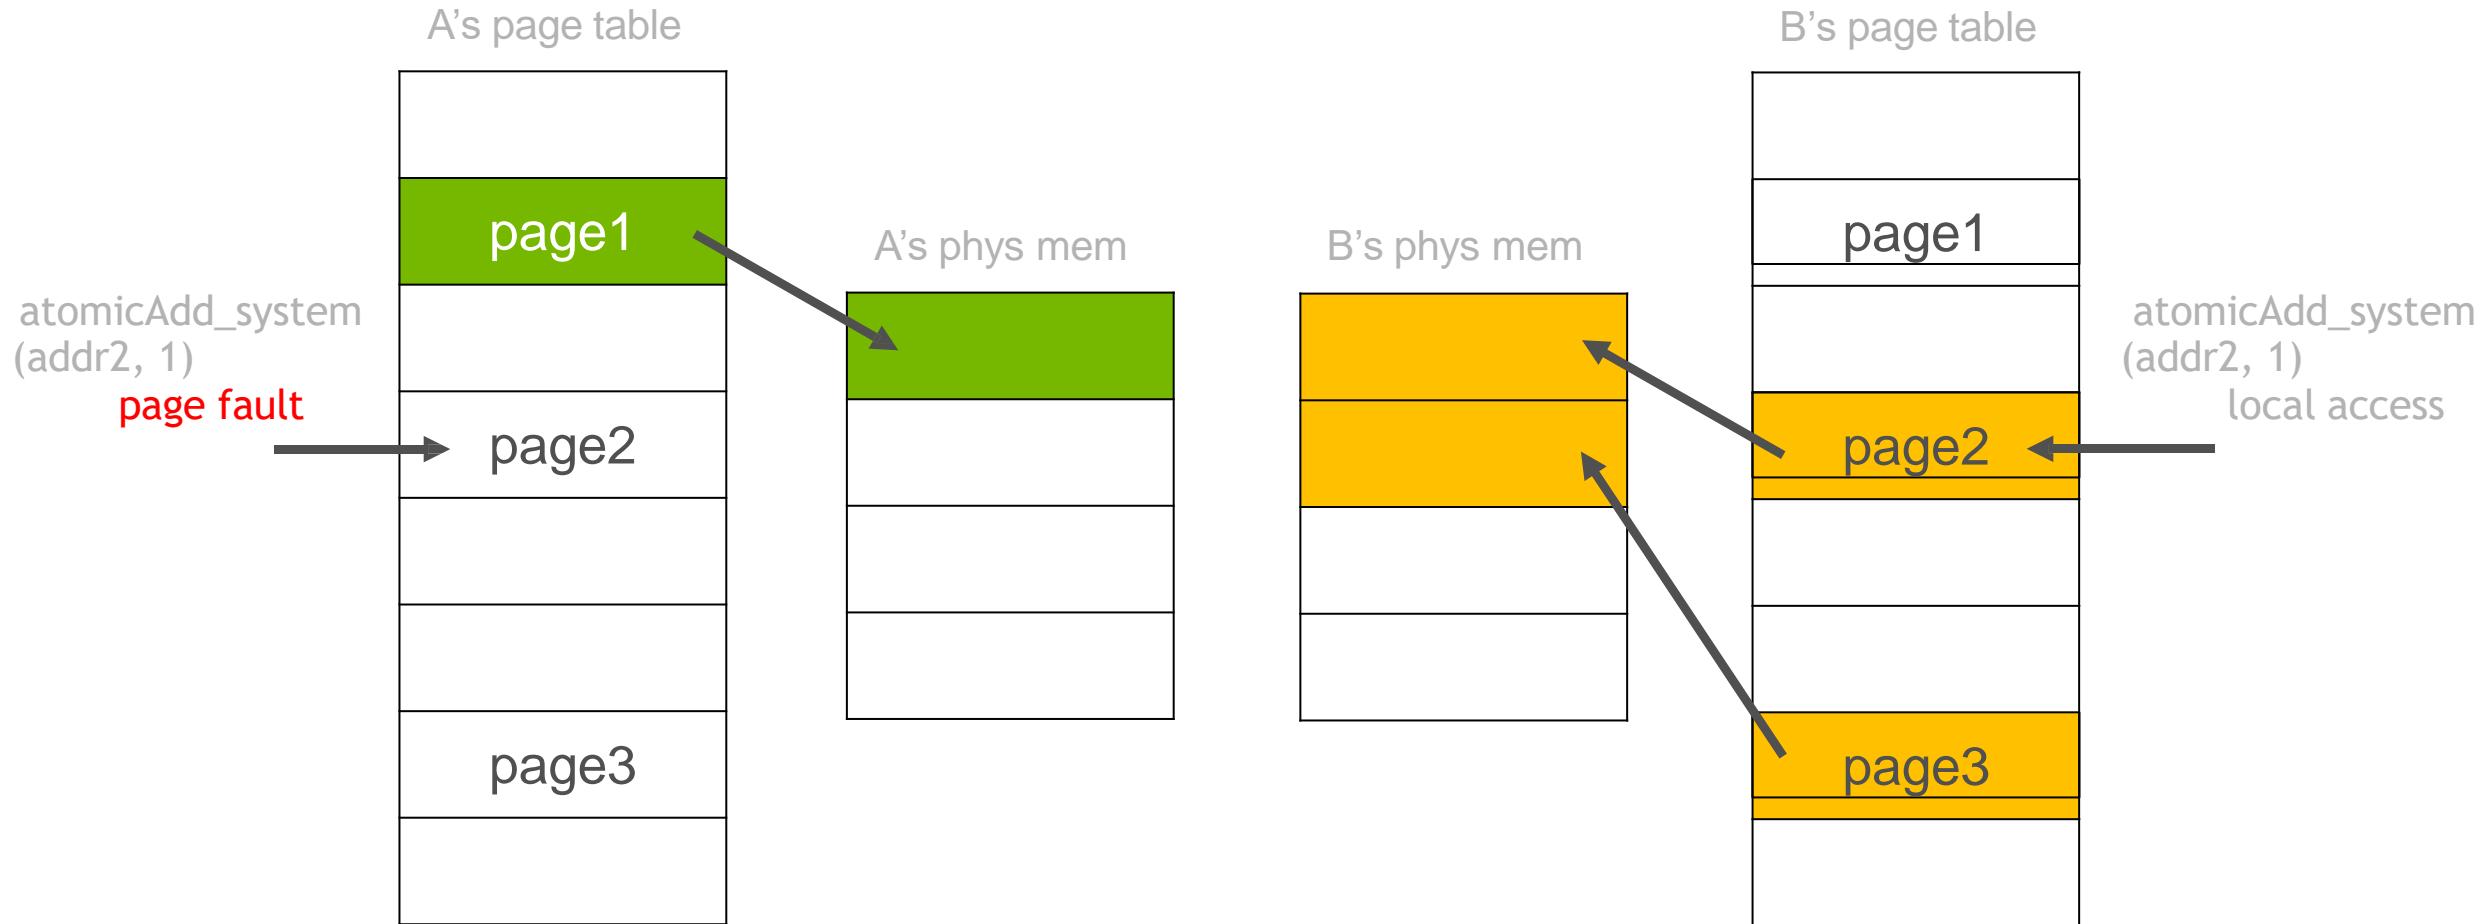

*this is a possible implementation and to guarantee this behavior you need to use `cudaMemAdvise` policies

CONCURRENT ACCESS


Exclusive Access

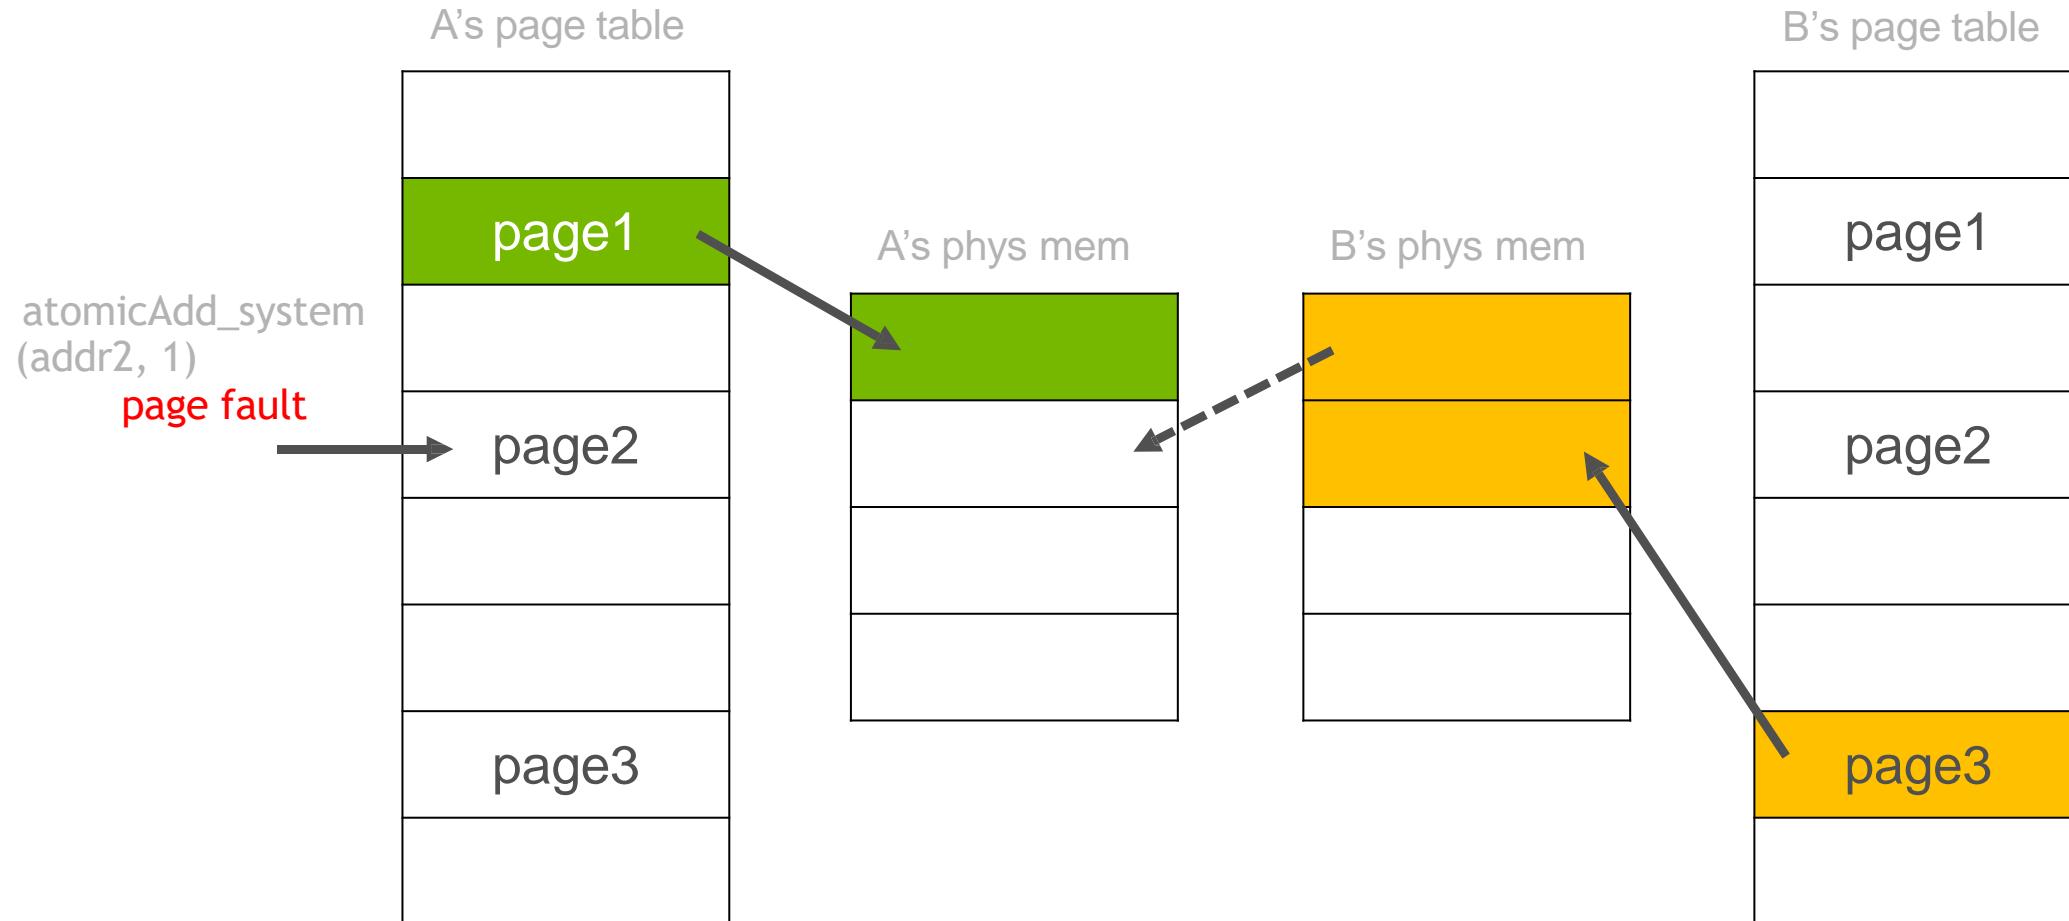

page2 unmapped in B's memory and migrated to A


CONCURRENT ACCESS

Exclusive Access

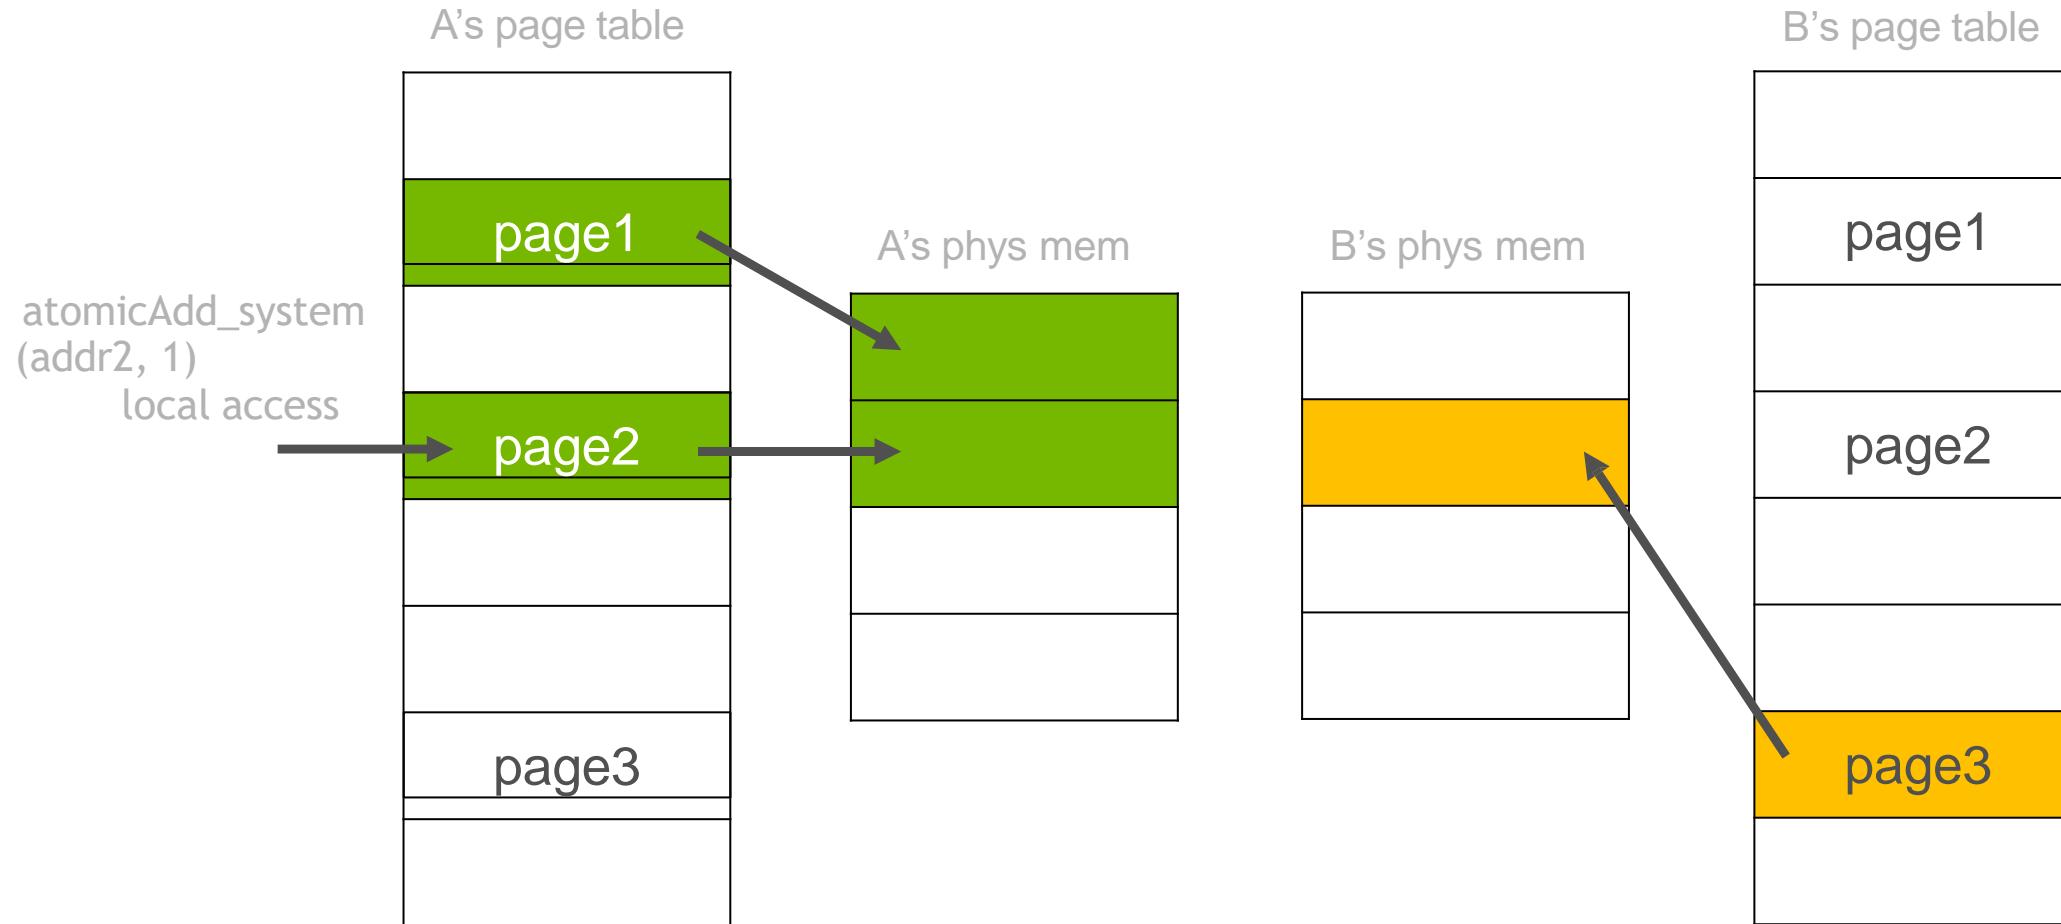

CONCURRENT ACCESS


Atomsics over NVLINK*

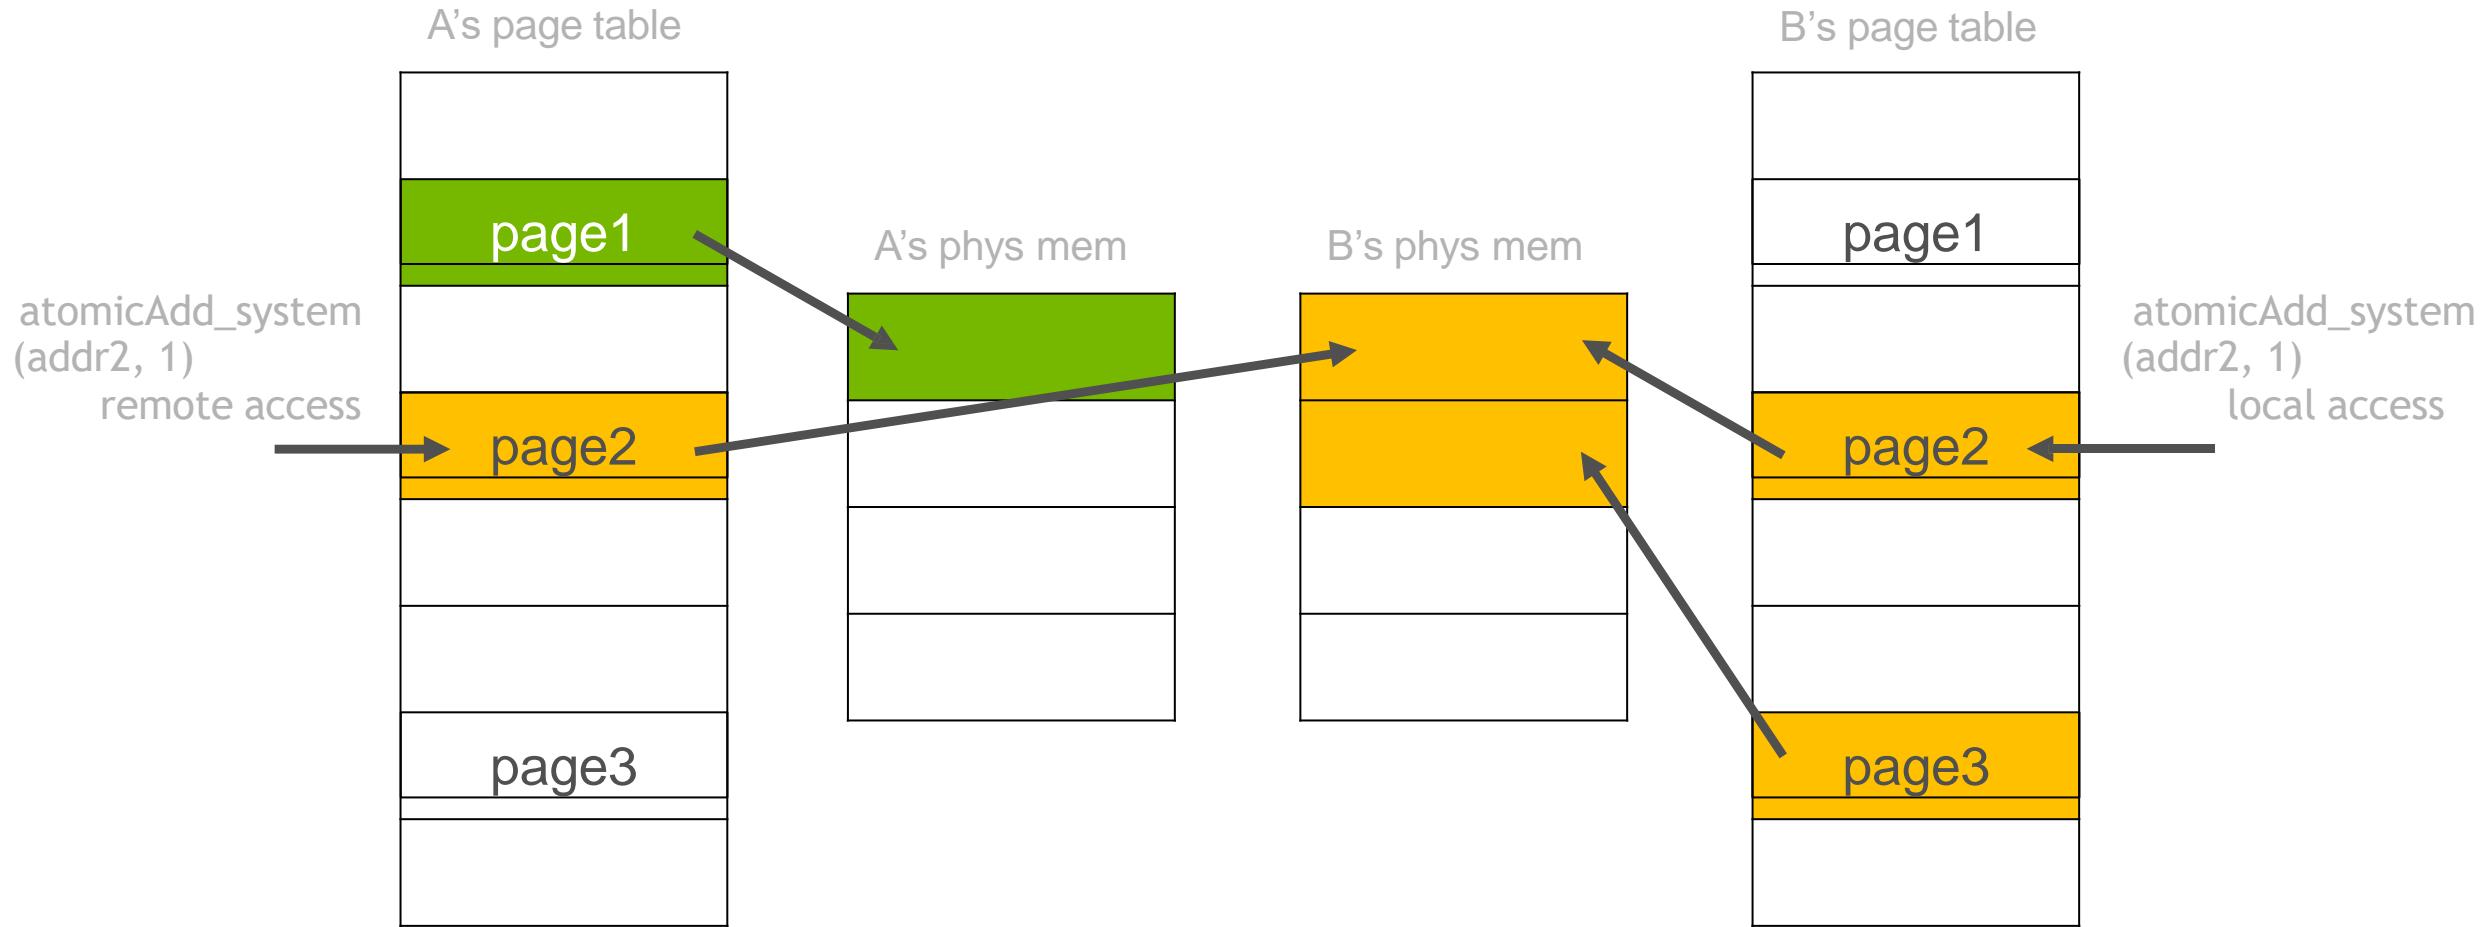

*both processors need to support atomic operations

CONCURRENT ACCESS


Read duplication*

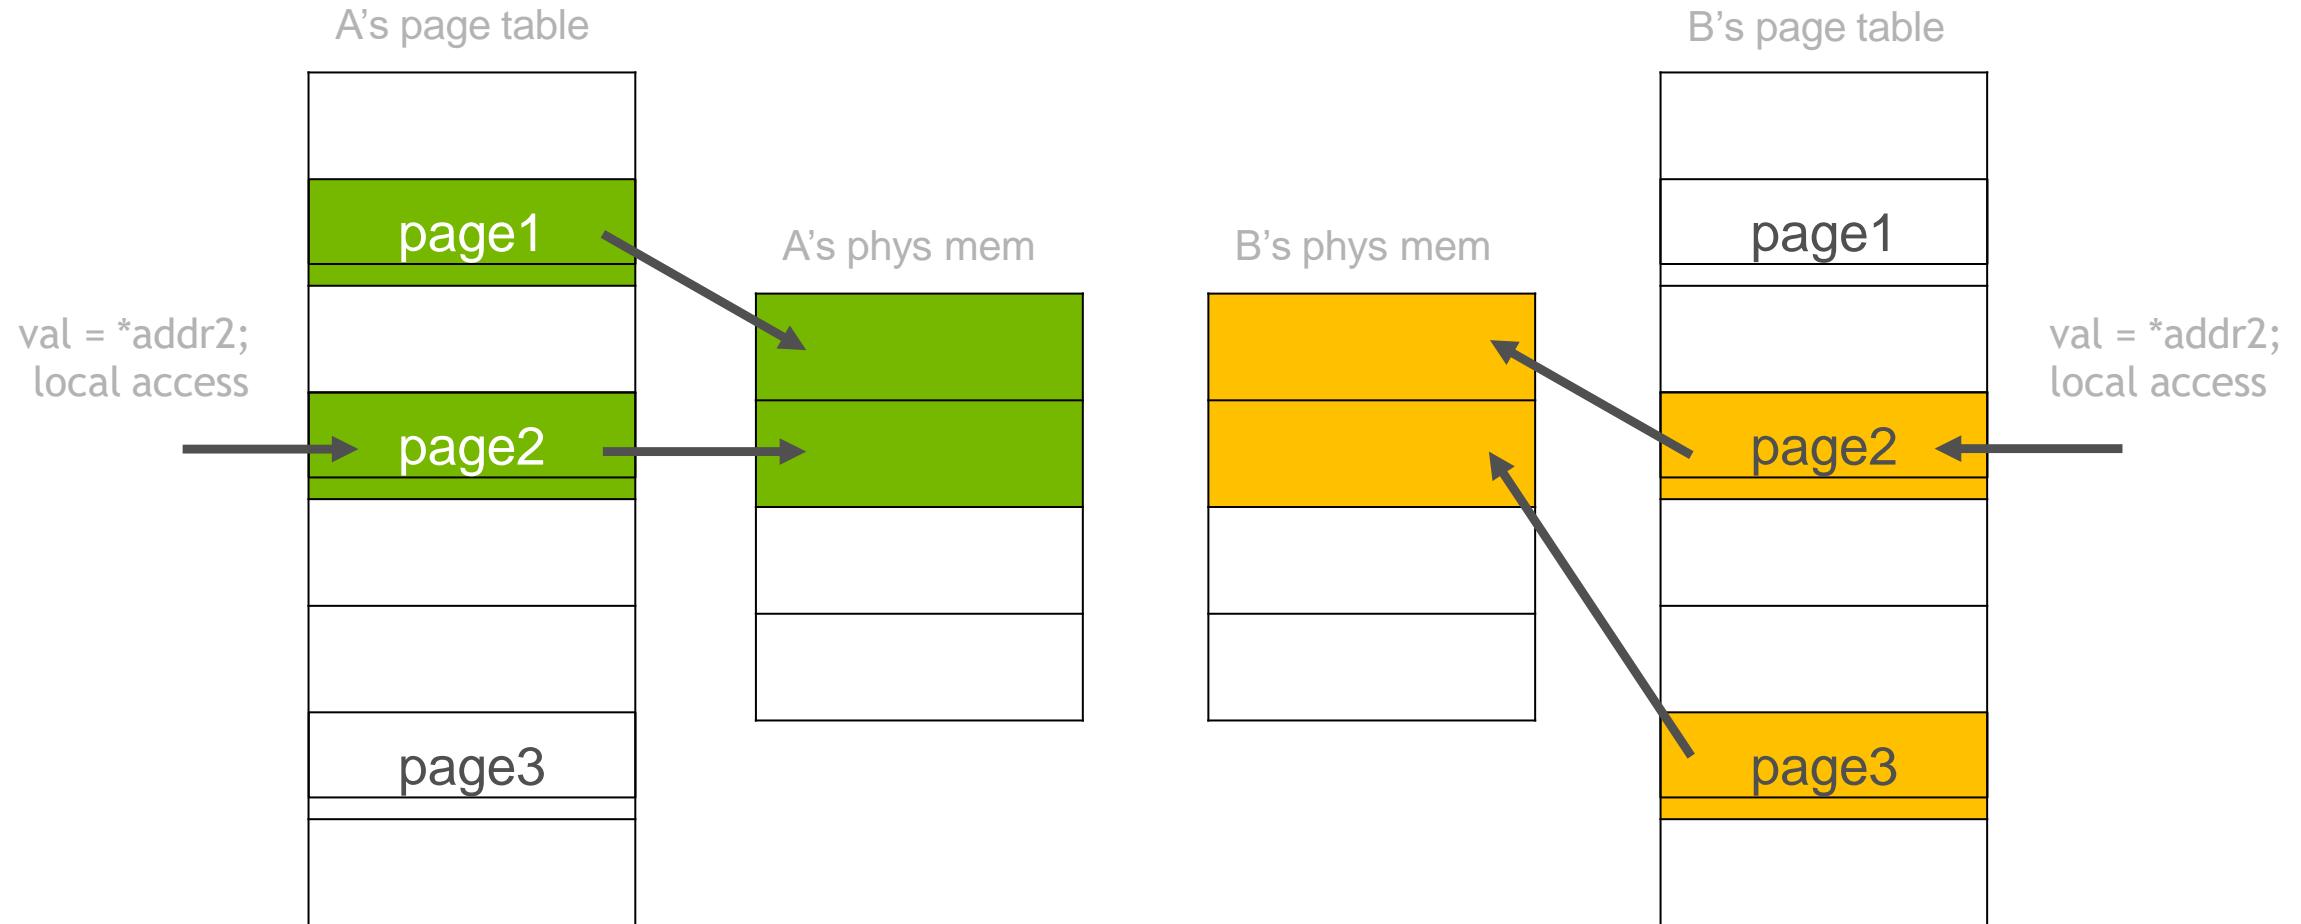

*each processor must maintain its own page table

CONCURRENT ACCESS


Read duplication: write

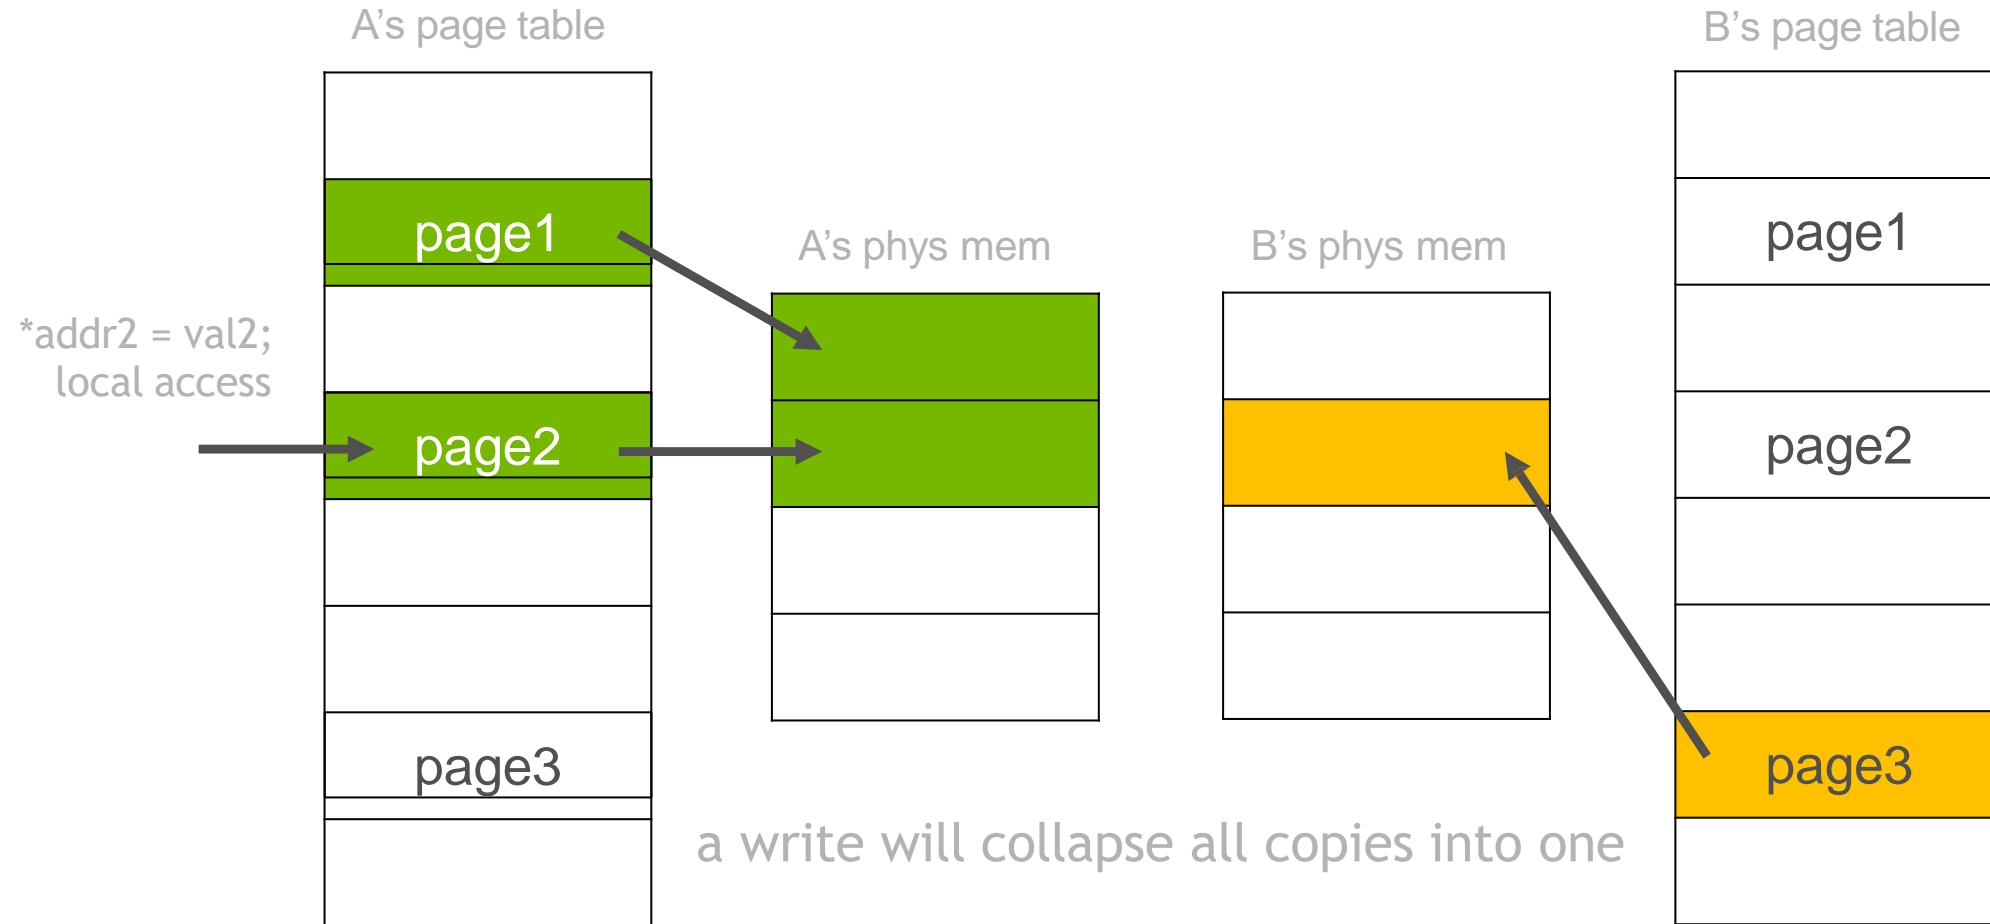


CONCURRENT ACCESS

Read duplication: read after write


A's page table

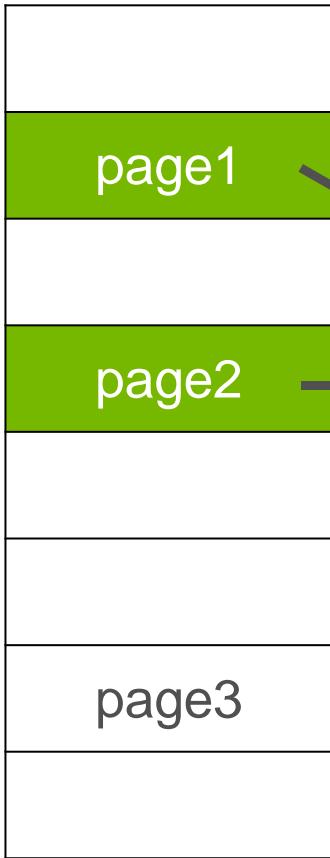

A's phys mem

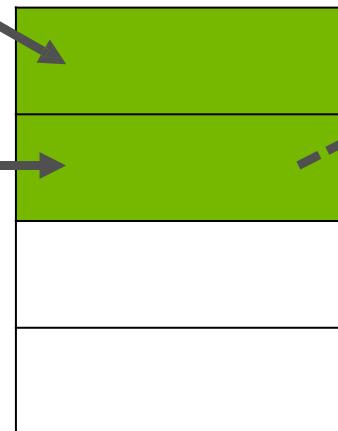

B's page table

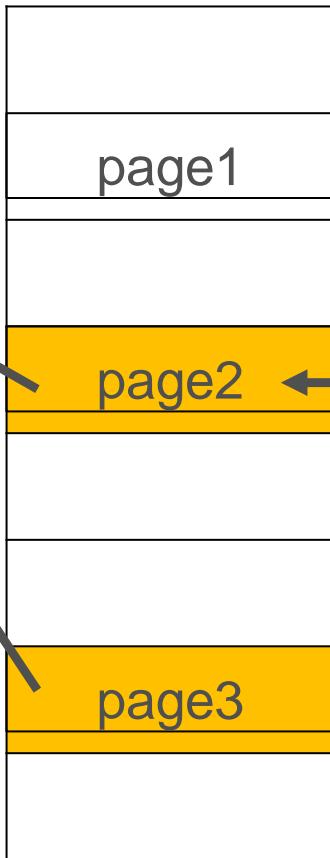


B's phys mem

val = *addr2;
local access

pages are duplicated again on faults

UNIFIED MEMORY + DGX-2

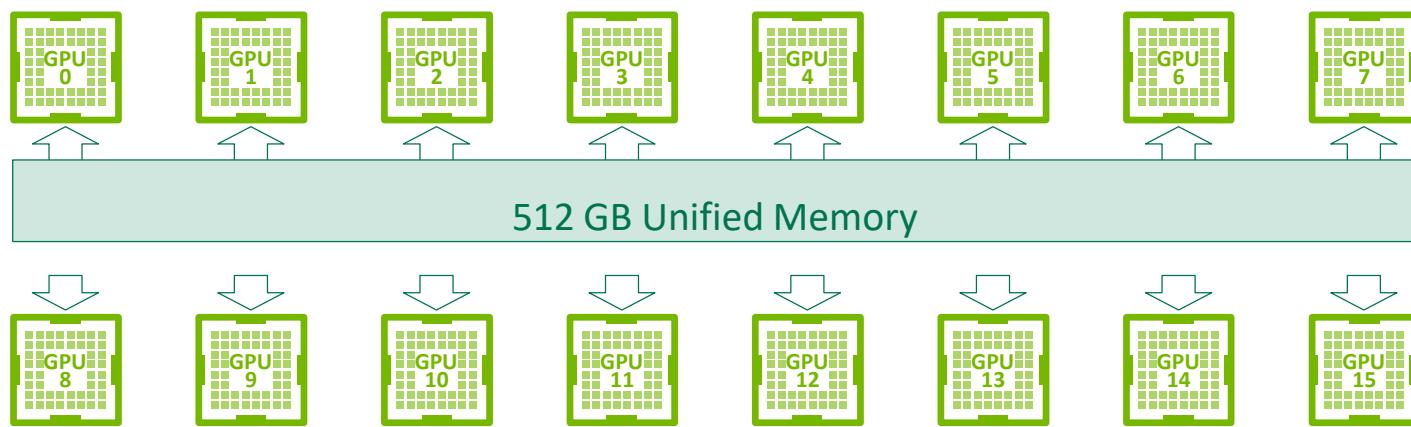

UNIFIED MEMORY PROVIDES

Single memory view shared by all GPUs

Automatic migration of data between GPUs

User control of data locality

ENABLING MULTI-GPU

Single-GPU

```
__global__ void kernel(int *data) {  
    int idx = threadIdx.x + blockDim.x * blockIdx.x;  
  
    doSomeStuff(idx, data, ...);  
}  
  
cudaMallocManaged(&data, N * sizeof(int));  
// initialize data on the CPU  
  
kernel<<<grid, block>>>(data);
```


Multi-GPU

```
__global__ void kernel(int *data, int gpuId) {  
    int idx = threadIdx.x + blockDim.x * (blockIdx.x  
        + gpuId * gridDim.x);  
  
    doSomeStuff(idx, data, ...);  
}  
  
cudaMallocManaged(&data, N * sizeof(int));  
// initialize data on the CPU  
for (int i = 0; i < numGPUs; i++) {  
    cudaSetDevice(i);  
    kernel<<<grid/numGPUs, block>>>(data, i);  
}
```


update blockIdx.x

update launch config

MULTI-GPU WITH UNIFIED MEMORY

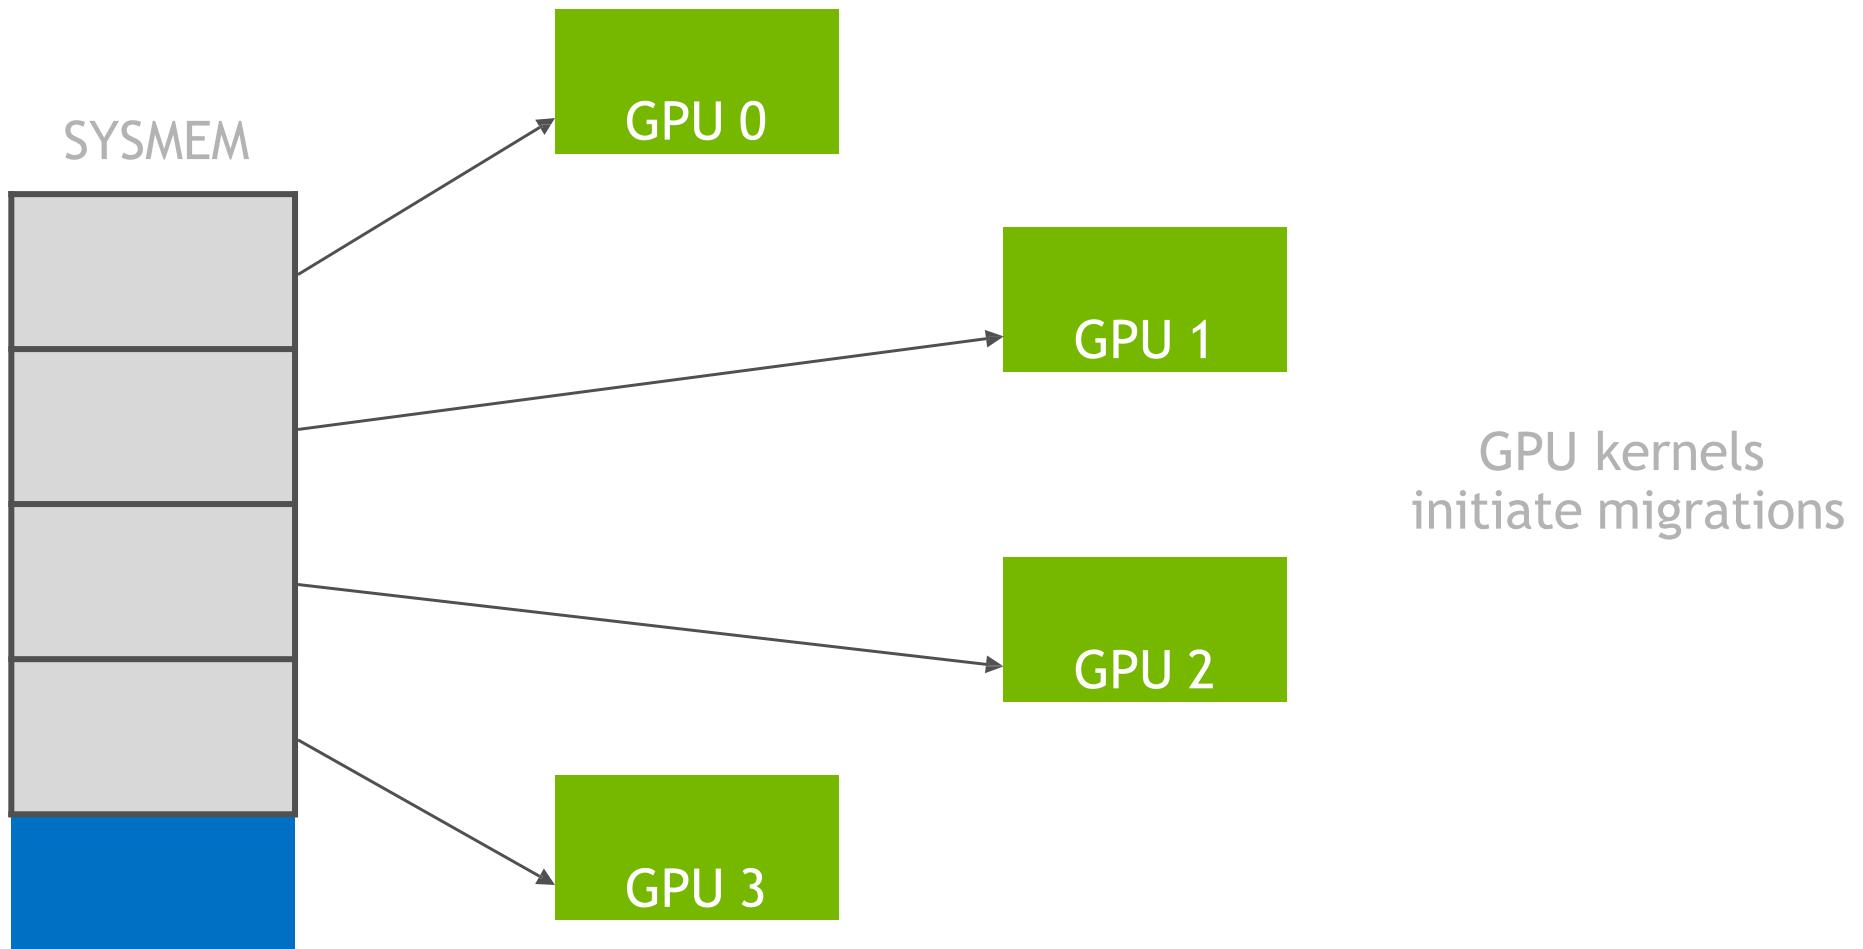


MULTI-GPU WITH UNIFIED MEMORY

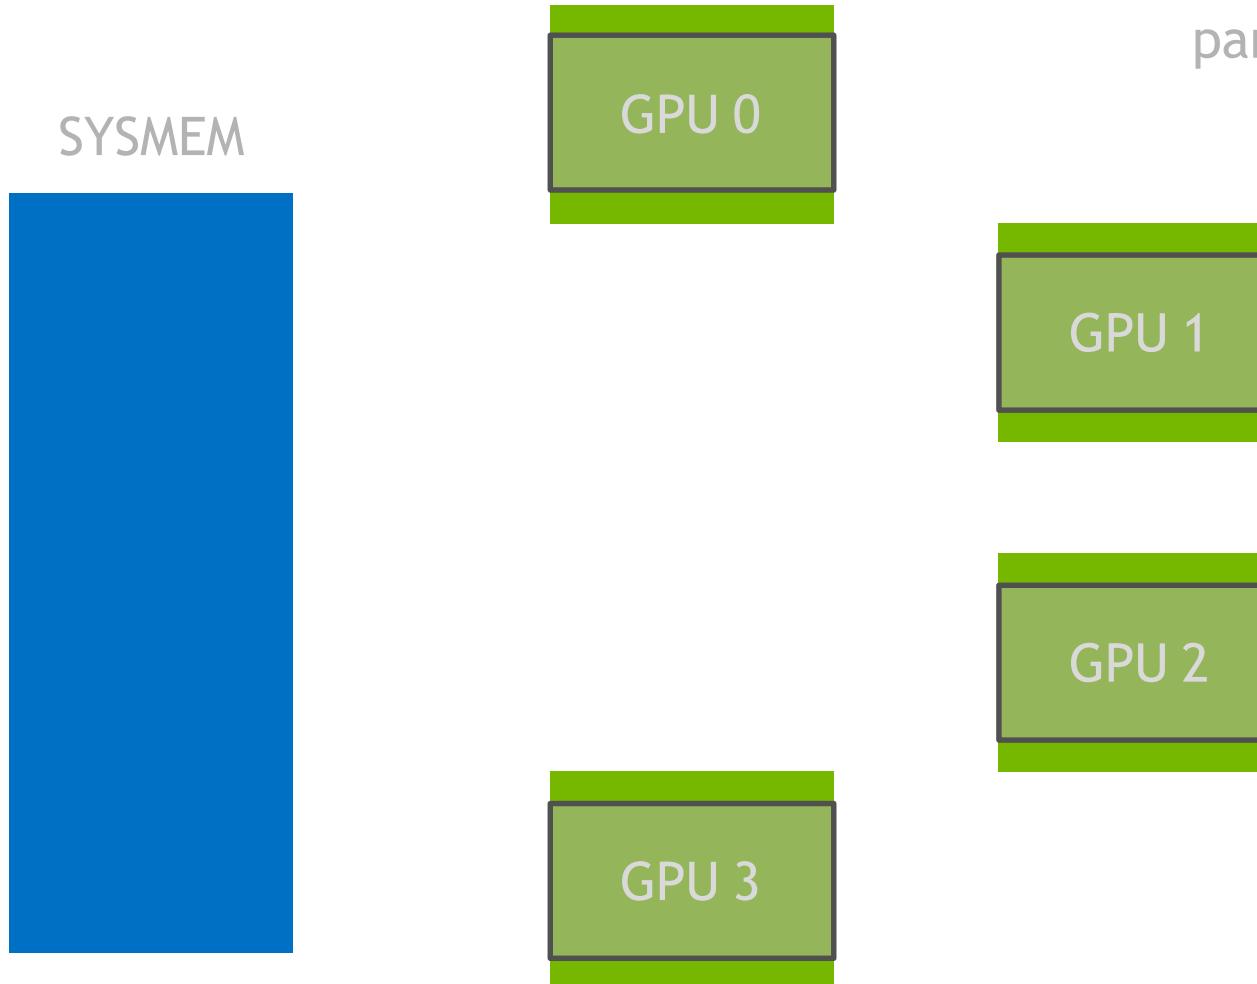


Data *automatically*
partitioned between GPUs
on first-touch

MULTI-GPU WITH UNIFIED MEMORY

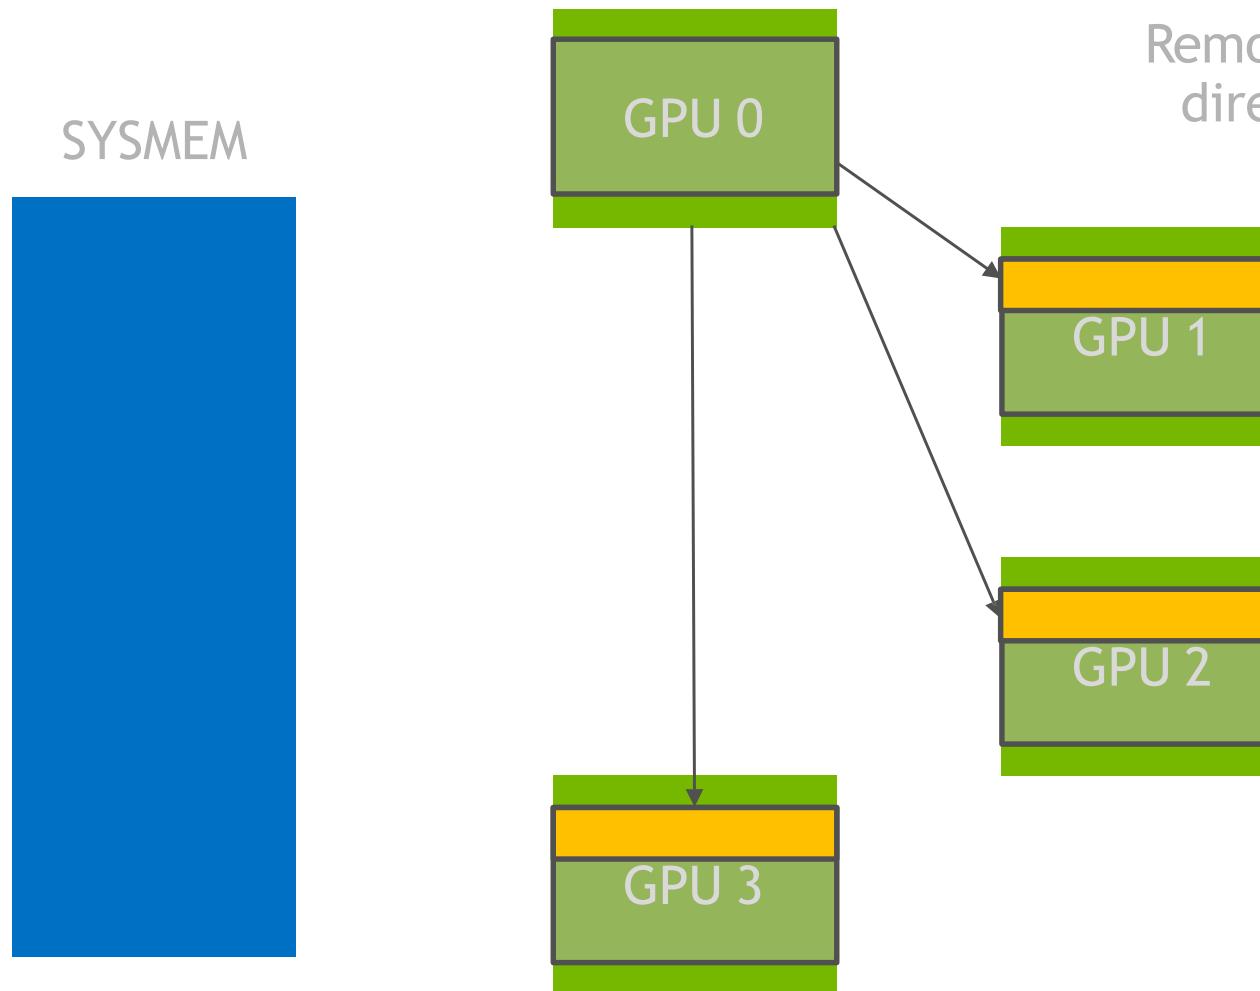

With policies:
Remote data can be accessed
directly without migrations

MULTI-GPU WITH UNIFIED MEMORY

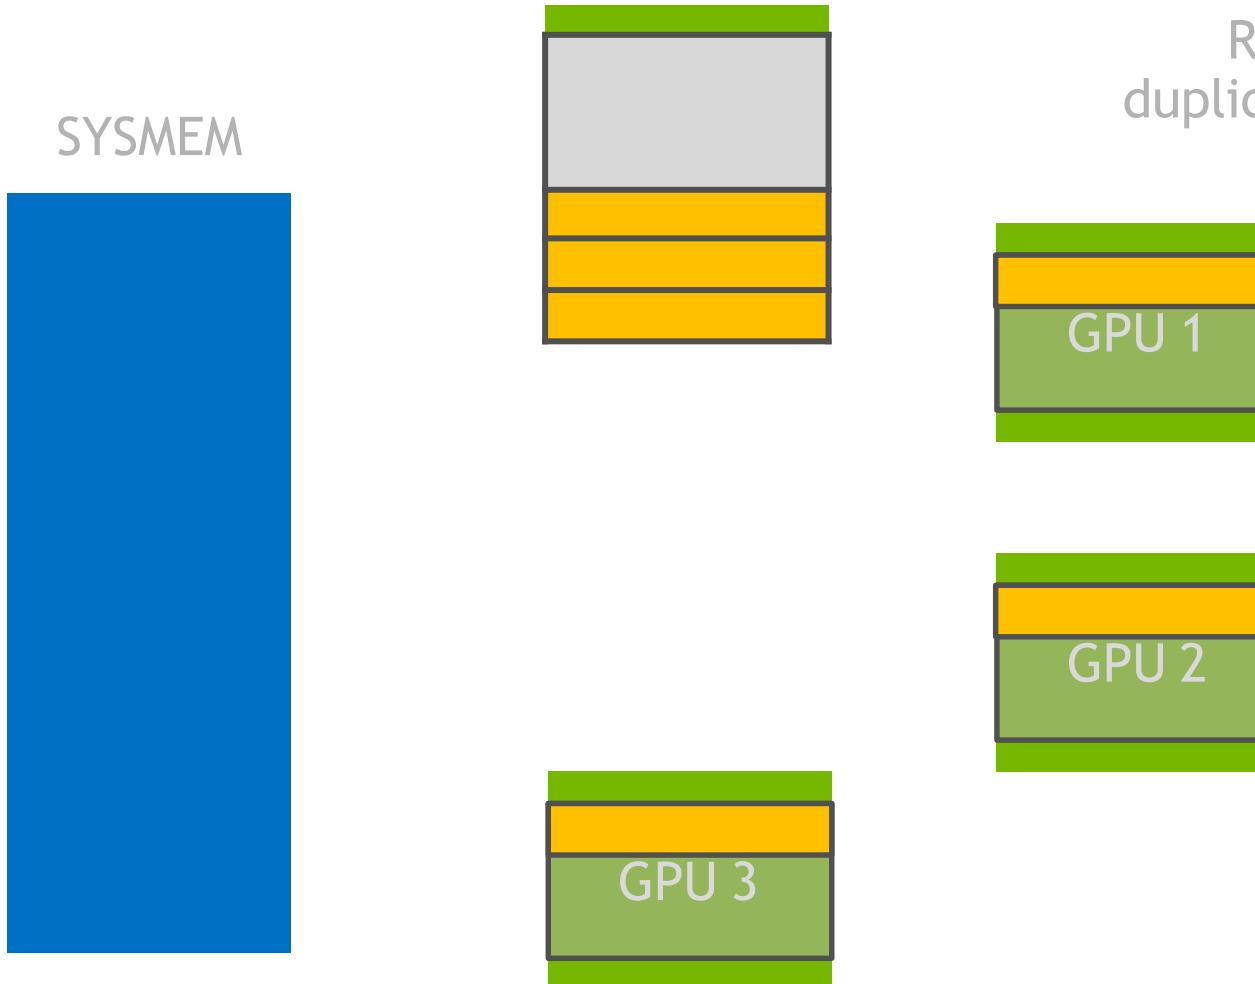


With policies:

Read-only data can be
duplicated and accessed locally

GPU ARCHITECTURE AND SOFTWARE EVOLUTION

UNIFIED MEMORY

Evolution of GPU architectures

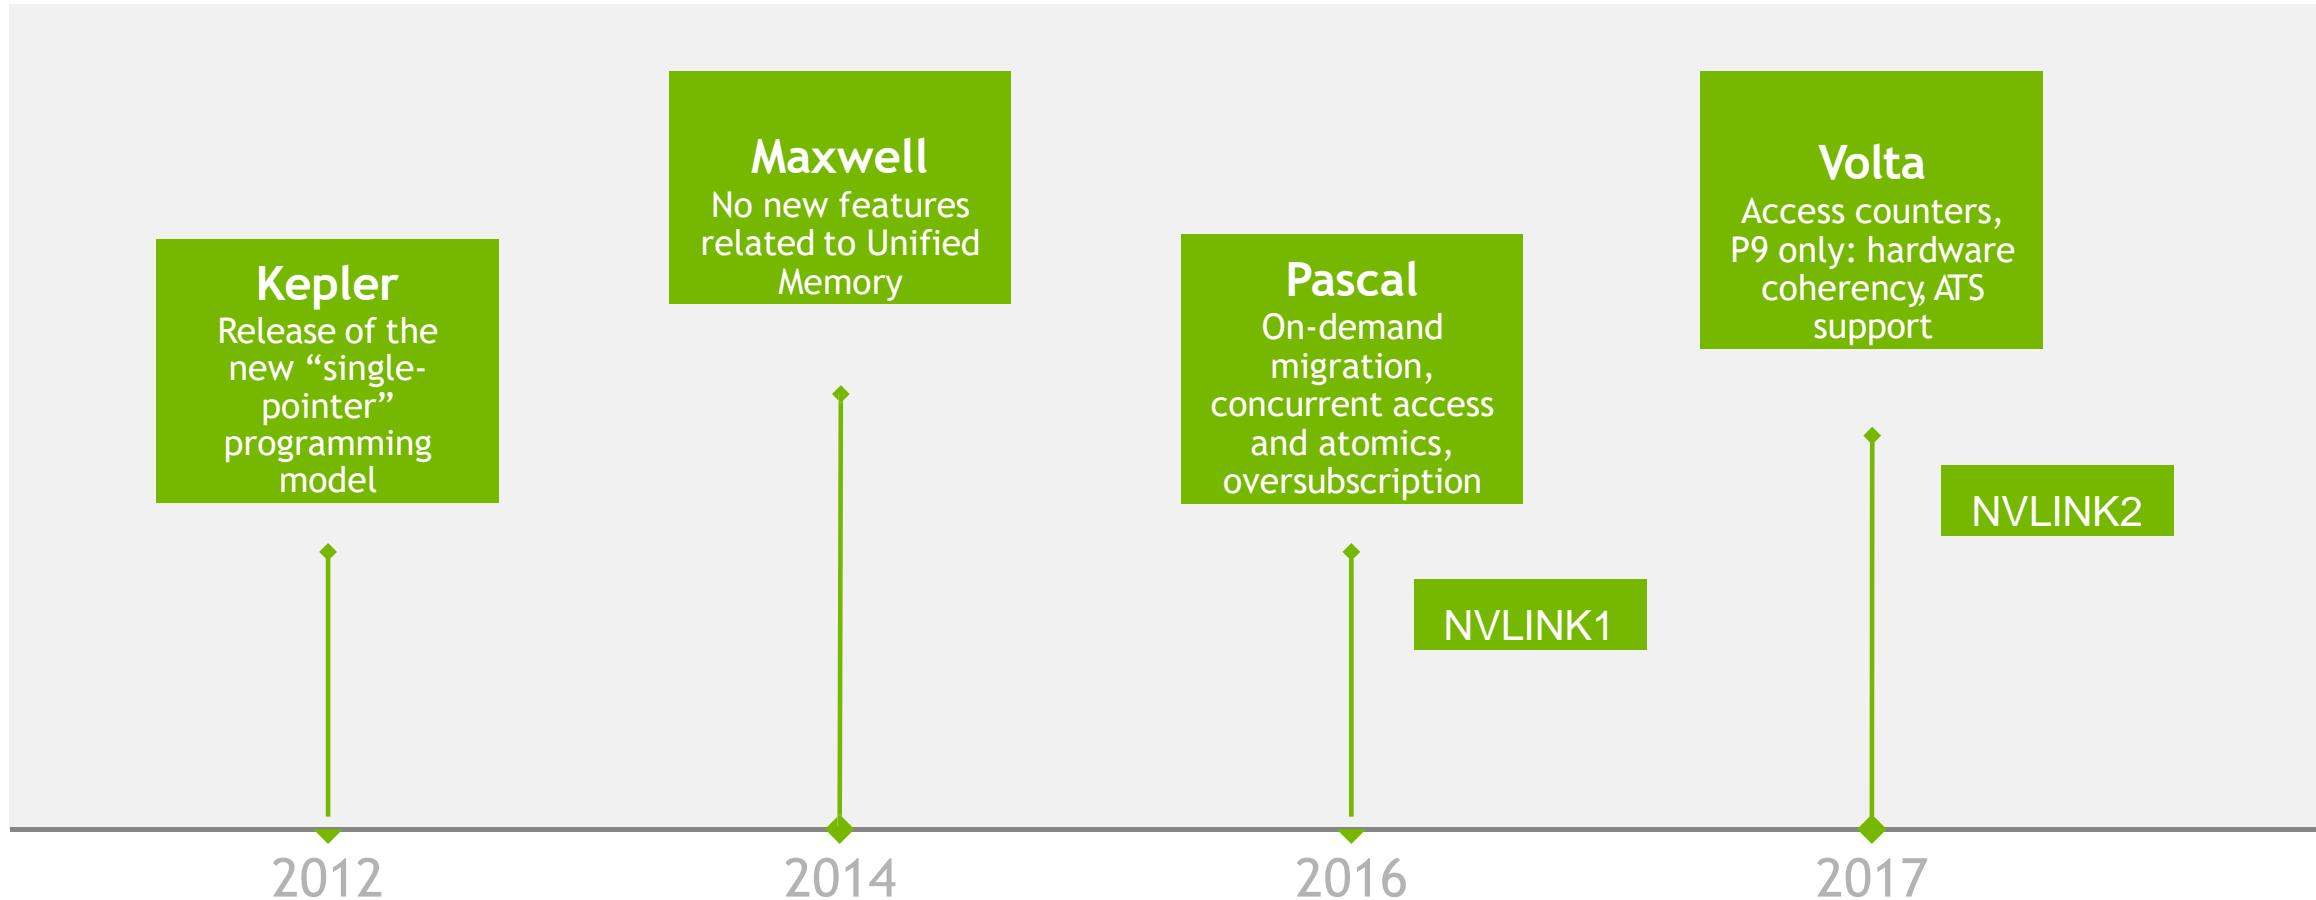


*Not all features are available on all platforms

UNIFIED MEMORY: BEFORE PASCAL

Available since CUDA 6

No GPU page fault support: move all dirty pages on kernel launch

No concurrent access, no GPU memory oversubscription, no system-wide atomics

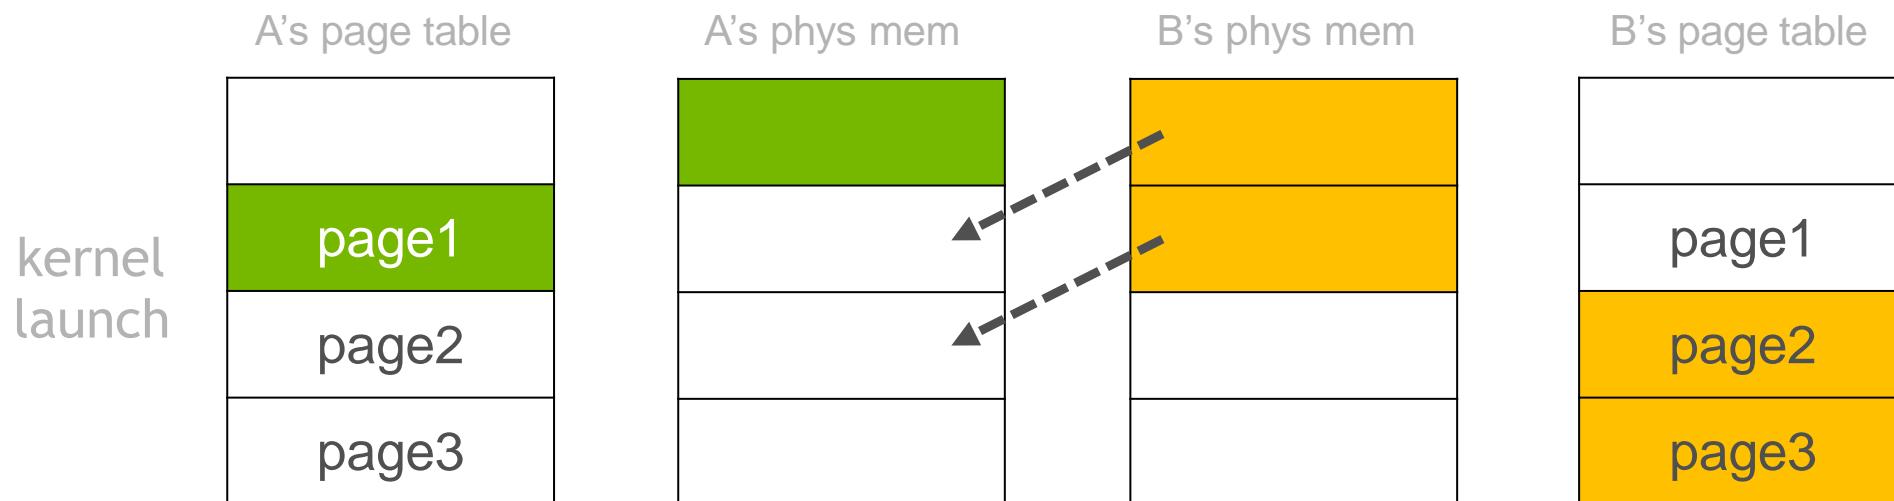


UNIFIED MEMORY: PASCAL AND VOLTA

Available since CUDA 8

GPU page fault support, concurrent access, extended VA space (48-bit)


On-demand migration to accessing processor **on first touch**

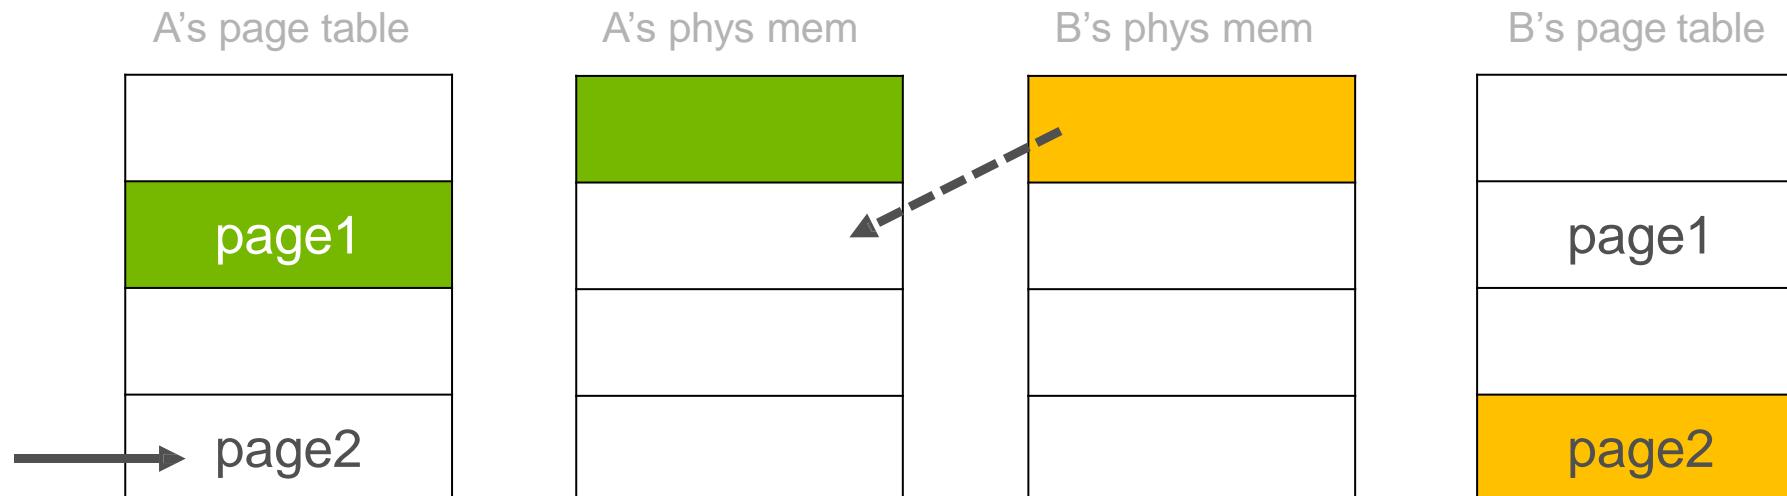

UNIFIED MEMORY ON VOLTA+P9

New Feature: Access Counters

If memory is mapped to the GPU, migration can be triggered by access counters

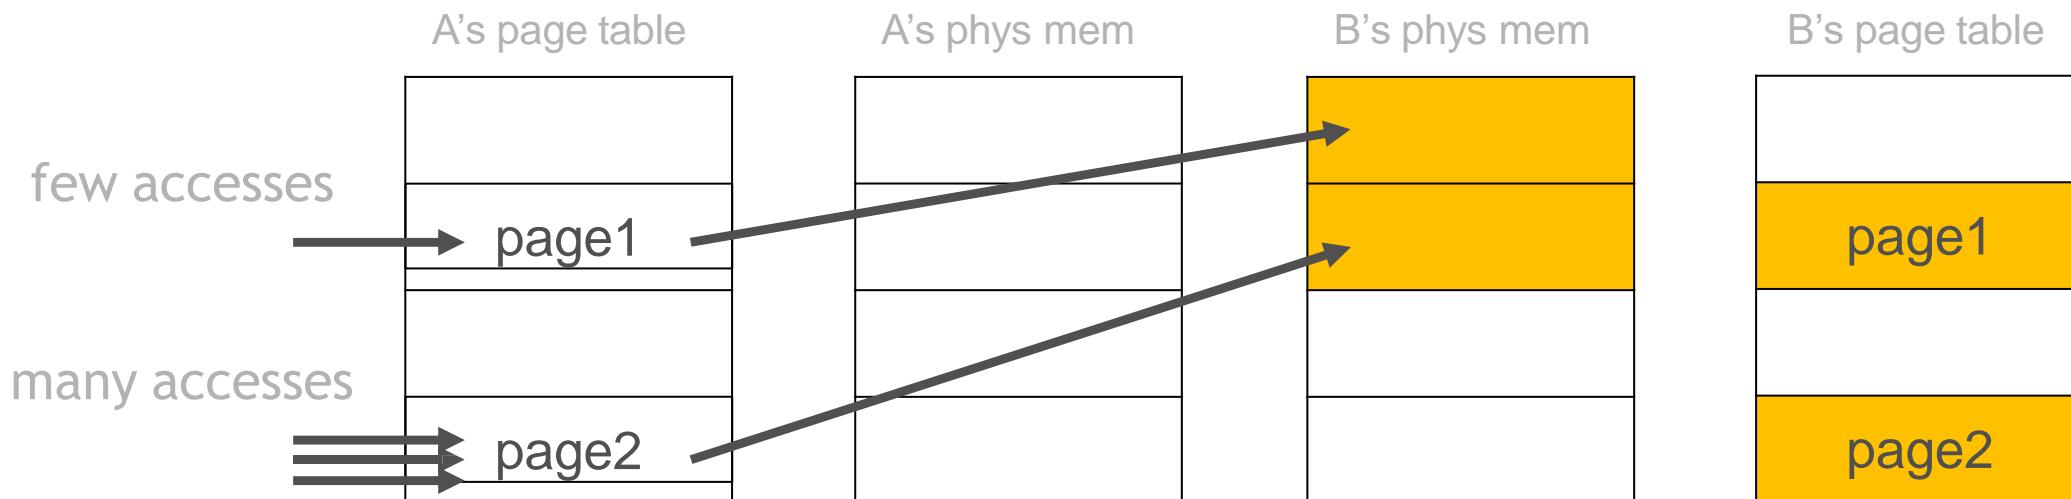


UNIFIED MEMORY ON VOLTA+P9

New Feature: Access Counters

With access counters **only hot pages** will be moved to the GPU

Migrations are *delayed* compared to the fault-based method

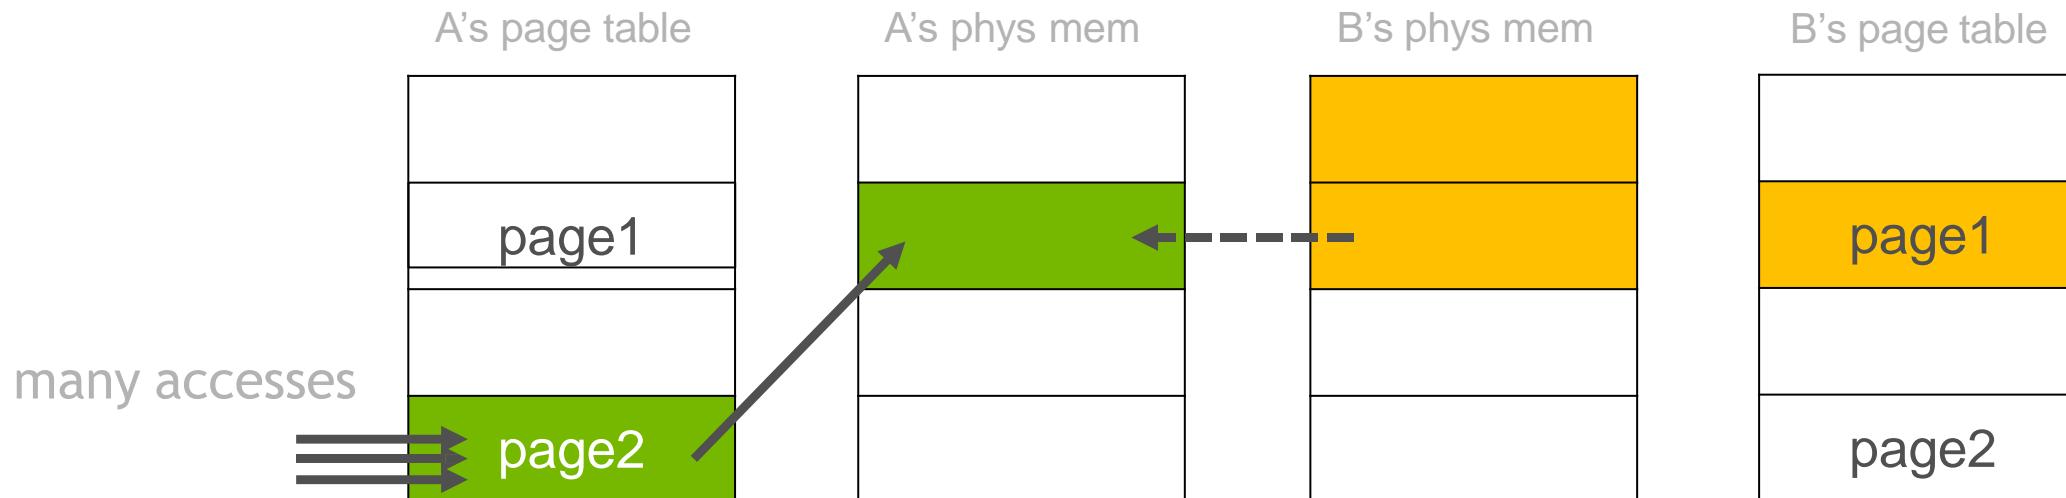


*When implemented this feature can be enabled with `cudaMemAdvise` policies

UNIFIED MEMORY ON VOLTA+P9

New Feature: Hardware Coherency with NVLINK2

CPU can directly access and *cache* GPU memory


Native atomics support for all accessible memory

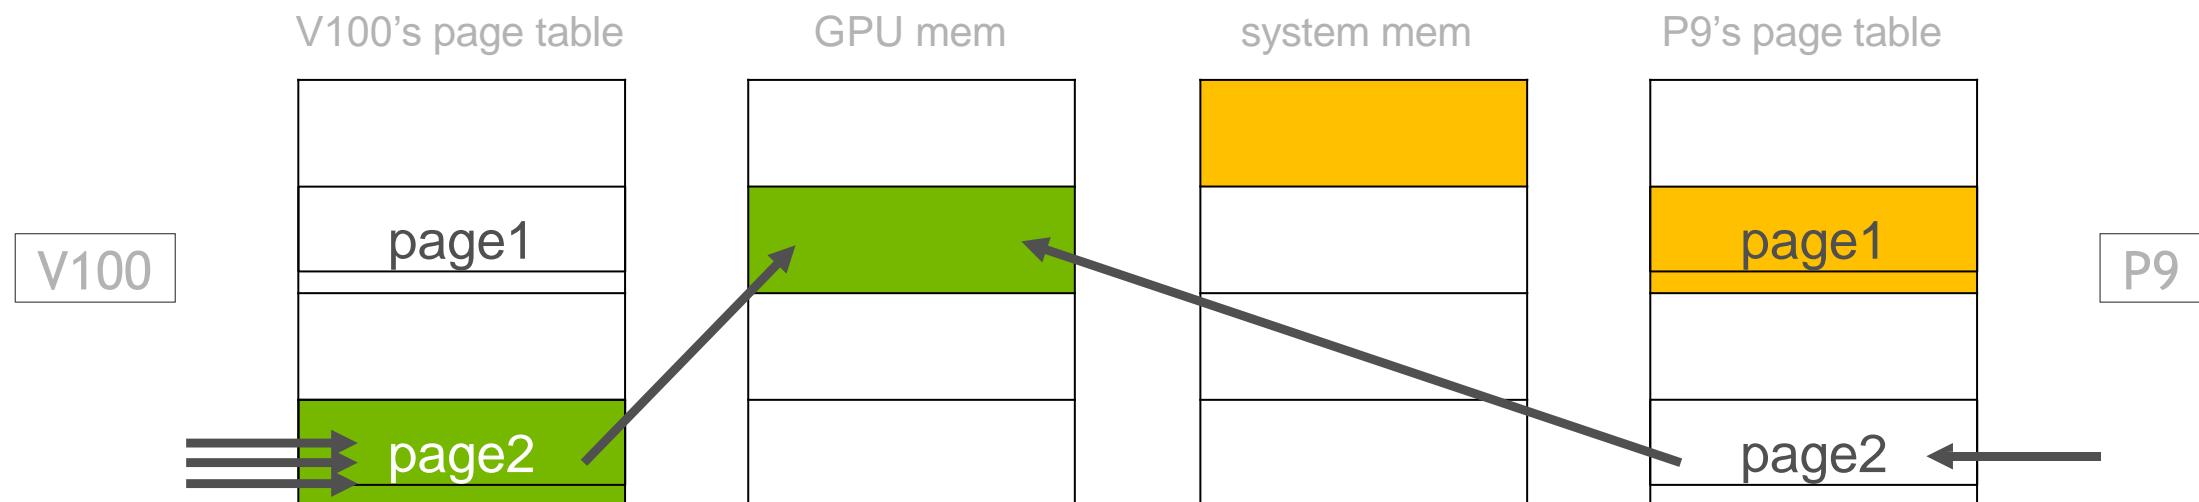

UNIFIED MEMORY ON VOLTA+P9

New Feature: ATS support

ATS: address translation service; CPU and GPU can share a *single* page table

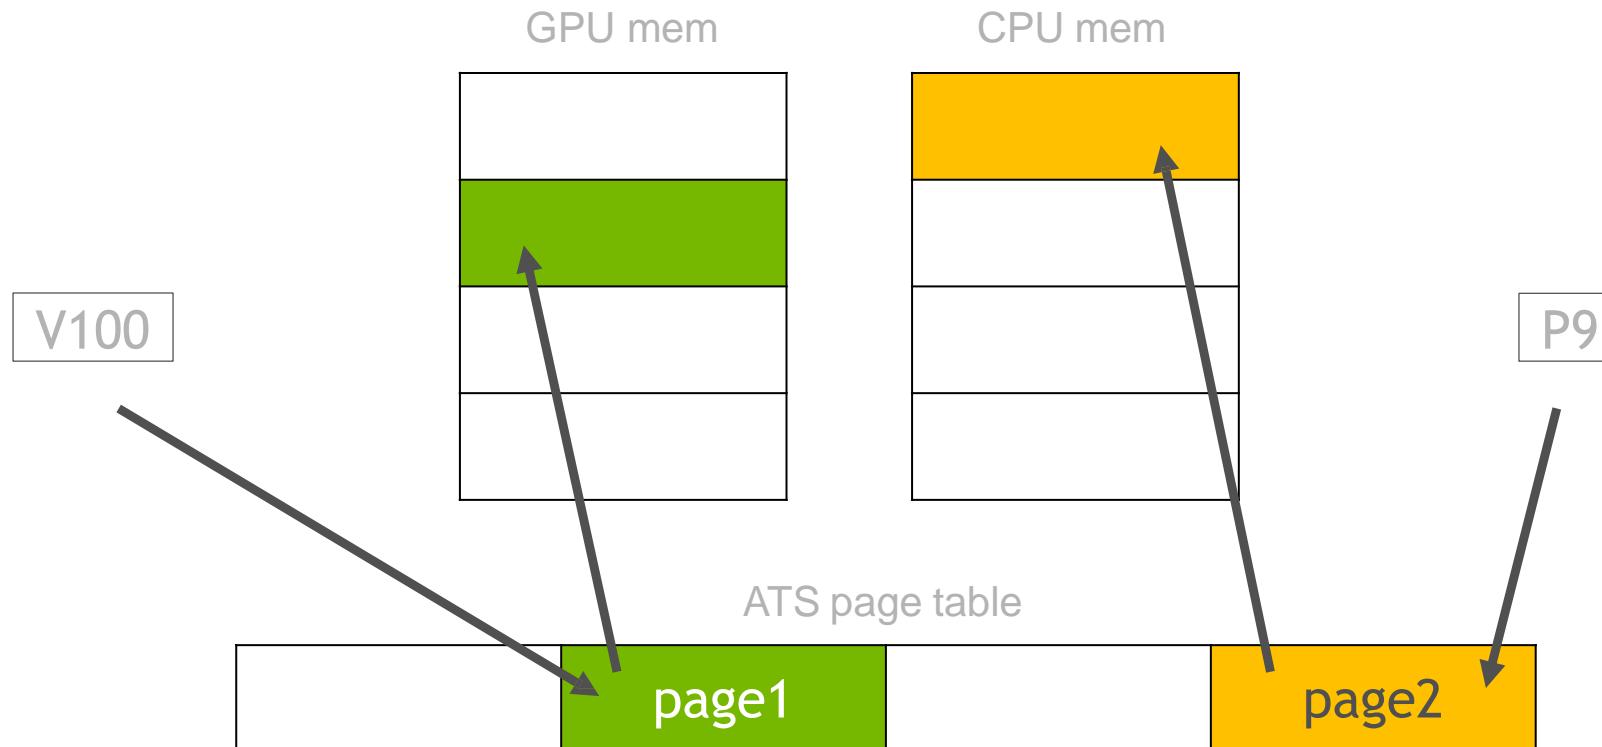

UNIFIED MEMORY WITH SYSTEM ALLOCATOR

System allocator support allows GPU to access all system memory
malloc, stack, global, file system

P9: Address Translation Service (ATS)

Support enabled in CUDA 9.2

x86: Heterogeneous Memory Management (HMM)

Initial version of the patchset is integrated into 4.14 kernel

NVIDIA will be supporting upcoming versions of HMM

WHAT YOU CAN DO WITH UNIFIED MEMORY

See it in action at the end of the talk!

Works everywhere today

```
int *data;  
cudaMallocManaged(&data, sizeof(int) *  
n); kernel<<<grid, block>>>(data);
```

Works on Power9 + ATS in CUDA 9.2
Will work in the future on x86 + HMM

```
int *data = (int*)malloc(sizeof(int) * n);  
kernel<<<grid, block>>>(data);
```

```
int data[1024];  
kernel<<<grid, block>>>(data);
```

```
int *data = (int*)alloca(sizeof(int) * n);  
kernel<<<grid, block>>>(data);
```

```
extern int *data;  
kernel<<<grid, block>>>(data);
```

UNIFIED MEMORY LANGUAGES

CUDA C/C++: `cudaMallocManaged`

CUDA Fortran: `managed` attribute (per allocation)

Python: `pycuda.driver.managed_empty` (allocate `numpy.ndarray`)

OpenACC: `-ta=managed` compiler option (all dynamic allocations)

UNIFIED MEMORY + OPENACC

Effortless way to run your code on GPUs

Literally adding a single line will get your code running on the GPU

```
#pragma acc kernels
{
    for (i = 0; i < n; ++i) {
        c[i] = a[i] + b[i];
        ...
    }
}
...
```

←
Initiate parallel execution

Easy to optimize later: add loop and data directives

PERFORMANCE DEEP DIVE


STREAMING BENCHMARK

How fast is on-demand migration?

```
__global__ void kernel(int *host, int *device) {
    int i = threadIdx.x + blockDim.x * blockIdx.x;
    device[i] = host[i];
}

// allocate and initialize memory
cudaMallocManaged(&host, size);
cudaMalloc(&device, size);
memset(host, 0, size);

// benchmark CPU->GPU migration
if (prefetch)
    cudaMemPrefetchAsync(host, size, gpuId);
kernel<<<grid, block>>>(host, device);
```

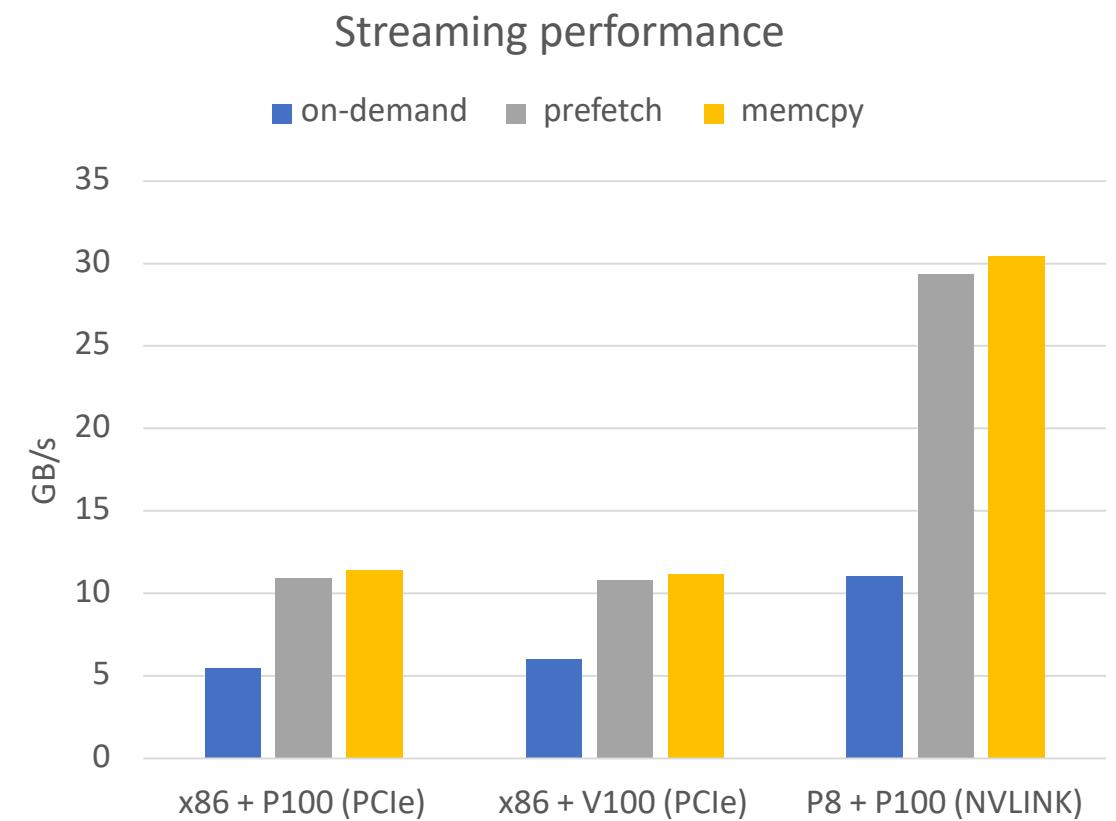

UNDERSTANDING PROFILER OUTPUT

```
==14487== Profiling result:
```

Type	Time (%)	Time	Calls	Avg	Min	Max	Name
GPU activities:	100.00%	23.270ms	1	23.270ms	23.270ms	23.270ms	void kernel(int*, int*)
API calls:	79.56%	23.272ms	1	23.272ms	23.272ms	23.272ms	cudaDeviceSynchronize
	20.42%	5.9732ms	1	5.9732ms	5.9732ms	5.9732ms	cudaLaunch
	0.01%	2.0490us	1	2.0490us	2.0490us	2.0490us	cudaConfigureCall
	0.01%	1.8360us	4	459ns	138ns	833ns	cudaSetupArgument

```
==14487== Unified Memory profiling result:
```

```
Device "Tesla V100-PCIE-16GB (0)"
```

Count	Avg	Size	Min Size	Max Size	Total Size	Total Time	Name
3012	21.758KB	4.0000KB	952.00KB	64.00000MB	13.49043ms	Host To Device	
81	-	-	-	-	-	23.23181ms	Gpu page fault groups


HEURISTIC PREFETCHING

Do Not Confuse with API-prefetching

GPU architecture supports different page sizes

Contiguous pages up to a large page size are promoted to the larger size

Driver prefetches whole regions if pages are accessed *densely*

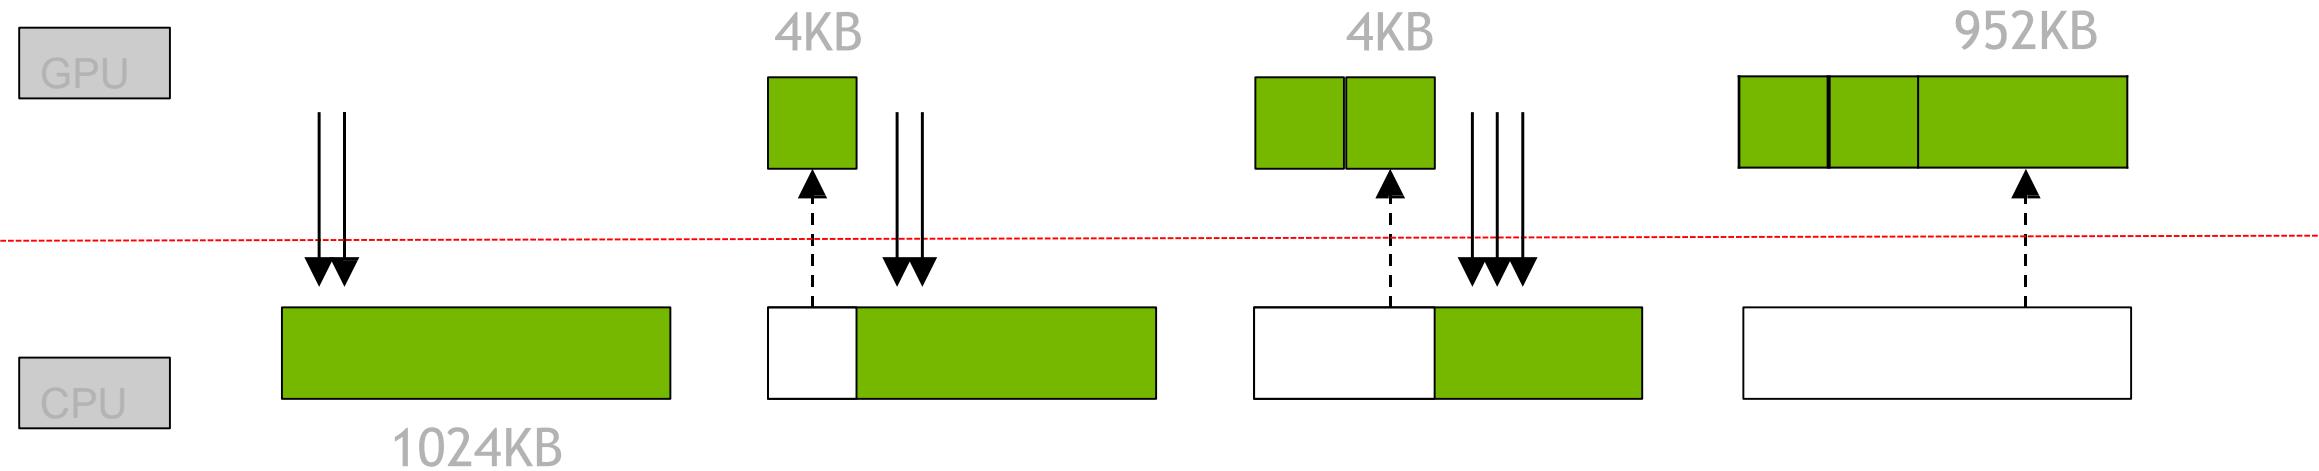


WHAT IS PAGE FAULT GROUPS?

```
==14487== Unified Memory profiling result:  
Device "Tesla V100-PCIE-16GB (0)"  
Count Avg Size Min Size Max Size Total Size Total Time Name  
3012 21.758KB 4.0000KB 952.00KB 64.00000MB 13.49043ms Host To Device  
81 - - - - 23.23181ms Gpu page fault groups
```

nvprof --print-gpu-trace ...



Unified Memory	Virtual Address	Name
8	0x3900010000	[Unified Memory GPU page faults]
9	0x3900040000	[Unified Memory GPU page faults]
5	0x3900108000	[Unified Memory GPU page faults]
5	0x3900200000	[Unified Memory GPU page faults]

PAGE FAULTS HANDLING

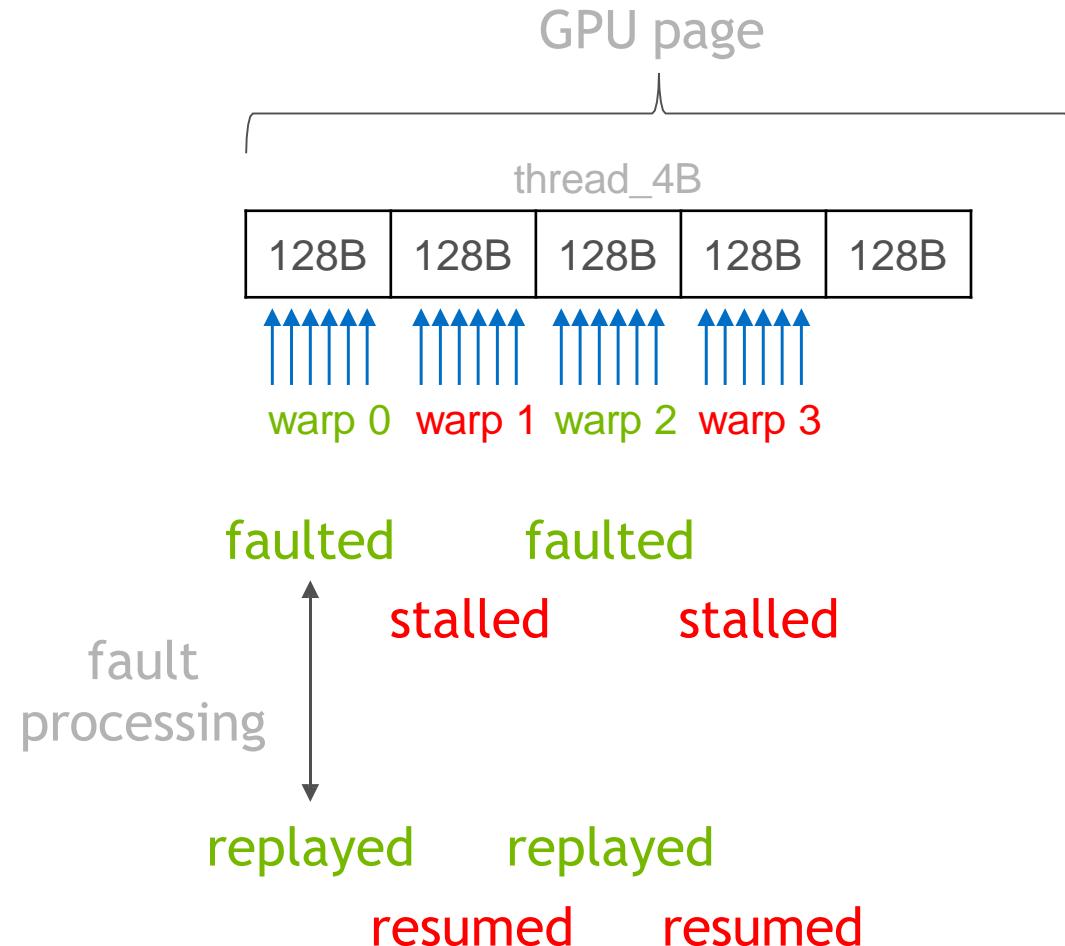

OPTIMIZING ON-DEMAND MIGRATION

Increase fault concurrency to reduce page fault stalls

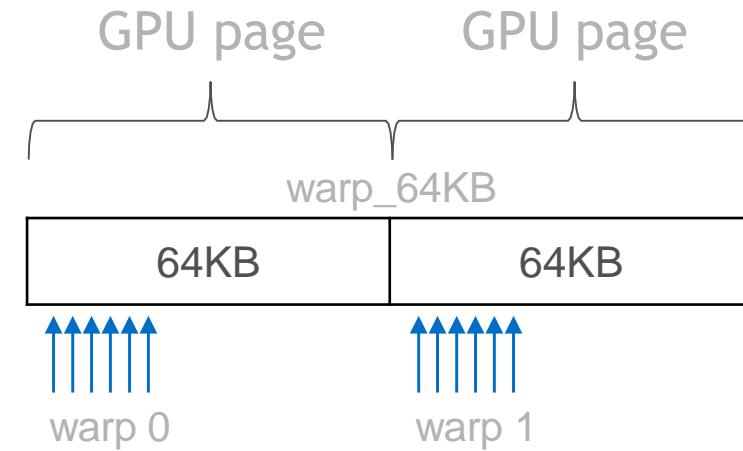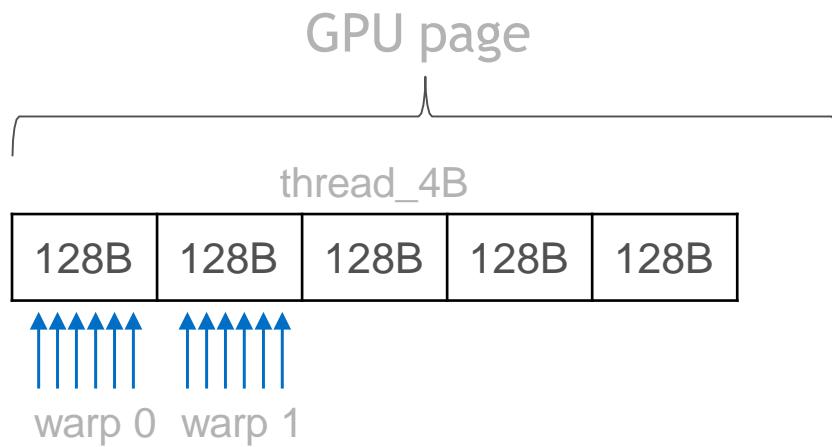

OPTIMIZING ON-DEMAND MIGRATION

Thread/4B

Count	Avg Size	Min Size	Max Size	Total Size	Total Time	Name
3012	21.758KB	4.0000KB	952.00KB	64.00000MB	13.49043ms	Host To Device
81	-	-	-	-	-	Gpu page fault groups
Unified Memory			Virtual Address	Name		
8			0x3900010000	[Unified Memory GPU page faults]		
9			0x3900040000	[Unified Memory GPU page faults]		
5			0x3900108000	[Unified Memory GPU page faults]		

Warp/64KB



Count	Avg Size	Min Size	Max Size	Total Size	Total Time	Name
957	68.481KB	4.0000KB	576.00KB	64.00000MB	8.242080ms	Host To Device
6	-	-	-	-	-	Gpu page fault groups
Unified Memory			Virtual Address	Name		
1			0x39000d0000	[Unified Memory GPU page faults]		
1			0x39000c0000	[Unified Memory GPU page faults]		
1			0x3900080000	[Unified Memory GPU page faults]		

more efficient prefetching

fewer stalls

STREAMING BENCHMARK


How fast is on-demand migration?

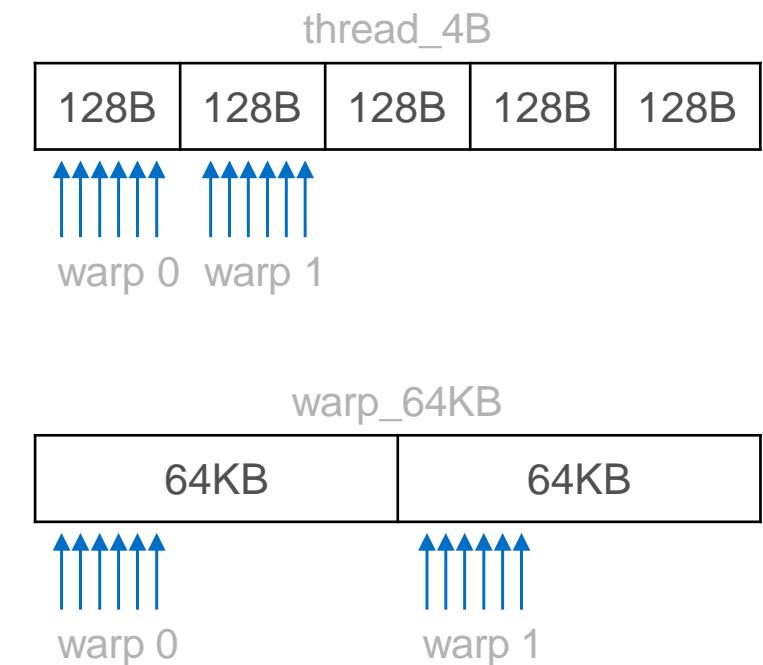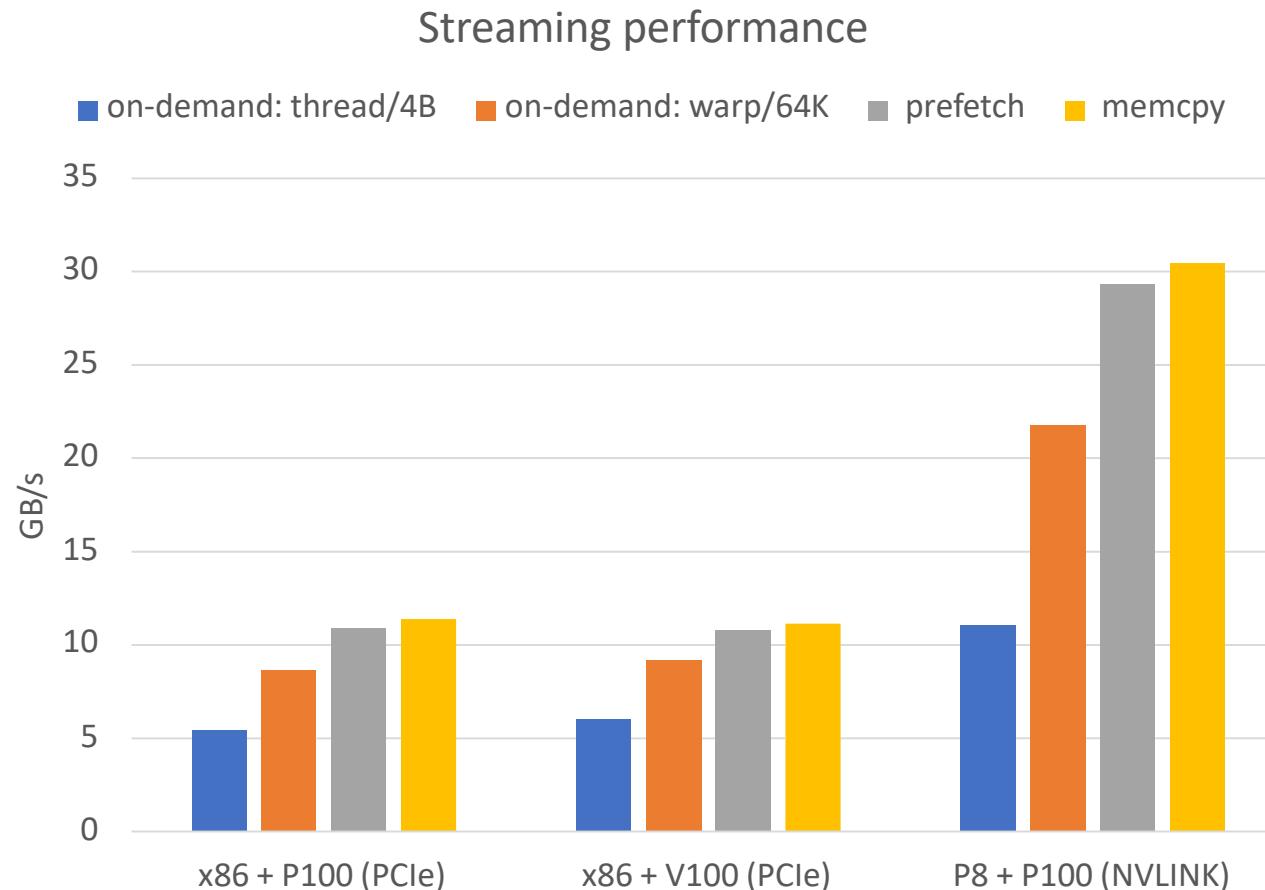

Also check the Parallel Forall blog: <https://devblogs.nvidia.com/maximizing-unified-memory-performance-cuda/>

EVICTION ALGORITHM

What Pages Are Moving Out of the GPU

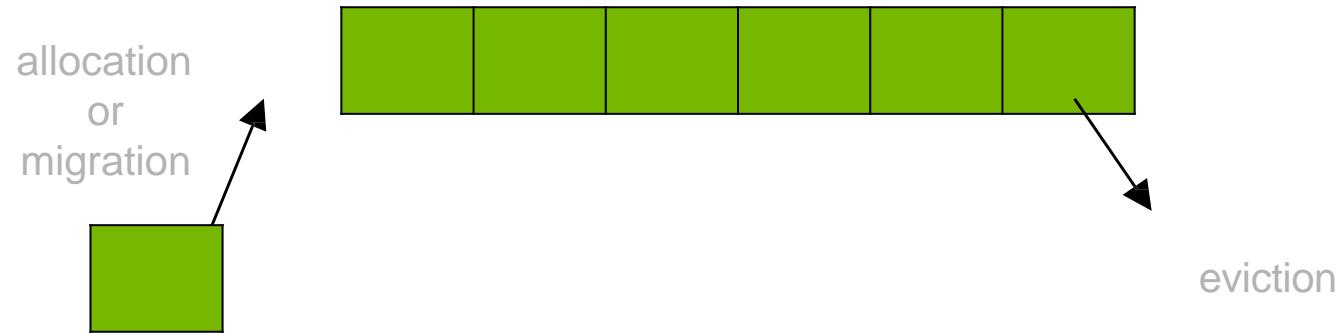

Driver keeps a list of physical chunks of GPU memory

Chunks from the front of the list are evicted first (LRU)


A chunk is considered “in use” when it is fully-populated or migrated

Prefetching and policies may impact eviction heuristic in the future


LOCALITY AND ACCESS CONTROL

cudaMemAdvise

Default: data *migrates* on first touch




ReadMostly: data *duplicated* on first touch



PreferredLocation: *resist* migrating away from the preferred location




AccessedBy: establish *direct mapping* and avoid faults



WHEN TO USE UNIFIED MEMORY

	<code>cudaMalloc</code>	<code>cudaMallocManaged</code>
Pinned allocation	<code>cudaMalloc</code>	<code>cudaMallocManaged</code> <code>PreferredLocation(GPU)</code> <code>SetAccessedBy(peer GPUs)</code> <code>cudaMemPrefetchAsync(GPU)</code>
<code>cudaMemcpy: ptrA -> ptrB</code>	Staging for non-pinned allocations or between non-P2P GPUs	Staging or a copy kernel required in all cases
Memory migration	Not possible	<code>cudaMemPrefetchAsync</code>
Debugging	Difficult	Easy
Oversubscription	No	Yes
IPC support	Yes	No

WHEN TO USE UNIFIED MEMORY

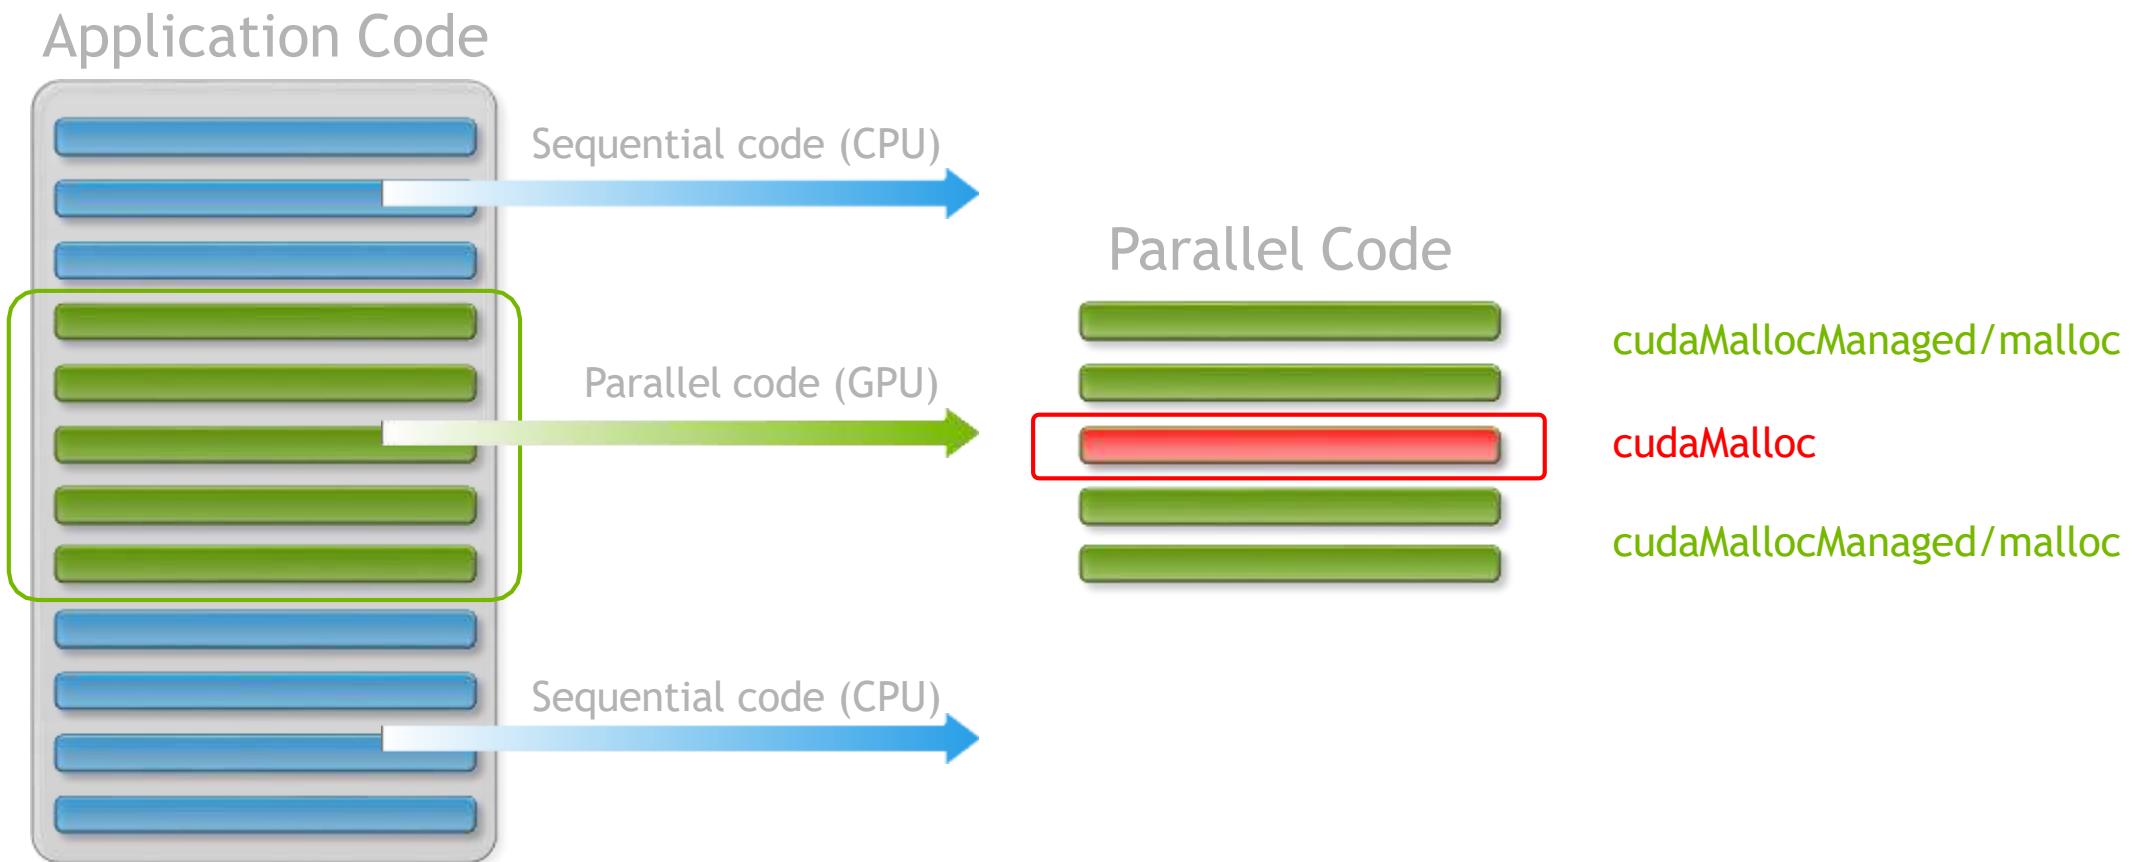

UNIFIED MEMORY PLATFORMS

	KEPLER	PASCAL	VOLTA
Linux + x86	No GPU fault support No concurrent access	On-demand migration	On-demand migration
Linux + Power		On-demand migration 80GB/s CPU-GPU BW*	On-demand migration 150GB/s CPU-GPU BW** Access counters HW coherency ATS support
Windows		No GPU fault support No concurrent access	
MacOS		No GPU fault support No concurrent access	
Tegra		Cached on CPU and iGPU No concurrent access	

*IBM Minsky: 4xP100 + 2xP8, 2xNVLINK1 links between P100 and P8, bi-directional aggregate BW

**IBM Newell: 4xV100 + 2xP9, 3xNVLINK2 links between V100 and P9, bi-directional aggregate BW

READ DUPLICATION


Usage example

```
char *data;  
cudaMallocManaged(&data, N);  
  
init_data(data, N);  
  
cudaMemAdvise(data, N, ..SetReadMostly, myGpuId);  
cudaMemPrefetchAsync(data, N, myGpuId, s);  
mykernel<<<..., s>>>(data, N);  
  
use_data(data, N);  
cudaFree(data);
```

The prefetch creates a copy instead of moving data

Both processors can read data simultaneously without faults

Writes will collapse all copies into one, subsequent reads will fault and duplicate

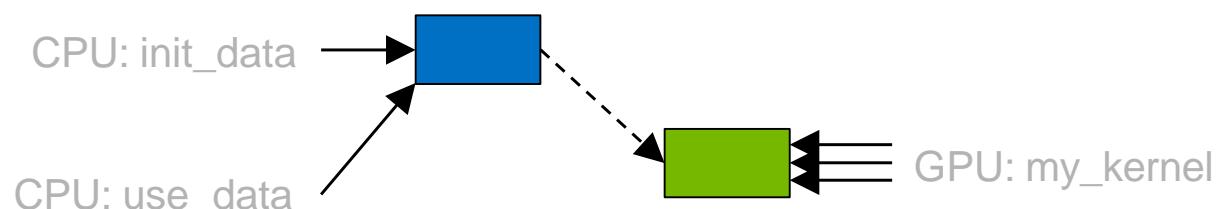


PREFERRED LOCATION

Resisting migrations

```
char *data;  
cudaMallocManaged(&data, N);  
  
init_data(data, N);  
  
cudaMemAdvise(data, N, ..PreferredLocation, cudaCpuDeviceId);  
  
mykernel<<<..., s>>>(data, N);  
  
  
use_data(data, N);  
  
cudaFree(data);
```

The kernel will *page fault* and generate direct mapping to data on the CPU

The driver will “resist” migrating data away from the preferred location

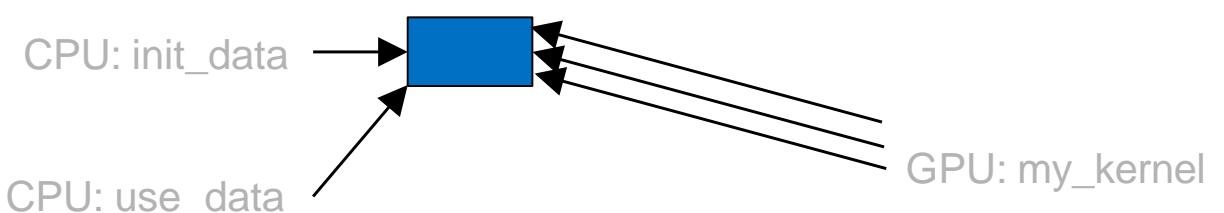

PREFERRED LOCATION

Page population on first-touch

```
char *data;  
cudaMallocManaged(&data, N);
```

The kernel will *page fault*,
populate pages on the CPU
and generate direct mapping to
data on the CPU


```
cudaMemAdvise(data, N, ..PreferredLocation, cudaCpuDeviceId);
```

Pages are populated on the
preferred location if the
faulting processor can access it

```
mykernel<<<..., s>>>(data, N);
```

```
use_data(data, N);
```

```
cudaFree(data);
```

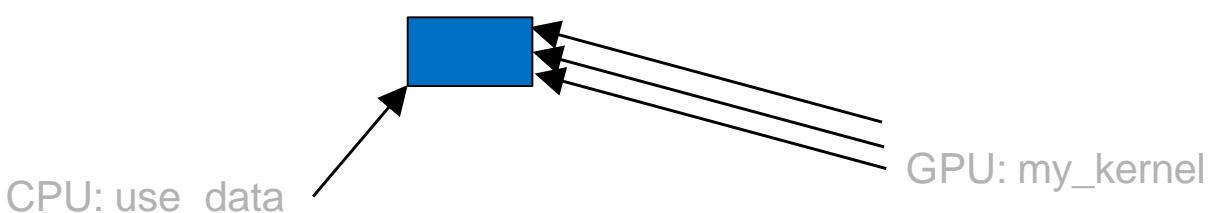


PREFERRED LOCATION ON P9+V100

CPU can directly access GPU memory

```
char *data;  
cudaMallocManaged(&data, N);  
  
init_data(data, N);  
  
cudaMemAdvise(data, N, ..PreferredLocation, gpuId);  
  
mykernel<<<..., s>>>(data, N);  
  
use_data(data, N);  
cudaFree(data);
```

The kernel will *page fault* and migrate data to the GPU

CPU will fault and access data directly instead of migrating

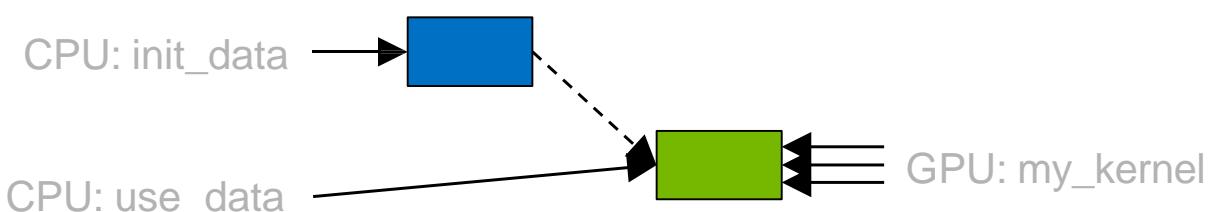

on non P9+V100 systems the driver will migrate back to the CPU


ACCESSED BY

Usage example

```
char *data;  
cudaMallocManaged(&data, N);  
  
init_data(data, N);  
  
cudaMemAdvise(data, N, ..SetAccessedBy, myGpuId);  
  
mykernel<<<..., s>>>(data, N);  
  
  
use_data(data, N);  
cudaFree(data);
```

GPU will establish direct mapping of data in CPU memory, no page faults will be generated

Memory can move freely to other processors and mapping will carry over

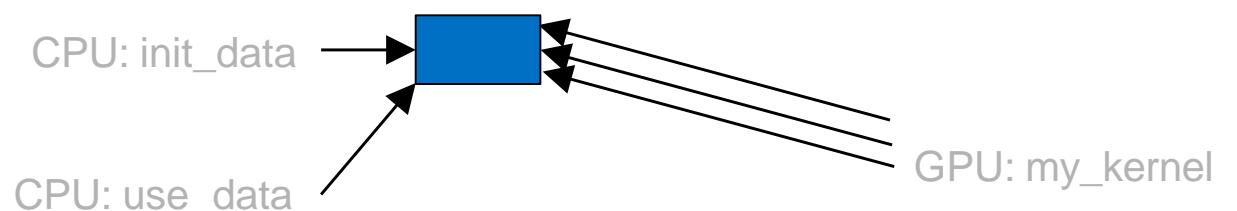


ACCESSED BY

Using access counters on Volta

```
char *data;  
cudaMallocManaged(&data, N);  
  
init_data(data, N);  
  
cudaMemAdvise(data, N, ..SetAccessedBy, myGpuId);  
  
mykernel<<<..., s>>>(data, N);  
  
  
use_data(data, N);  
  
cudaFree(data);
```

GPU will establish direct mapping of data in CPU memory, no page faults will be generated

Access counters may eventually trigger migration of **frequently accessed pages** to the GPU

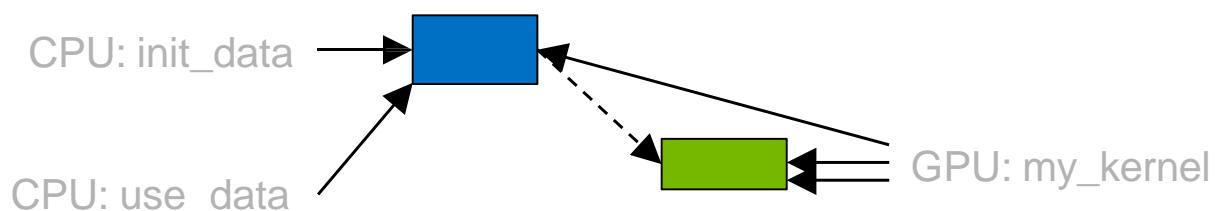

MANAGED VS MALLOC ON VOLTA+P9

First touch allocation policy

```
ptr = cudaMallocManaged(size);  
doStuffOnGpu<<<...>>>(ptr, size);
```

↑
GPU page faults

Unified Memory driver allocates on GPU
GPU accesses GPU memory

```
ptr = malloc(size);  
doStuffOnGpu<<<...>>>(ptr, size);
```

↑
GPU uses ATS, faults
OS allocates on CPU (by default)
GPU uses ATS to access CPU memory

*You may alter this behavior by using `cudaMemAdvise` policies

MANAGED VS MALLOC ON P9

cudaMallocManaged: same behavior as x86

```
ptr = cudaMallocManaged(size);  
  
fillData(ptr, size);  
  
doStuffOnGpu<<<...>>>(ptr, size); ← GPU page faults  
ptr migrated to GPU  
  
cudaDeviceSynchronize();  
  
doStuffOnCpu(ptr, size); ← CPU page faults  
ptr migrated to CPU
```

MANAGED VS MALLOC ON P9

malloc: no on-demand migrations*

```
ptr = malloc(size);  
  
fillData(ptr, size);  
  
doStuffOnGpu<<<...>>>(ptr, size); ←  
  
cudaDeviceSynchronize();  
  
doStuffOnCpu(ptr, size); ←
```

GPU uses ATS to
access CPU memory
**(no on-demand migration
except cudaMemPrefetchAsync*)**

CPU accesses
CPU memory


*In the future Volta access counters will be used to migrate malloc memory

HYPRE-INSPIRED USE CASE

Algebraic Multi-Grid library: <https://github.com/LLNL/hypre>

Lots of small allocations: multiple variables may end up on the same page

If used by different processors this will result in **false-sharing**

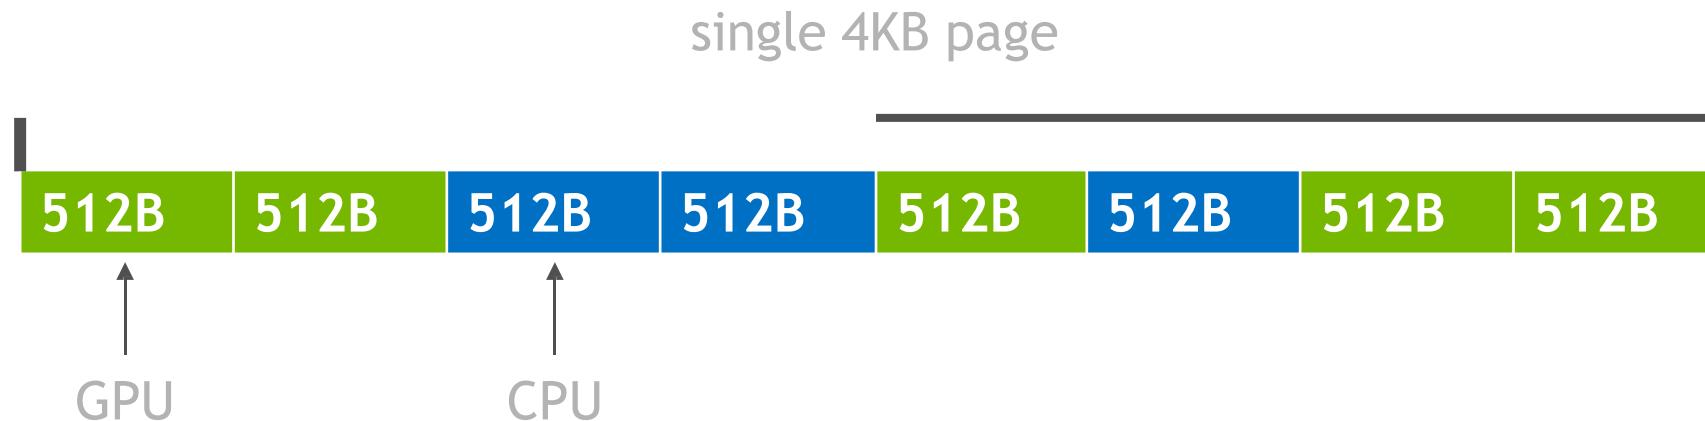


FALSE-SHARING

Issues with false-sharing:

- Spurious migrations, thrashing mitigation does not solve it
- Performance hints are applied on page boundaries, due to suballocation data may inherit the wrong policies


How to mitigate this:

- Use separate allocators or memory pools for CPU and GPU

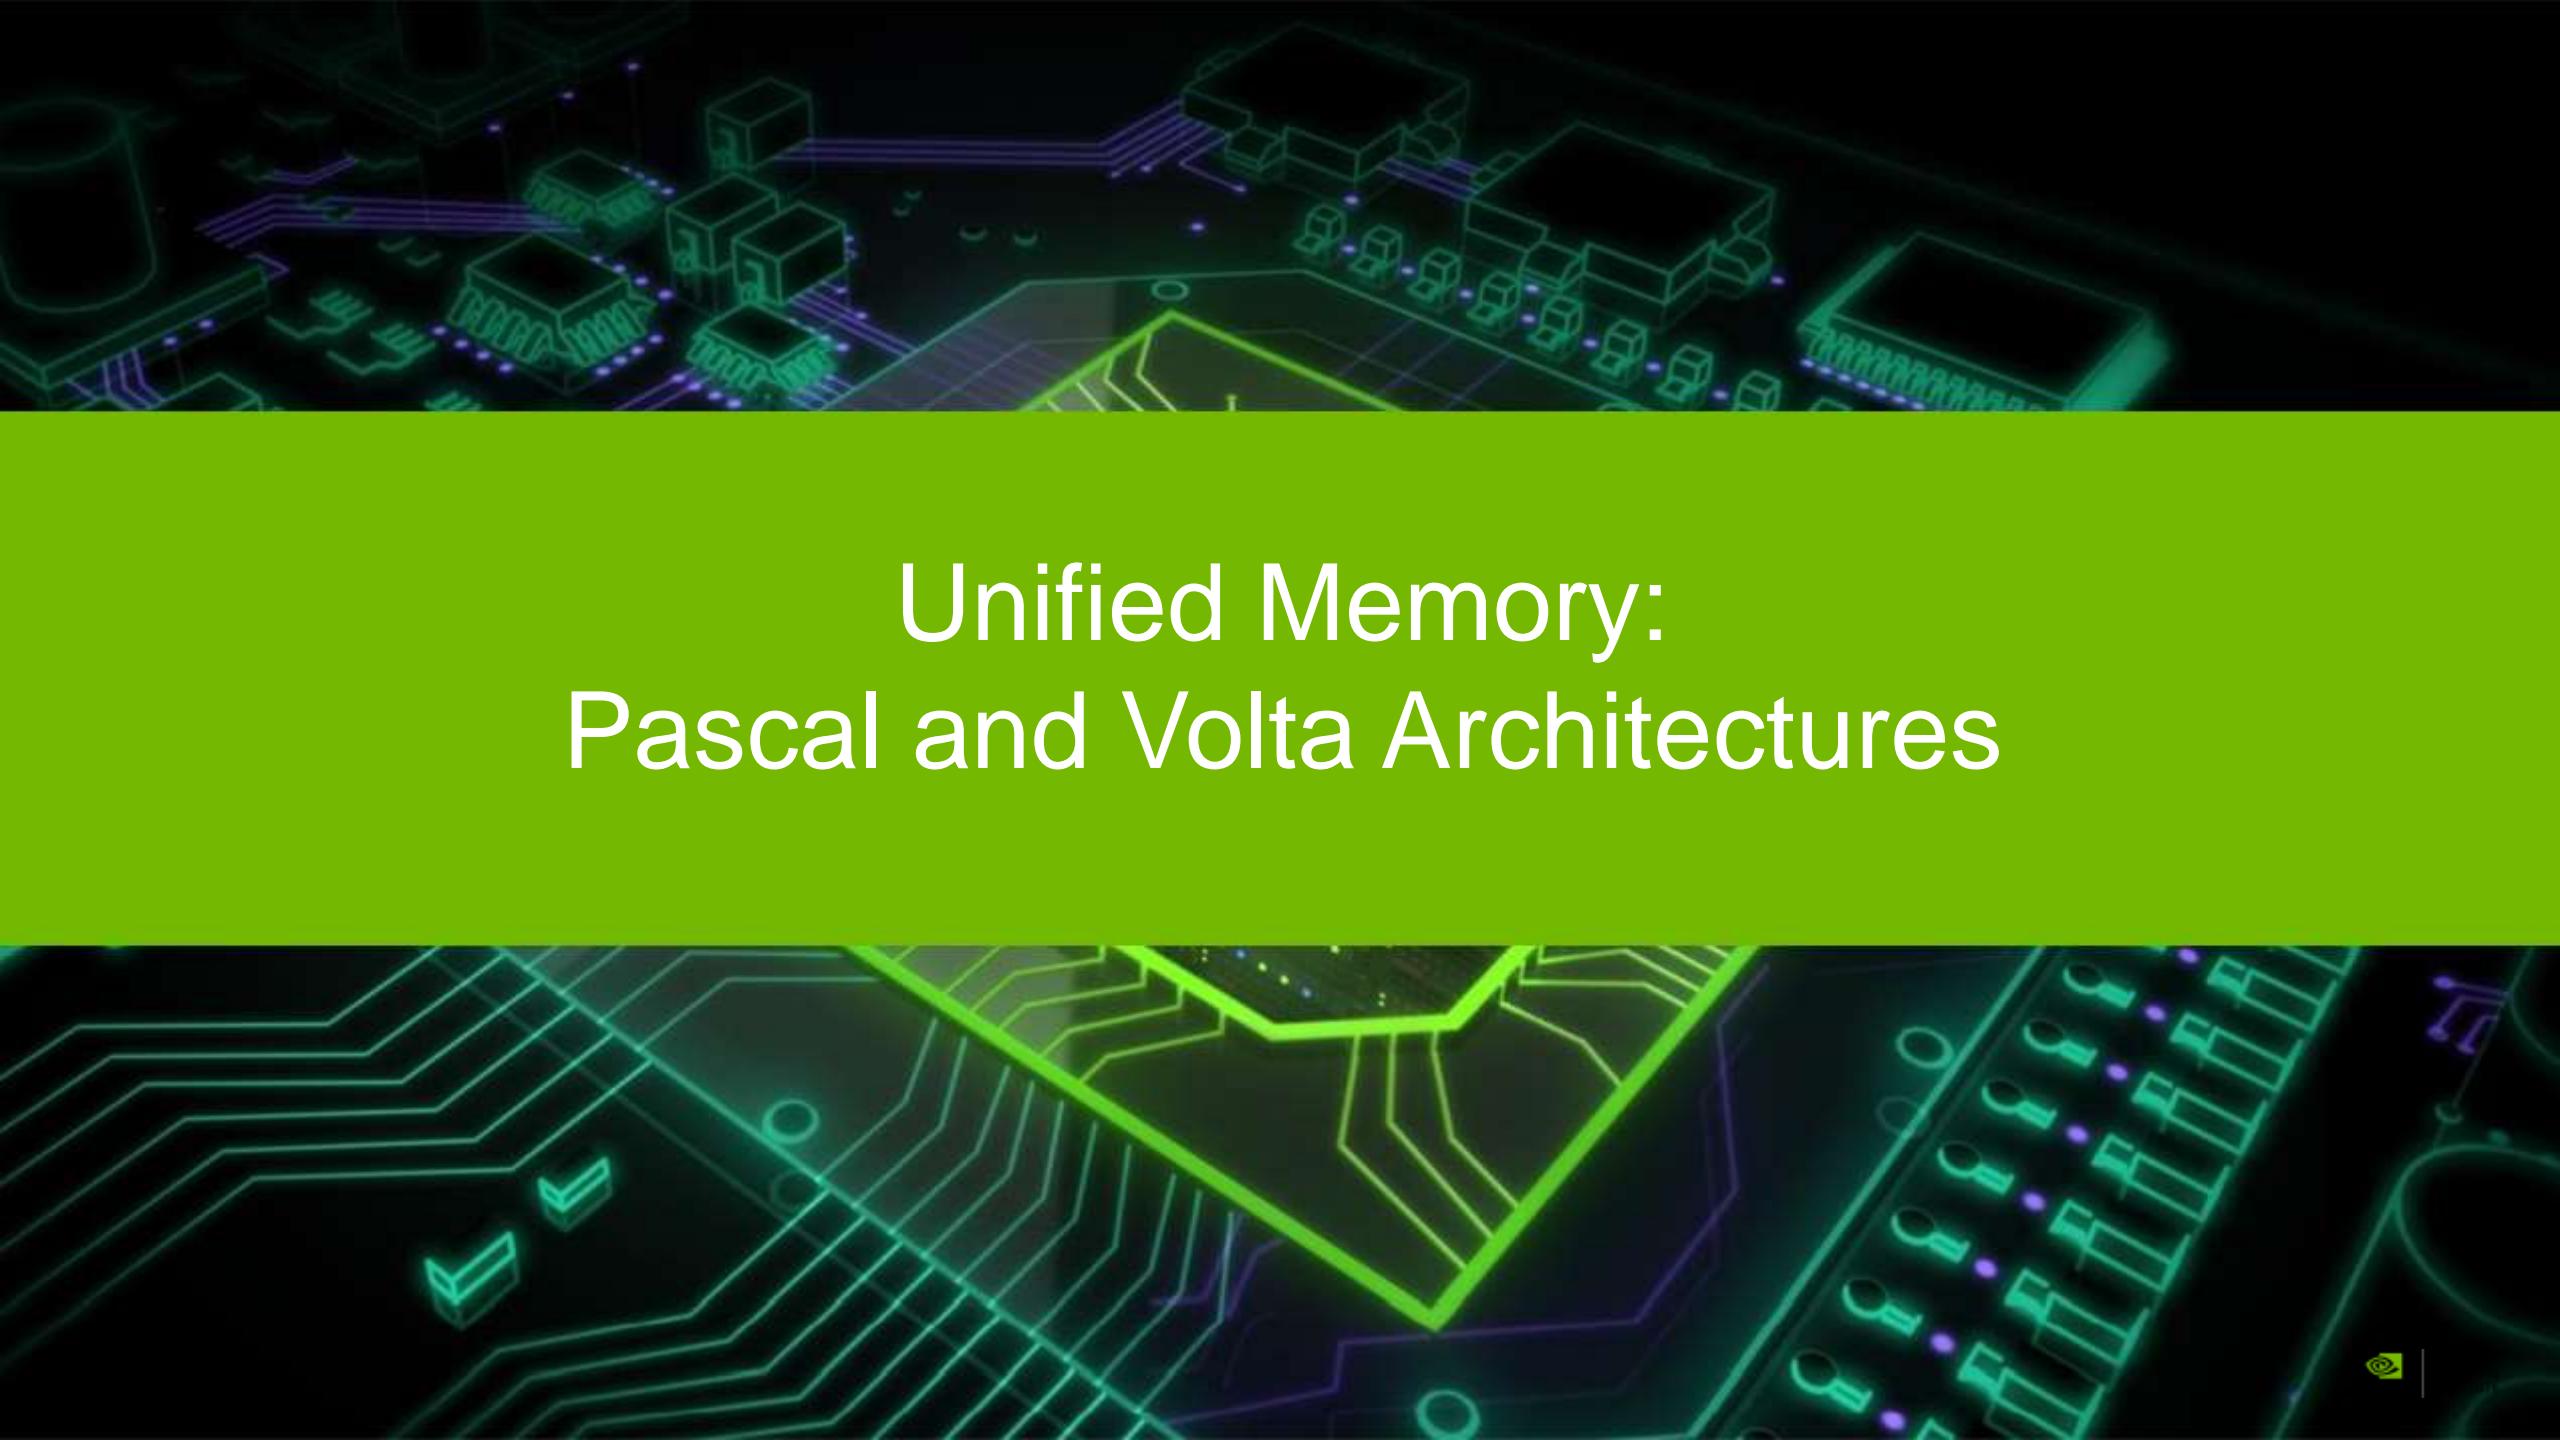

Unified Memory: Pascal and Volta Architectures

HETEROGENEOUS ARCHITECTURES

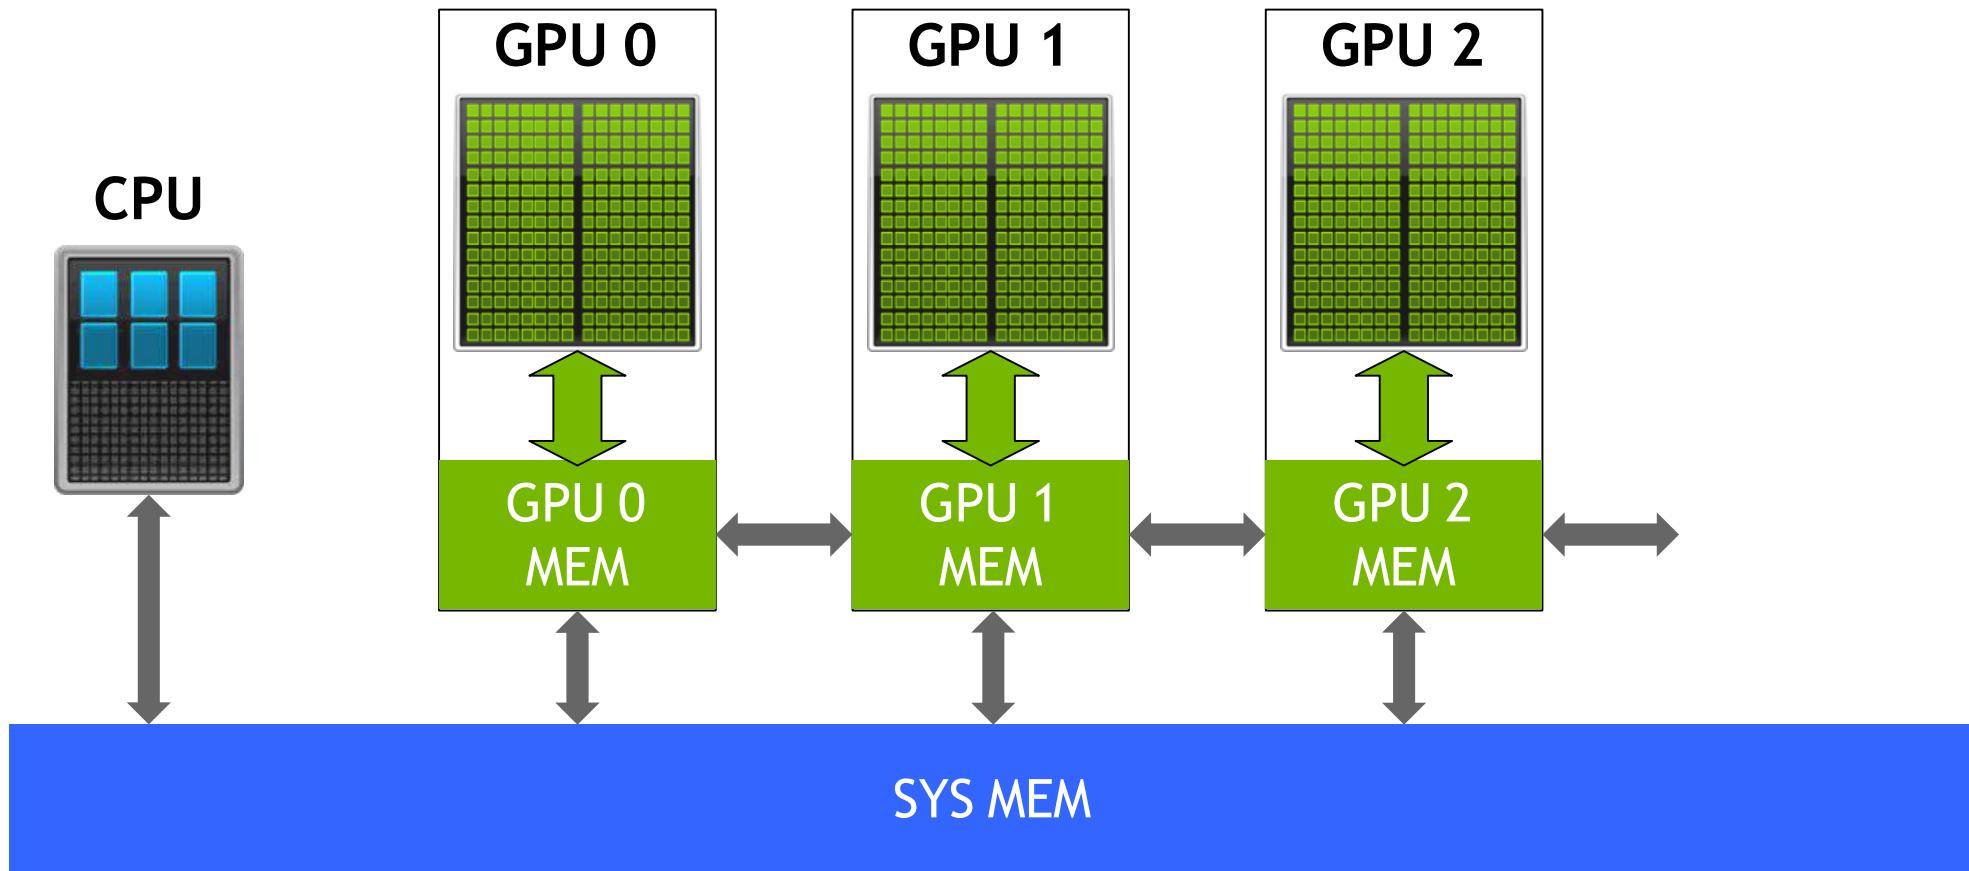

UNIFIED MEMORY FUNDAMENTALS

Single Pointer

CPU code

```
void *data;  
data = malloc(N);  
  
cpu_func1(data, N);  
  
cpu_func2(data, N);  
  
cpu_func3(data, N);  
  
free(data);
```

GPU code

```
void *data;  
data = malloc(N);  
  
cpu_func1(data, N);  
  
gpu_func2<<<...>>>(data, N);  
cudaDeviceSynchronize();  
  
cpu_func3(data, N);  
  
free(data);
```

UNIFIED MEMORY FUNDAMENTALS

Single Pointer

Explicit Memory Management

```
void *h_data, *d_data;  
h_data = malloc(N);  
cudaMalloc(&d_data, N);  
cpu_func1(h_data, N);  
cudaMemcpy(d_data, h_data, N, ...)  
gpu_func2<<<...>>>(data, N);  
  
cudaMemcpy(h_data, d_data, N, ...)  
cpu_func3(h_data, N);  
  
free(h_data);  
cudaFree(d_data);
```

Unified Memory

```
void *data;  
data = malloc(N);  
  
cpu_func1(data, N);  
  
gpu_func2<<<...>>>(data, N);  
cudaDeviceSynchronize();  
  
cpu_func3(data, N);  
  
free(data);
```

UNIFIED MEMORY FUNDAMENTALS

Deep Copy Nightmare

Explicit Memory Management

```
char **data;
data = (char**)malloc(N*sizeof(char*));
for (int i = 0; i < N; i++)
    data[i] = (char*)malloc(N);

char **d_data;
char **h_data = (char**)malloc(N*sizeof(char*));
for (int i = 0; i < N; i++) {
    cudaMalloc(&h_data2[i], N);
    cudaMemcpy(h_data2[i], h_data[i], N, ...);
}
cudaMalloc(&d_data, N*sizeof(char*));
cudaMemcpy(d_data, h_data2, N*sizeof(char*), ...);

gpu_func<<<...>>>(data, N);
```


Unified Memory

```
char **data;
data = (char**)malloc(N*sizeof(char*));
for (int i = 0; i < N; i++)
    data[i] = (char*)malloc(N);

gpu_func<<<...>>>(data, N);
```


UNIFIED MEMORY FUNDAMENTALS

On-Demand Migration

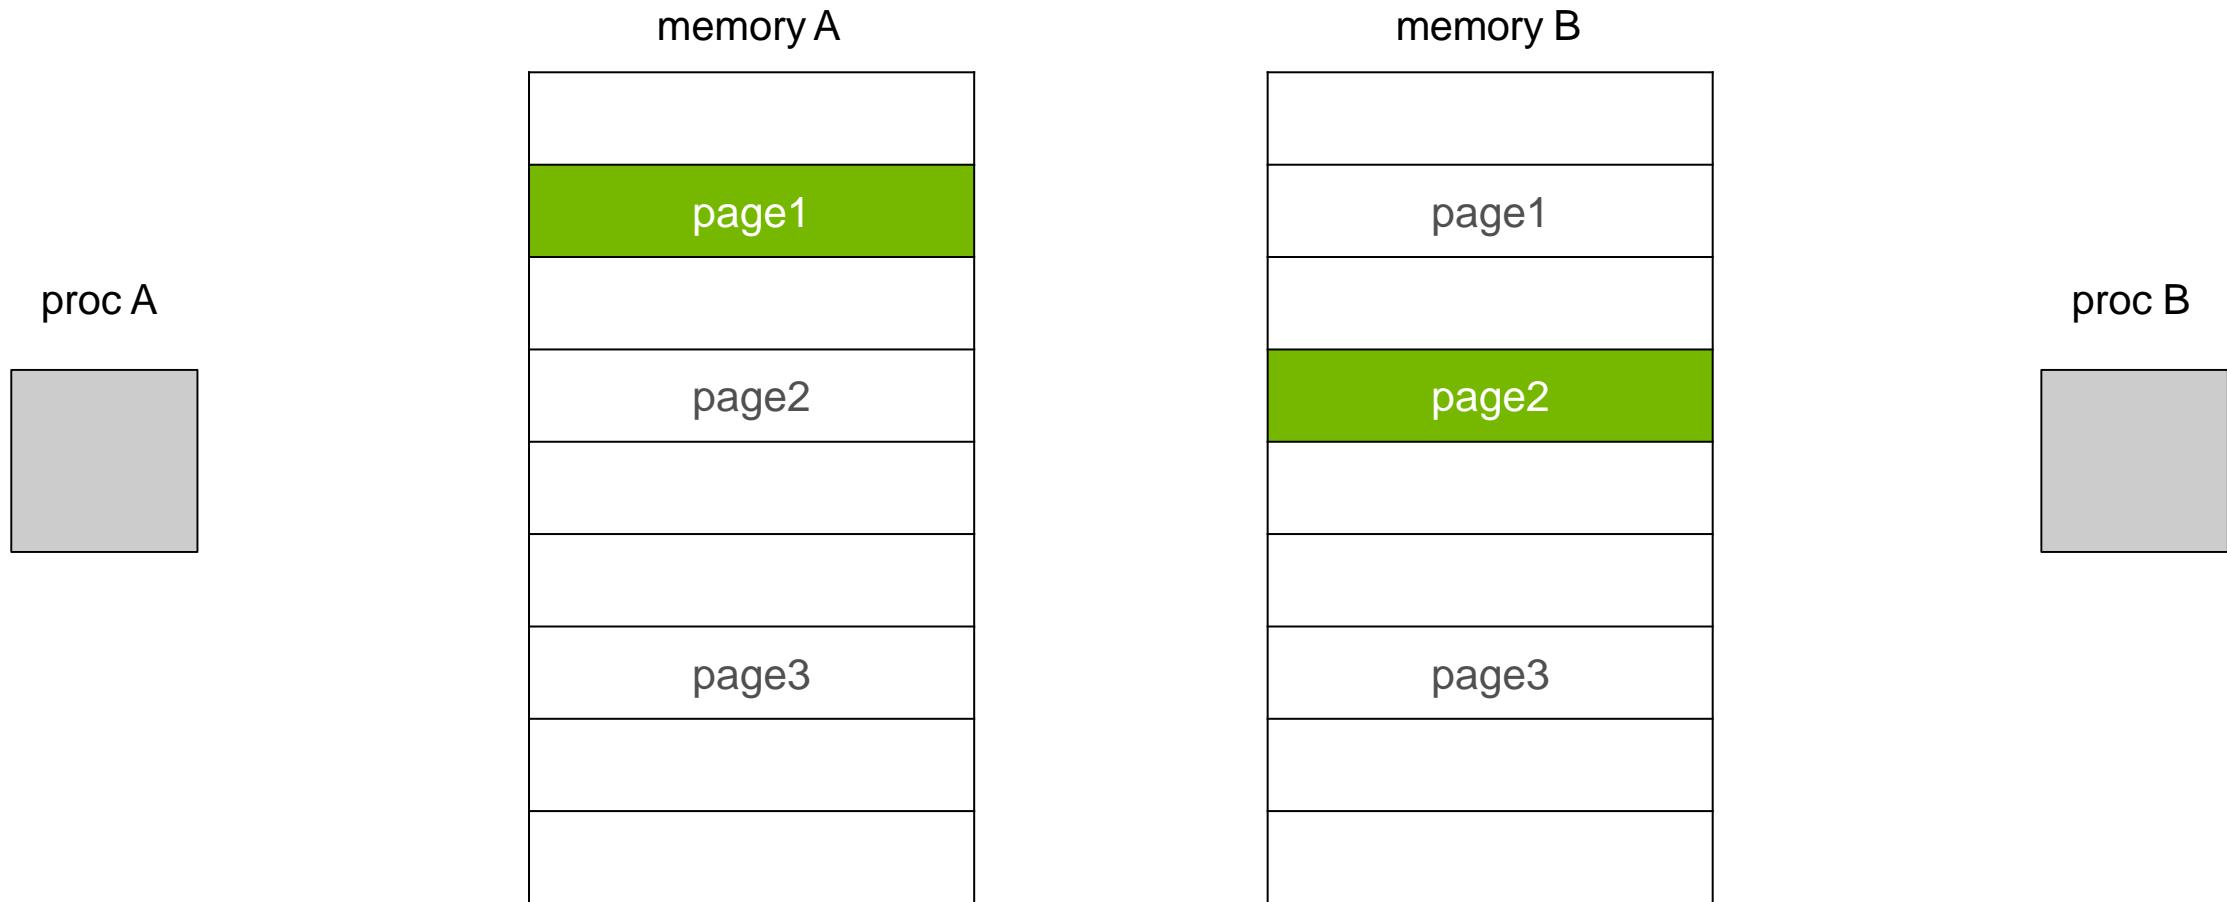


UNIFIED MEMORY FUNDAMENTALS

On-Demand Migration

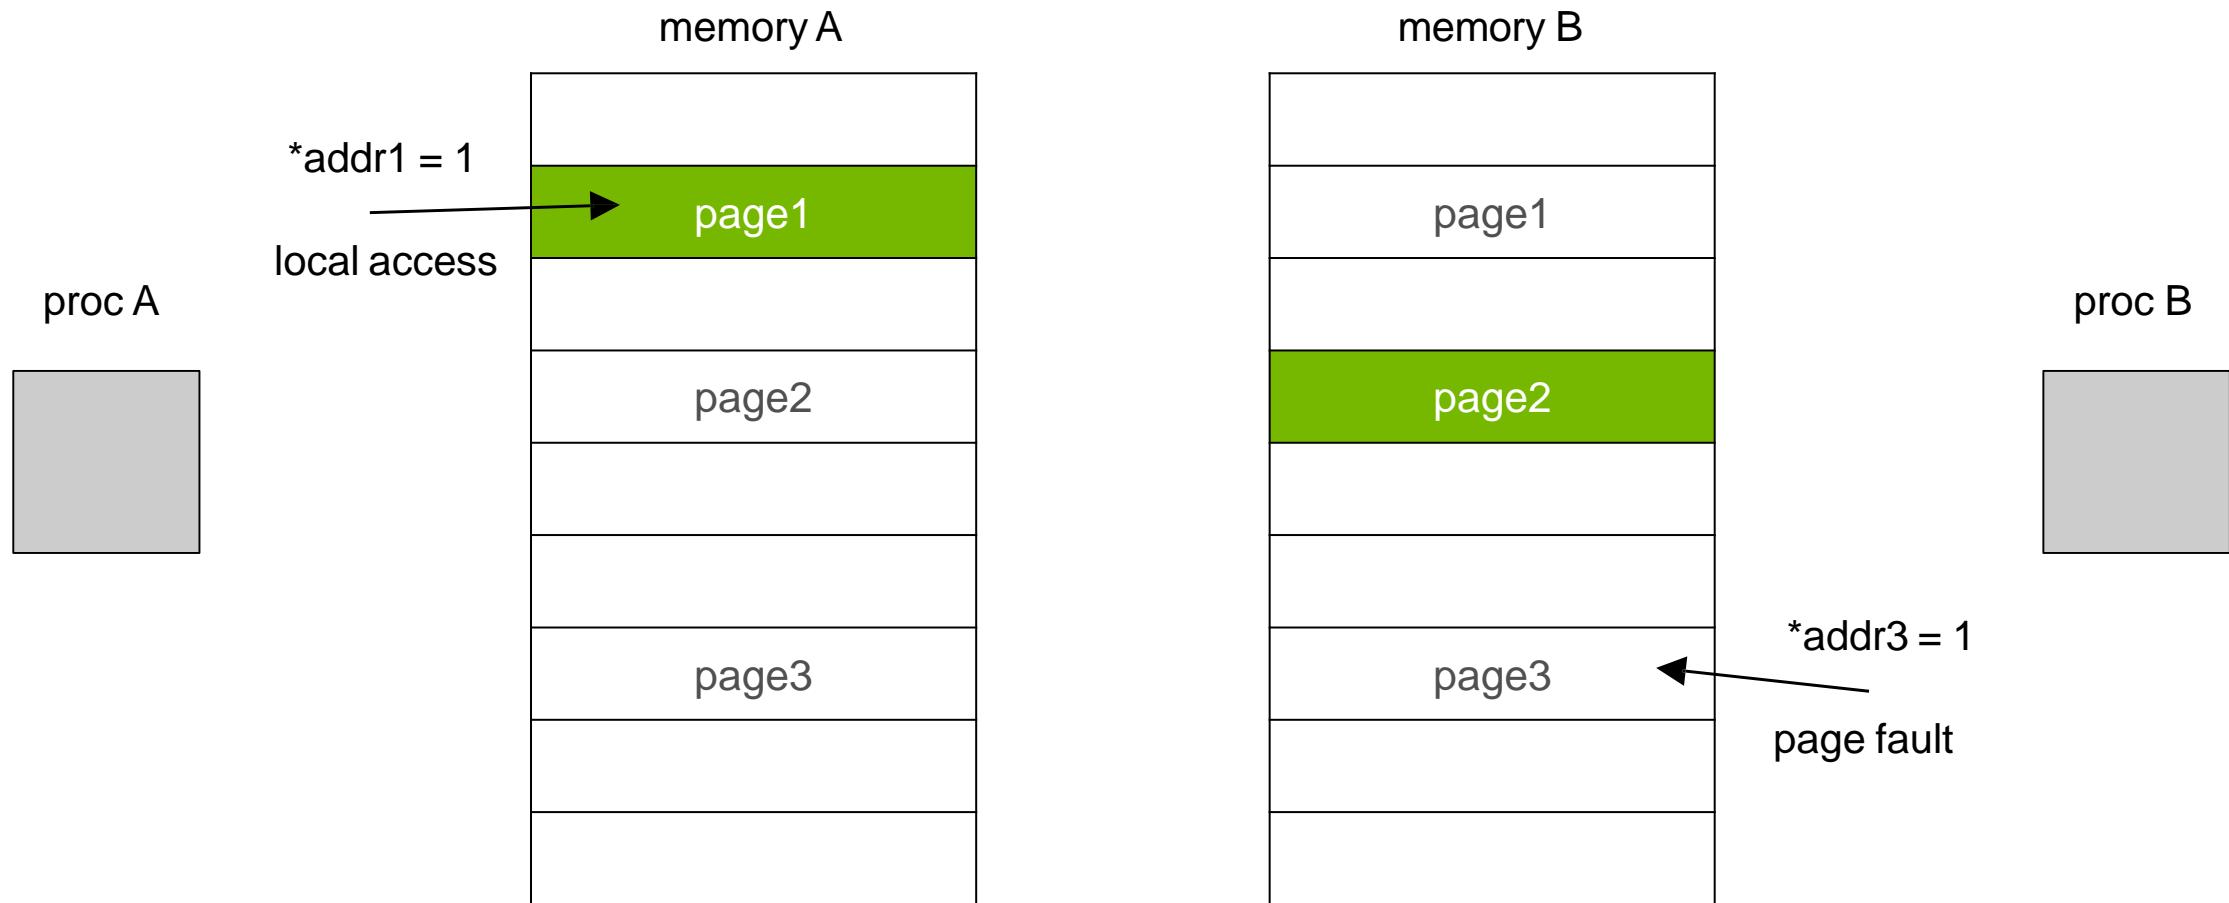


UNIFIED MEMORY FUNDAMENTALS

On-Demand Migration

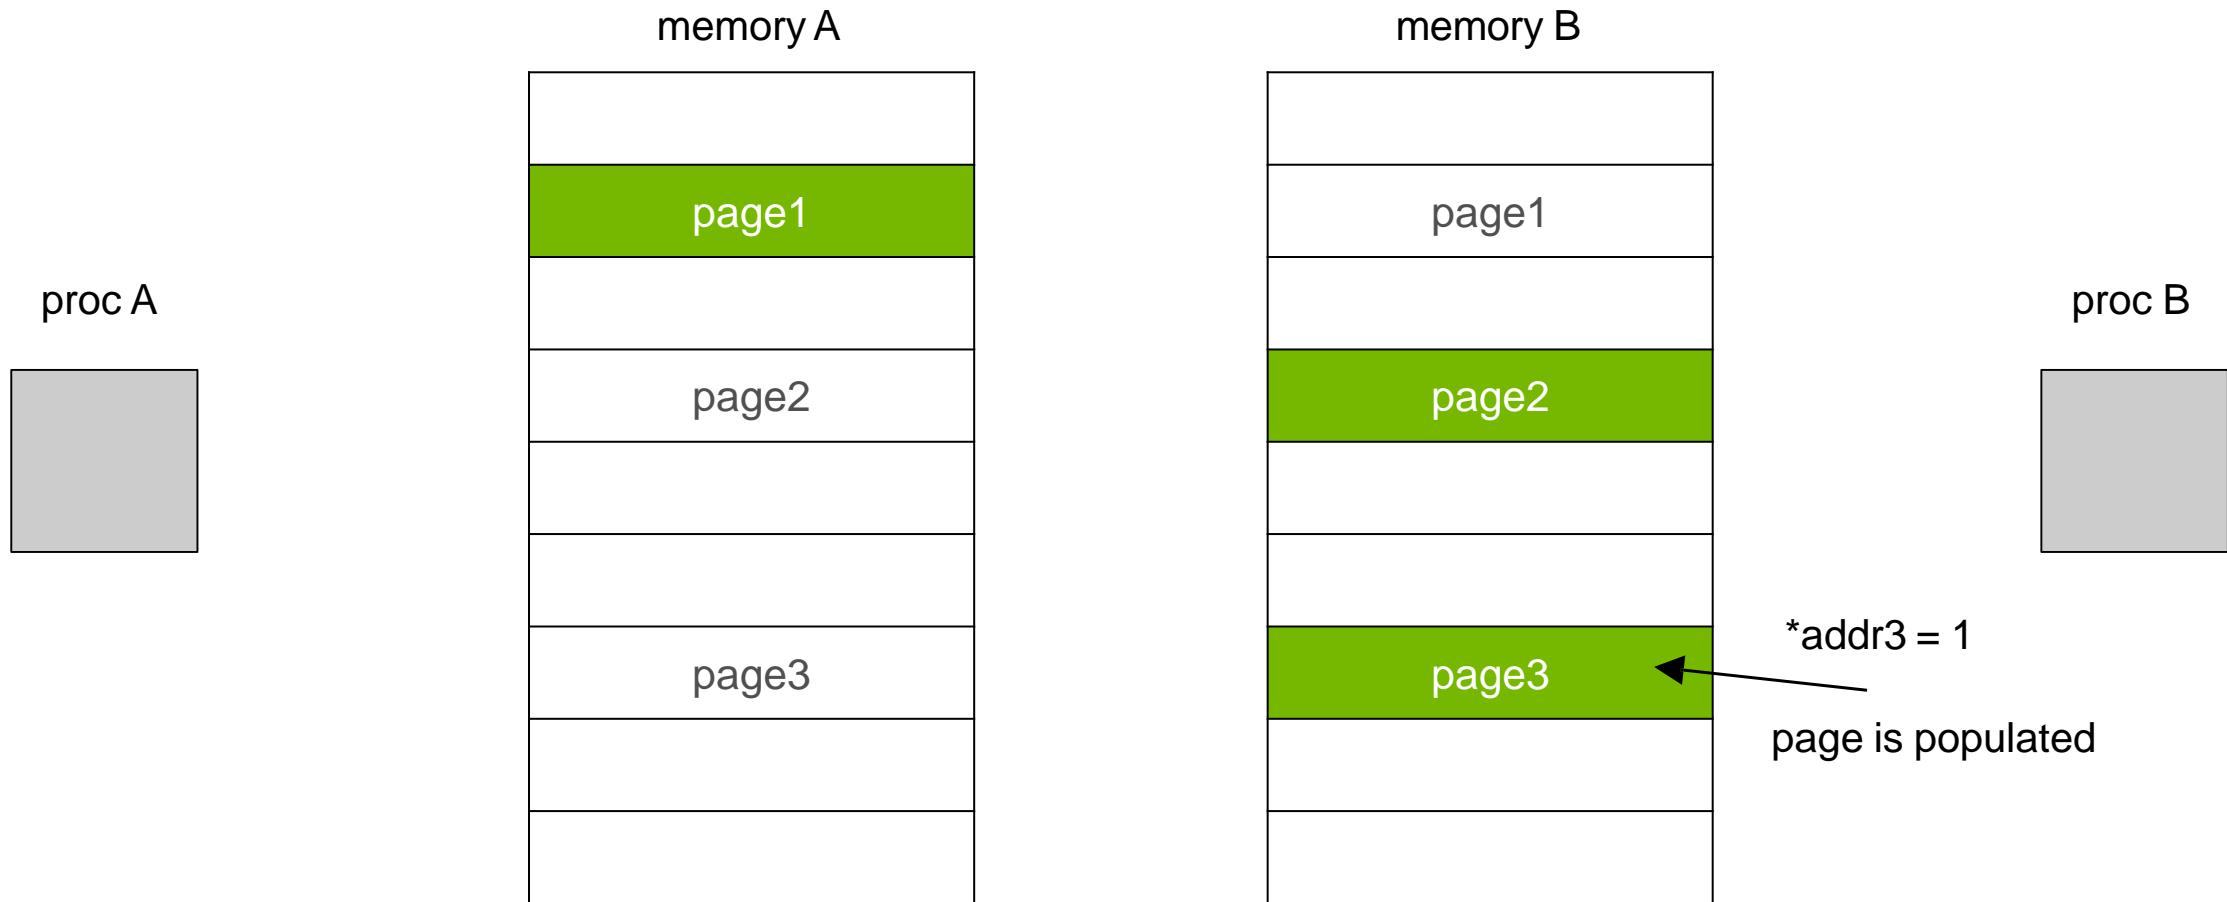


UNIFIED MEMORY FUNDAMENTALS

On-Demand Migration

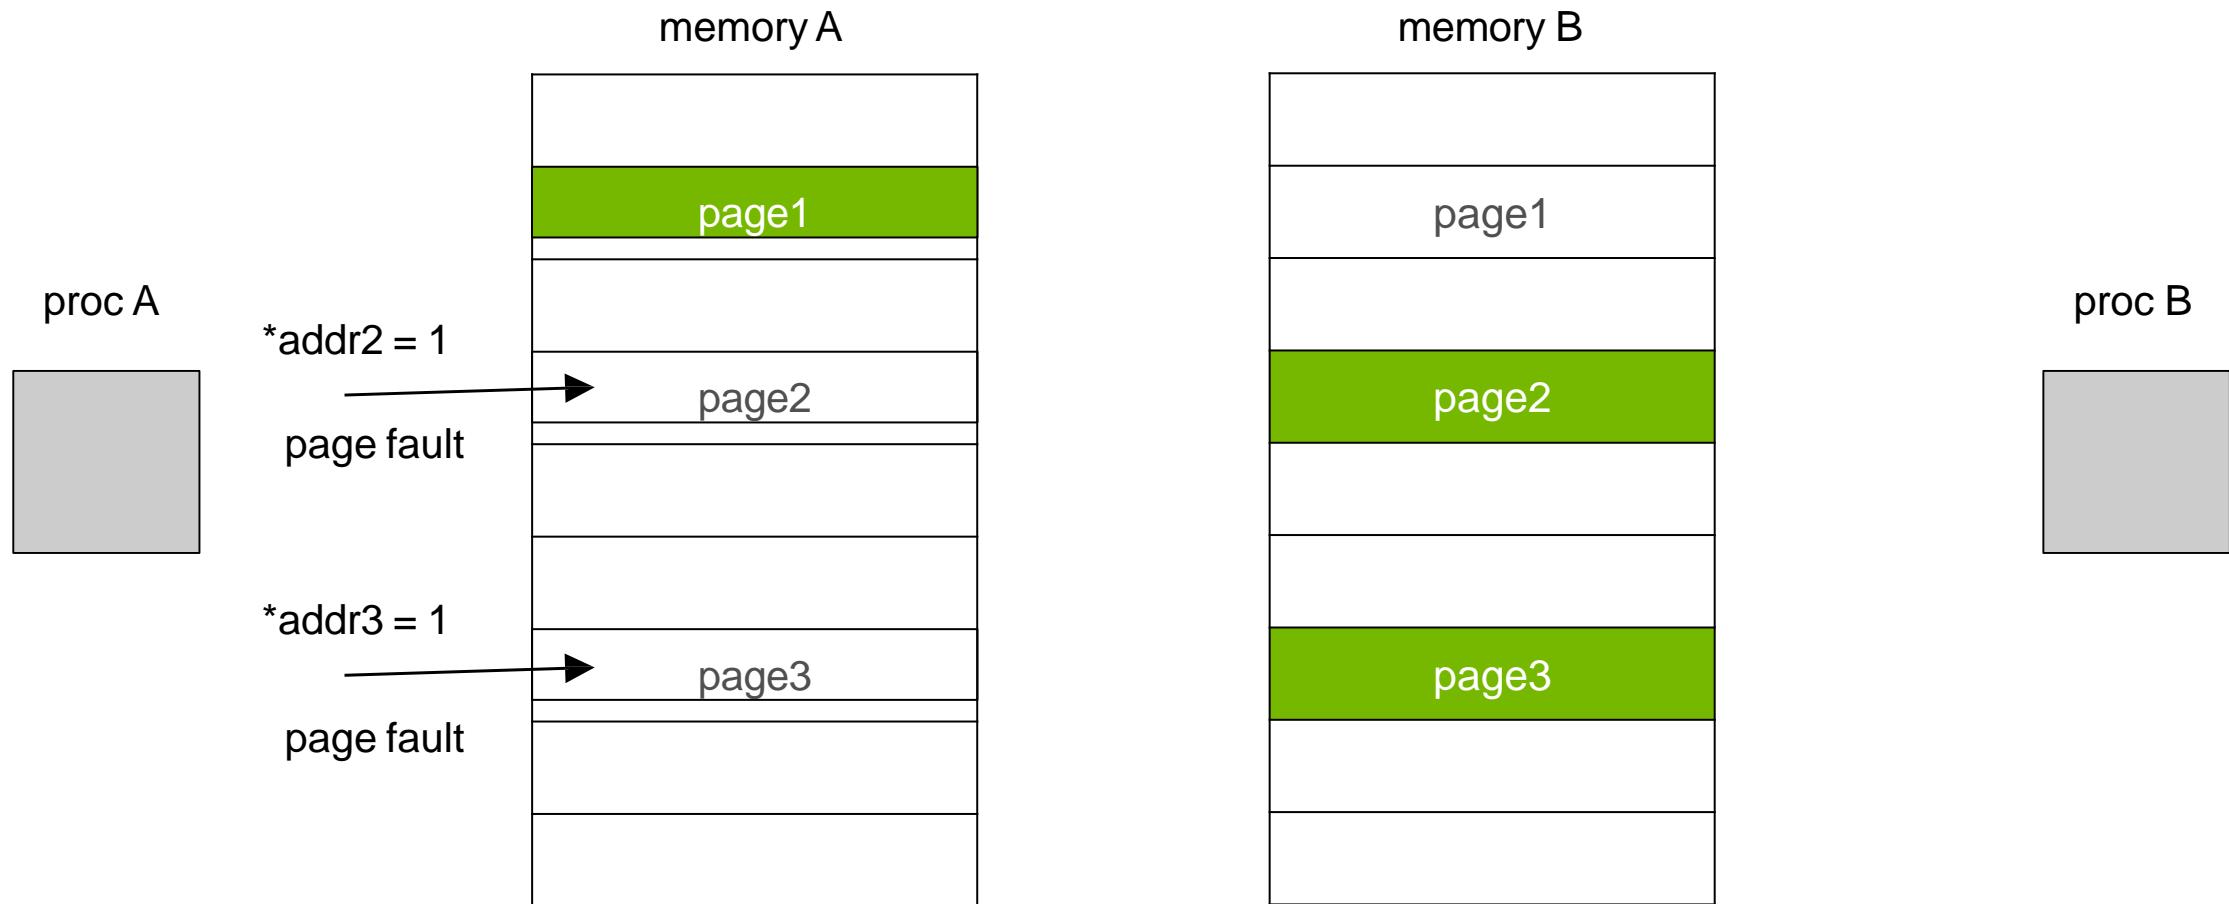


UNIFIED MEMORY FUNDAMENTALS

On-Demand Migration

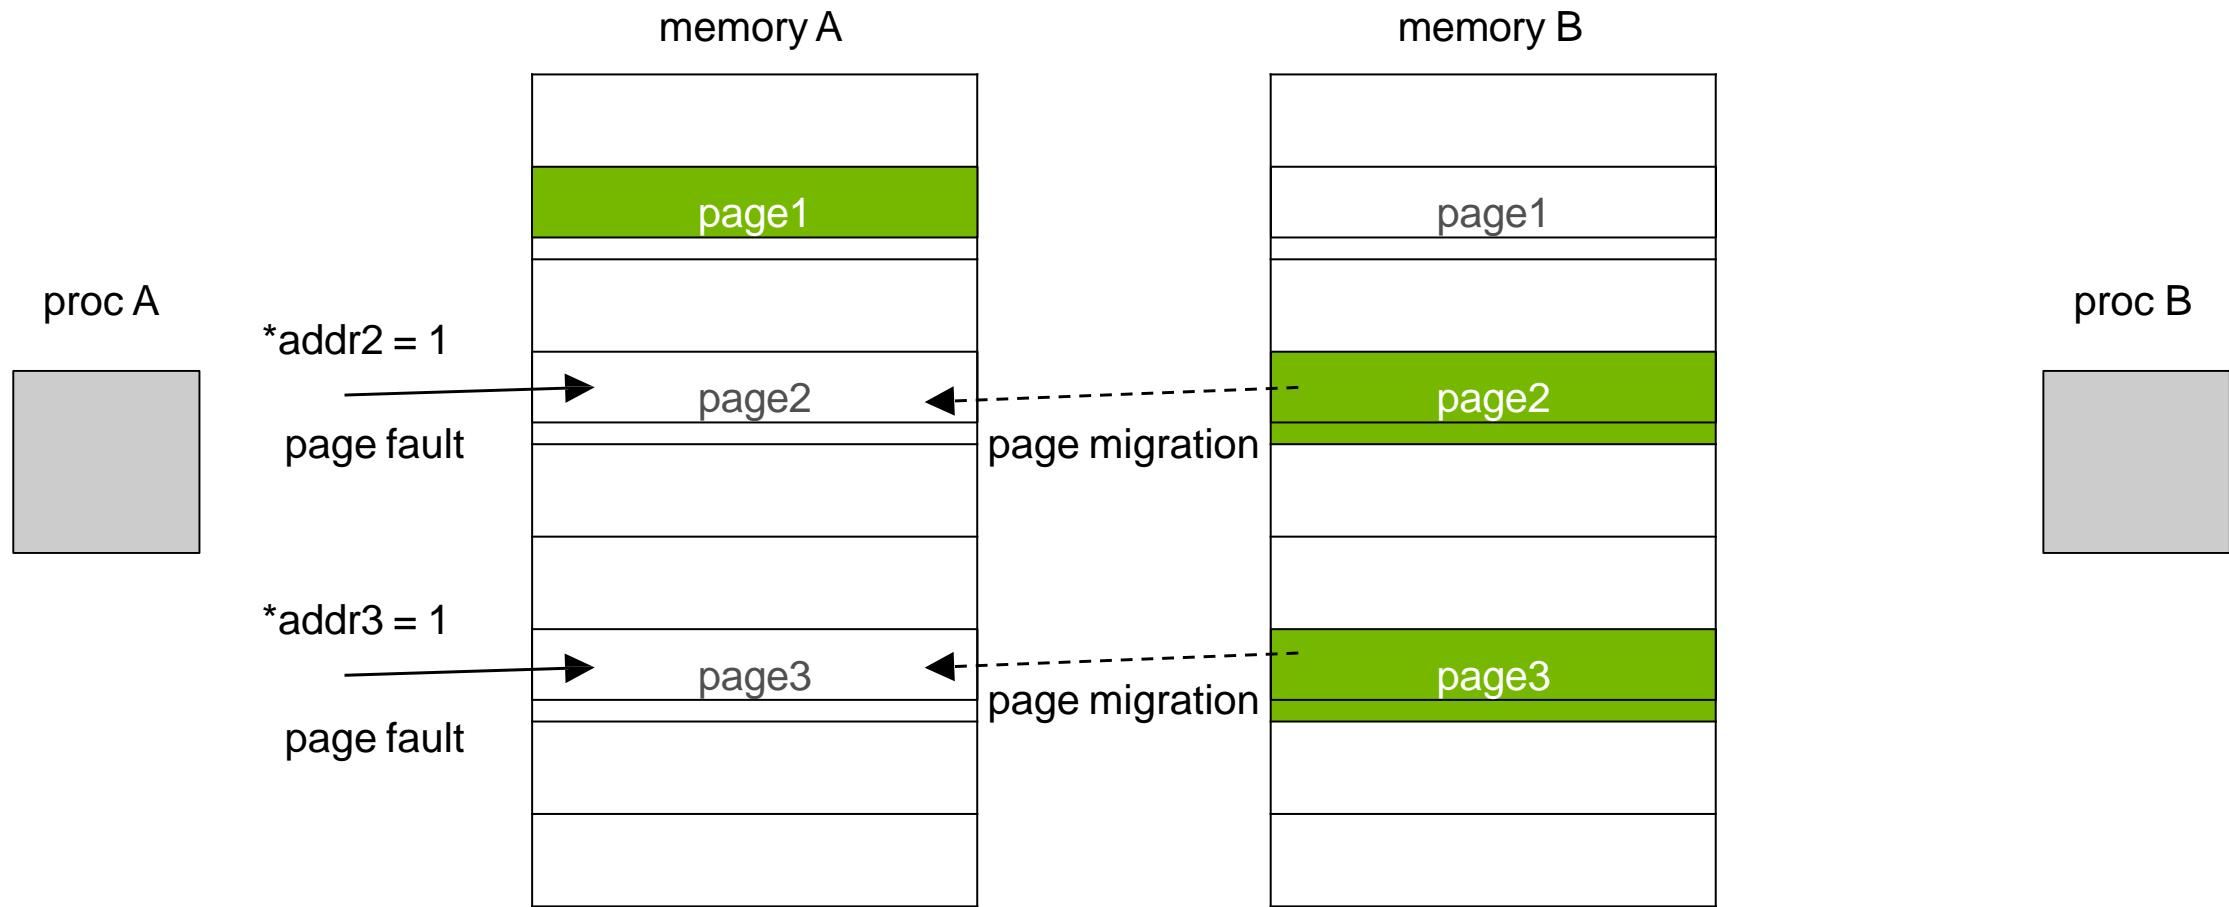

UNIFIED MEMORY FUNDAMENTALS

On-Demand Migration

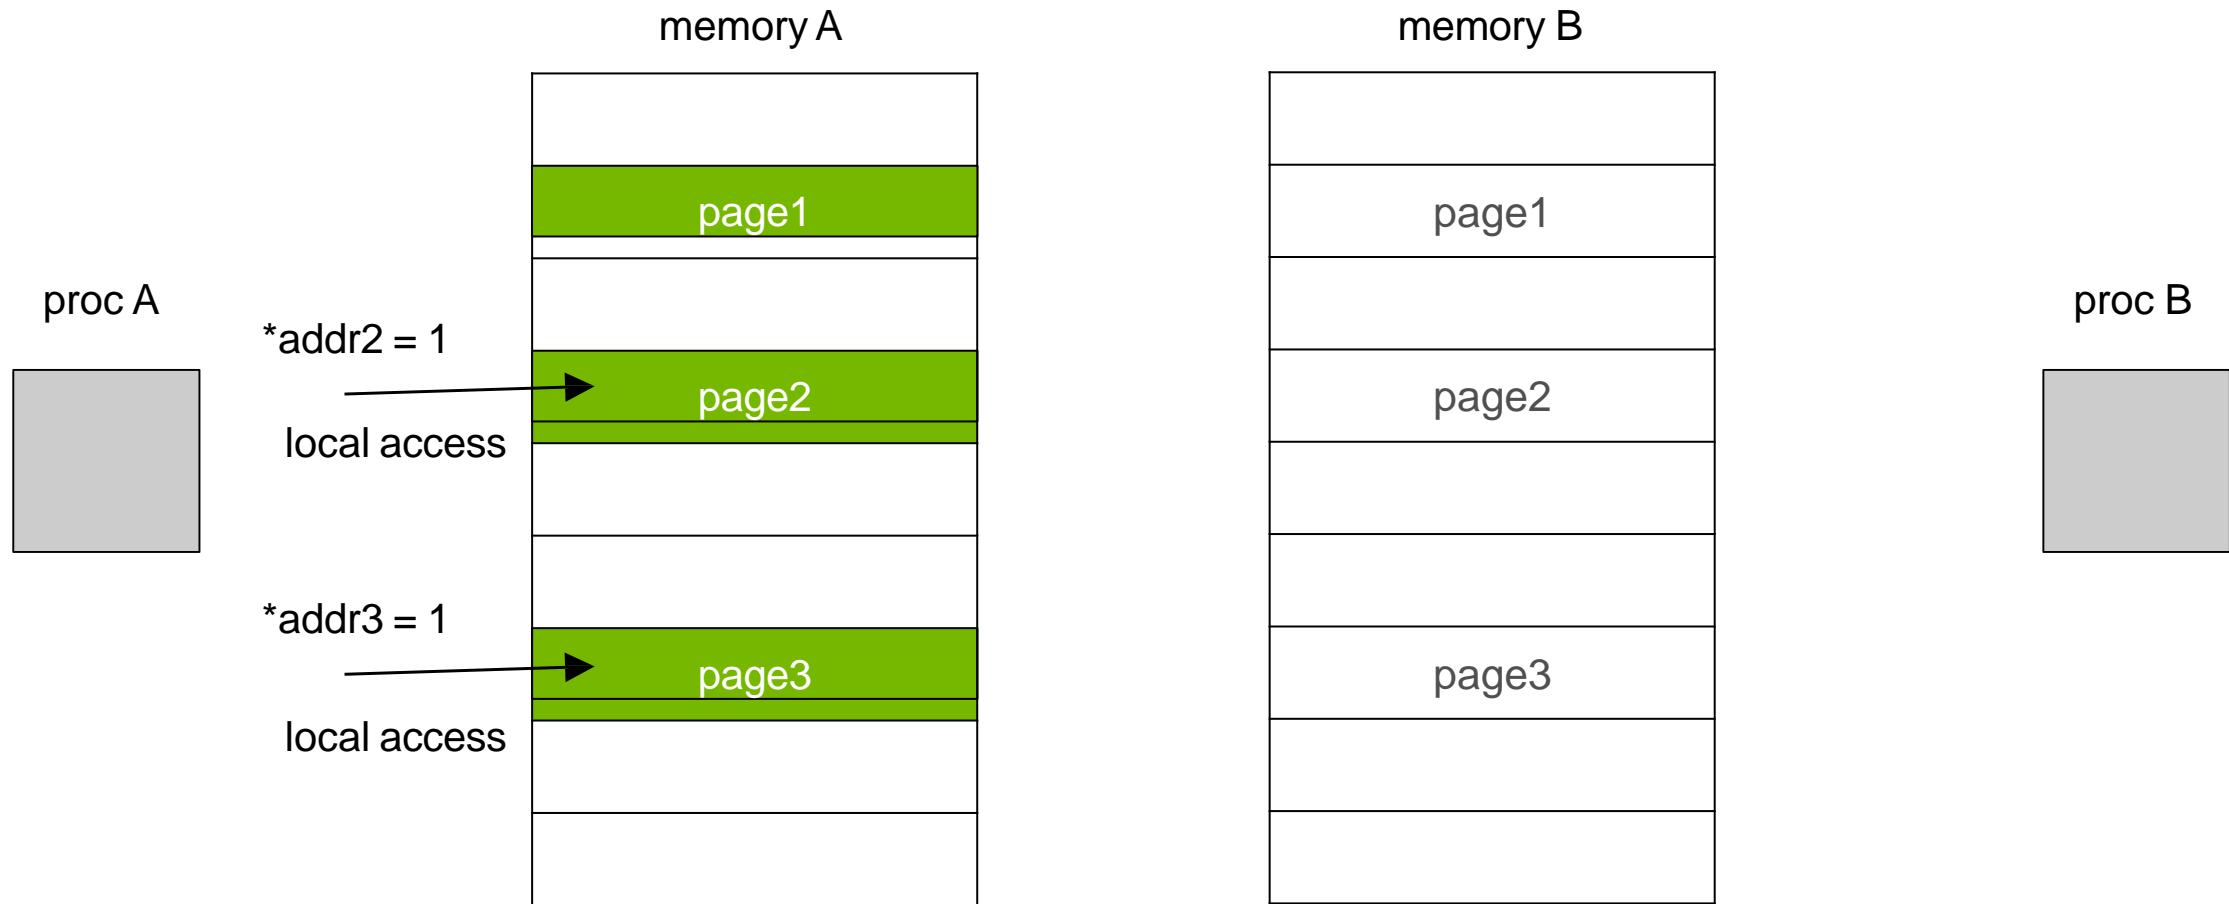

UNIFIED MEMORY FUNDAMENTALS

When Is This Helpful?

When it doesn't matter *how* data moves to a processor

- 1) Quick and dirty algorithm prototyping
- 2) Iterative process with lots of data reuse, migration cost can be amortized
- 3) Simplify application debugging

When it's difficult to isolate the working set

- 1) Irregular or *dynamic* data structures, unpredictable access
- 2) Data partitioning between multiple processors

UNIFIED MEMORY FUNDAMENTALS

Memory Oversubscription Benefits

When you have **large** dataset and not enough physical memory


Moving pieces by hand is error-prone and requires tuning for memory size

Better to run slowly than get fail with out-of-memory error

You can actually get **high performance** with Unified Memory!


UNIFIED MEMORY FUNDAMENTALS

System-Wide Atomics with Exclusive Access

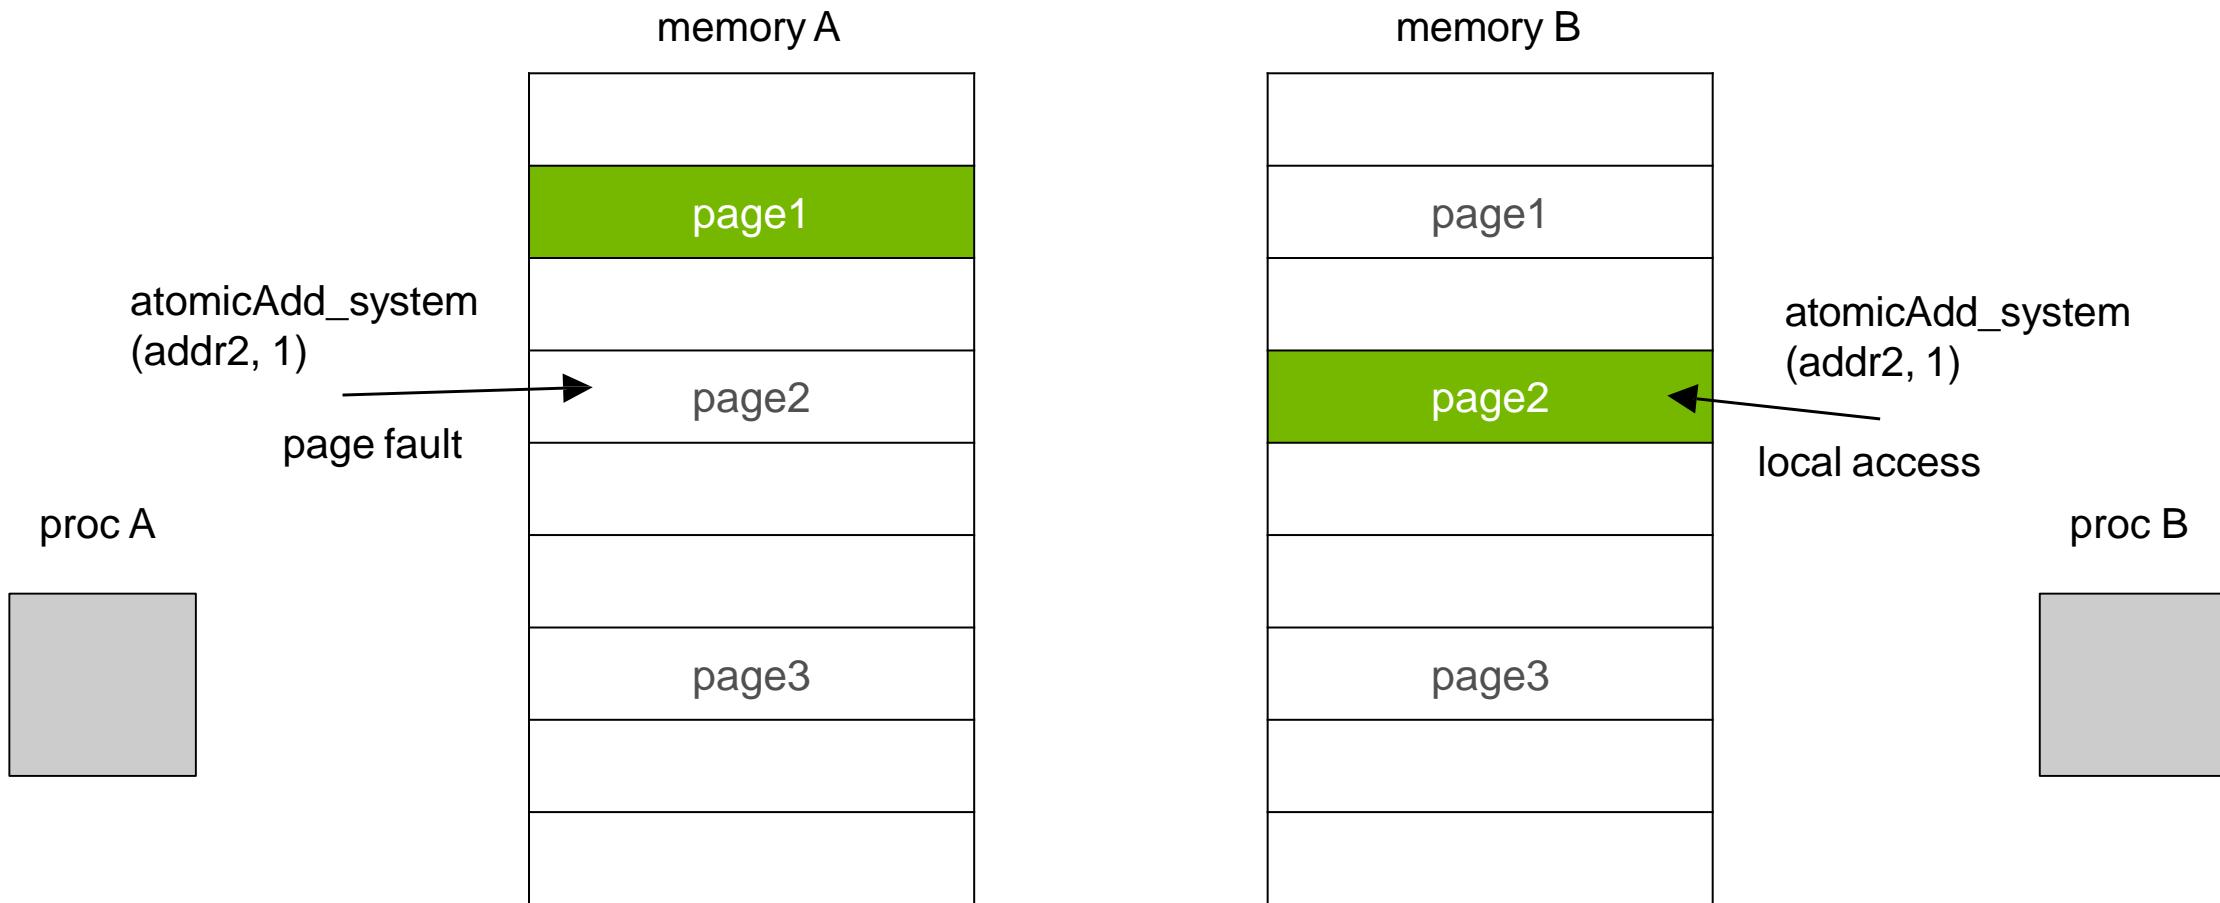


UNIFIED MEMORY FUNDAMENTALS

System-Wide Atomics with Exclusive Access

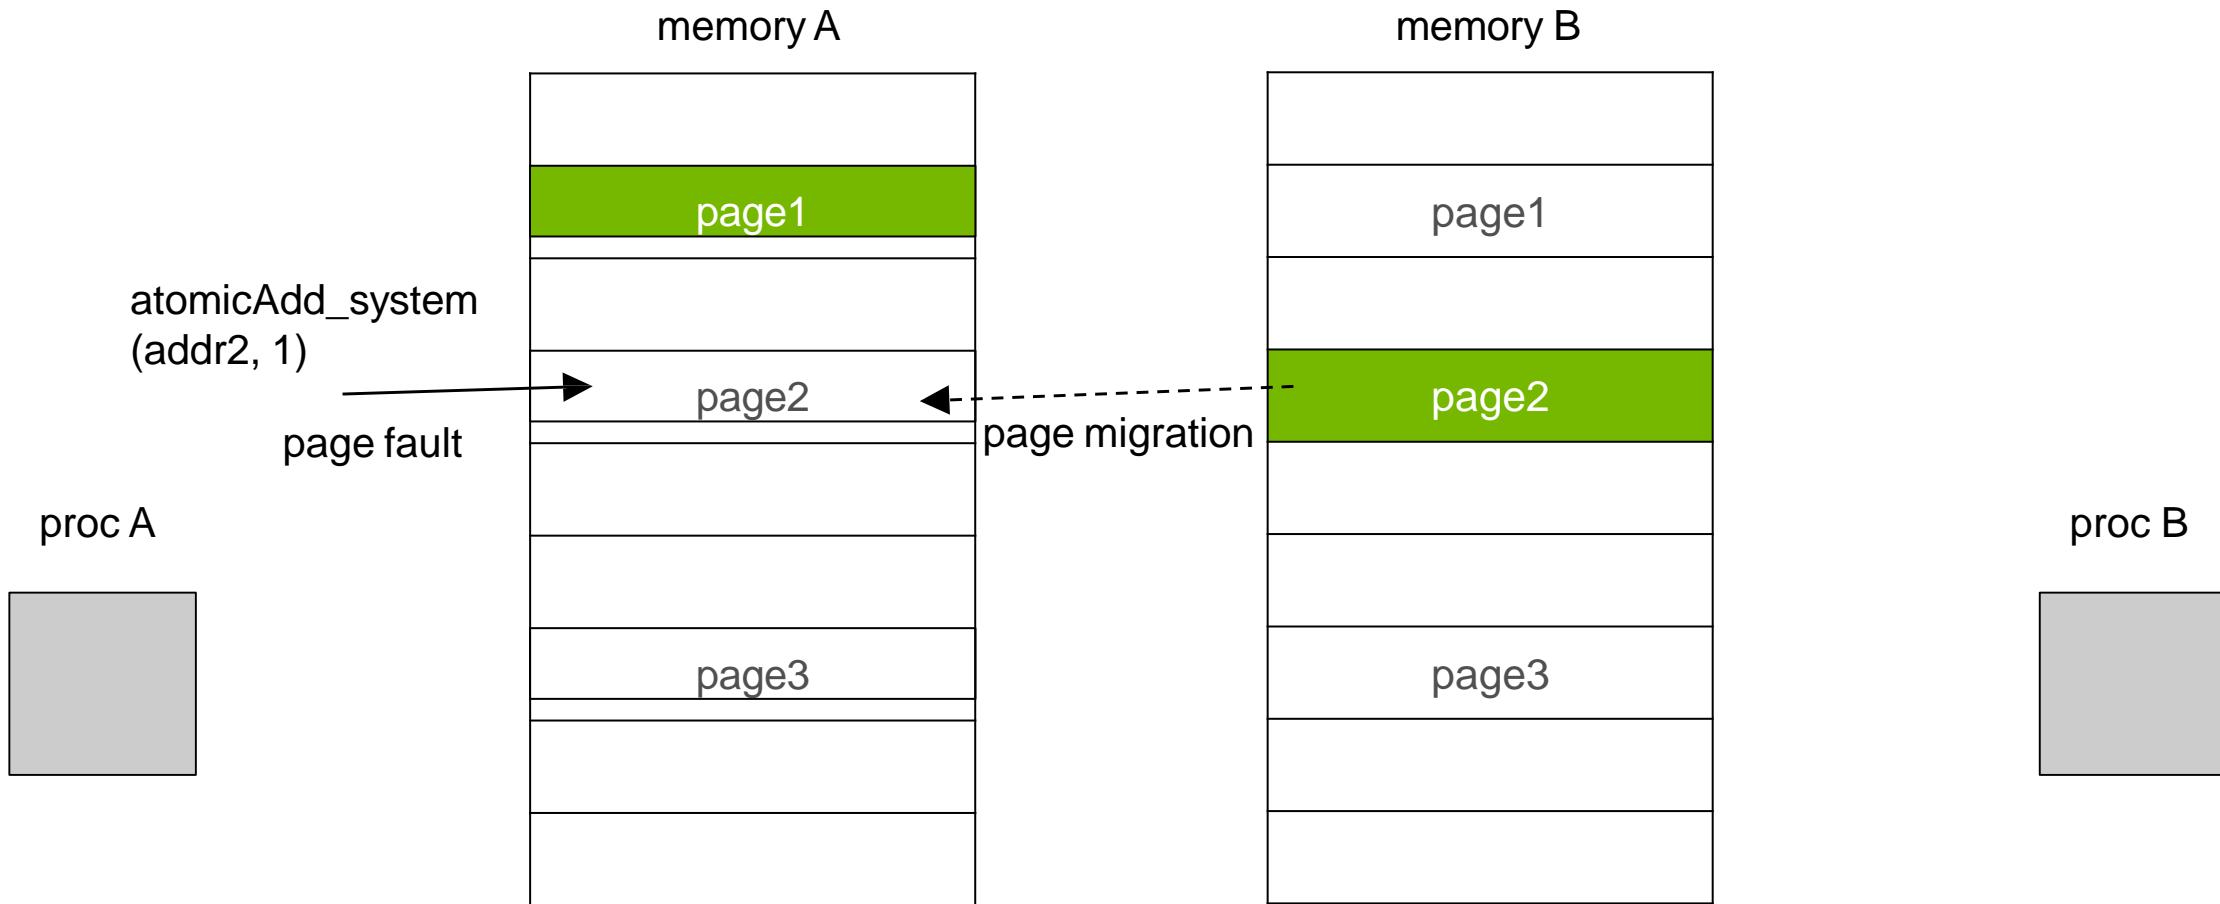


UNIFIED MEMORY FUNDAMENTALS

System-Wide Atomics with Exclusive Access

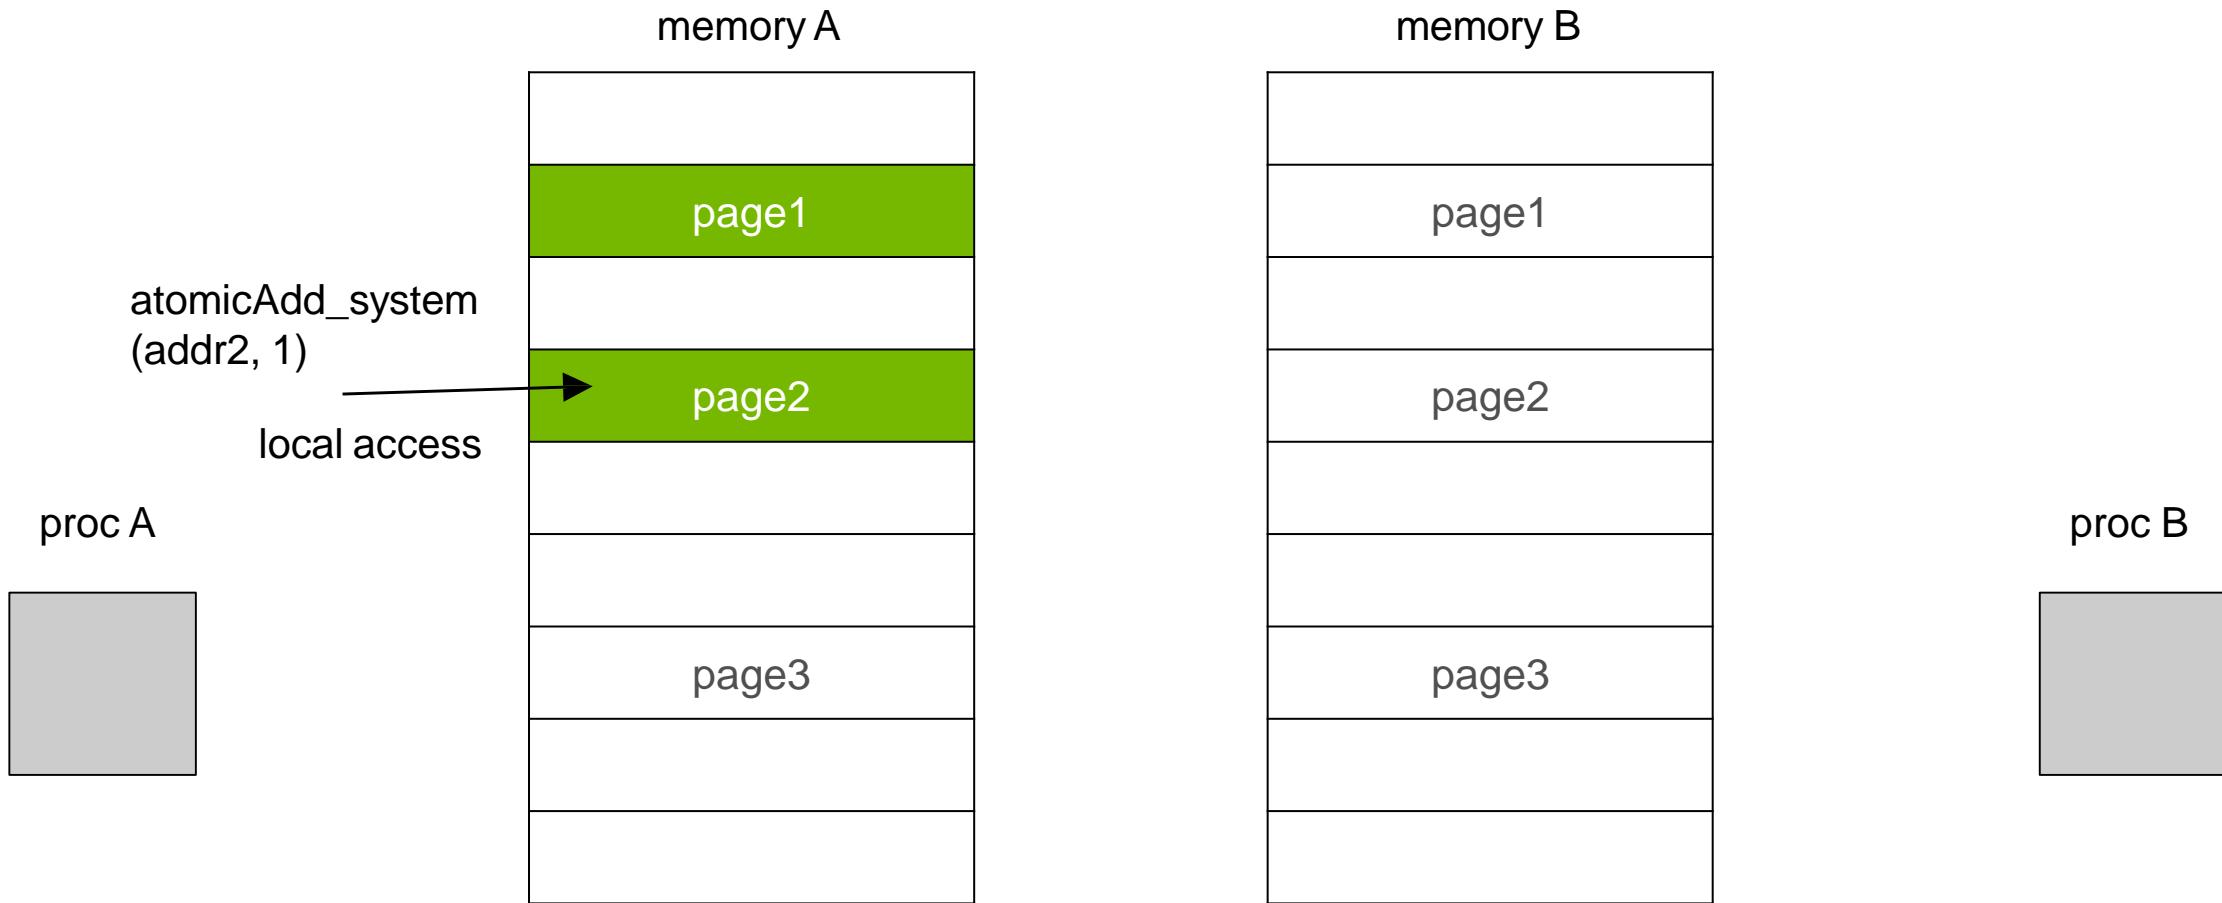

UNIFIED MEMORY FUNDAMENTALS

System-Wide Atomics over NVLINK*

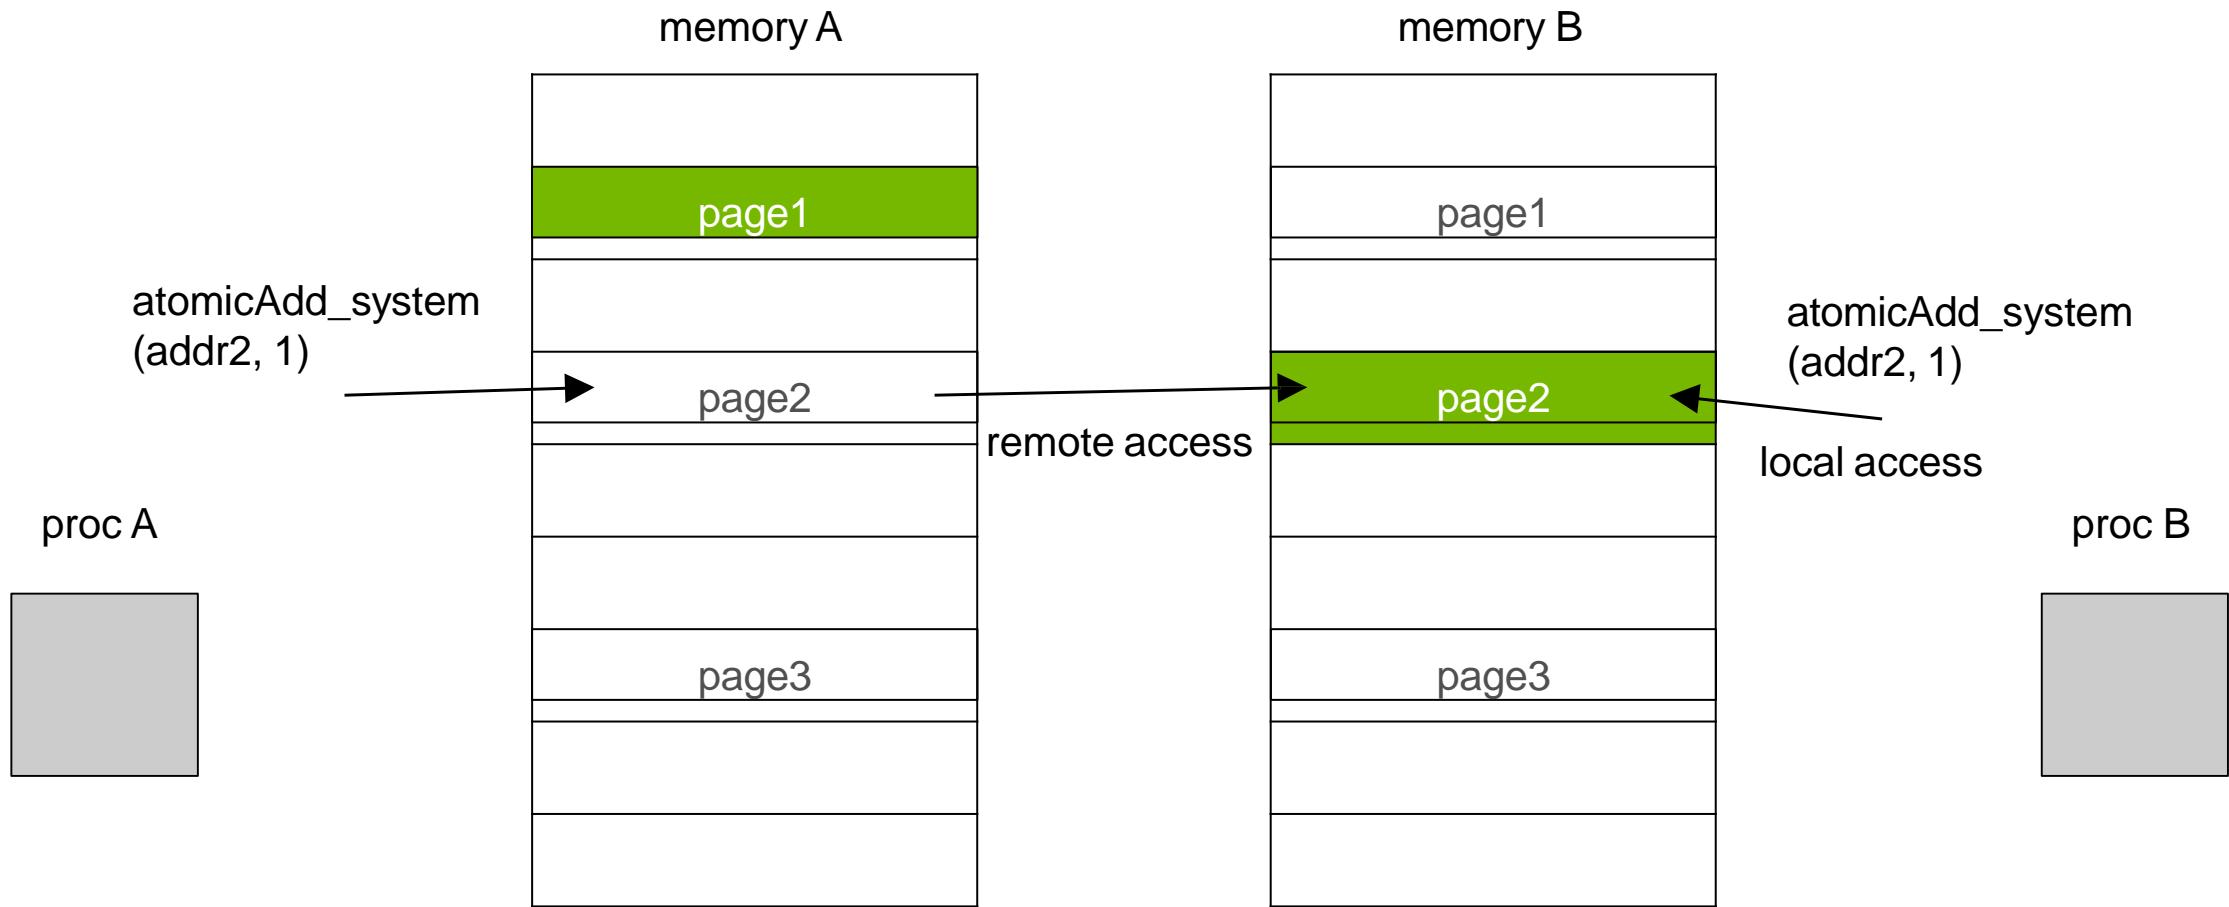

*both processors need to support atomic operations

UNIFIED MEMORY FUNDAMENTALS

System-Wide Atomics

GPUs are very good at handling atomics from *thousands of threads*

Makes sense to utilize atomics between GPUs or between CPU and GPU

We will see this in action on a realistic example later on

AGENDA

Unified Memory Fundamentals
Under the Hood Details
Performance Analysis and Optimizations
Applications Deep Dive

UNIFIED MEMORY ALLOCATOR

Available Options

CUDA C: **cudaMallocManaged** is your most reliable way to opt in today

CUDA Fortran: **managed** attribute (per allocation)

OpenACC: **-ta=managed** compiler option (all dynamic allocations)


malloc support is coming on Pascal+ architectures (Linux only)

Note: you can write your own malloc hook to use **cudaMallocManaged**

UNIFIED MEMORY ON KEPLER

Available since CUDA 6


Kepler GPU: no page fault support, limited virtual space

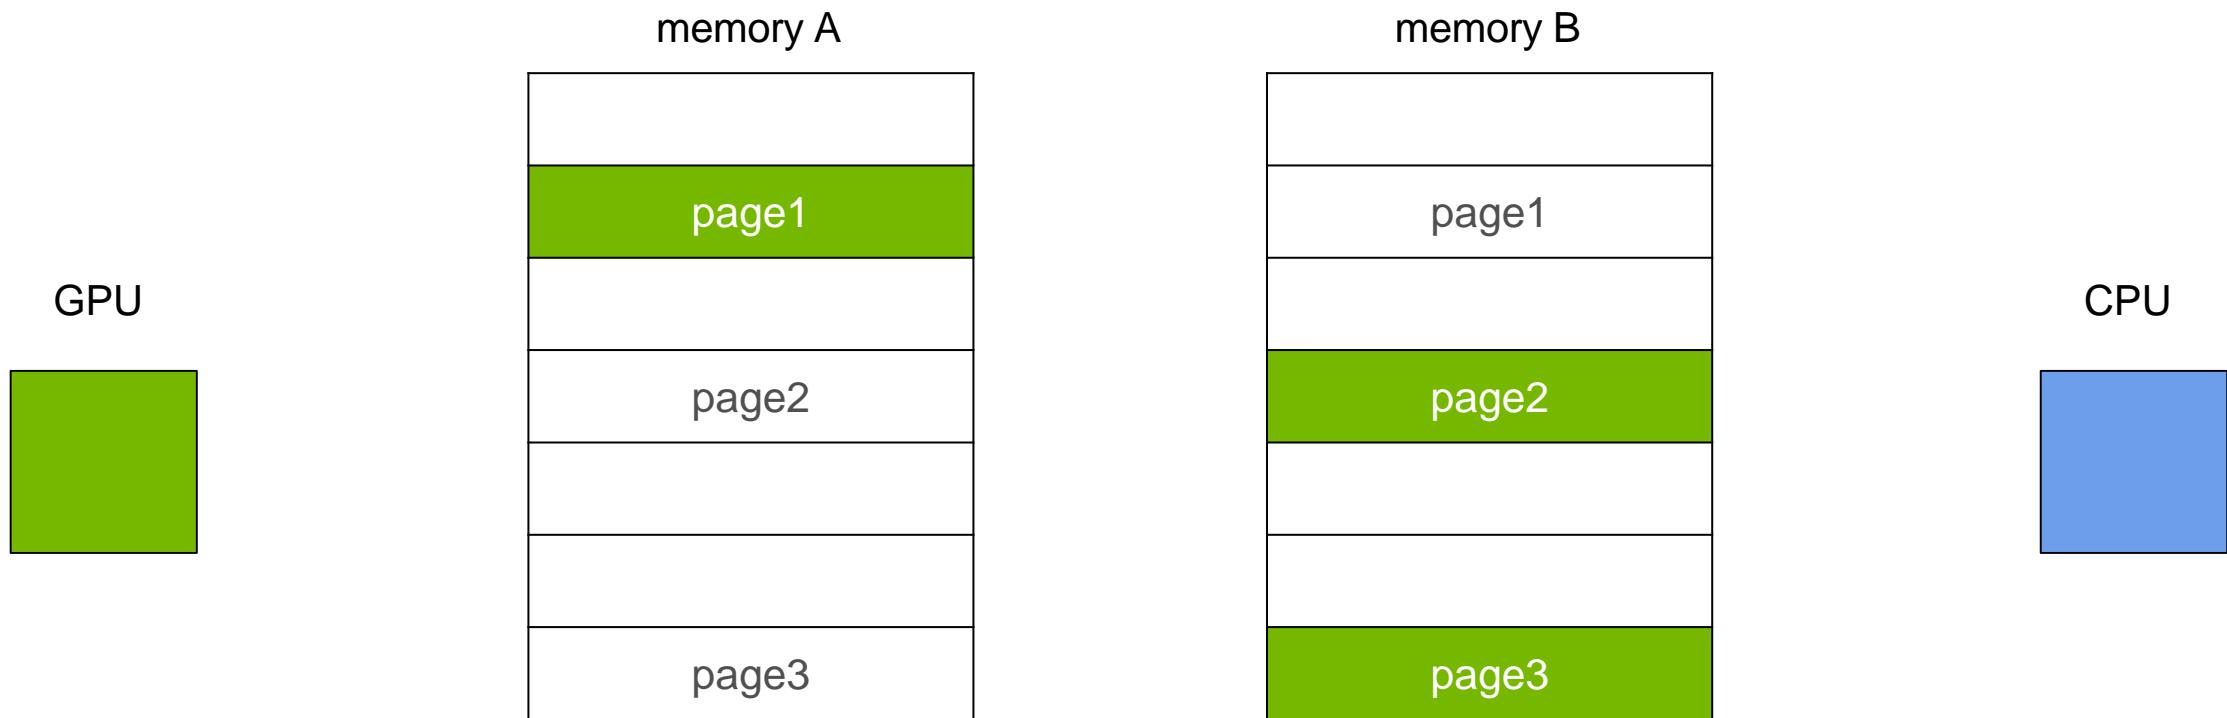

UNIFIED MEMORY ON KEPLER

Available since CUDA 6


Bulk migration of **all pages** attached to current stream on kernel launch

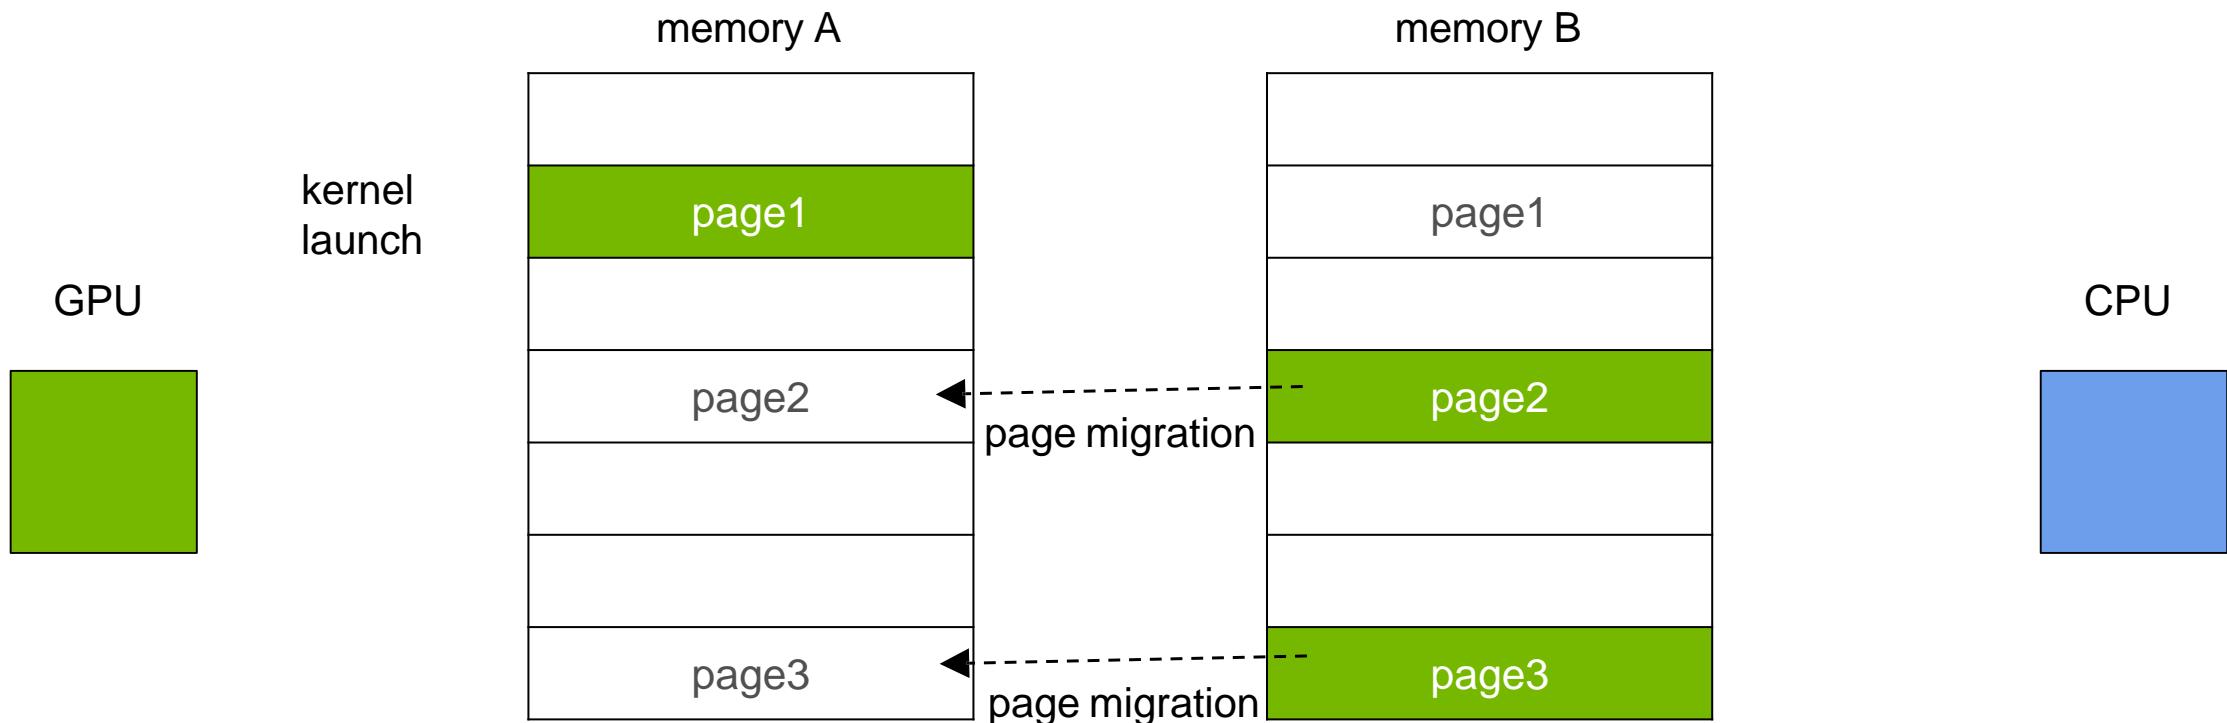

UNIFIED MEMORY ON KEPLER

Available since CUDA 6


No on-demand migration for the GPU, no oversubscription, no system-wide atomics

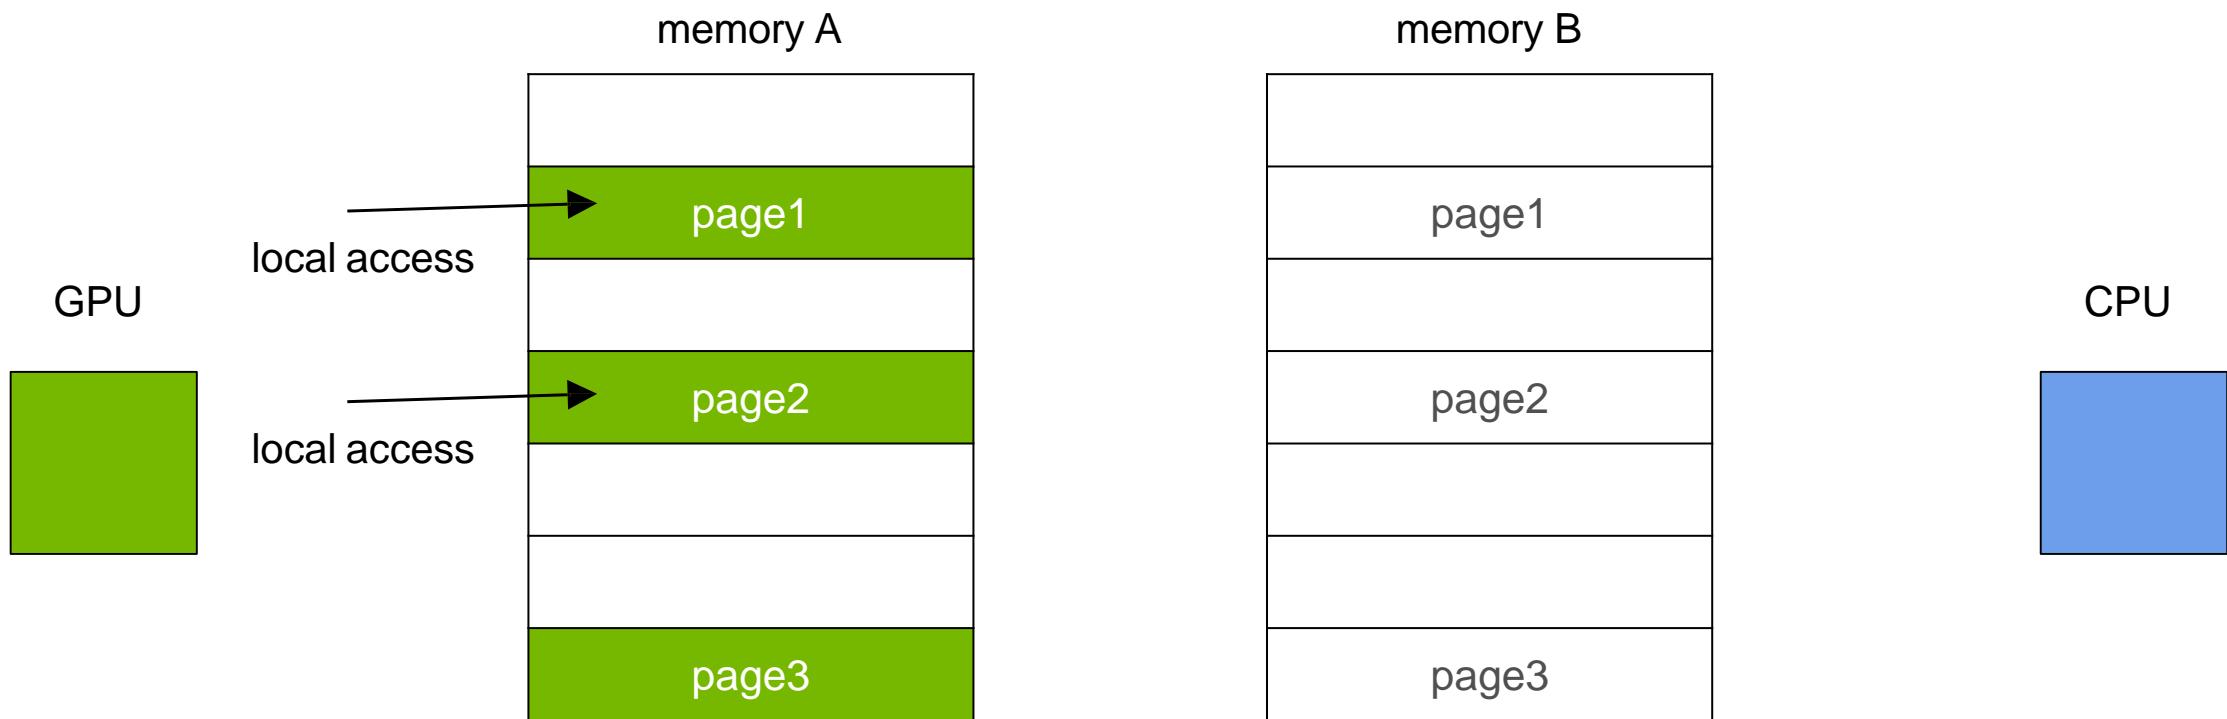

UNIFIED MEMORY ON PASCAL

Available since CUDA 8


Pascal GPU: page fault support, extended virtual address space (48-bit)

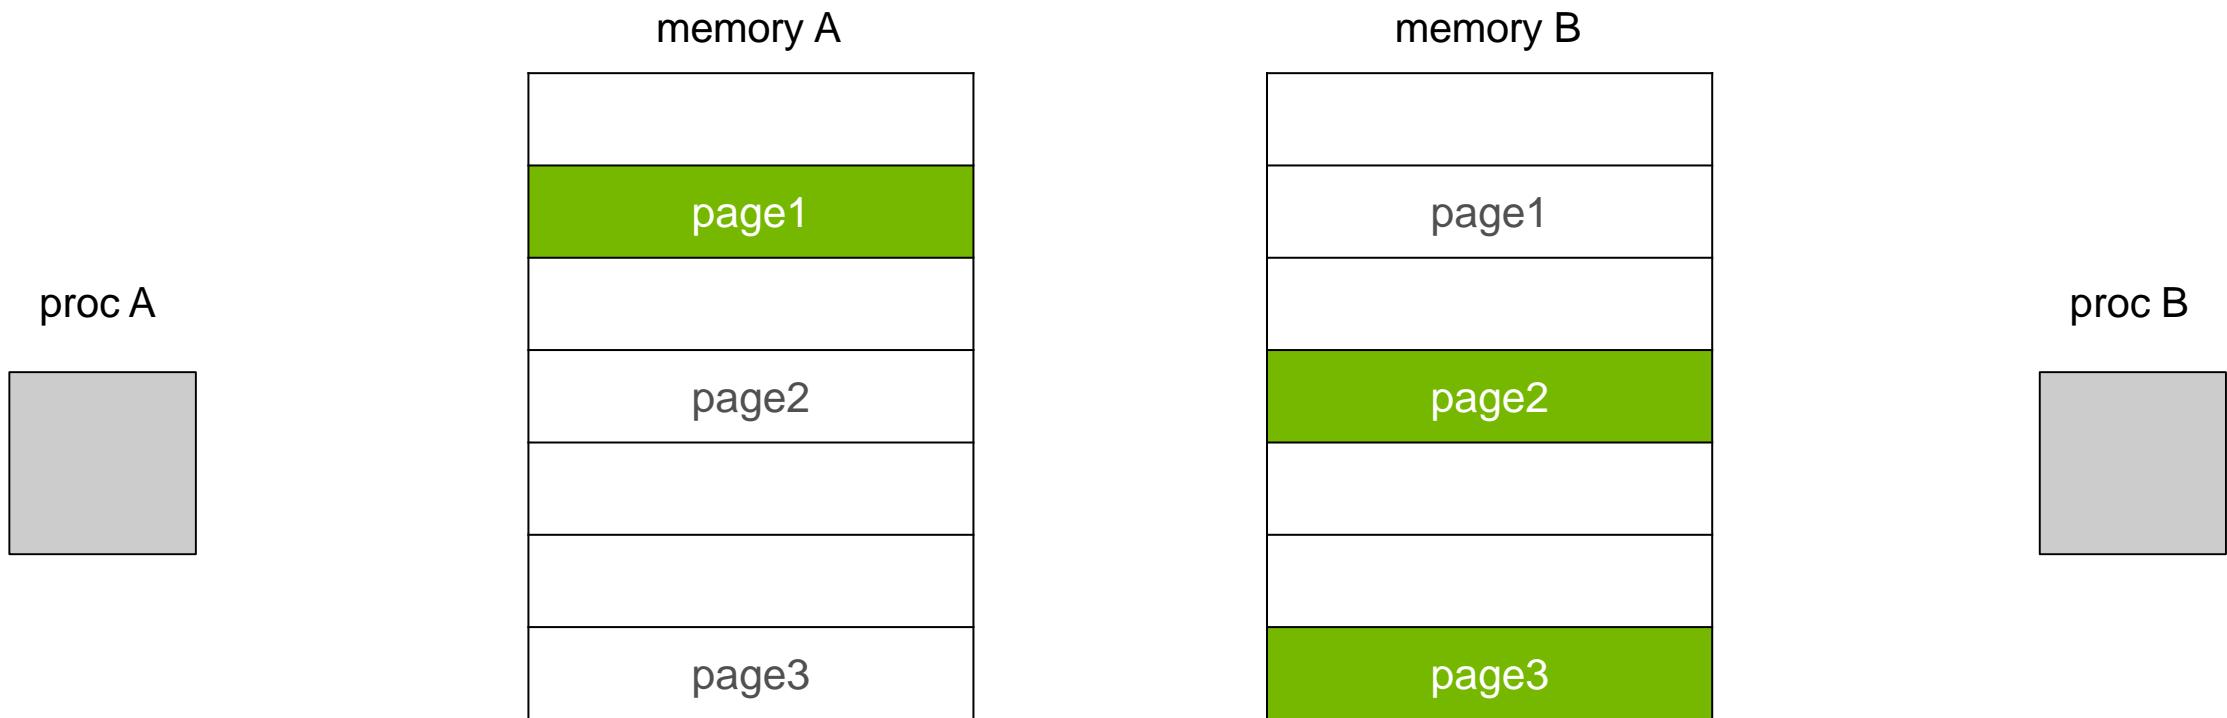

UNIFIED MEMORY ON PASCAL

Available since CUDA 8


On-demand migration to accessing processor on first touch

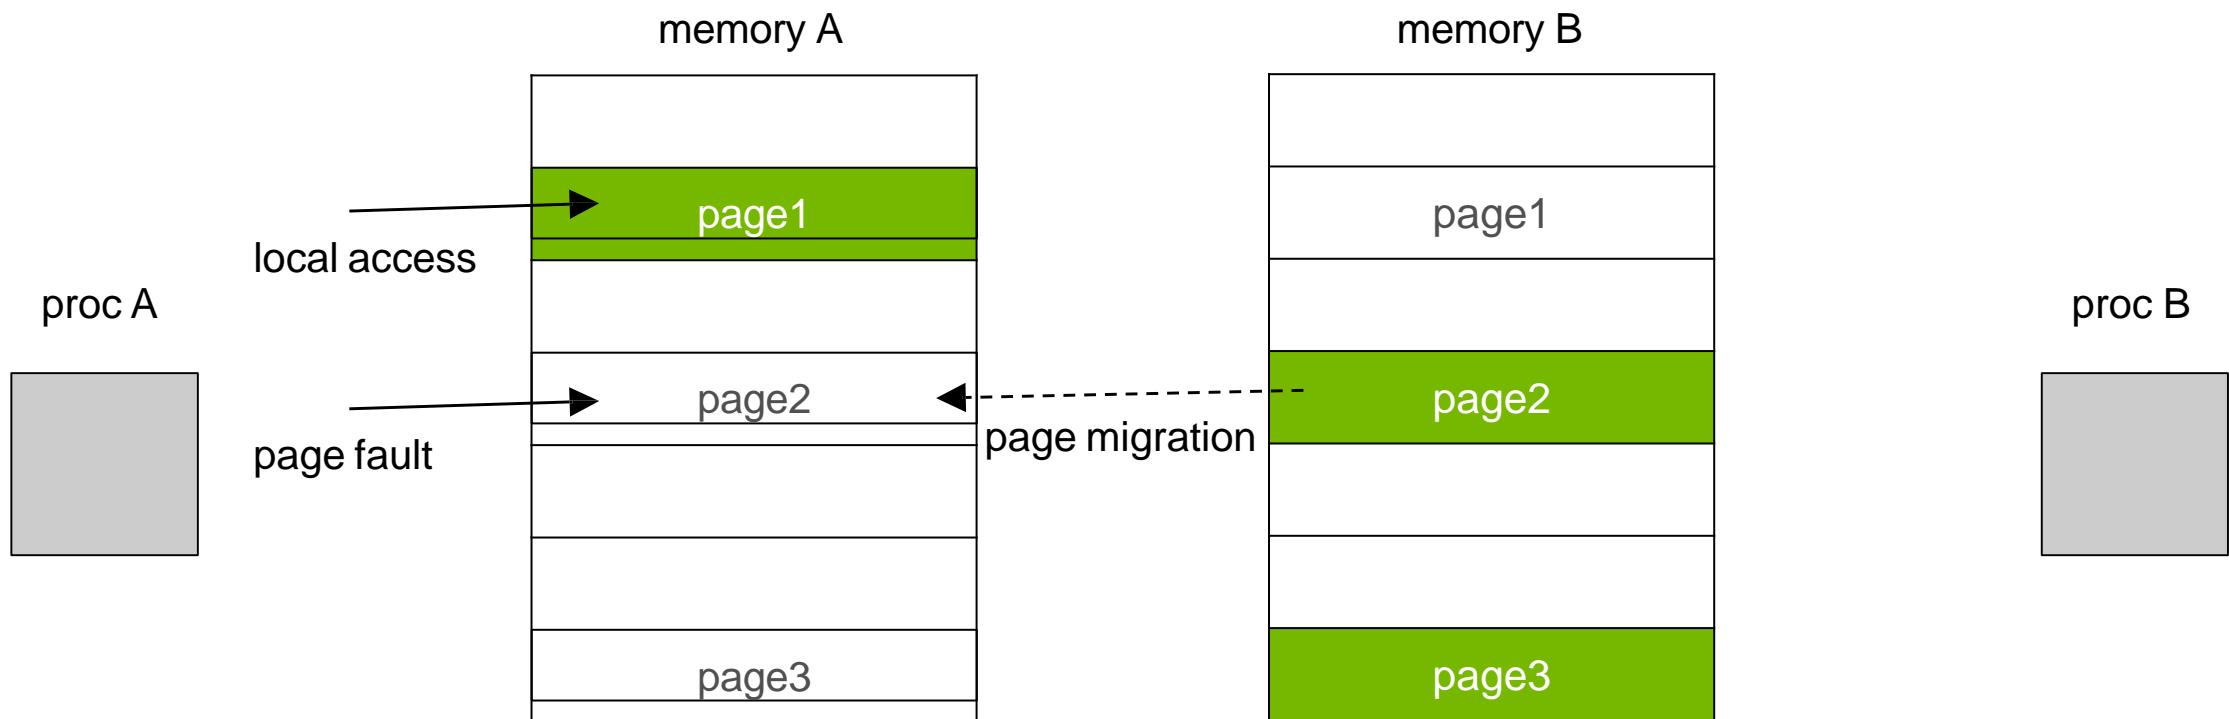

UNIFIED MEMORY ON PASCAL

Available since CUDA 8


All features: on-demand migration, oversubscription, system-wide atomics

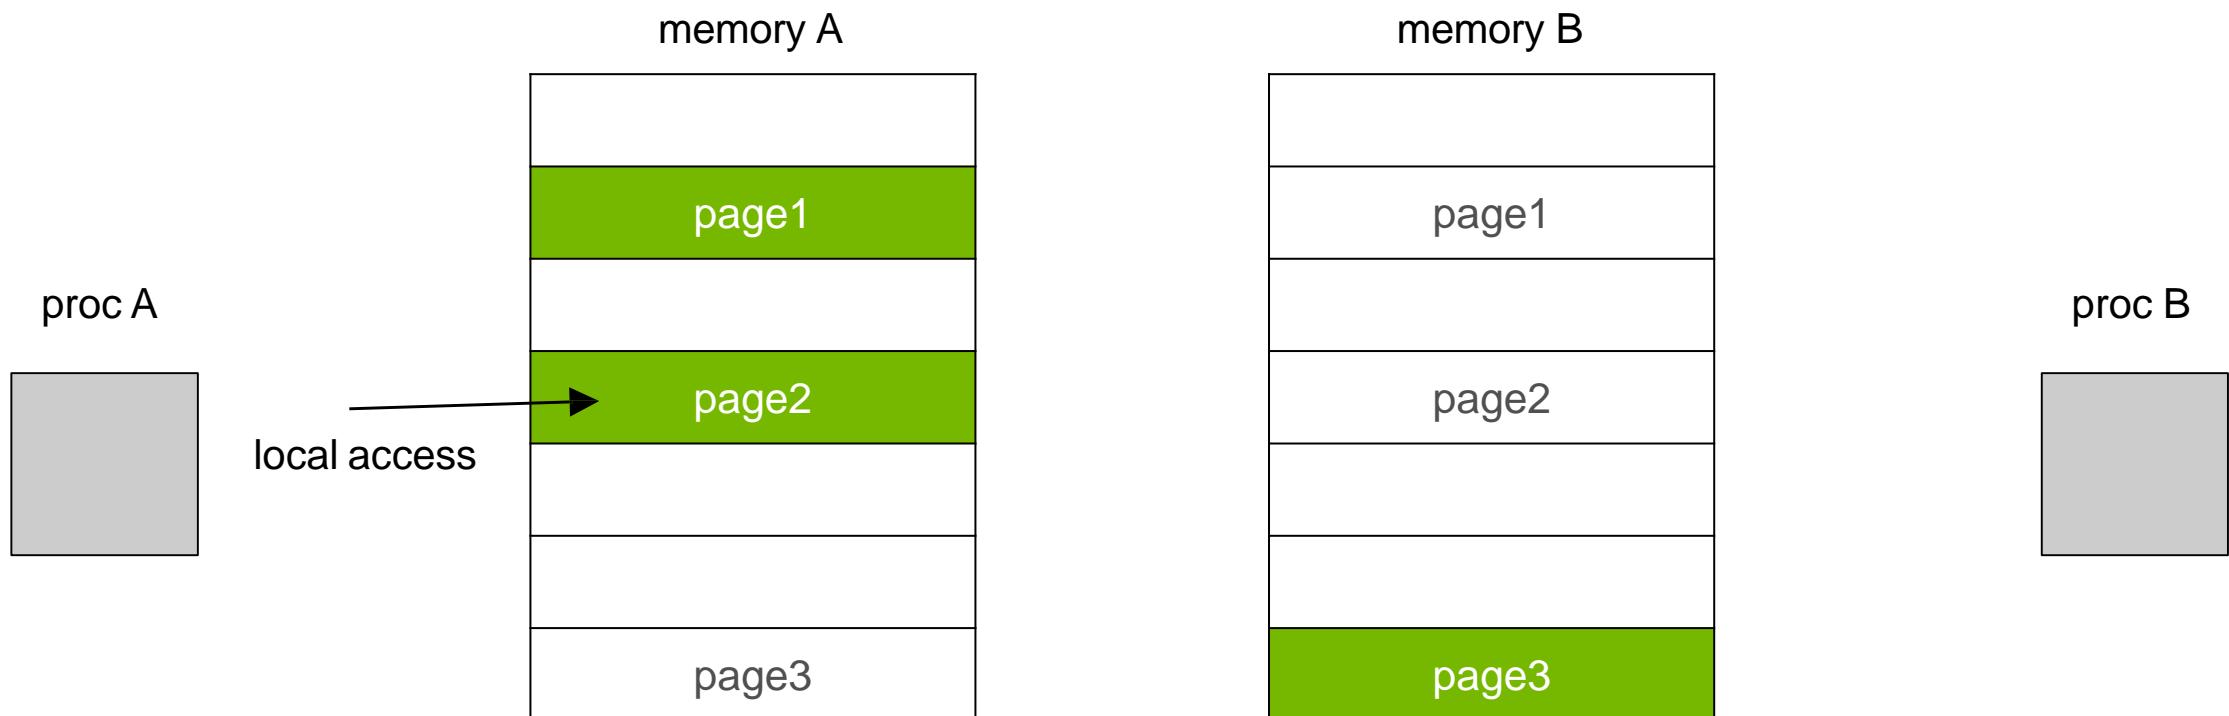

UNIFIED MEMORY ON VOLTA

Default model


Volta GPU: uses fault on first touch for migration, same as Pascal

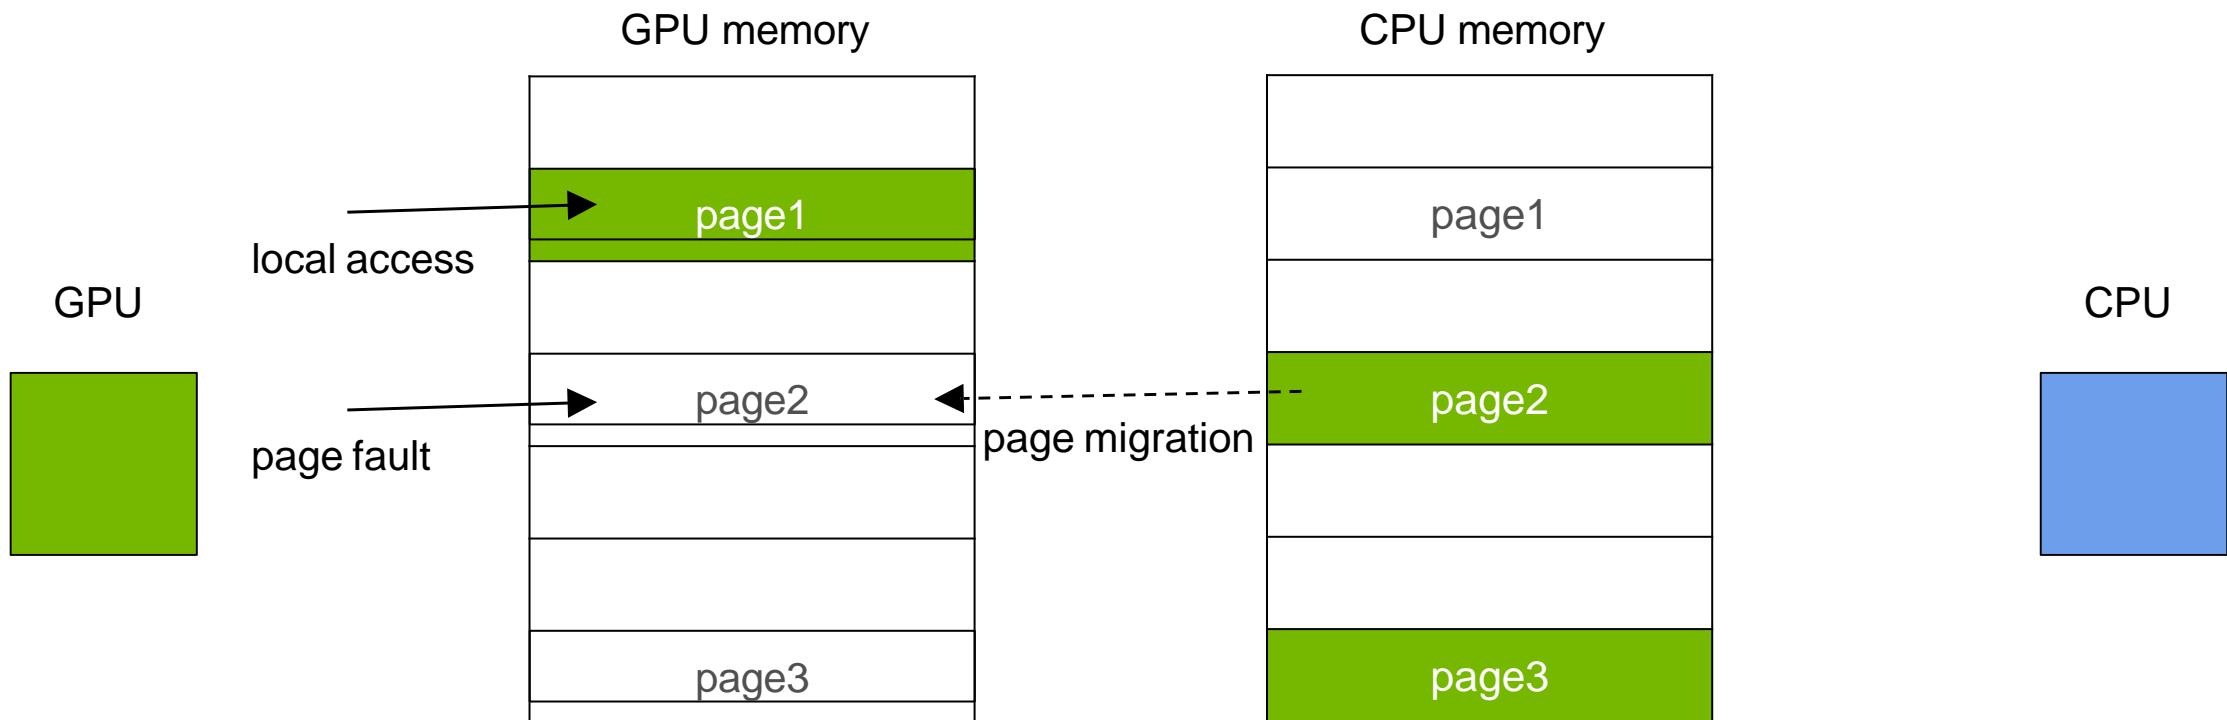

UNIFIED MEMORY ON VOLTA

New Feature: Access Counters


If memory is mapped to the GPU, migration can be triggered by access counters

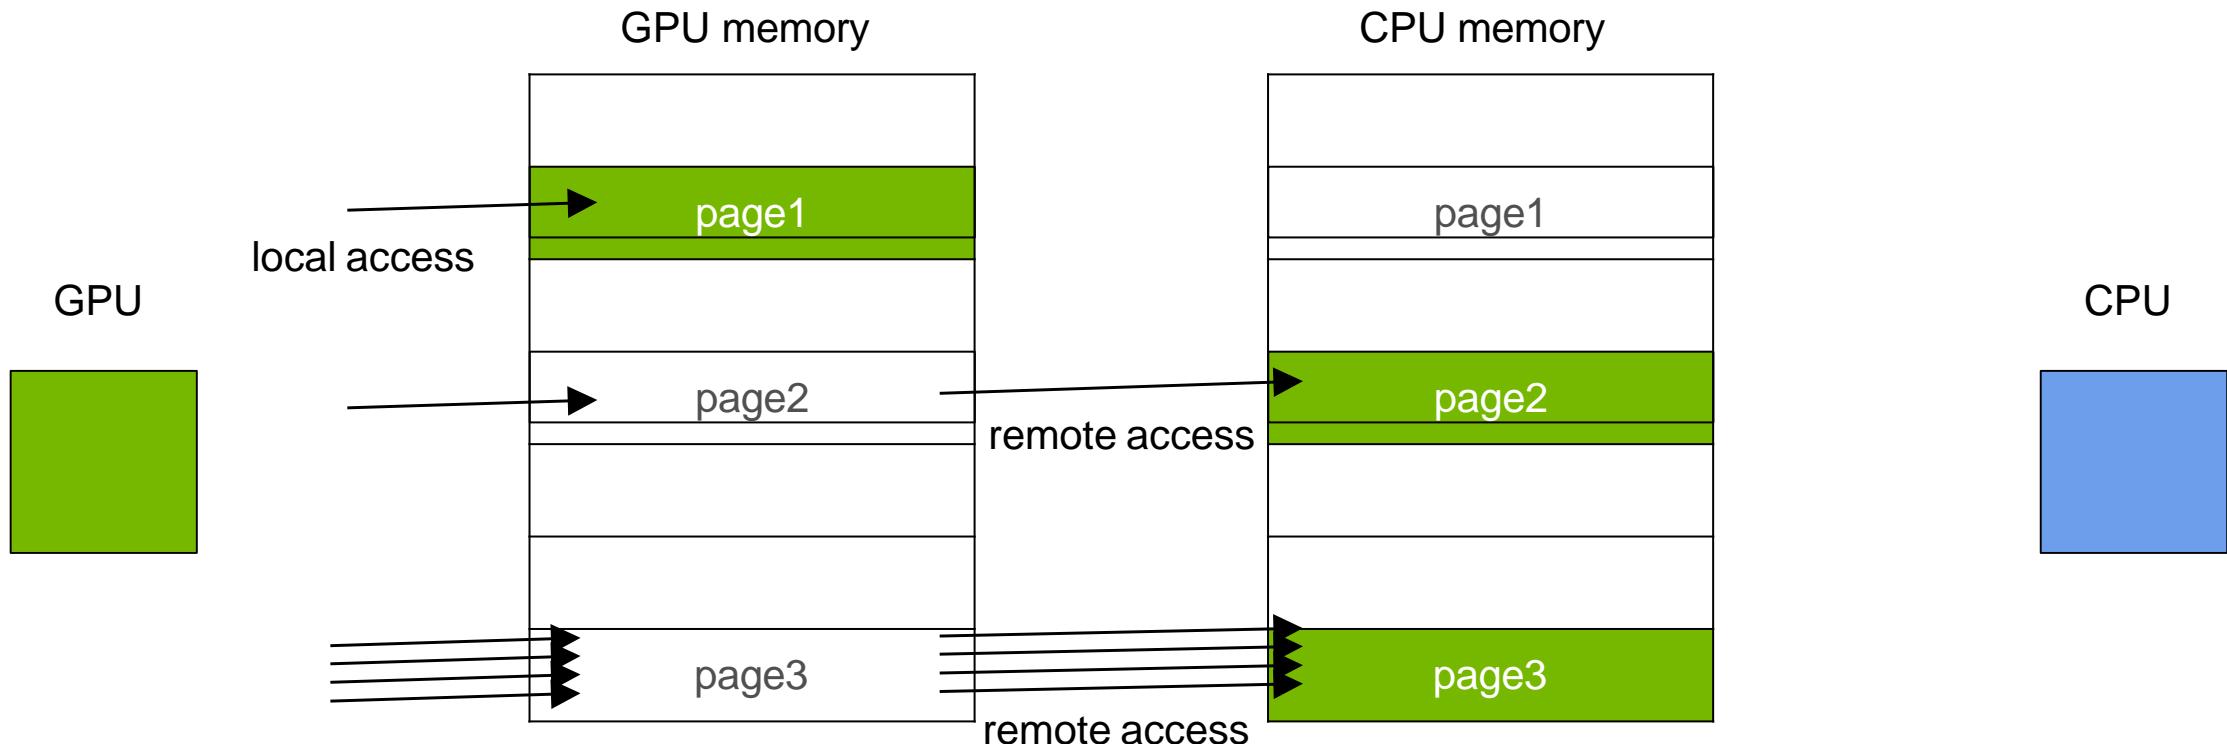

UNIFIED MEMORY ON VOLTA

New Feature: Access Counters

With access counters migration **only hot pages** will be moved to the GPU

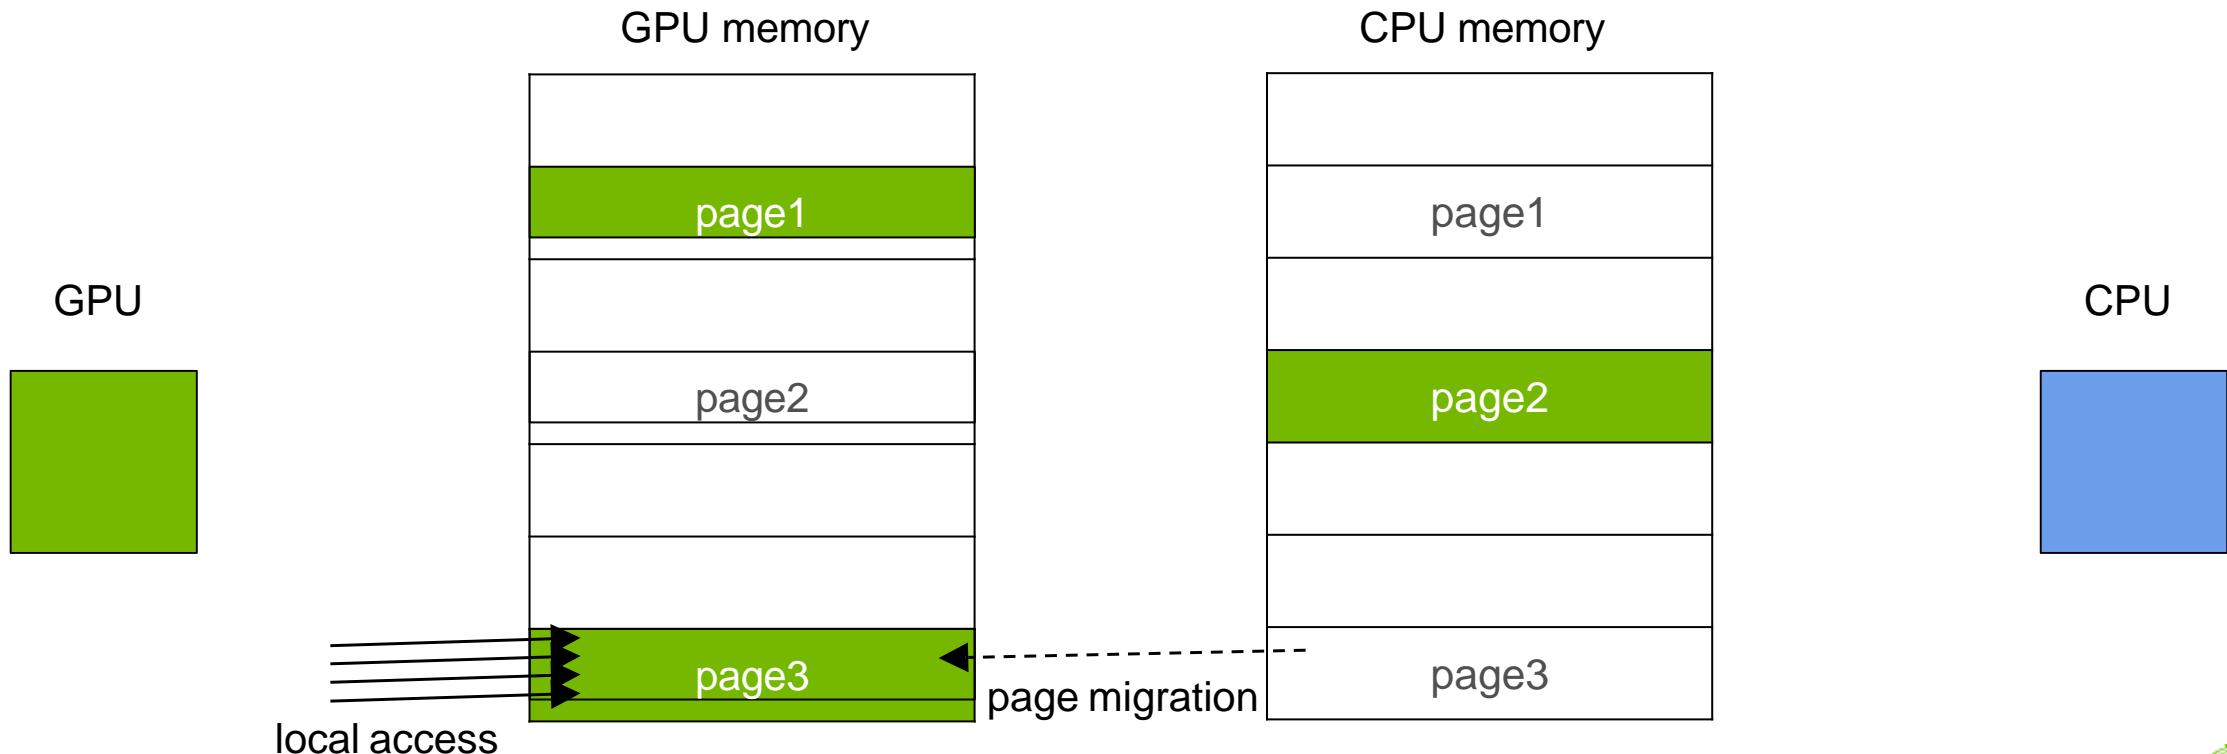

USER HINTS

Why, When, and How to Use Them

If you know your application well you can optimize with hints

These are also useful to override some of the driver heuristics

cudaMemPrefetchAsync(ptr, size, processor, stream)

Similar to `move_pages()` in Linux

cudaMemAdvise(ptr, size, advice, processor)

Similar to `madvise()` in Linux


USER HINTS

Prefetching

```
char *data;  
cudaMallocManaged(&data, N);  
  
init_data(data, N);  
  
cudaMemPrefetchAsync(data, N, myGpuId, s);  
mykernel<<<..., s>>>(data, N);  
cudaMemPrefetchAsync(data, N, cudaCpuDeviceId, s);  
cudaStreamSynchronize(s);  
  
use_data(data, N);  
  
cudaFree(data);
```

Page faults can be expensive
and they stall SM execution

Avoid faults by prefetching data
to the accessing processor

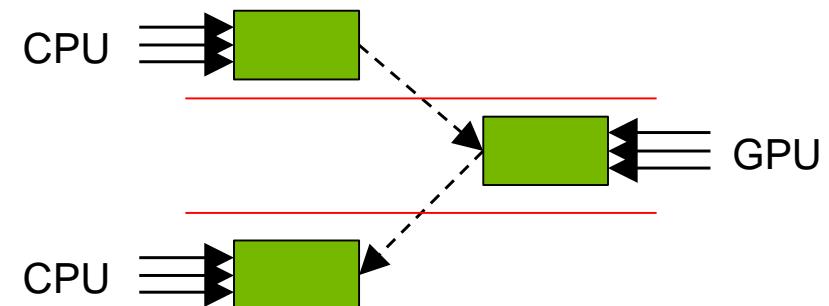

USER HINTS


Read Mostly

```
char *data;  
cudaMallocManaged(&data, N);  
  
init_data(data, N);  
  
cudaMemAdvise(data, N, ..SetReadMostly, myGpuId);  
cudaMemPrefetchAsync(data, N, myGpuId, s);  
mykernel<<<..., s>>>(data, N);  
  
use_data(data, N);  
  
cudaFree(data);
```

In this case prefetch creates a copy instead of moving data

Both processors can read data **simultaneously** without faults

Writes are allowed but they are expensive

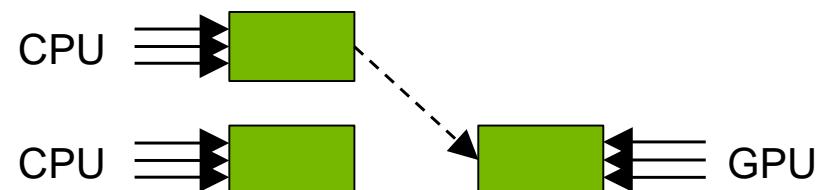


USER HINTS

Preferred Location

```
char *data;  
cudaMallocManaged(&data, N);  
  
init_data(data, N);  
  
cudaMemAdvise(data, N, ..PreferredLocation, cudaCpuDeviceId);  
  
mykernel<<<..., s>>>(data, N);  
  
use_data(data, N);  
  
cudaFree(data);
```

Here the kernel will *page fault* and generate direct mapping to data on the CPU

The driver will “resist” migrating data away from the preferred location

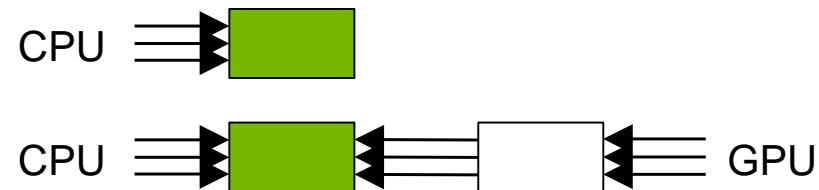


USER HINTS

Accessed By

```
char *data;  
cudaMallocManaged(&data, N);  
  
init_data(data, N);  
  
cudaMemAdvise(data, N, ..SetAccessedBy, myGpuId);  
  
mykernel<<<..., s>>>(data, N);  
  
  
use_data(data, N);  
  
cudaFree(data);
```

GPU will establish direct mapping of data in CPU memory, **no page faults** will be generated

Memory can move freely to other processors and mapping will carry over

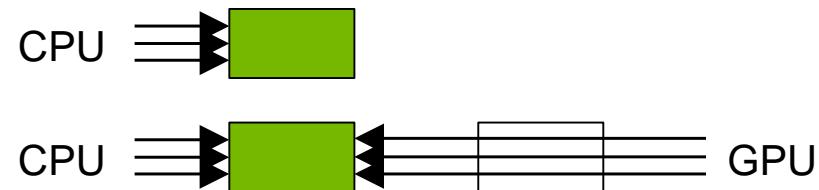


USER HINTS

Accessed By on Volta

```
char *data;  
cudaMallocManaged(&data, N);  
  
init_data(data, N);  
  
cudaMemAdvise(data, N, ..SetAccessedBy, myGpuId);  
  
mykernel<<<..., s>>>(data, N);  
  
  
use_data(data, N);  
  
cudaFree(data);
```

GPU will establish direct mapping of data in CPU memory, **no page faults** will be generated

Access counters may eventually trigger migration of this memory to the GPU

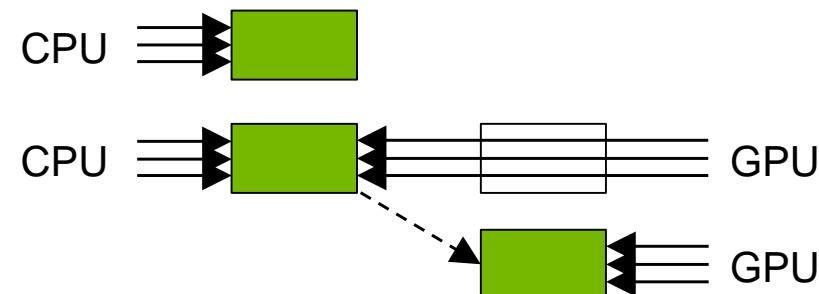

CONCLUSIONS AND OUTLOOK


Consider using Unified Memory for any new application development

Get your code *running* on the GPU much sooner!

Enjoy clean code and **virtually** no memory limits

Increase productivity, explore and prototype new algorithms


Use the explicit data management only *where you need it*

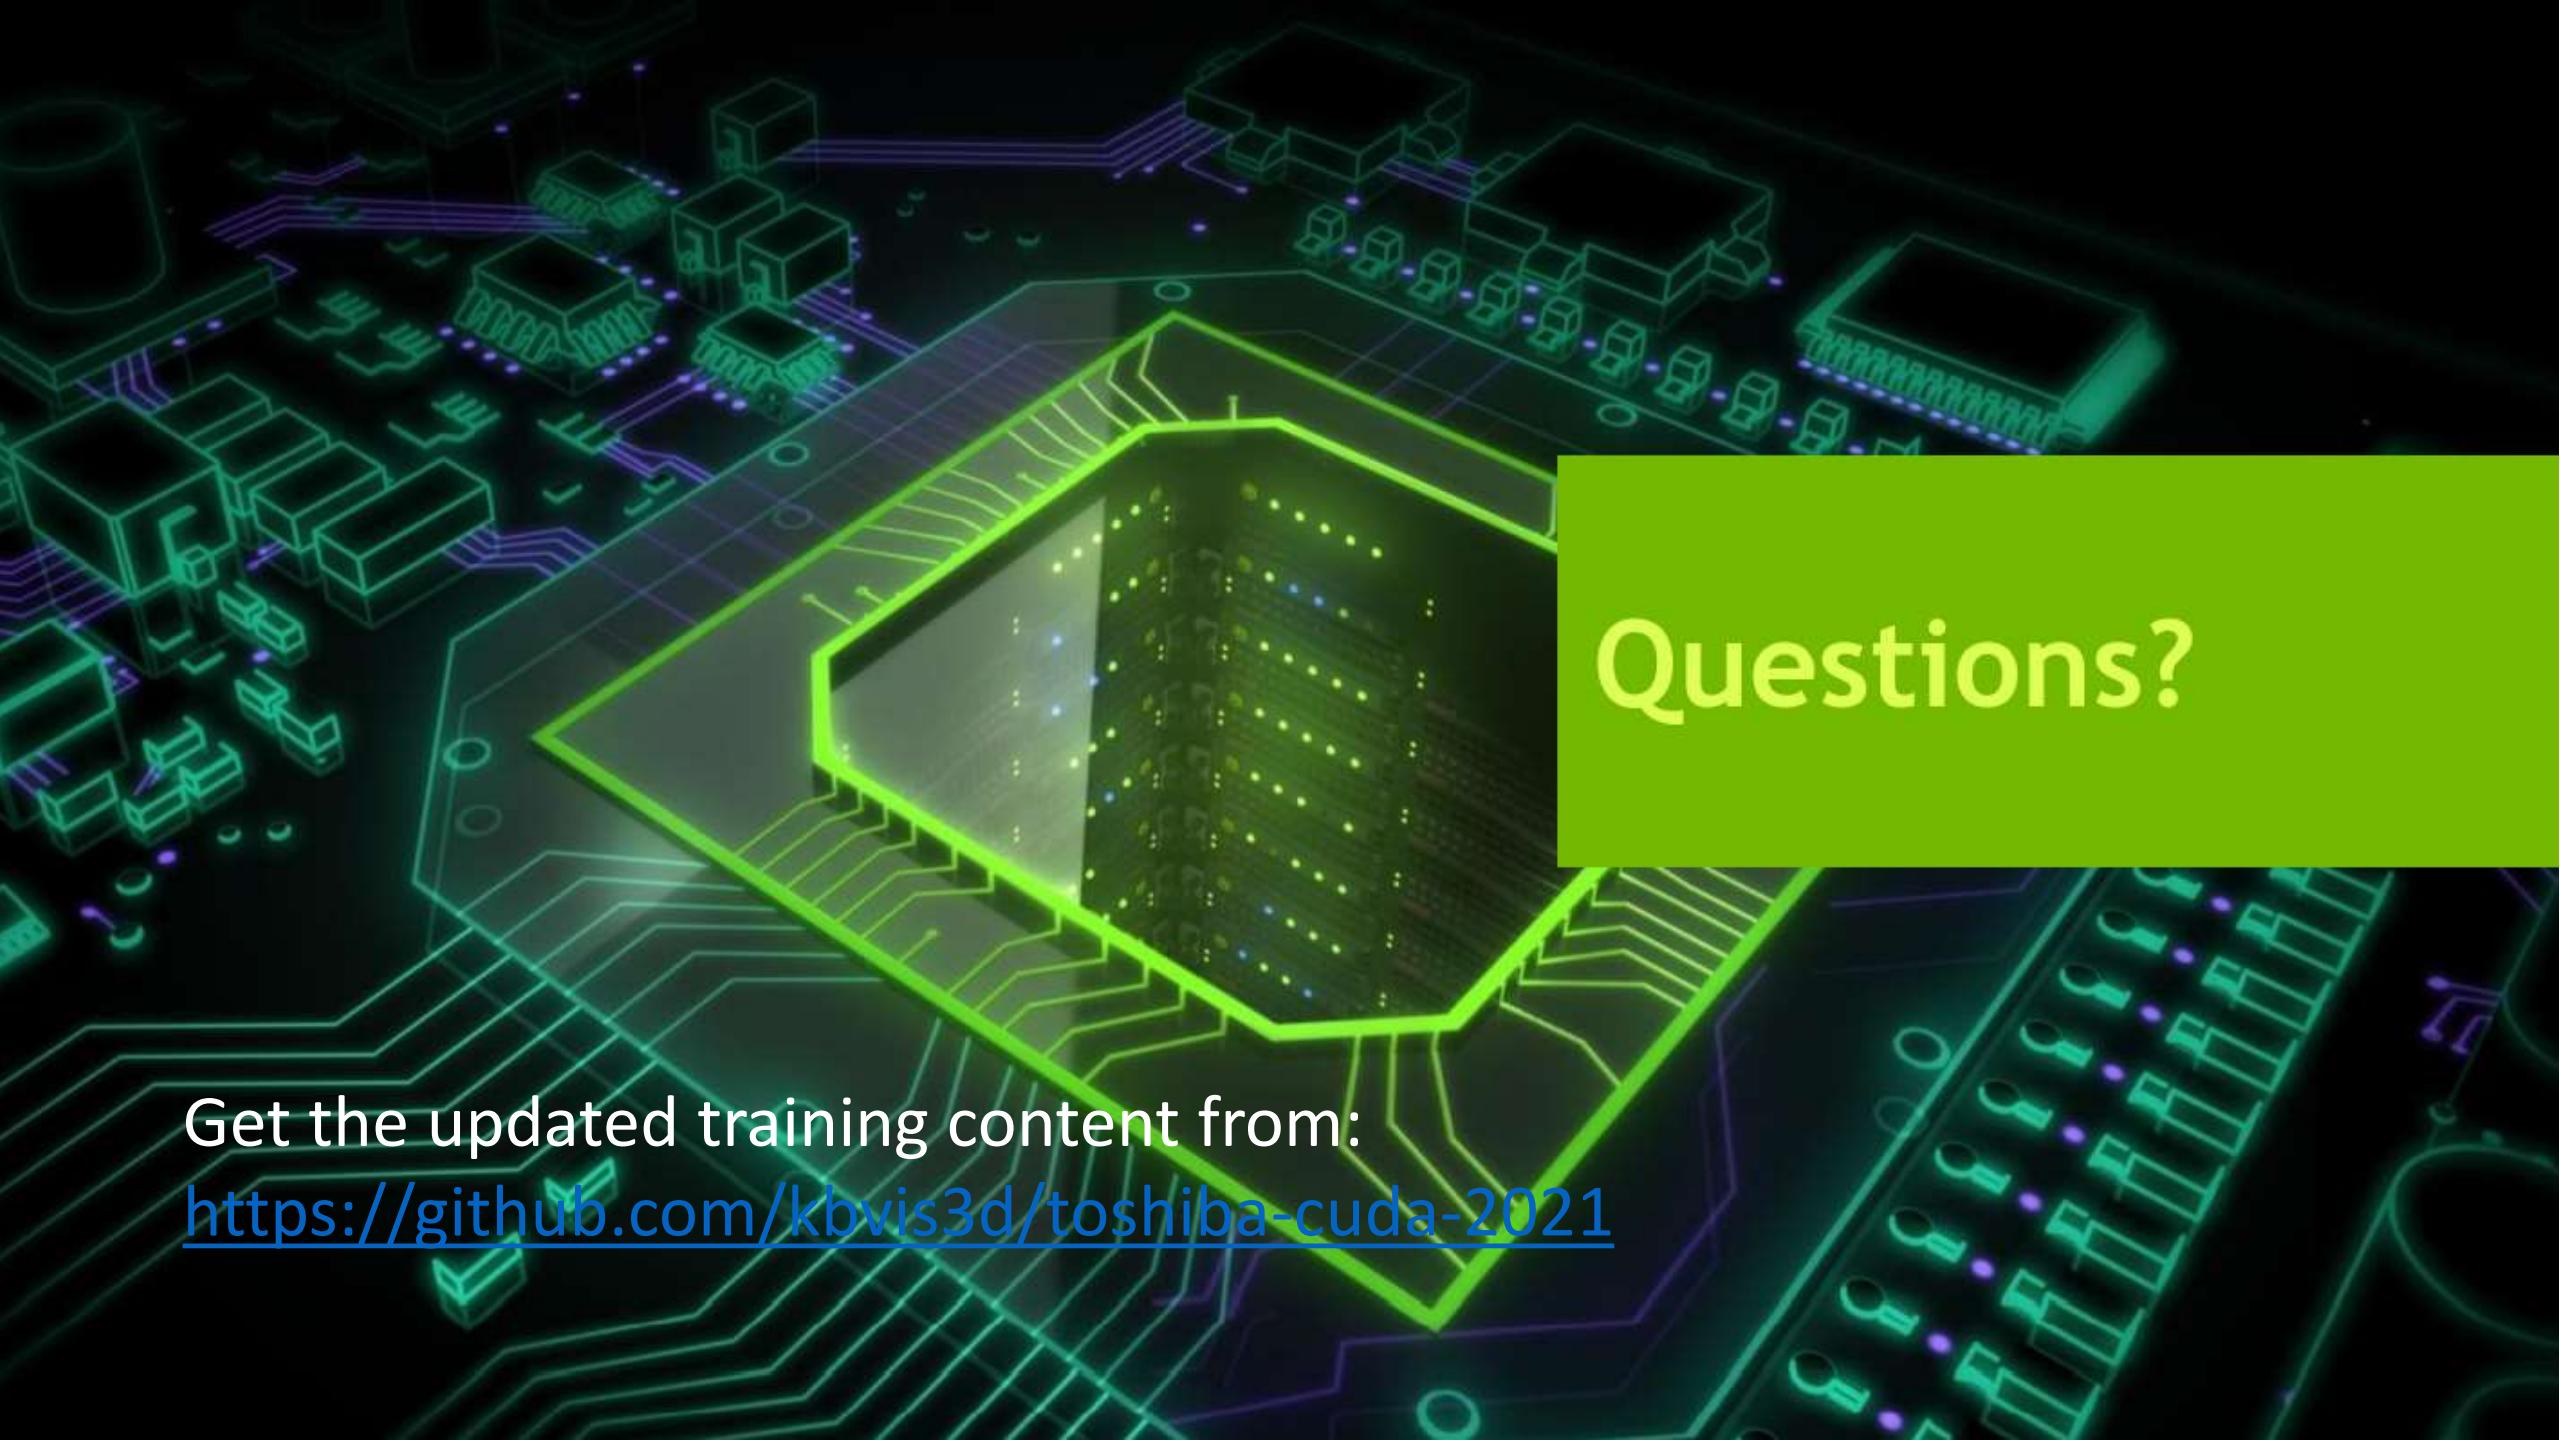

Questions?

Get the updated training content from:

<https://github.com/kbvis3d/toshiba-cuda-2021>

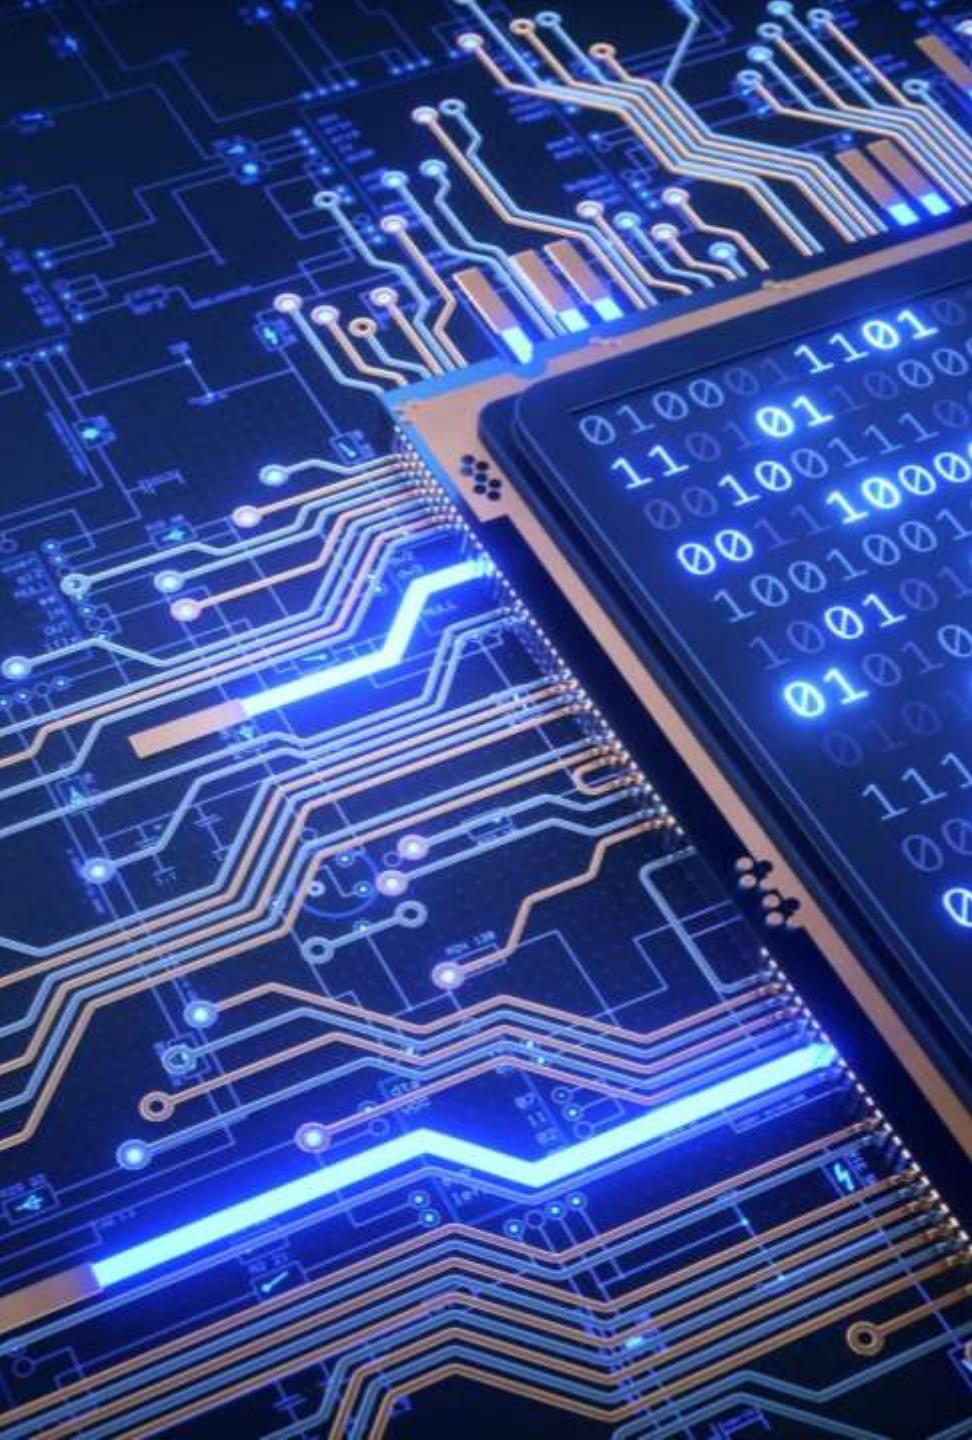

DAY 3

- CUDA Profiling with Nsight Systems
 - vector-add with pre-fetch
- Non-Unified Memory
 - cudaHostAlloc/cudaMallocHost
 - cudaMemcpyAsync
- CUDA Streams
 - vector-add with overlapped data init
 - vector-add with overlapped data transfer
 - streams-cipher sample
 - cudaStreamSynchronize

Get the updated training content from:

<https://github.com/kbvis3d/toshiba-cuda-2021>

System- and Kernel-Level Profiling


- **Nsight Systems:** System-level Profiling:
 - How effectively is my system delivering work to the GPU?
 - What is my system doing while the GPU is working?
 - How fast is data moving to/from the GPU? o How much time does the CPU take to control the GPU?
 - When do asynchronous operations occur?
- **Nsight Compute:** Kernel-Level Profiling
 - How fast does the GPU execute my kernel?

Nvidia Nsight Systems



<https://developer.nvidia.com/nsight-systems>

Nvidia Compute

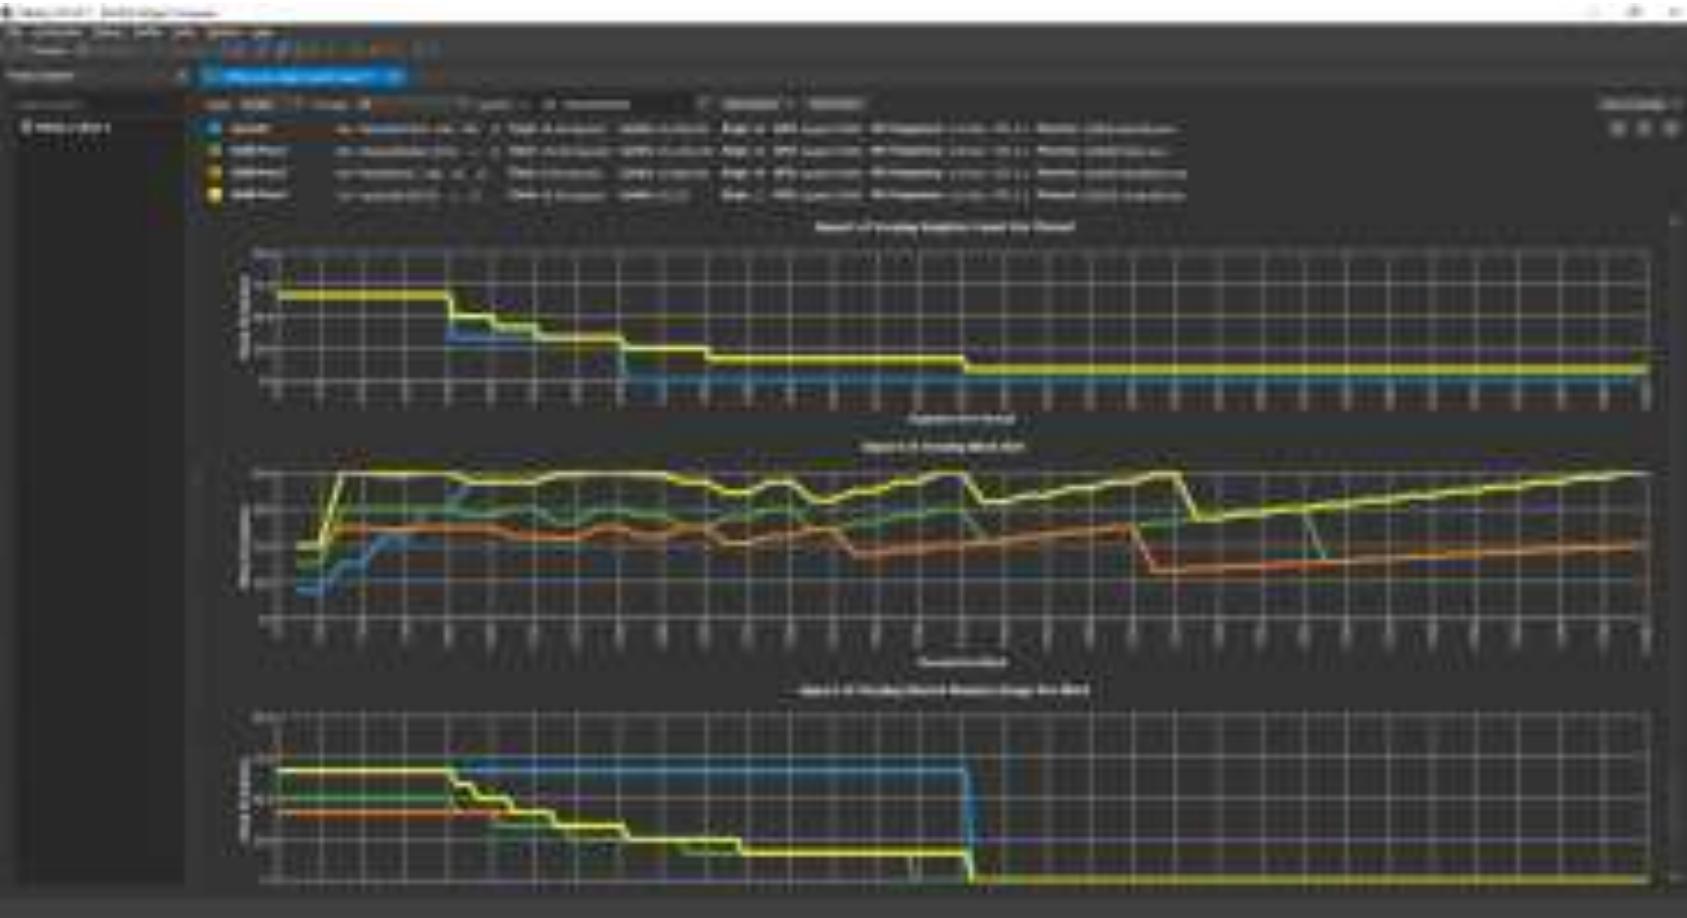

<https://developer.nvidia.com/nsight-compute>

(install v2019.5.1 for compatibility with Pascal GPUs)

Nsight Visual Studio Extension

The screenshot shows the Visual Studio IDE interface with the Nsight Visual Studio Extension installed. The menu bar is visible at the top, and the main code editor window displays CUDA C++ code for a vector addition kernel. The Solution Explorer and Properties windows are also visible on the right side of the interface.

The Nsight Compute 2019.5.1 and Nsight Systems 2021.2.4 menus are highlighted with red boxes. The Trace menu item is also highlighted with a red box. The code in the editor is as follows:

```
vectorAdd.cu
vectorAdd
65
66    cudaMemPrefetchAsync(a, size, deviceId);
67    addVectorsErr = cudaGetLastError();
68    cudaMemPrefetchAsync(b, size, deviceId);
69    addVectorsErr = cudaGetLastError();
70    cudaMemPrefetchAsync(c, size, deviceId);
71    addVectorsErr = cudaGetLastError();
72
73    size_t threadsPerBlock;
74    size_t numberOfBlocks;
75
76    threadsPerBlock = 256;
```

The Output window shows the program's startup logs:

```
'vectorAdd.exe' (Win32): Loaded 'C:\Windows\System32\cryptnet.dll'.
'vectorAdd.exe' (Win32): Loaded 'C:\Windows\System32\crypt32.dll'.
'vectorAdd.exe' (Win32): Loaded 'C:\Windows\System32\cryptbase.dll'.
'vectorAdd.exe' (Win32): Loaded 'C:\Windows\System32\dwimapi.dll'.
'vectorAdd.exe' (Win32): Loaded 'C:\Windows\System32\combase.dll'.
'vectorAdd.exe' (Win32): Loaded 'C:\Windows\System32\uxtheme.dll'.
'vectorAdd.exe' (Win32): Unloaded 'C:\Windows\System32\dwimapi.dll'
'vectorAdd.exe' (Win32): Loaded 'C:\Windows\System32\nvapif64.dll'.
'vectorAdd.exe' (Win32): Loaded 'C:\Windows\System32\setupapi.dll'.
'vectorAdd.exe' (Win32): Loaded 'C:\Windows\System32\cfgmgr32.dll'.
'vectorAdd.exe' (Win32): Loaded 'C:\Windows\System32\bcrypt.dll'.
'vectorAdd.exe' (Win32): Loaded 'C:\Windows\System32\shell32.dll'.
'vectorAdd.exe' (Win32): Loaded 'C:\Windows\System32\shlwapi.dll'.
'vectorAdd.exe' (Win32): Loaded 'C:\Windows\System32\ole32.dll'.
'vectorAdd.exe' (Win32): Loaded 'C:\Windows\System32\kernel.appcore.dll'.
The program '[4028] vectorAdd.exe' has exited with code 0 (0x0).
```

The system tray at the bottom right shows the date and time as 8/7/2021, 8:10 PM, with a temperature of 15°C and weather as Clear.

Nsight Visual Studio Extension

NVIDIA Nsight Systems 2021.2.4

File View Tools Help

Project 1 >

GRAPHICS-LAPTOP Target is ready [More info...](#)

Target application

Command line with arguments: [Edit arguments](#)
"C:\ProgramData\NVIDIA Corporation\CUDA Samples\v11.4\bin\win64\Debug\vectorAdd.exe"

Working directory: C:\ProgramData\NVIDIA Corporation\CUDA Samples\v11.4\0_Simple\09b-prefetch-to-gpu

Directory of executable is different from the working directory

Start

Start profiling manually
 Start profiling after 10.0 seconds
 Limit profiling to 10.0 seconds
 Hotkey Start/Stop F12 (not available in console apps)

Sample target process

Sampling rate: 1 kHz

Collect call stacks of executing threads

Collect CPU context switch trace

Collect call stacks of blocked threads

Collect CUDA trace

Collect GPU metrics

Collect NVTX trace

Collect DX11 trace

Collect DX12 trace

Collect OpenGL trace

Collect Vulkan trace


Custom ETW trace

Collect WDDM trace


Type here to search

13°C Clear 8:18 PM 8/7/2021


Nsight Visual Studio Extension

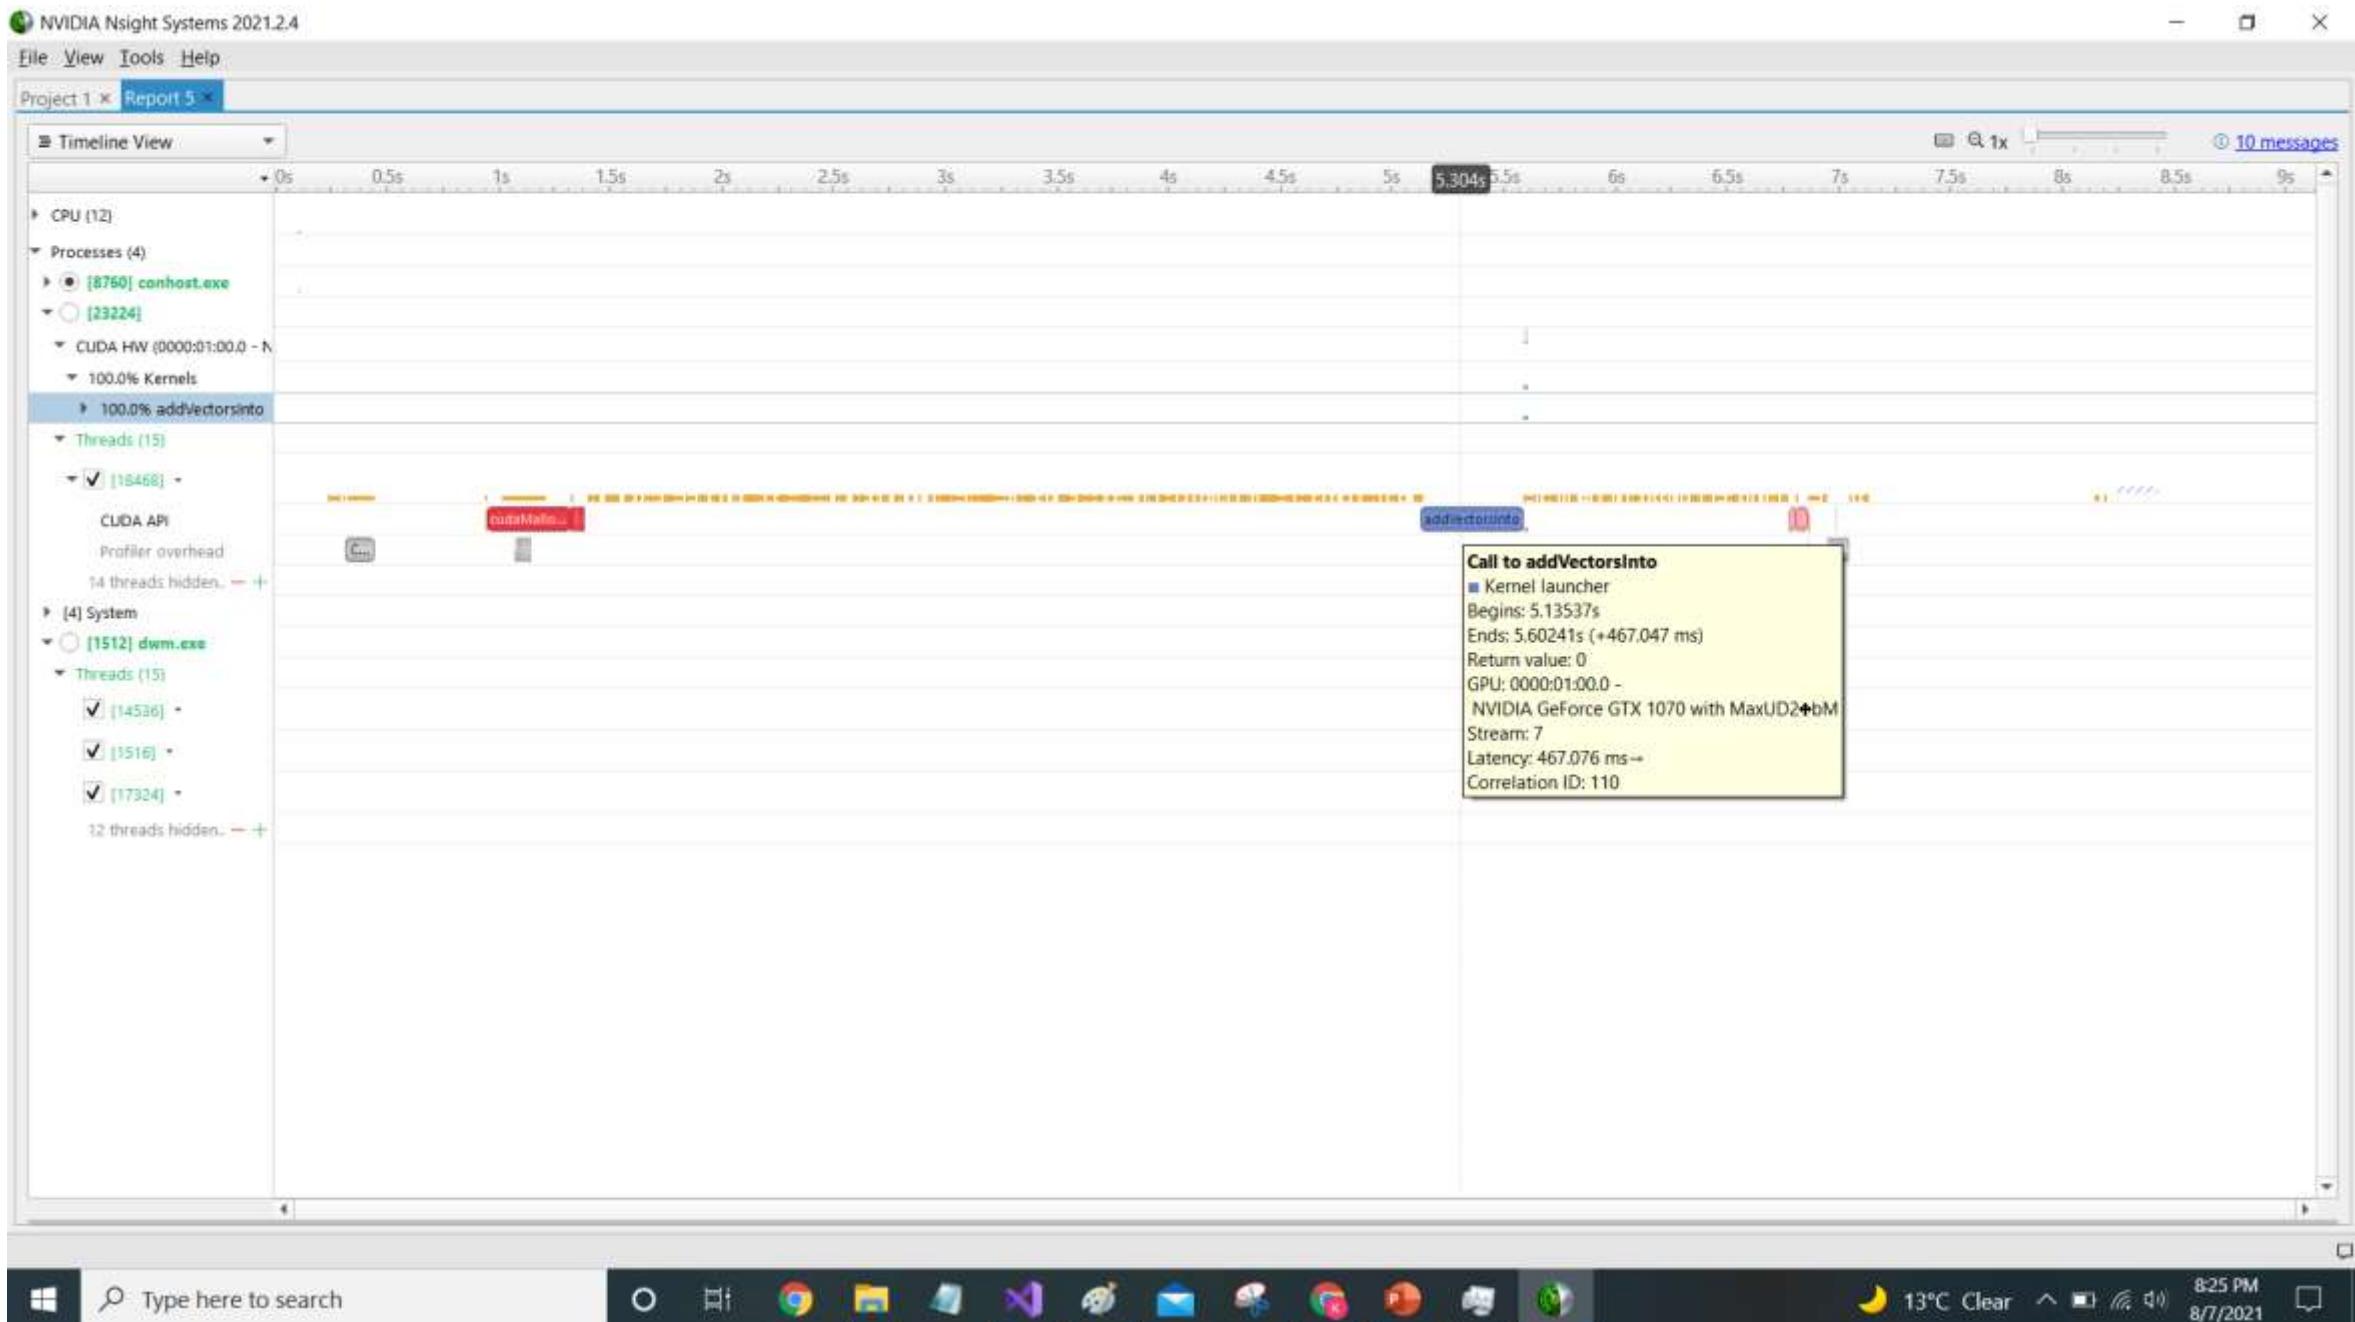

Nsight Visual Studio Extension

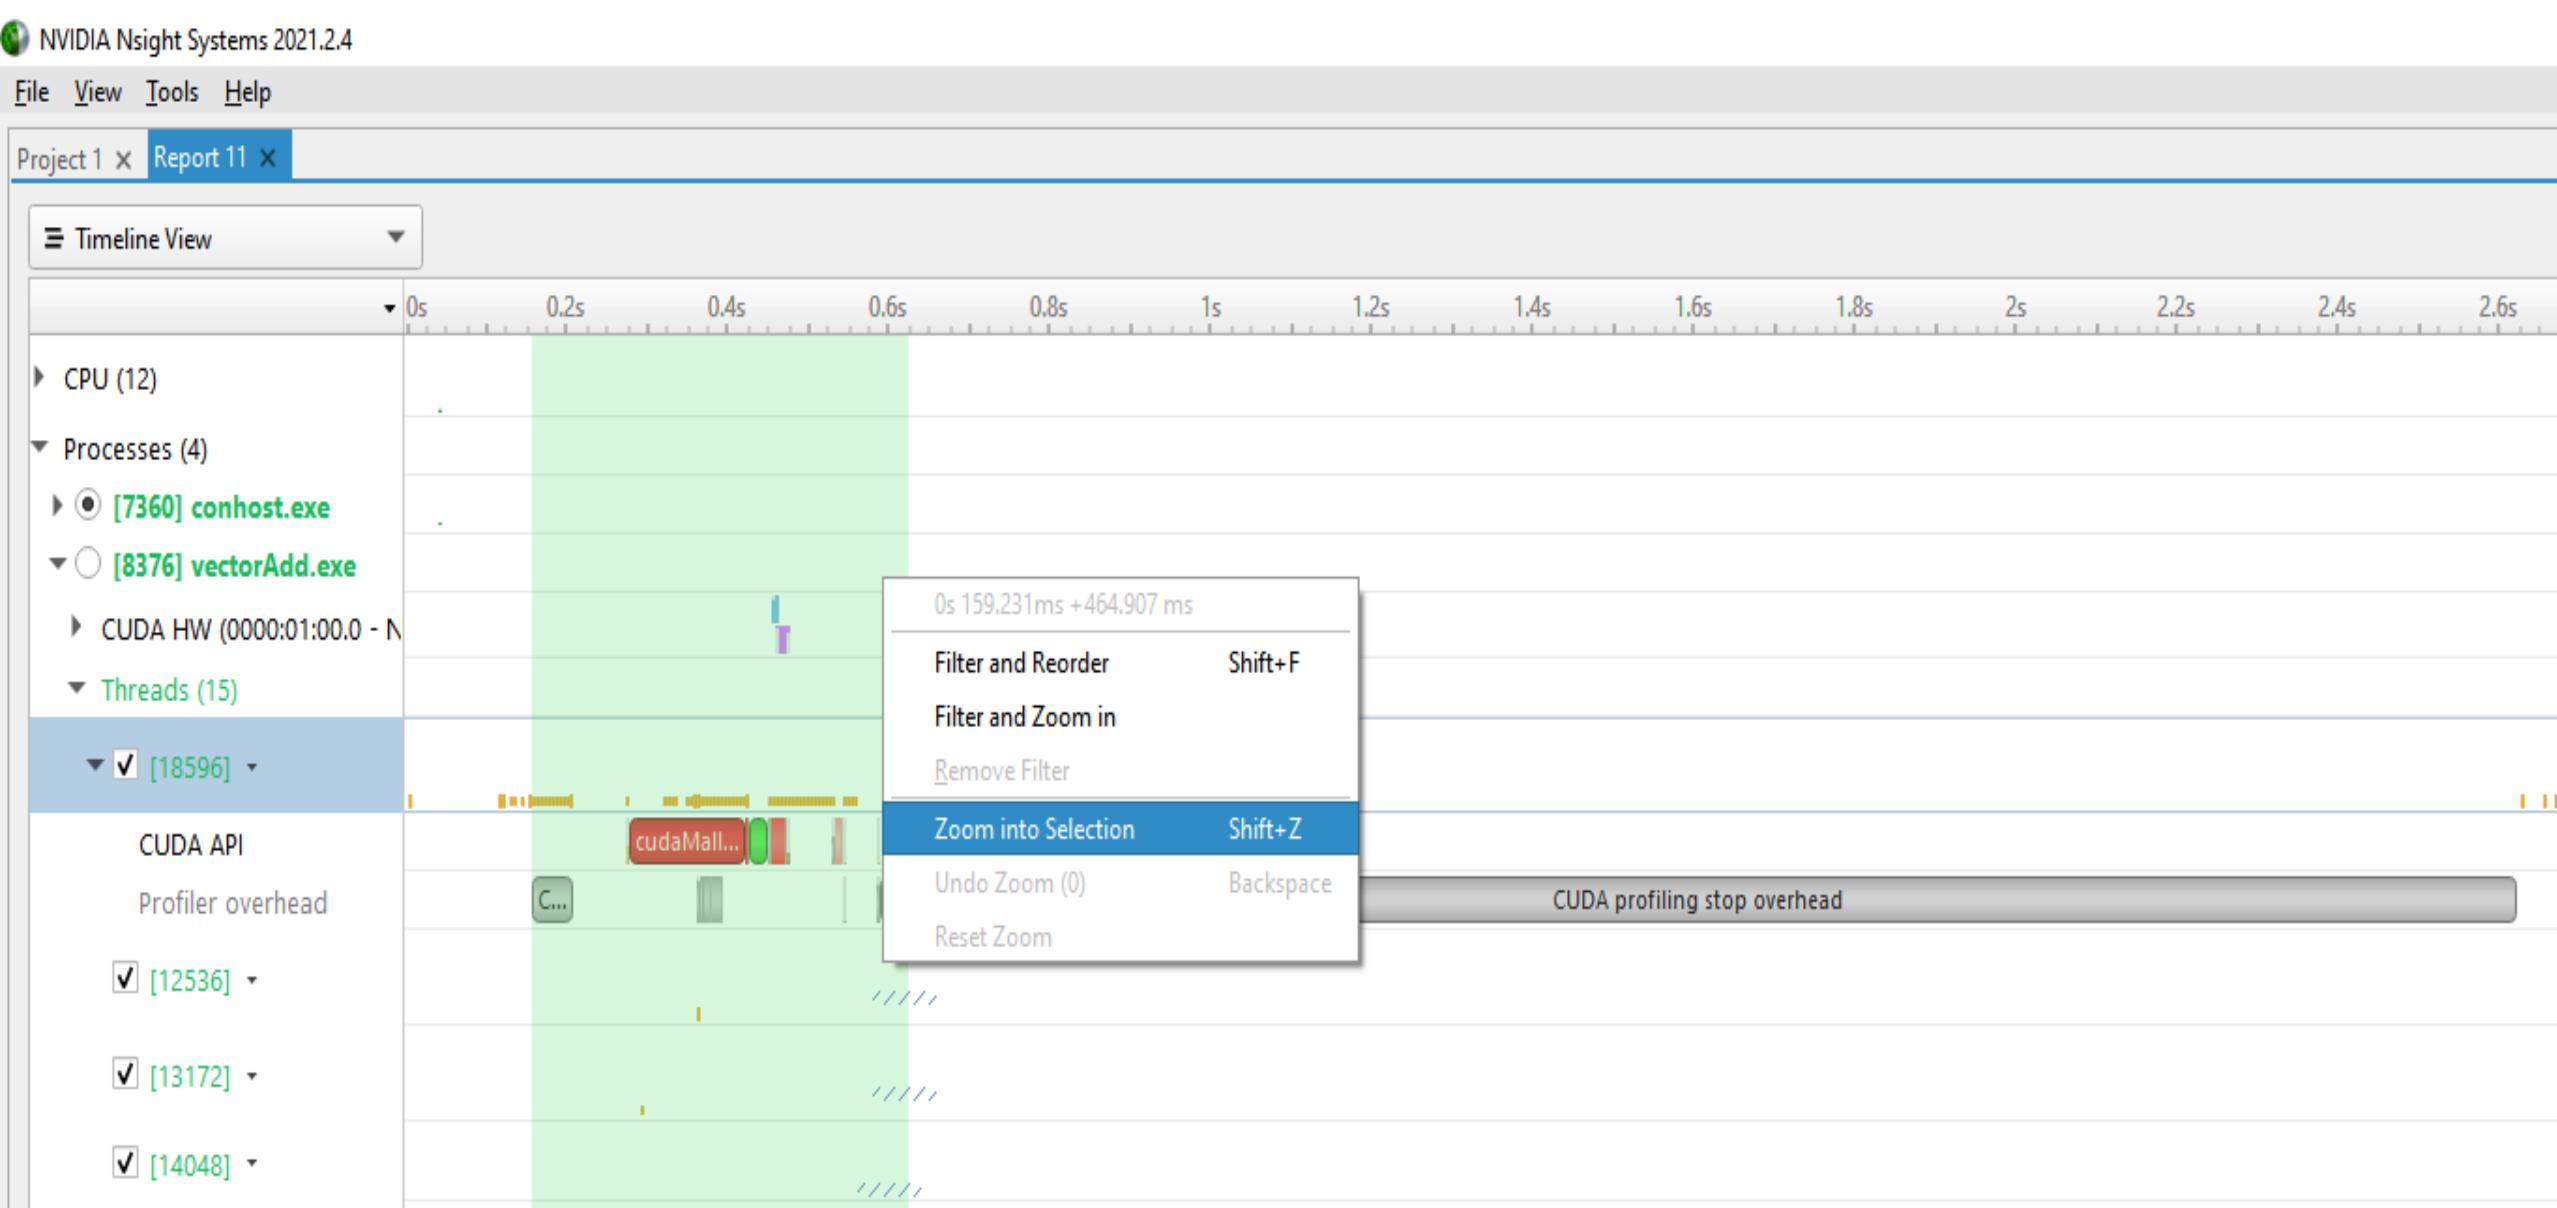

Nsight Visual Studio Extension

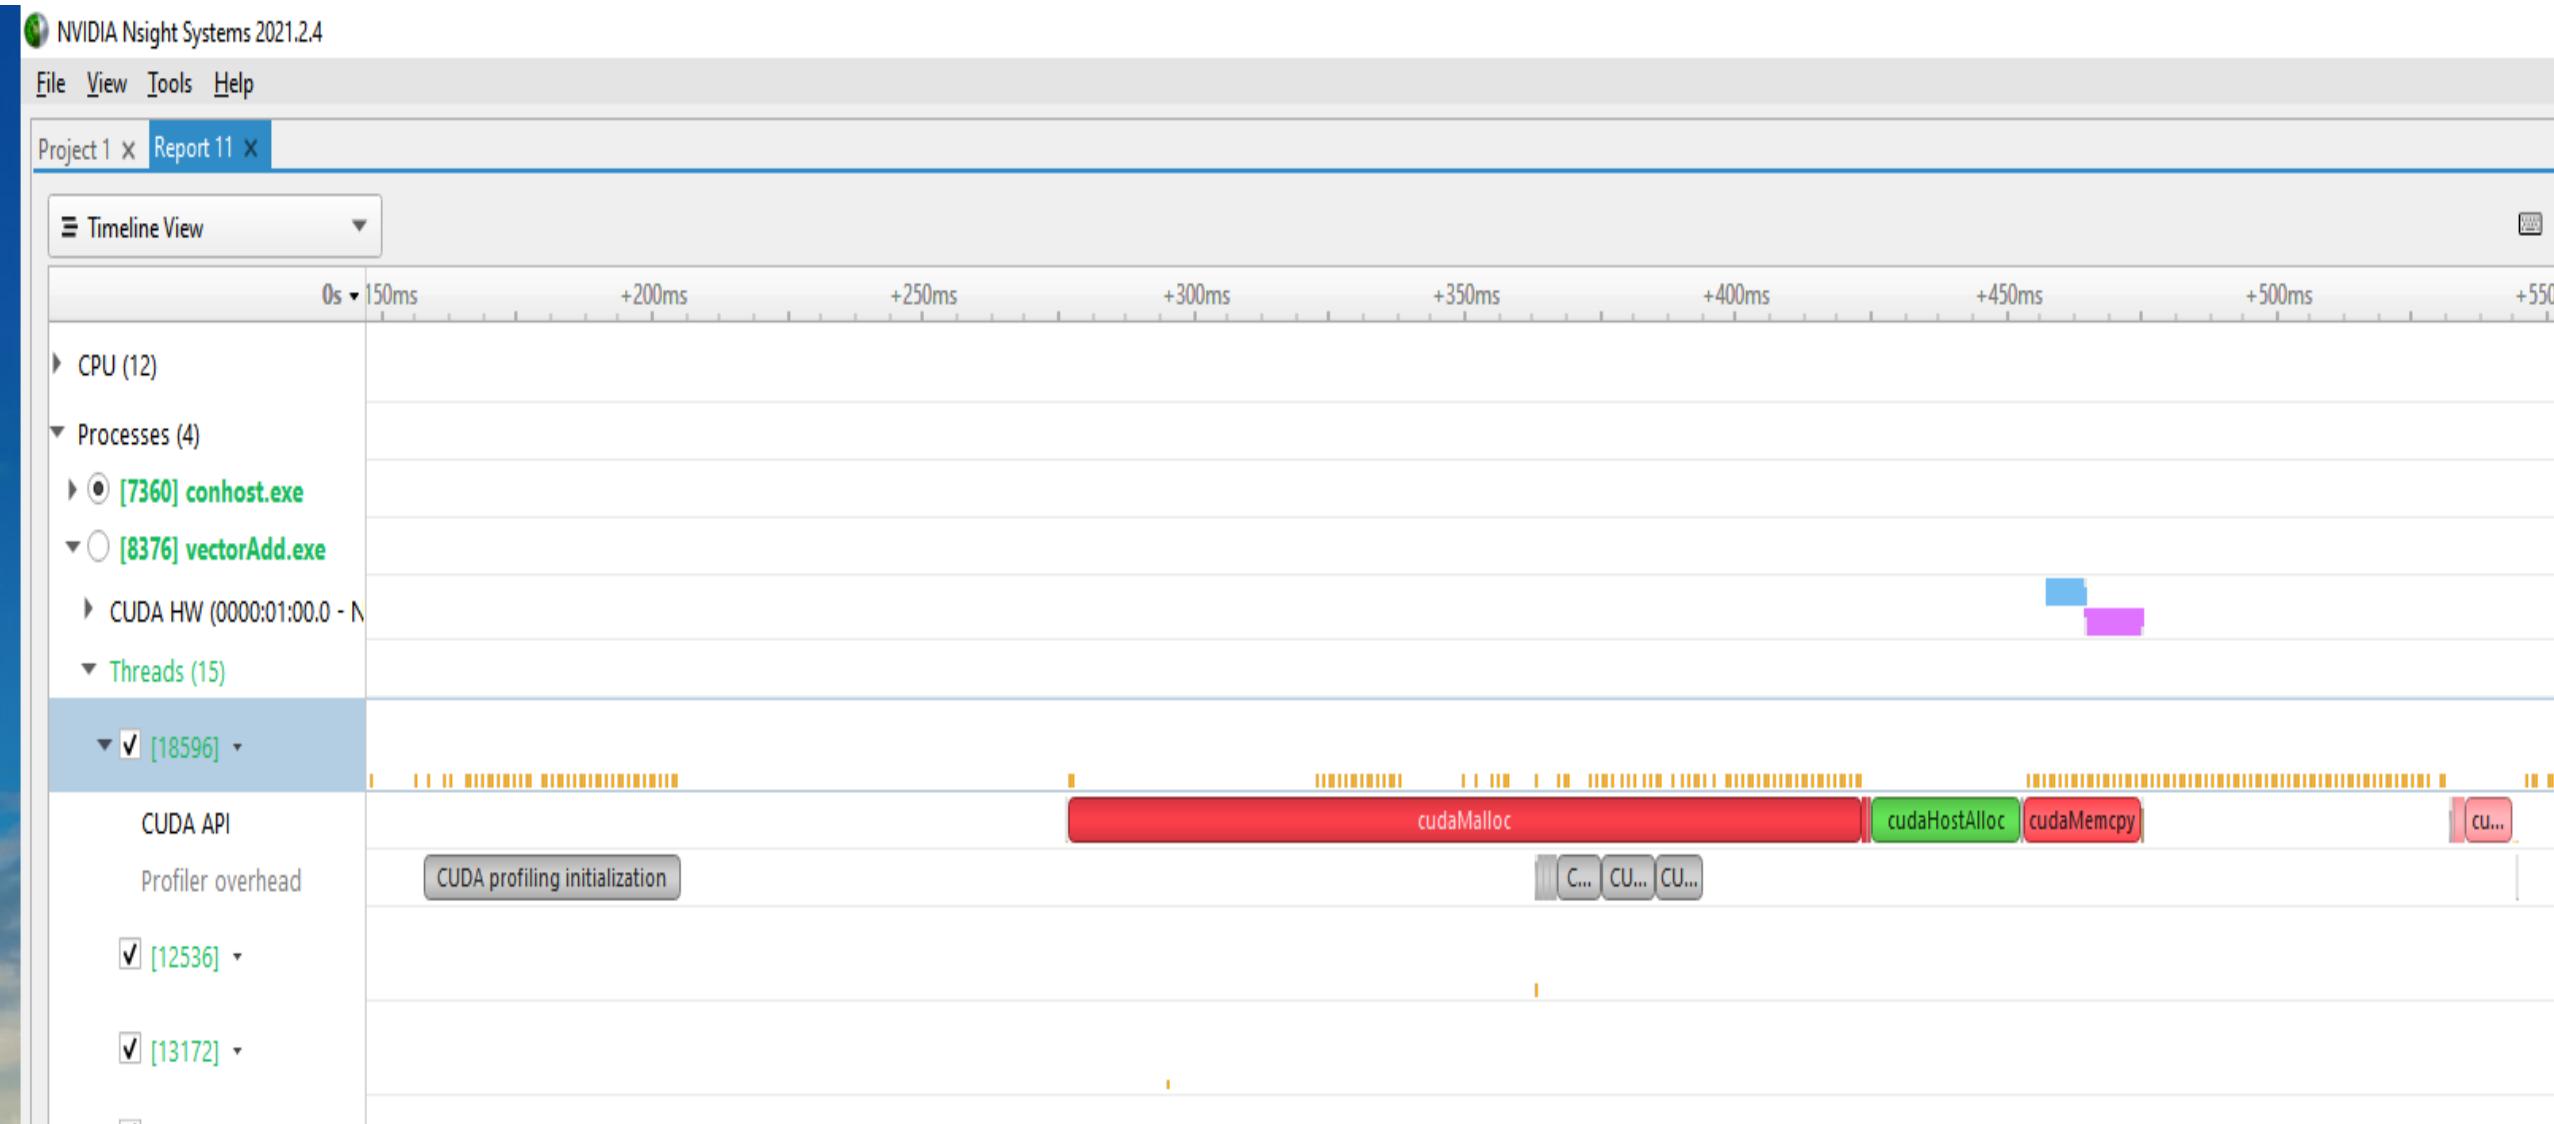

No Pre-fetch

NVIDIA Nsight Systems 2020.3.4


File View Tools Help

Project 1 X vector-add-no-prefetch-report.qdrep

vector-add-prefetch-report.qdrep X init-kernel-report.qdrep X prefetch-to-host-report.qdrep X

1 error, 4 warnings, 11 messages

Timeline View

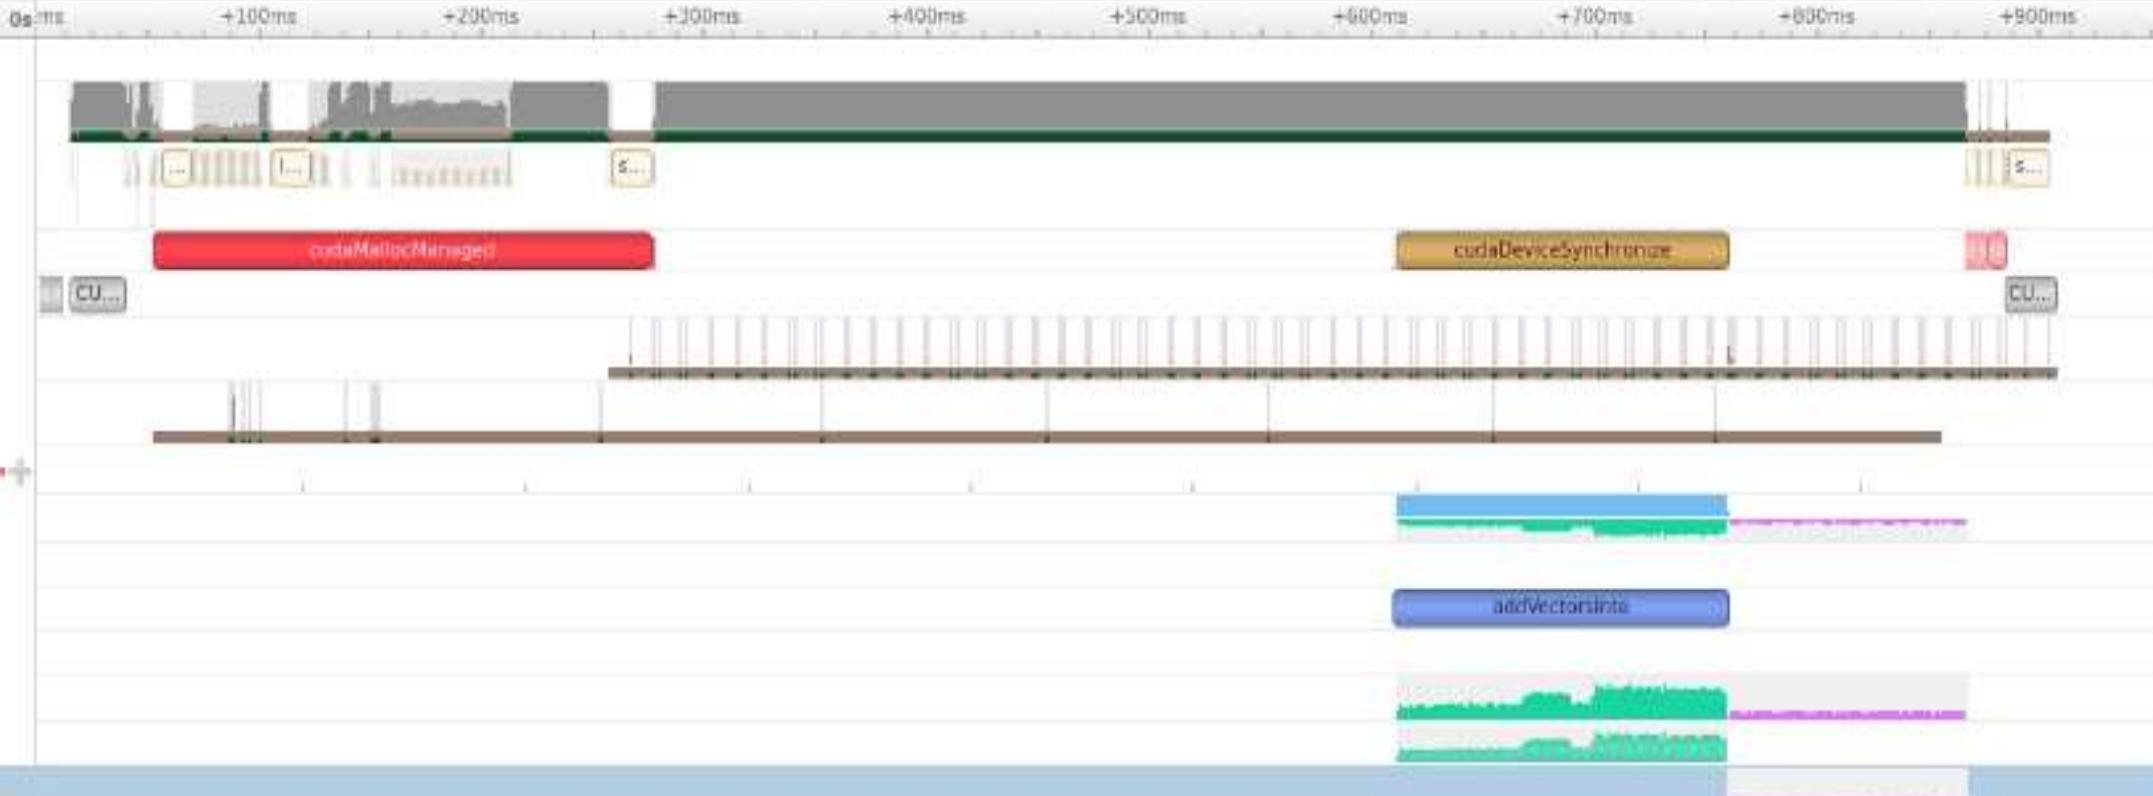

CUDA Memory Operation Statistics (nanoseconds)

Time(%)	Total Time	Operations	Average	Minimum	Maximum	Name
78.7	77932864	7526	10355.2	1824	133920	[CUDA Unified Memory memcpy HtoD]
21.3	21067424	768	27431.5	1376	159840	[CUDA Unified Memory memcpy DtoH]

Pre-fetch to GPU




Pre-fetch with Init in Kernel

NVIDIA Nsight Systems 2020.3.4

File View Tools Help

Project 1 × vector-add-no-prefetch-report.qdrep × vector-add-prefetch-report.qdrep × init-kernel-report.qdrep × prefetch-to-host-report.qdrep ×

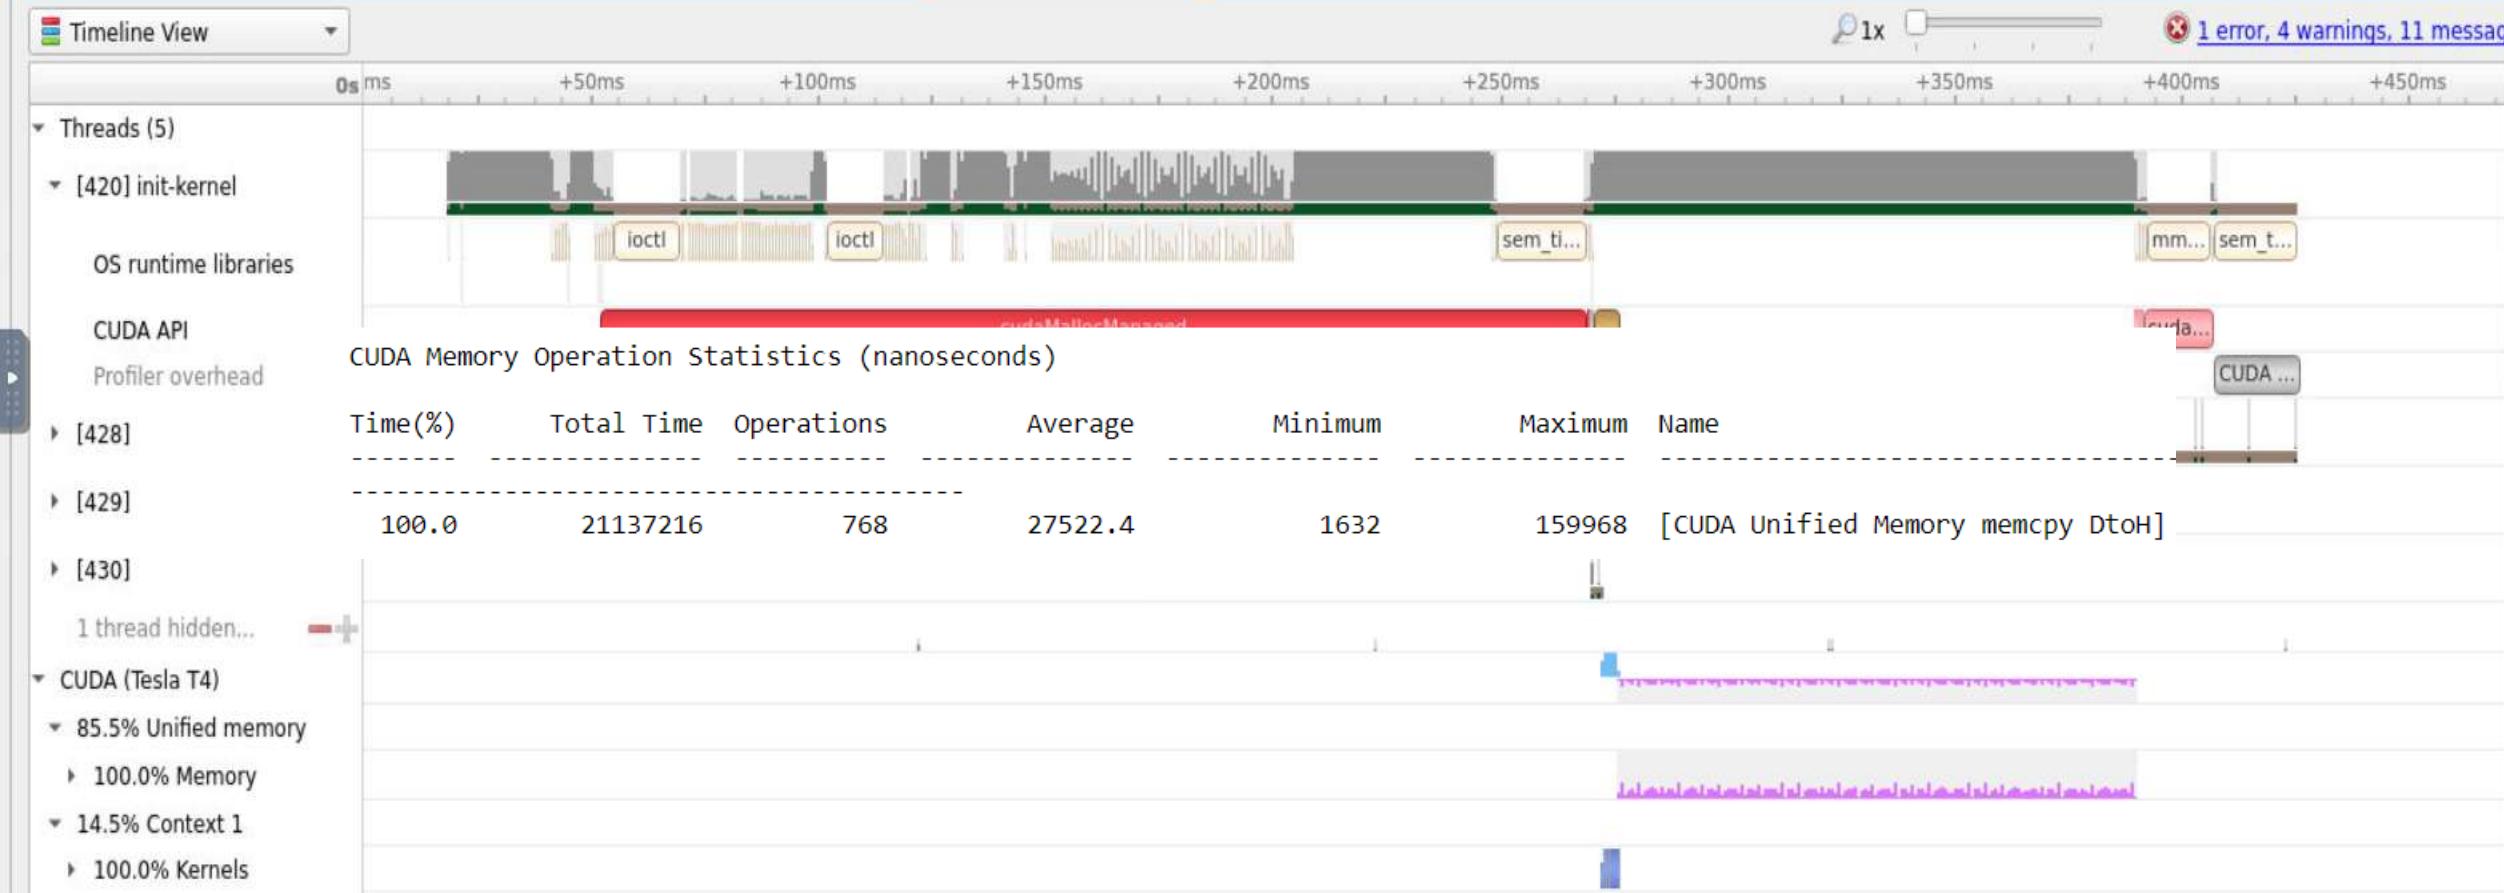

CUDA Memory Operation Statistics (nanoseconds)

Time(%)	Total Time	Operations	Average	Minimum	Maximum	Name
100.0	21137216	768	27522.4	1632	159968	[CUDA Unified Memory memcpy DtoH]


Pre-fetch back to Host

NVIDIA Nsight Systems 2020.3.4

File View Tools Help


Project 1 X vector-add-no-prefetch-report.qdrep X vector-add-prefetch-report.qdrep X init-kernel-report.qdrep X prefetch-to-host-report.qdrep X

1 error, 4 warnings, 11 messages

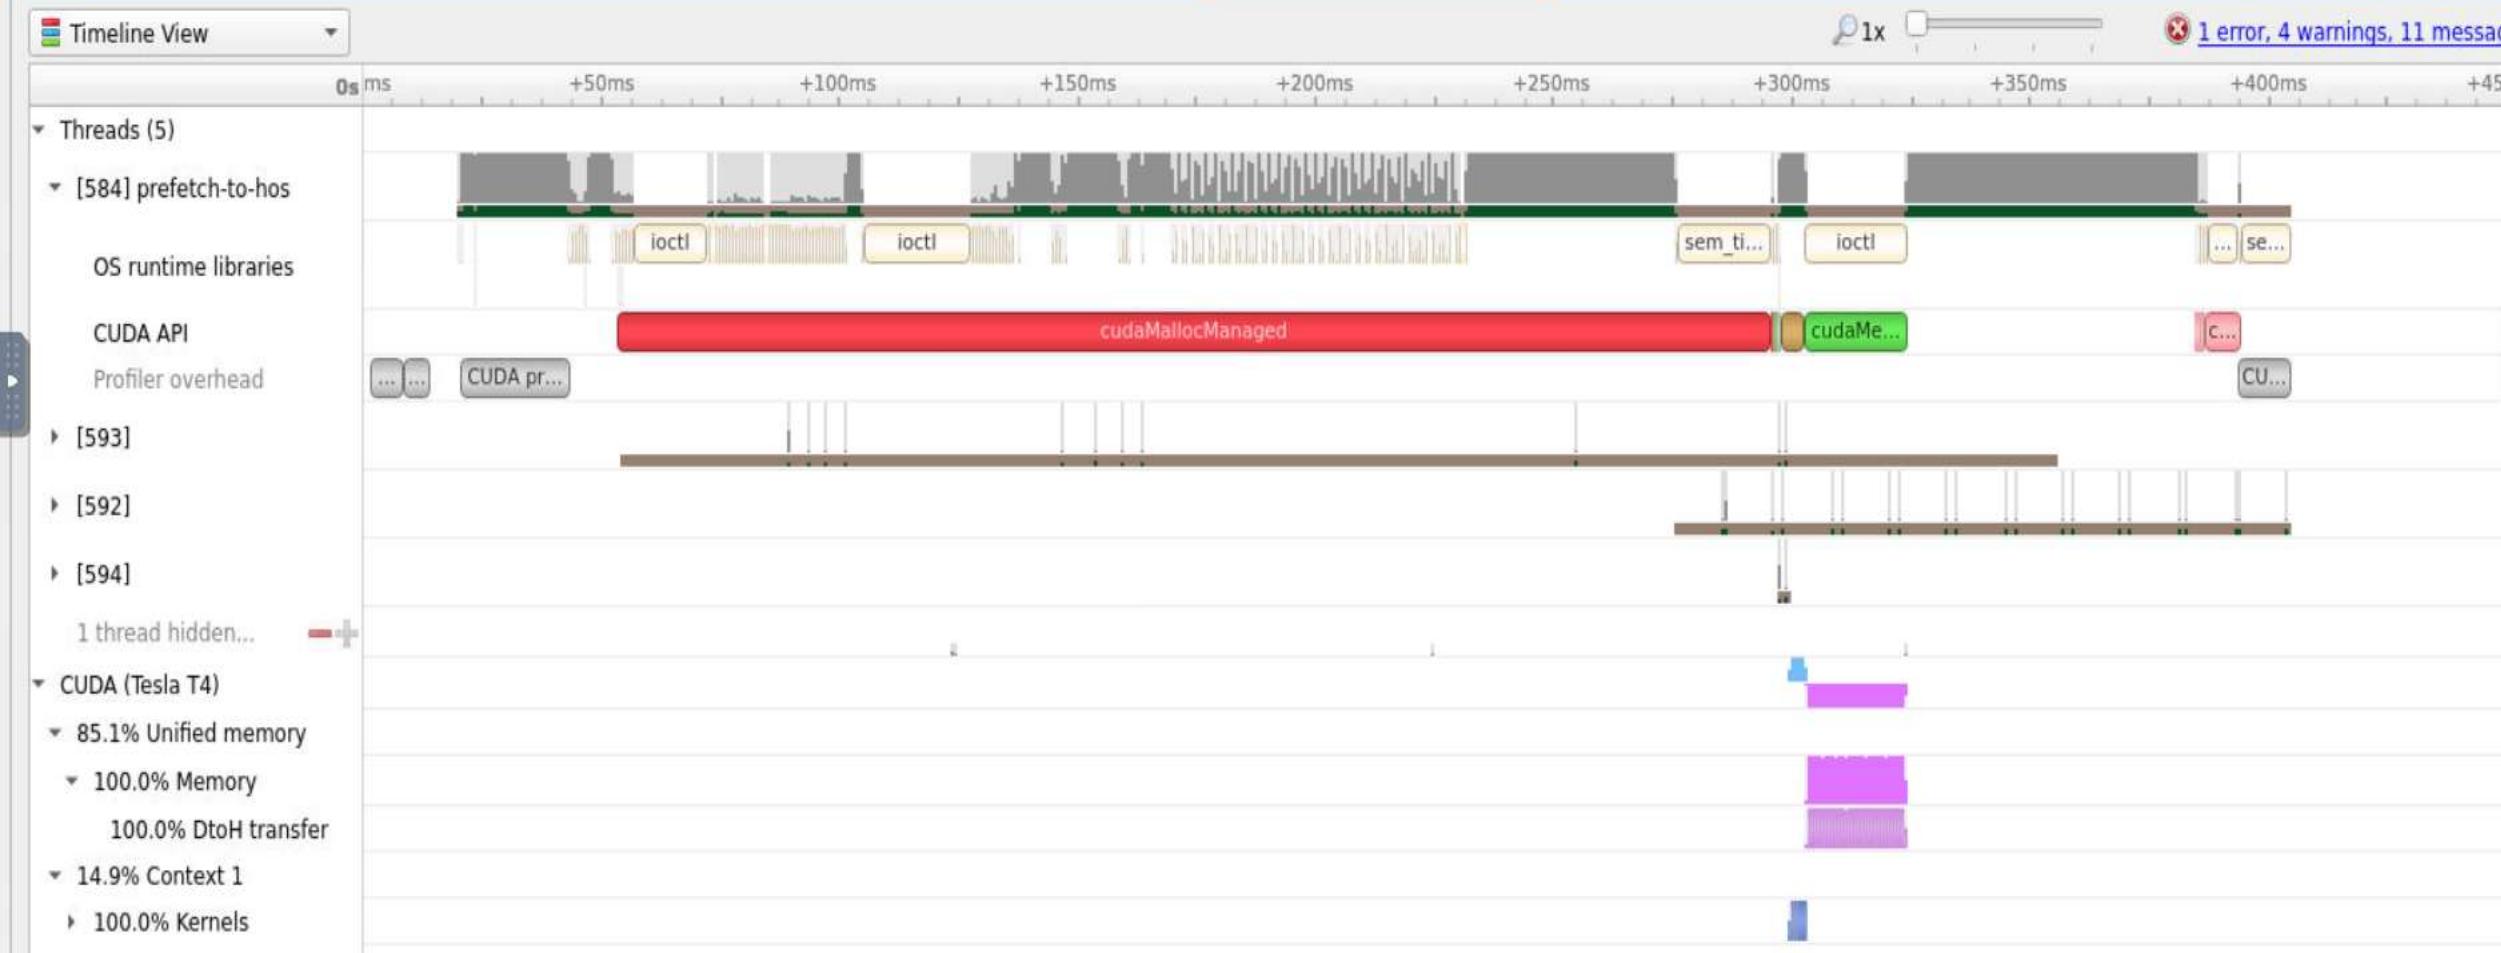



Non-Unified Memory

Memory can be allocated directly to
the GPU with ``cudaMalloc``

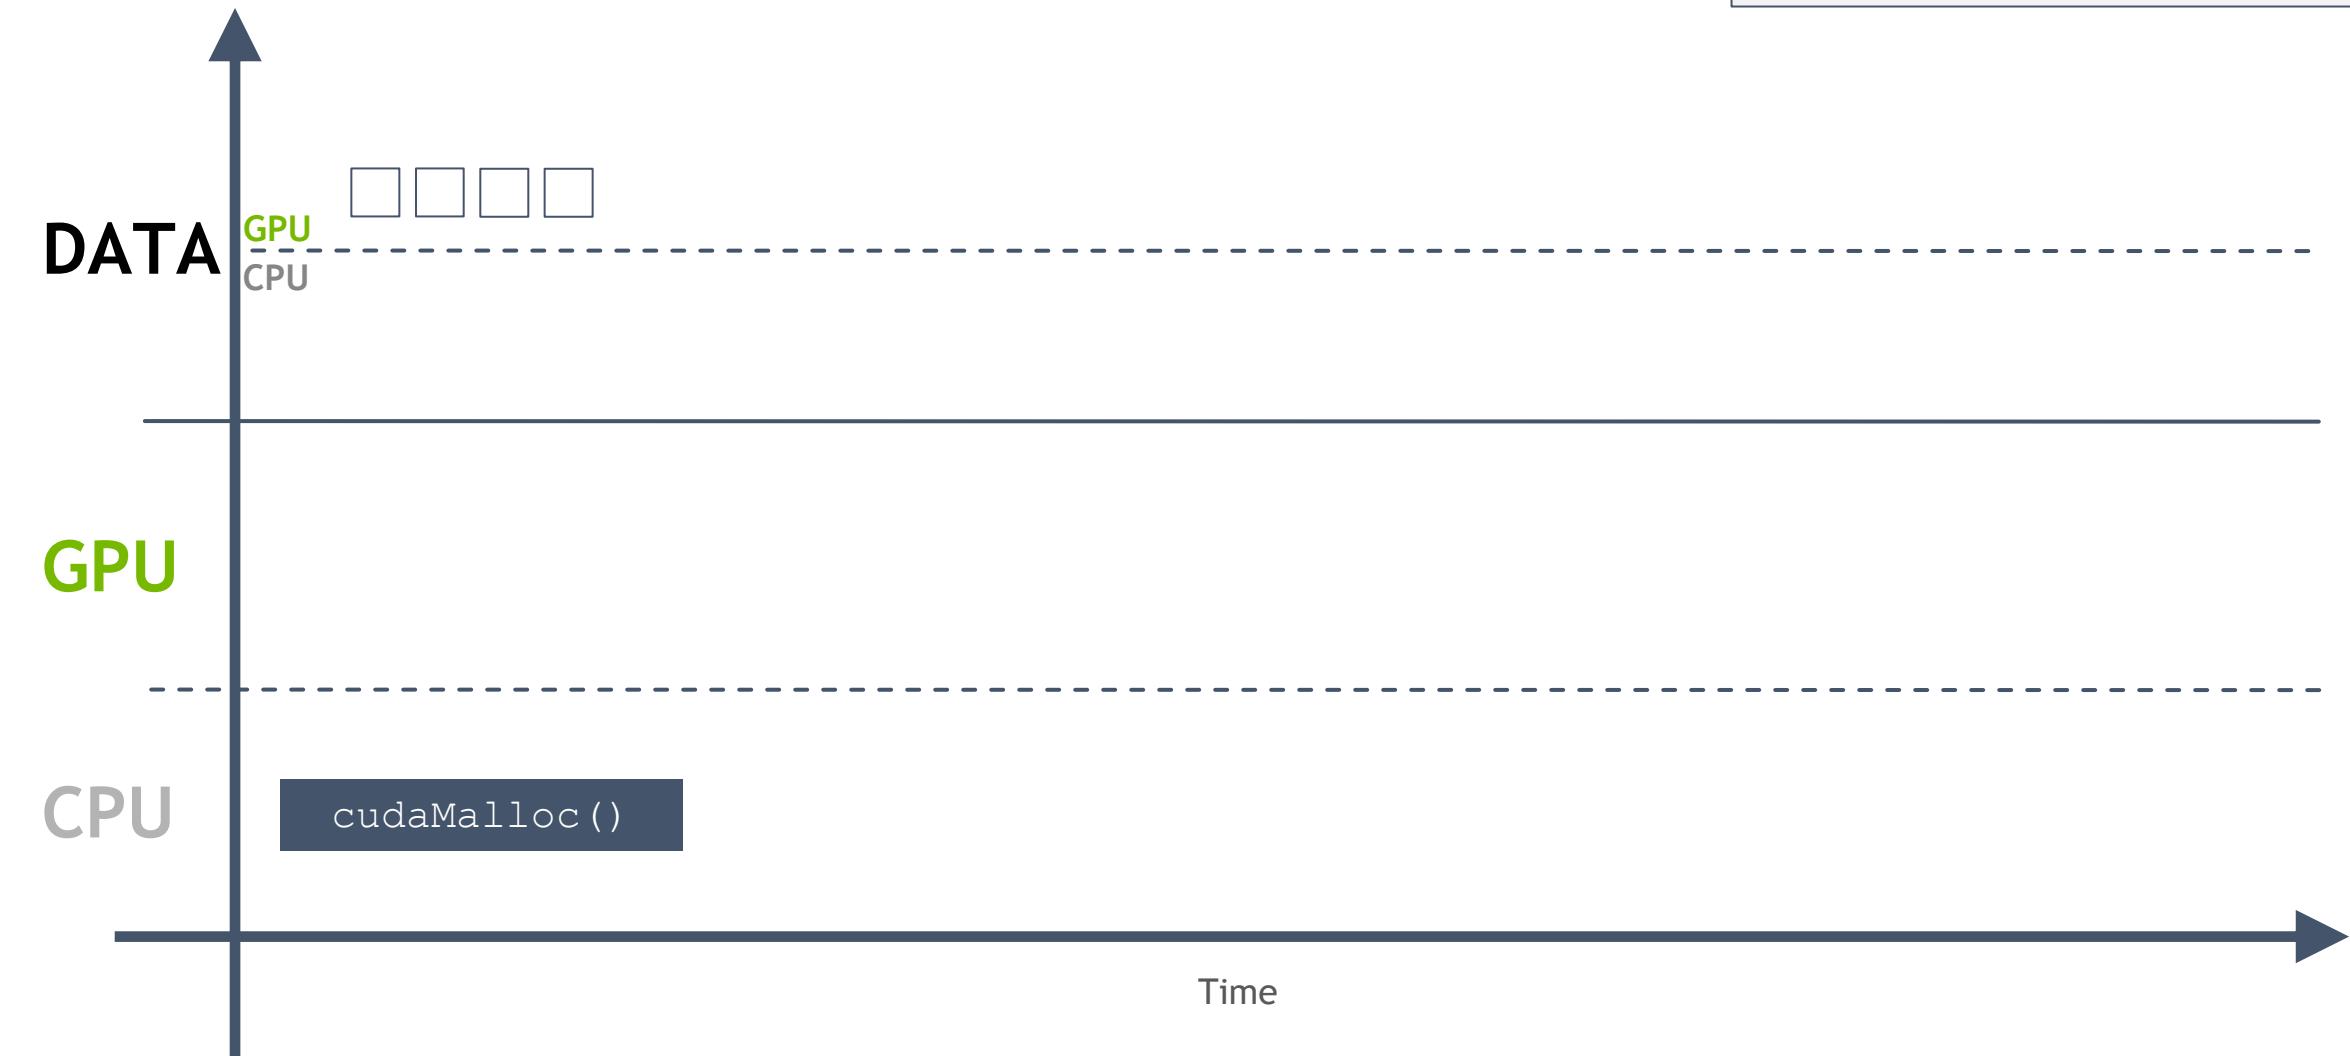

Memory can be allocated directly to
the host with `'cudaMallocHost'`

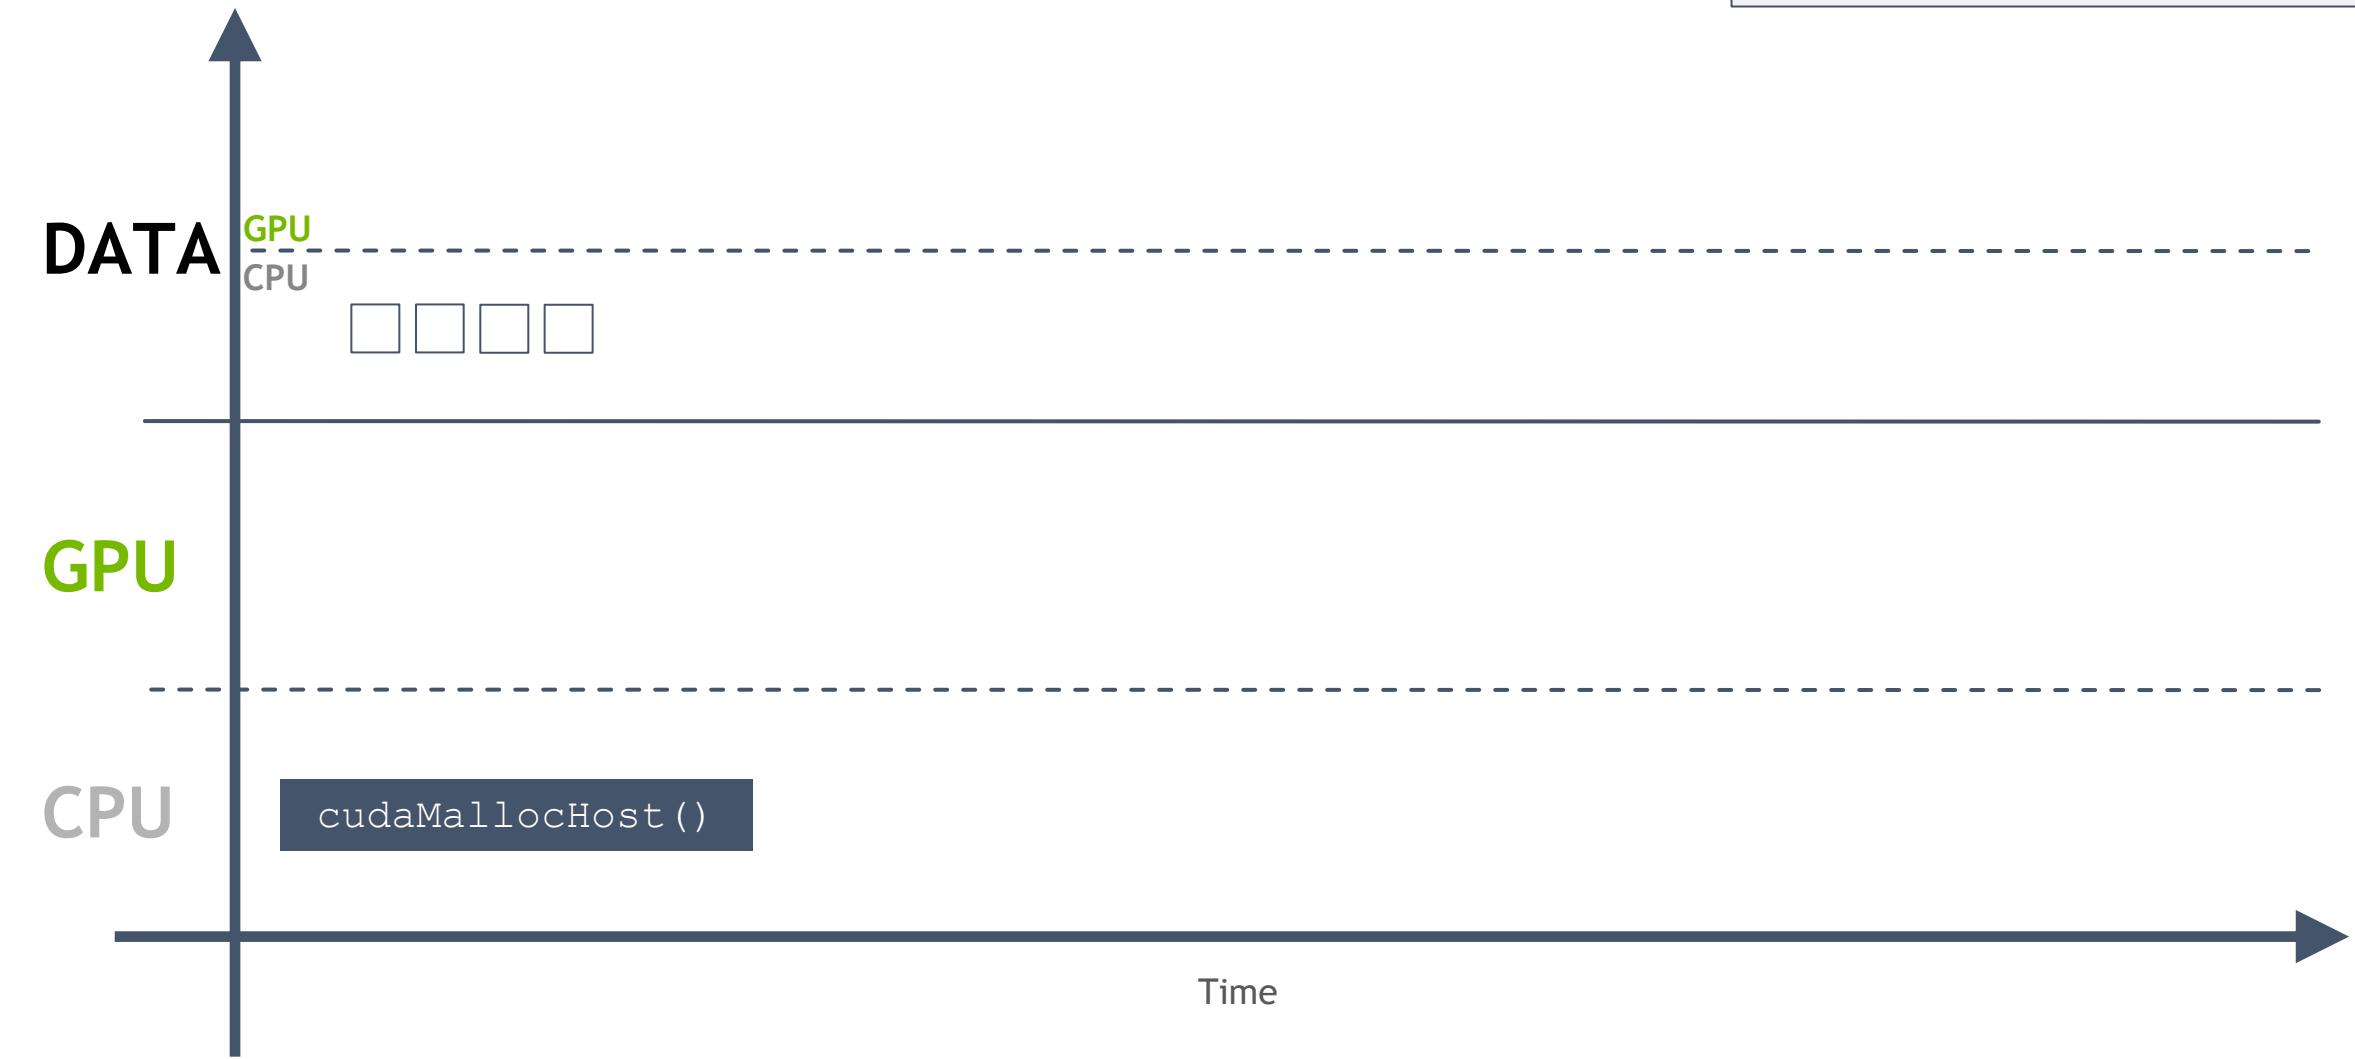

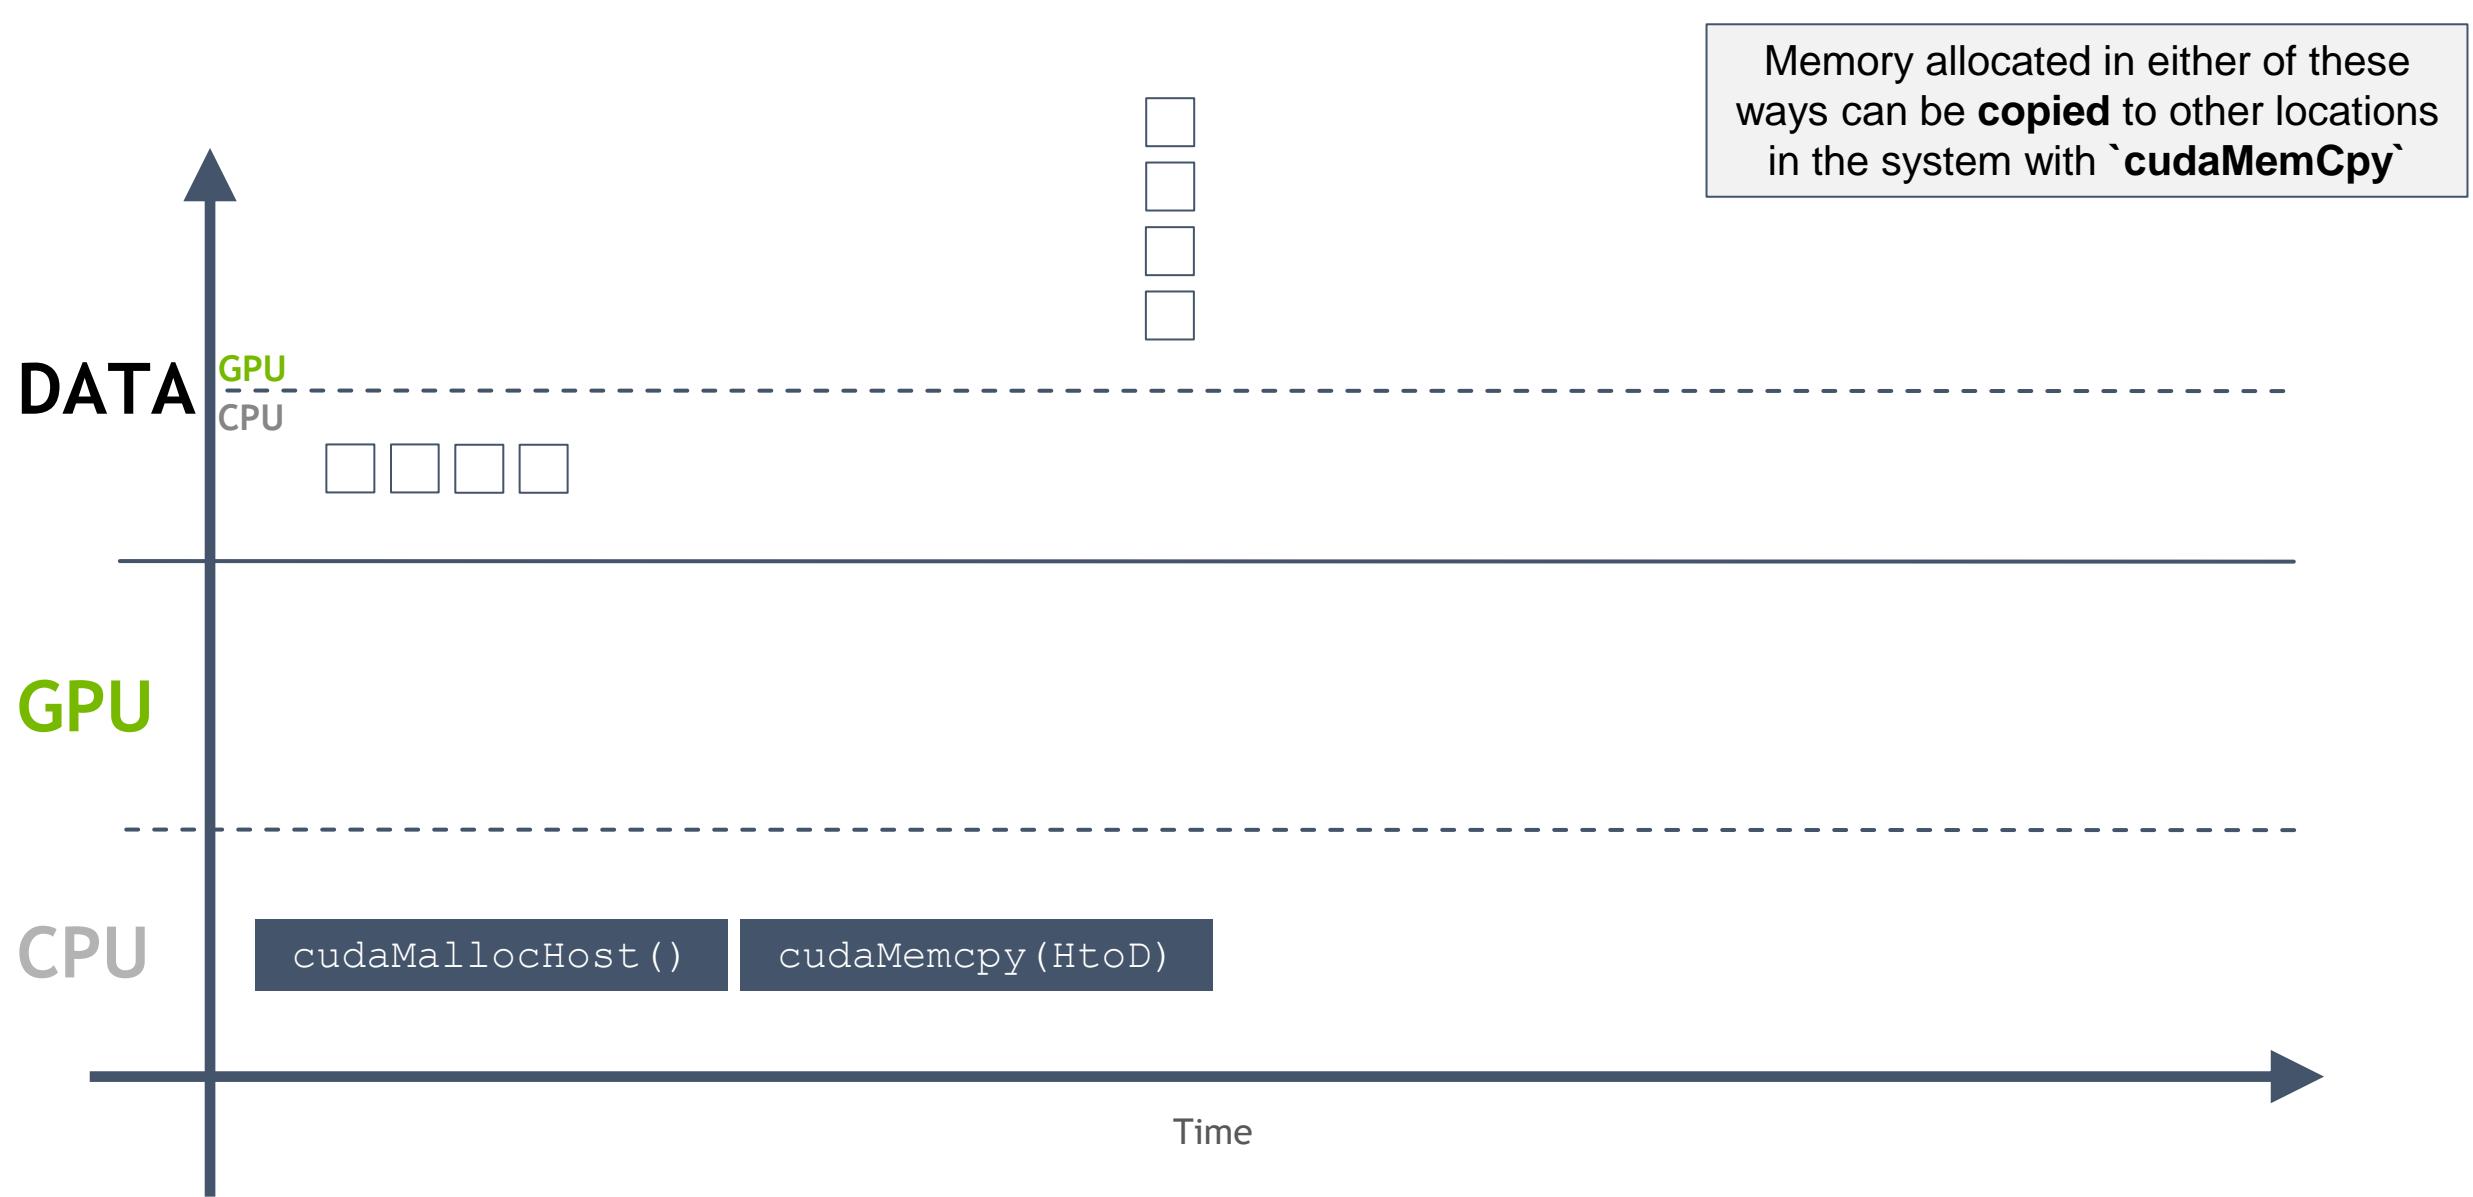

Copying leaves 2 copies in of in the system

DATA

GPU

CPU



GPU

CPU


cudaMallocHost()

cudaMemcpy(HtoD)


Time

cudaMemcpyAsync


``cudaMemcpyAsync`` can
asynchronously transfer memory over
a non-default stream

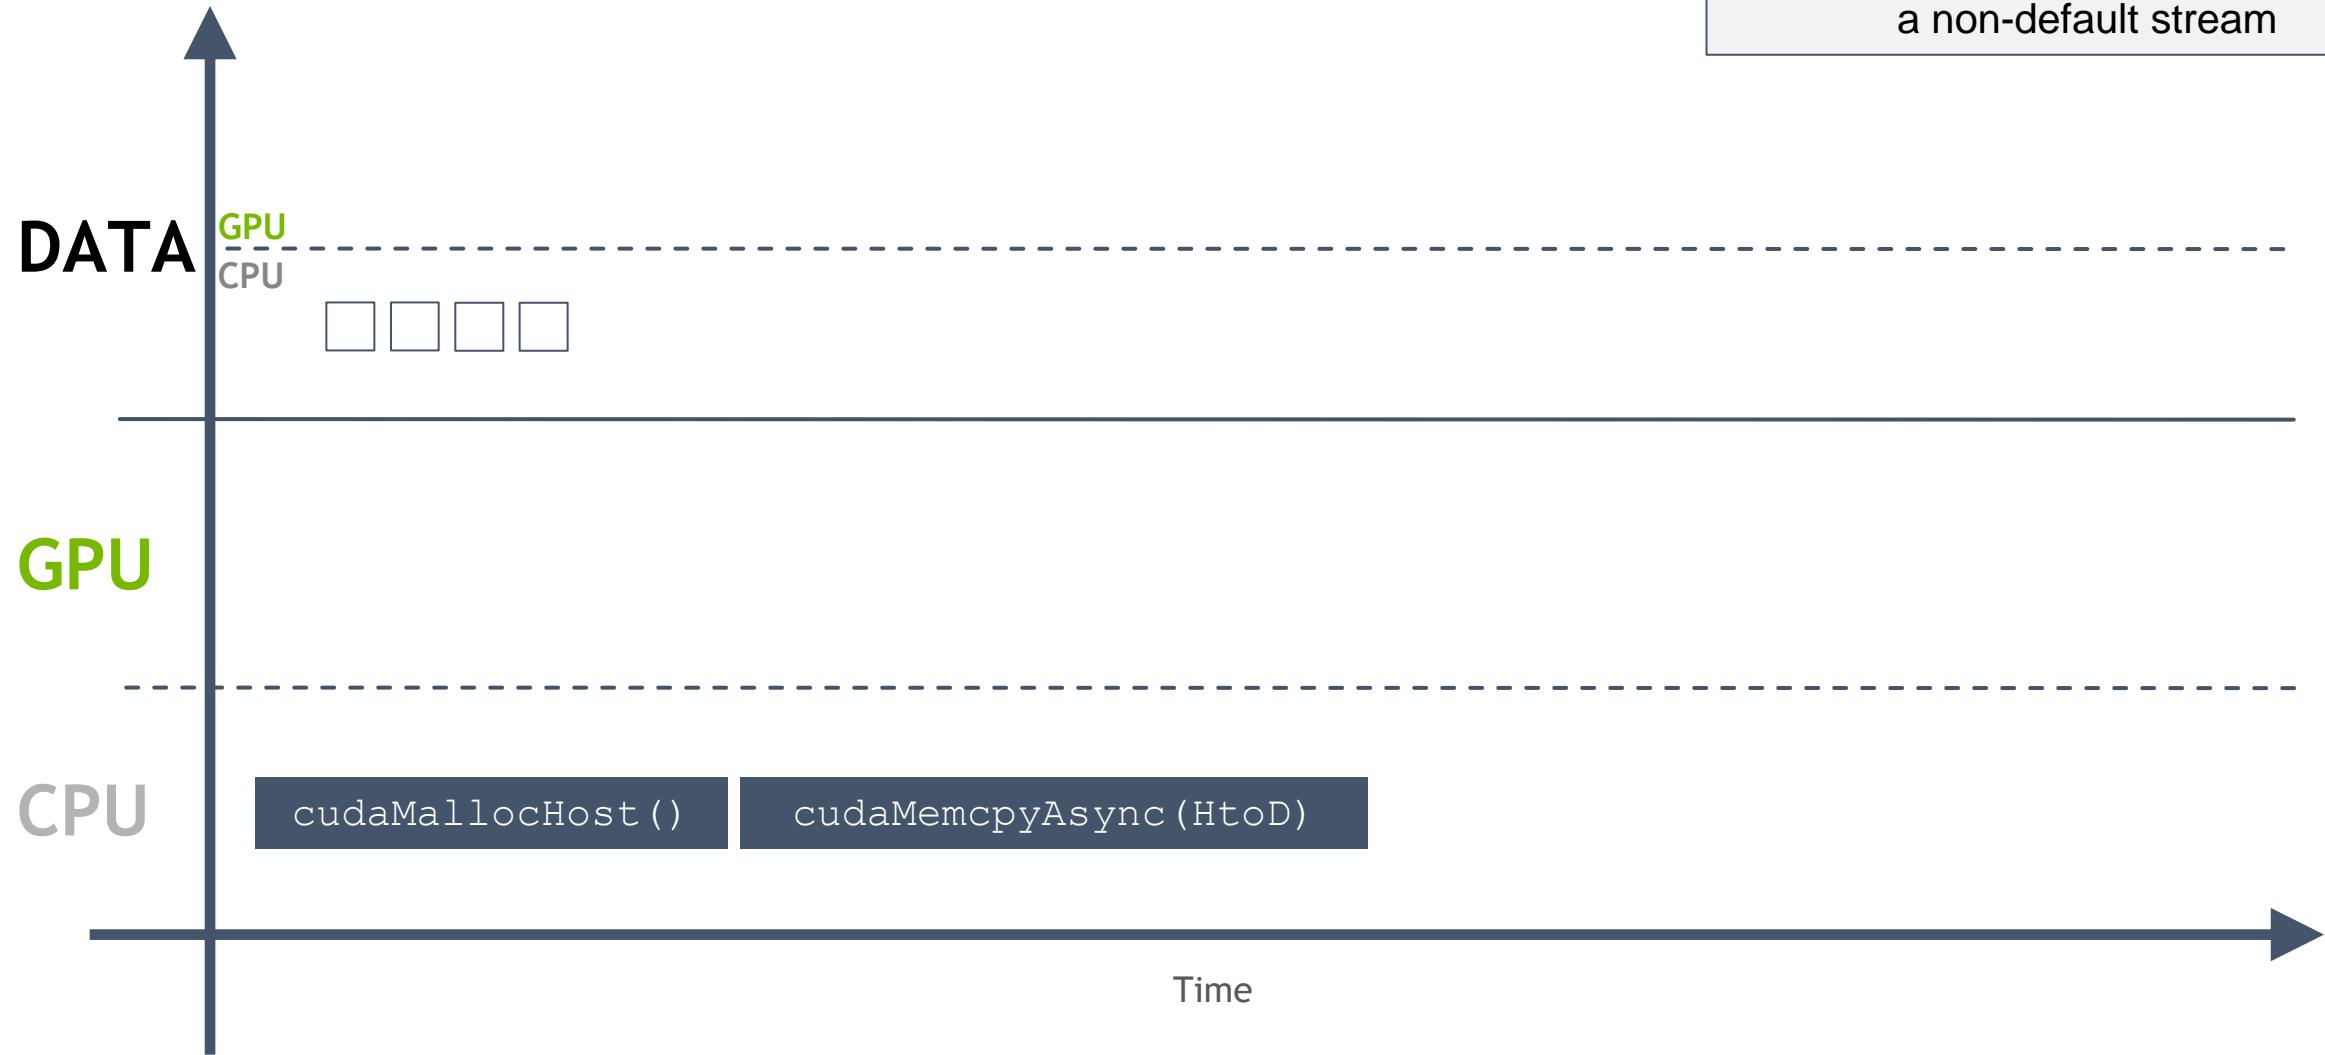


This can allow the **overlapping** memory copies and computation

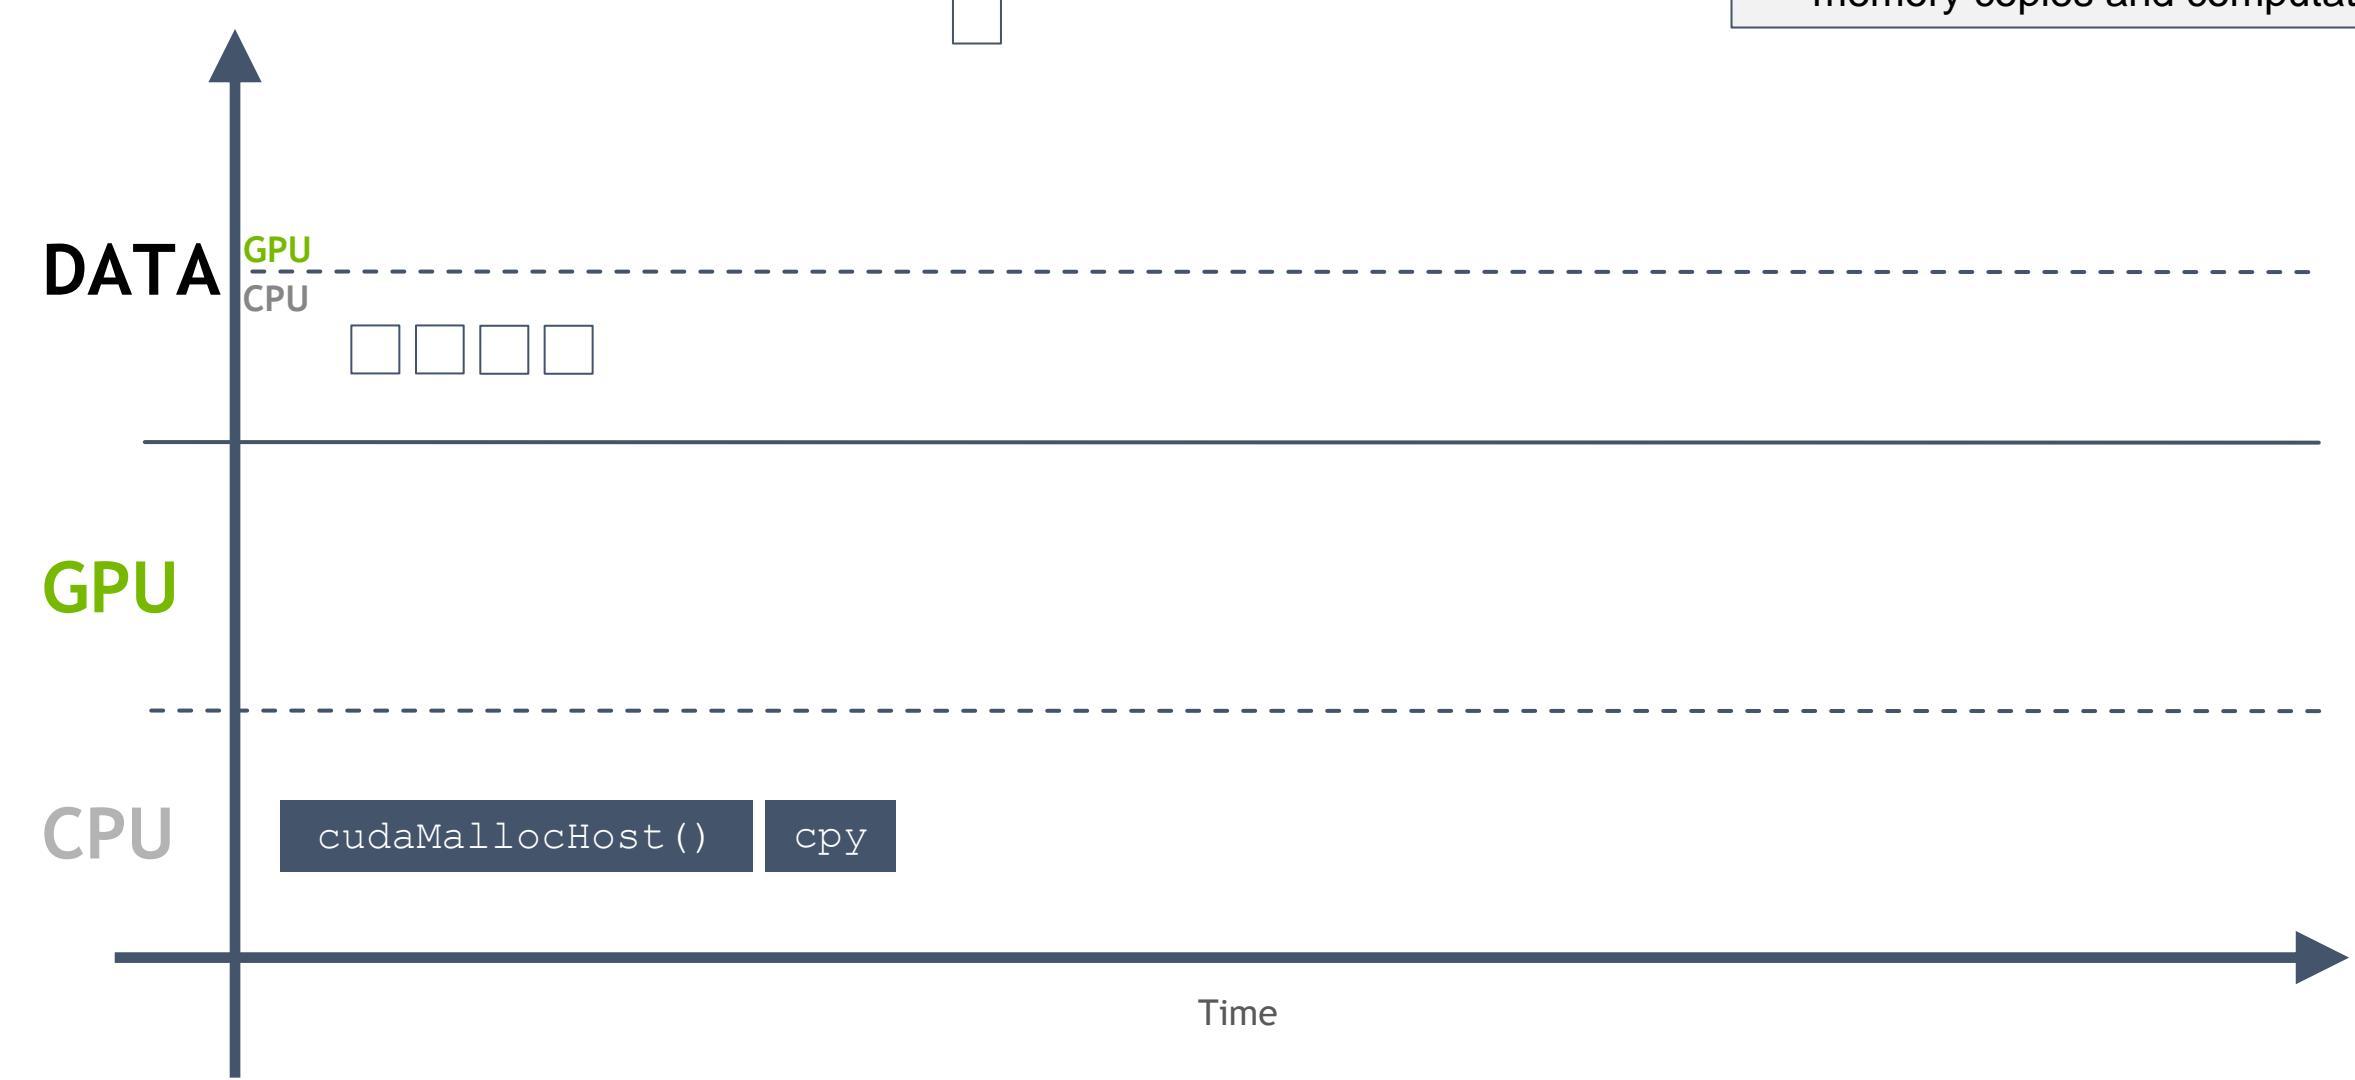


This can allow the **overlapping** memory copies and computation

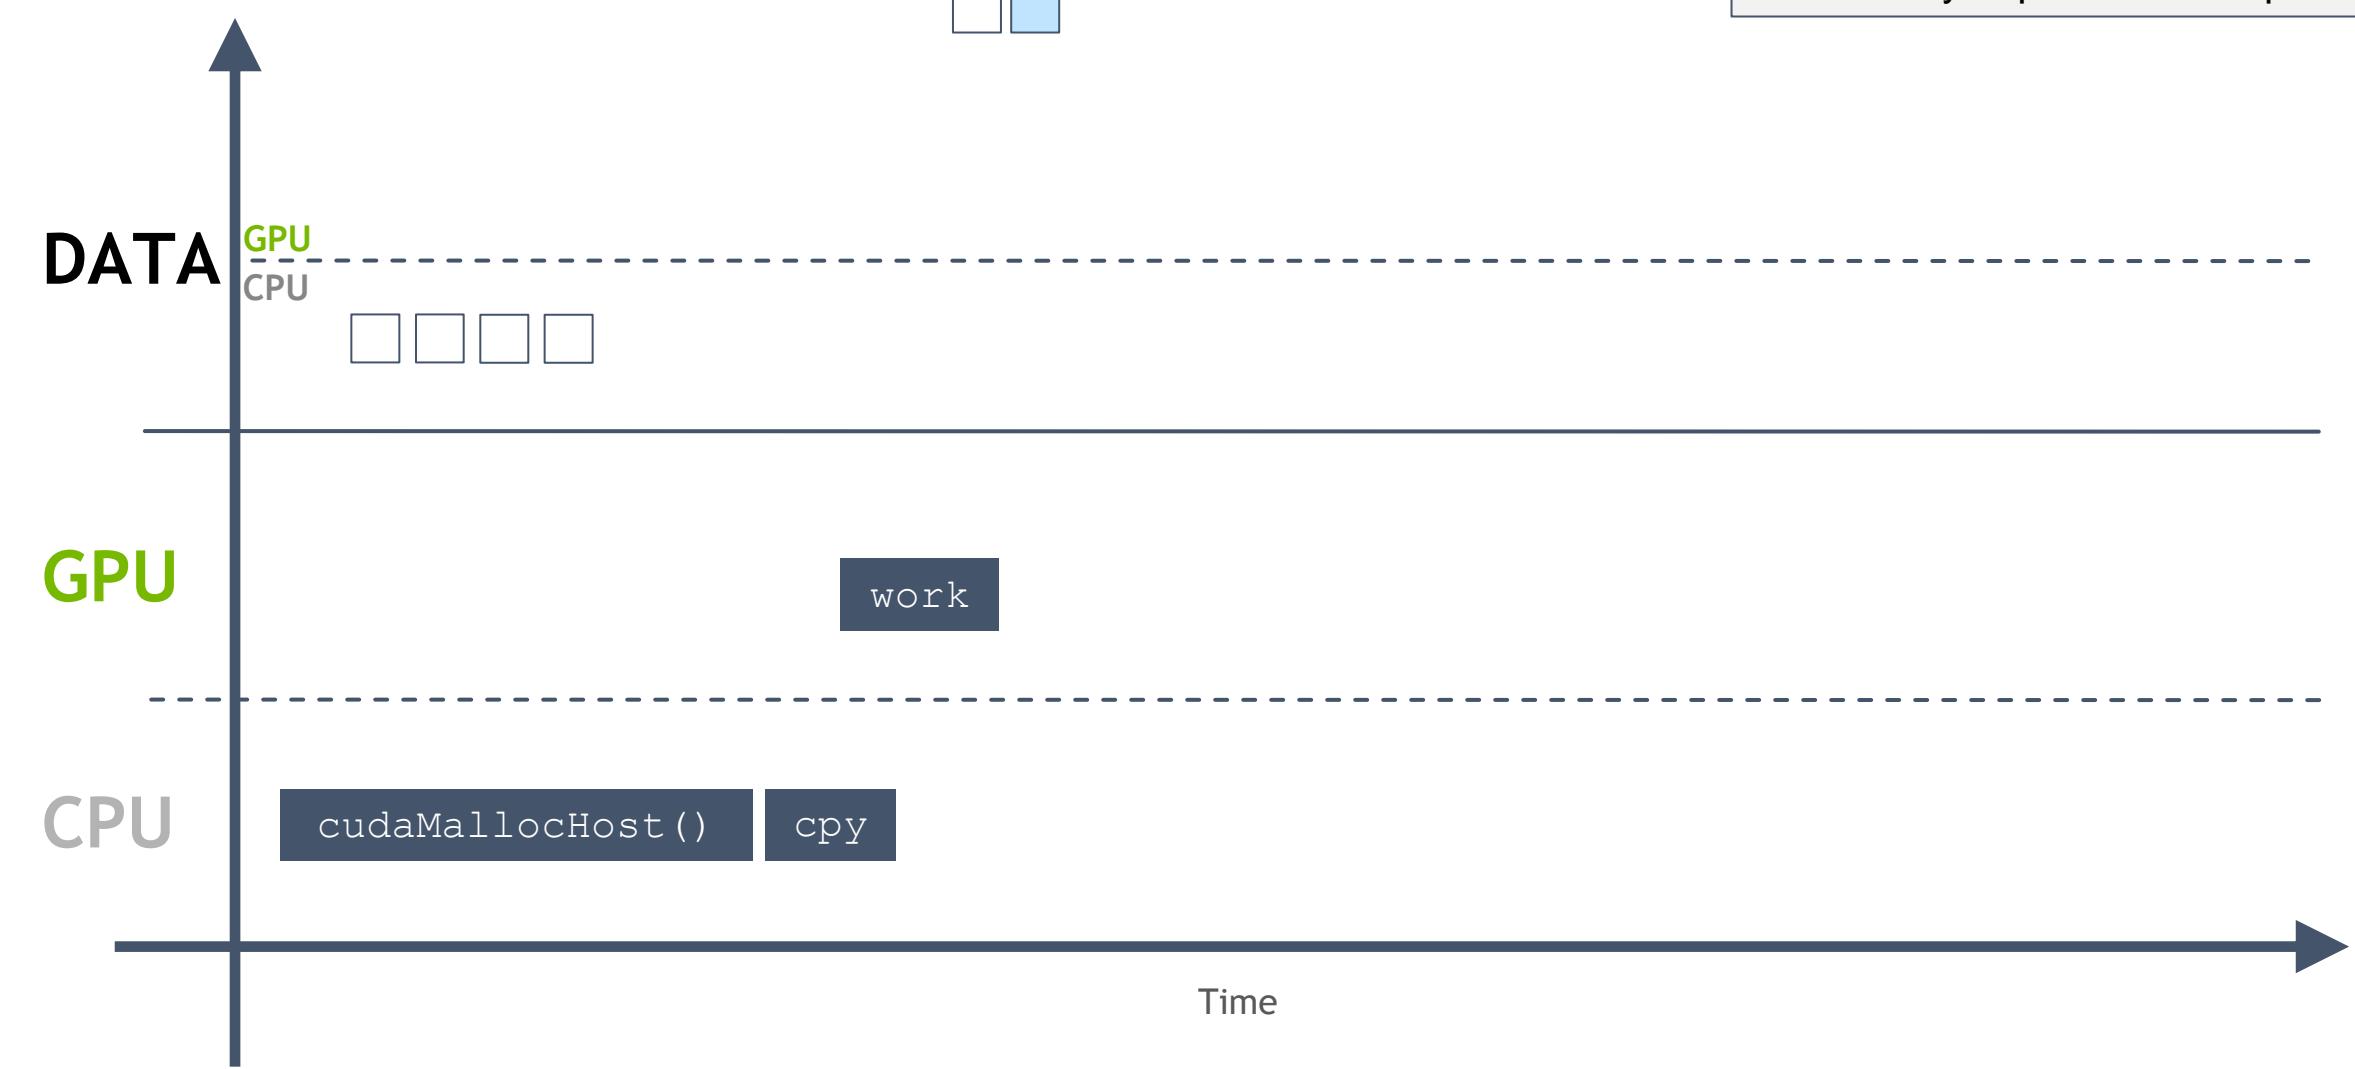


This can allow the **overlapping** memory copies and computation

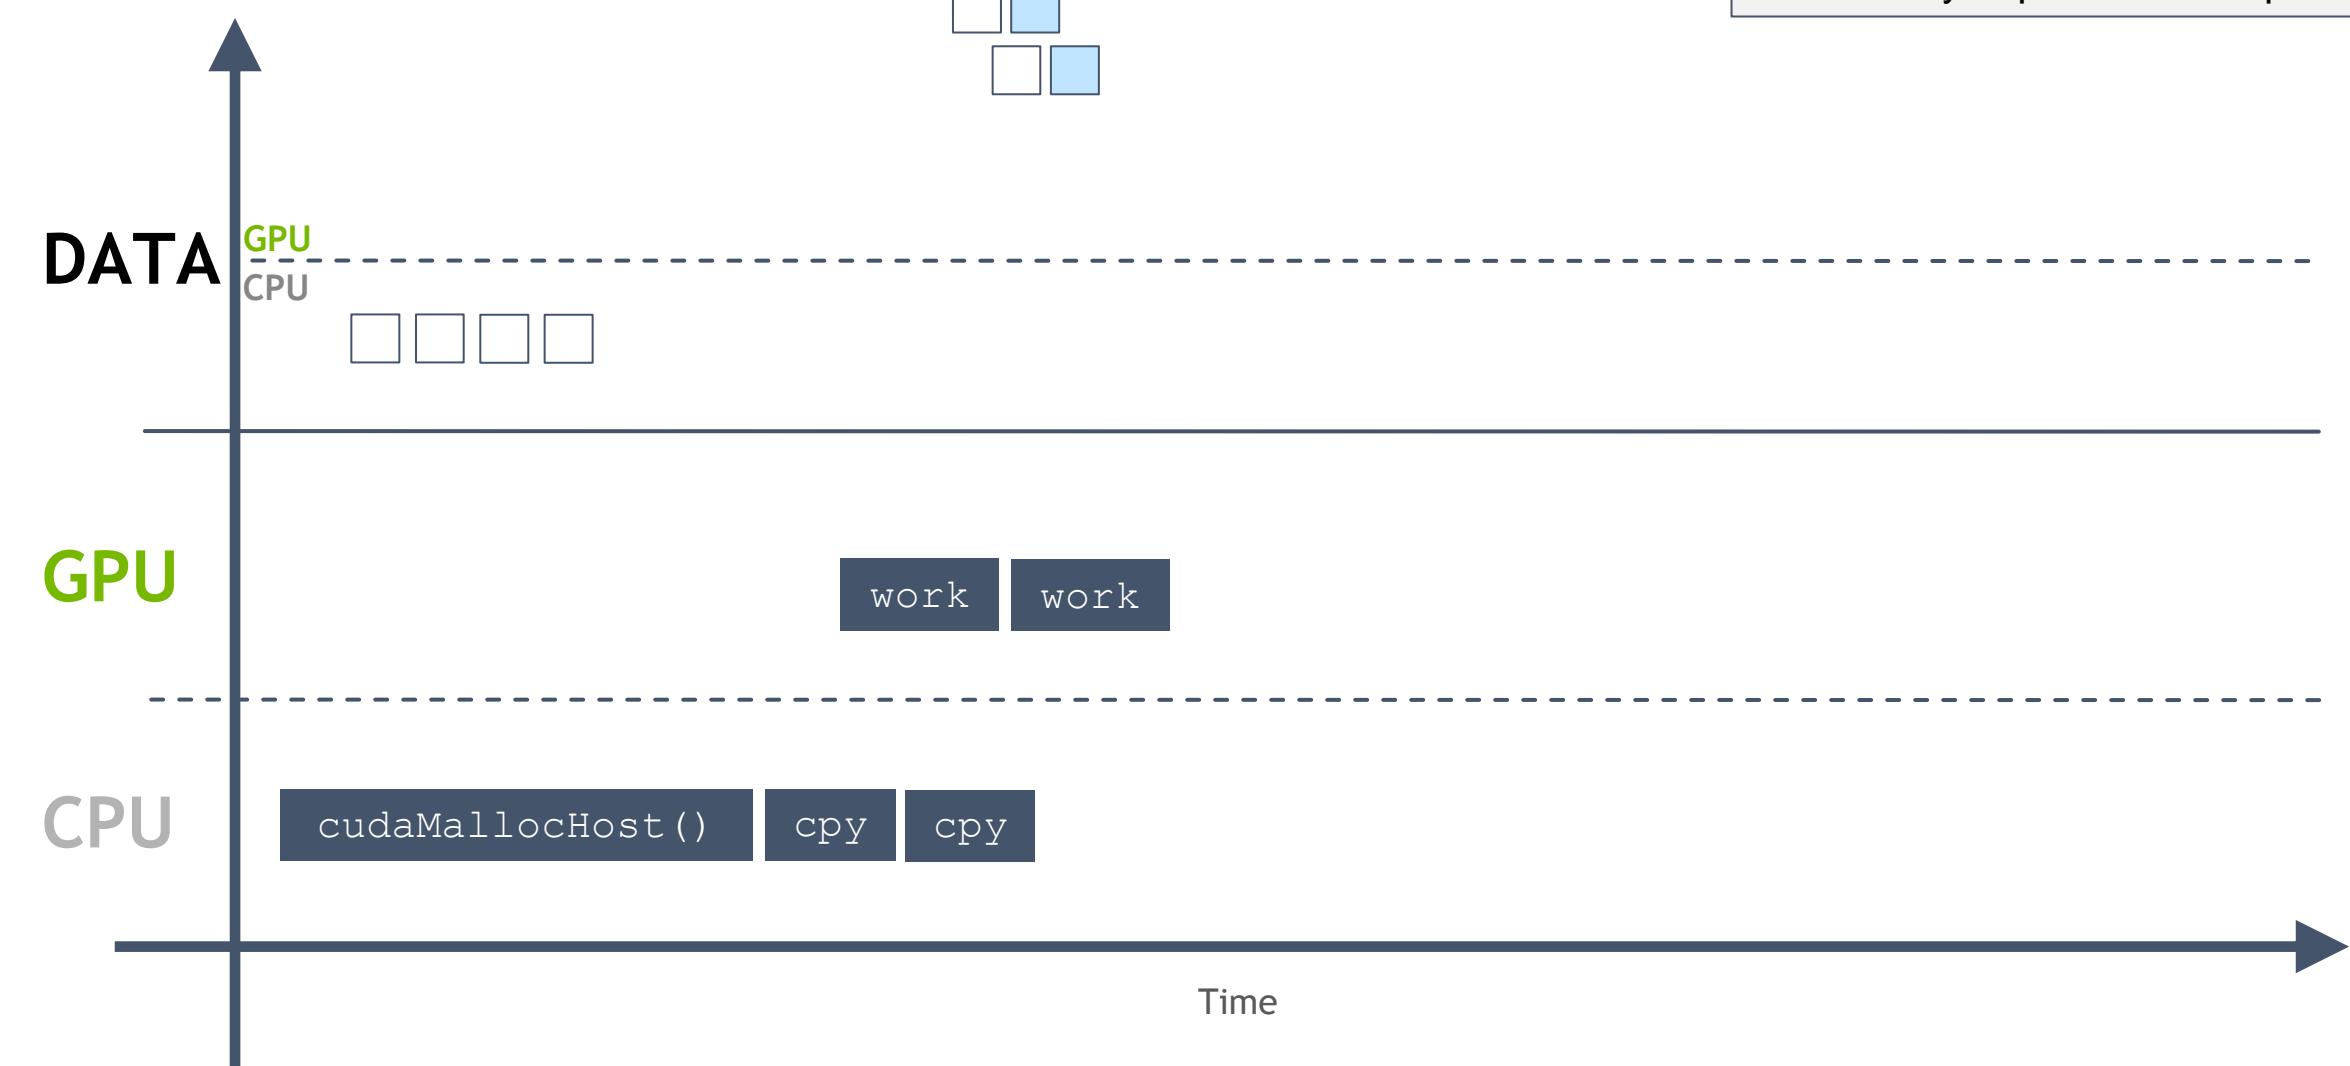

This can allow the **overlapping** memory copies and computation

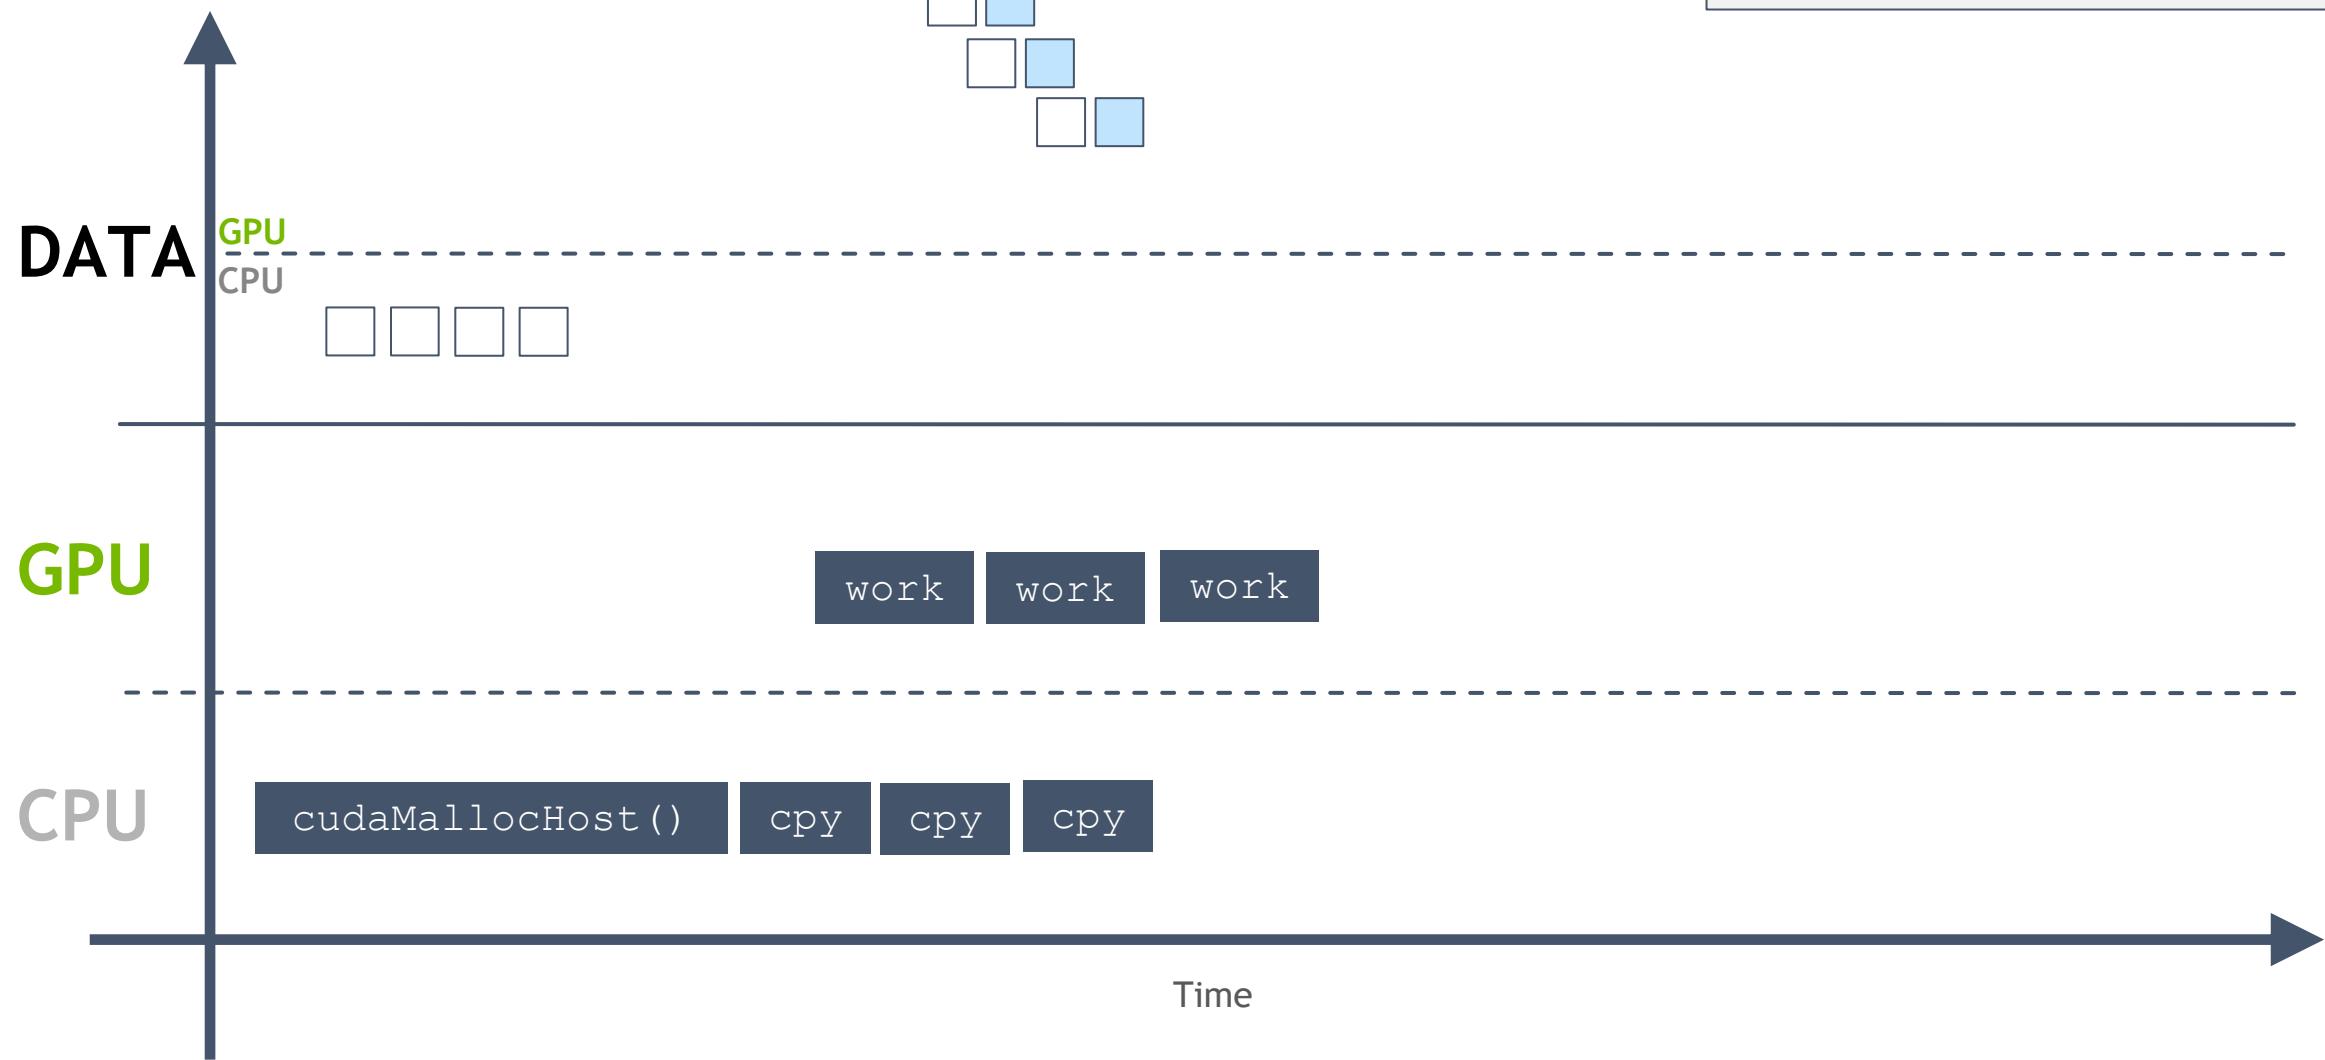


This can allow the **overlapping** memory copies and computation

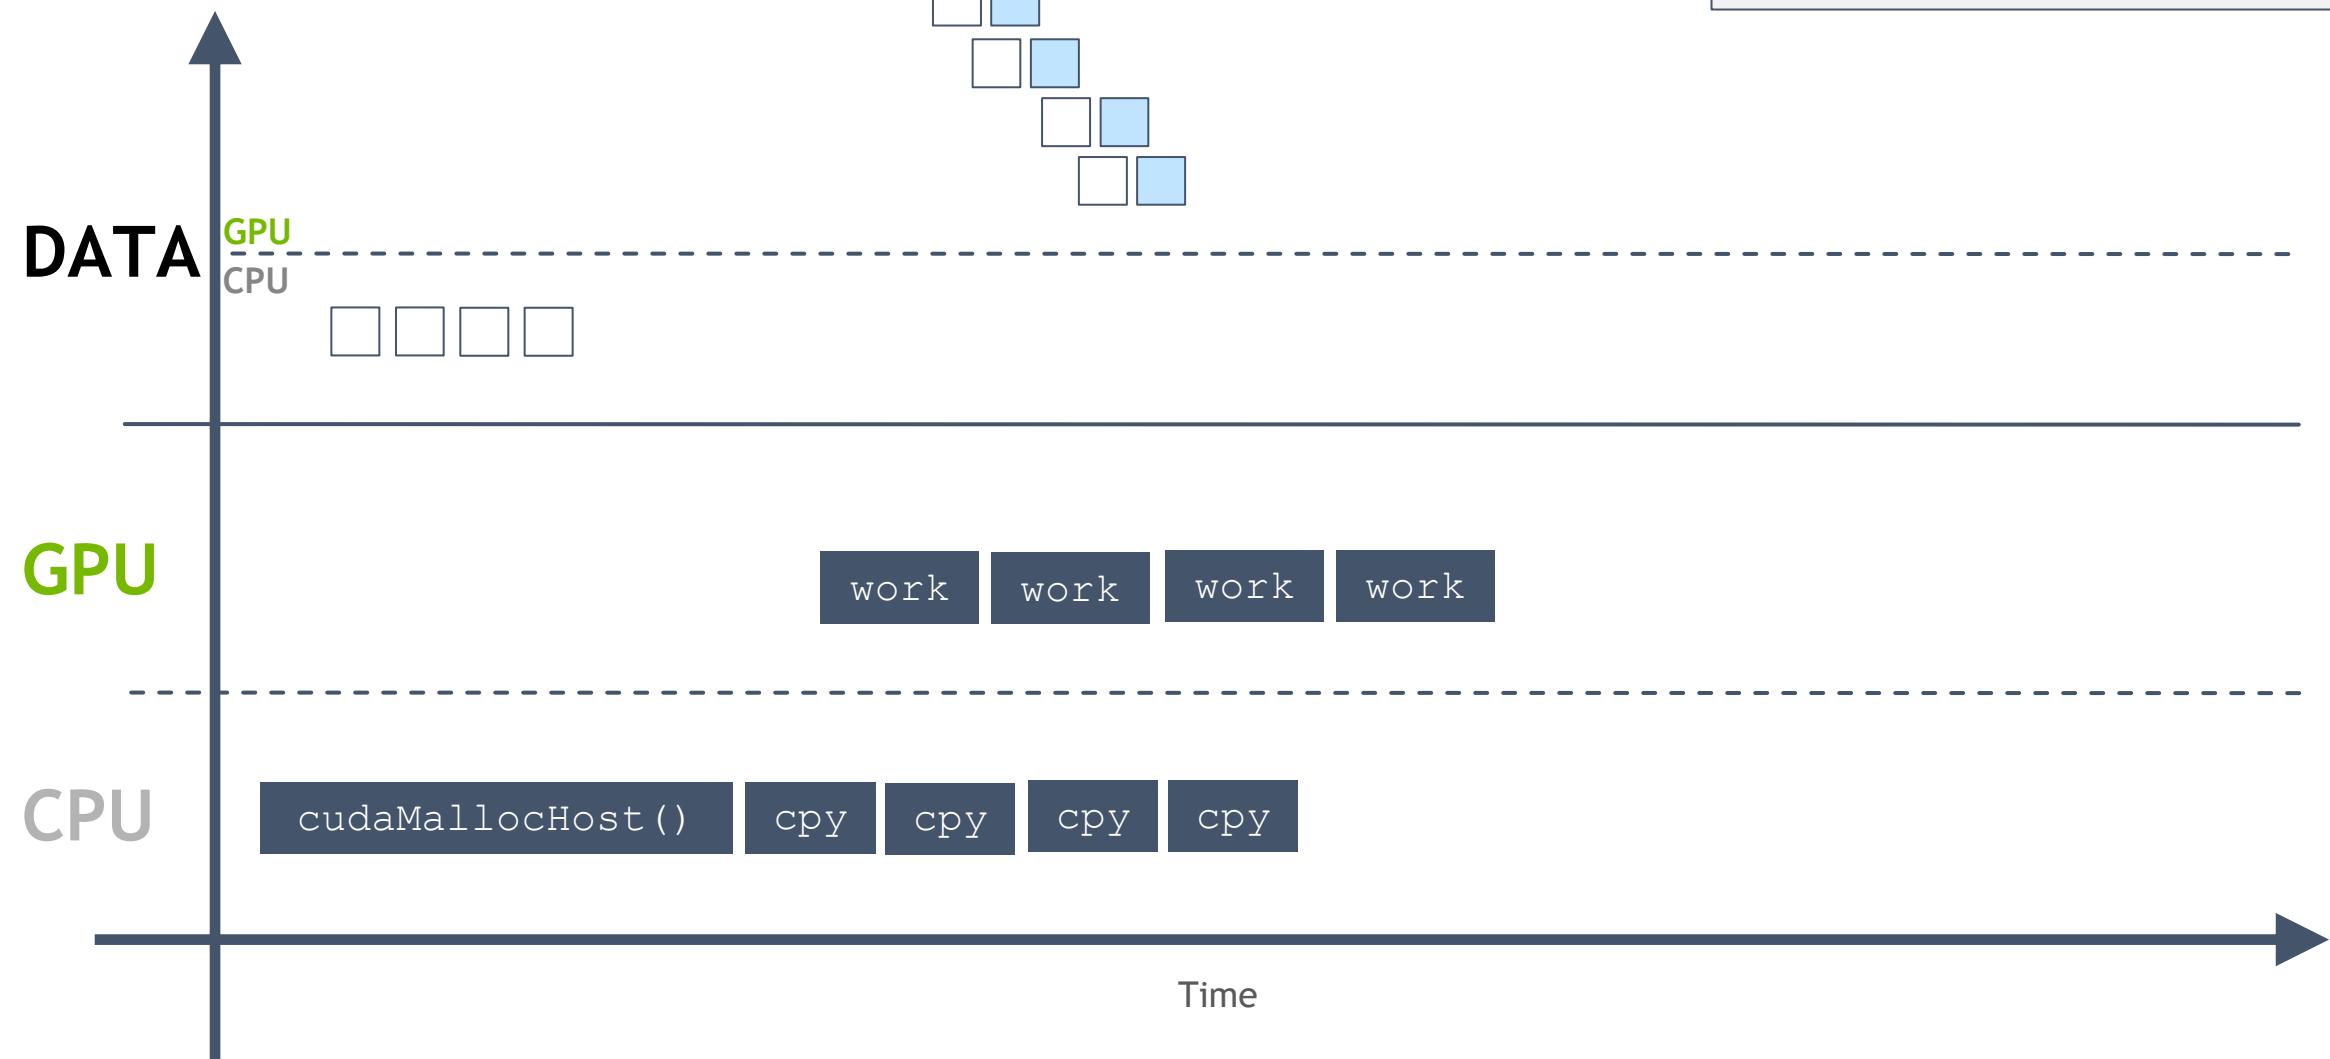


Pinned Memory

Pageable Data Transfer

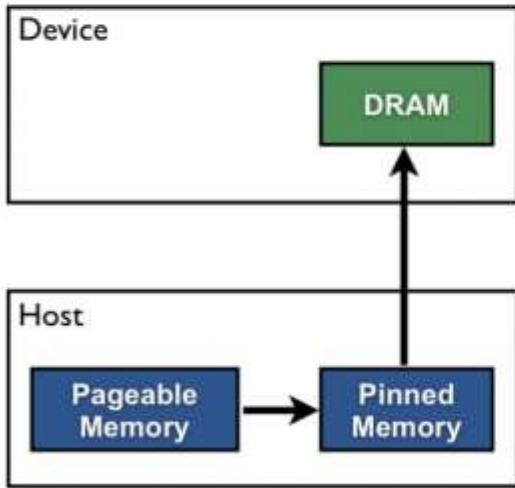

Pinned Data Transfer

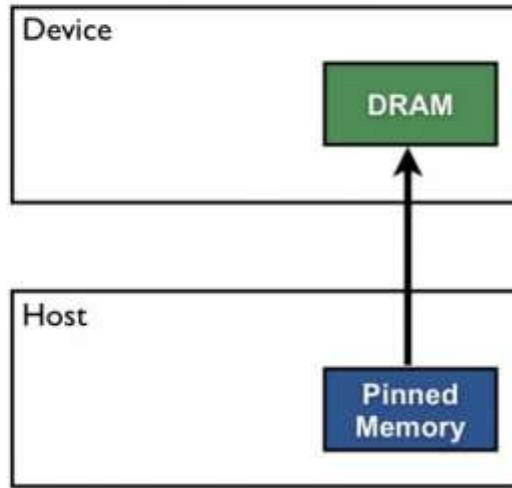

- Using pinned memory speeds up `cudaMemcpy()` calls.
- Pinned memory is a limited resource.
- Pinning memory “removes” it from the host paged virtual memory system.
- Less useful since Over-subscription introduced for Unified Memory in CUDA 8.

`samples / simpleZeroCopy`

- **cudaHostAlloc** – Allocates page-locked memory on host.
- **cudaHostRegister** – Registers (page-locks) an existing host memory range for use by CUDA.
- **cudaHostGetDevicePointer** – Gets device pointer corresponding to the mapped, pinned host buffer.
- Just use Unified Memory with **cudaMallocManaged()** and async prefetch/copy unless there is a clear case for explicit memory management.

cudaHostAlloc()

```
flags = cudaHostAllocMapped;
checkCudaErrors(cudaHostAlloc((void **)a, bytes, flags));
checkCudaErrors(cudaHostAlloc((void **)b, bytes, flags));
checkCudaErrors(cudaHostAlloc((void **)c, bytes, flags));
```

```
checkCudaErrors(cudaHostGetDevicePointer((void **)&d_a, (void *)a, 0));
checkCudaErrors(cudaHostGetDevicePointer((void **)&d_b, (void *)b, 0));
checkCudaErrors(cudaHostGetDevicePointer((void **)&d_c, (void *)c, 0));
```

cudaHostRegister()

```
a_UA = (float *) malloc(bytes + MEMORY_ALIGNMENT);
b_UA = (float *) malloc(bytes + MEMORY_ALIGNMENT);
c_UA = (float *) malloc(bytes + MEMORY_ALIGNMENT);

// We need to ensure memory is aligned to 4K (so we will need to pad memory accordingly)
a = (float *) ALIGN_UP(a_UA, MEMORY_ALIGNMENT);
b = (float *) ALIGN_UP(b_UA, MEMORY_ALIGNMENT);
c = (float *) ALIGN_UP(c_UA, MEMORY_ALIGNMENT);

checkCudaErrors(cudaHostRegister(a, bytes, cudaHostRegisterMapped));
checkCudaErrors(cudaHostRegister(b, bytes, cudaHostRegisterMapped));
checkCudaErrors(cudaHostRegister(c, bytes, cudaHostRegisterMapped));
```

```
checkCudaErrors(cudaHostGetDevicePointer((void **)&d_a, (void *)a, 0));
checkCudaErrors(cudaHostGetDevicePointer((void **)&d_b, (void *)b, 0));
checkCudaErrors(cudaHostGetDevicePointer((void **)&d_c, (void *)c, 0));
```


Concurrent CUDA Streams

A **stream** is a series of instructions,
and CUDA has a **default stream**


DEFAULT STREAM

Time


By default, CUDA kernels run in the
default stream

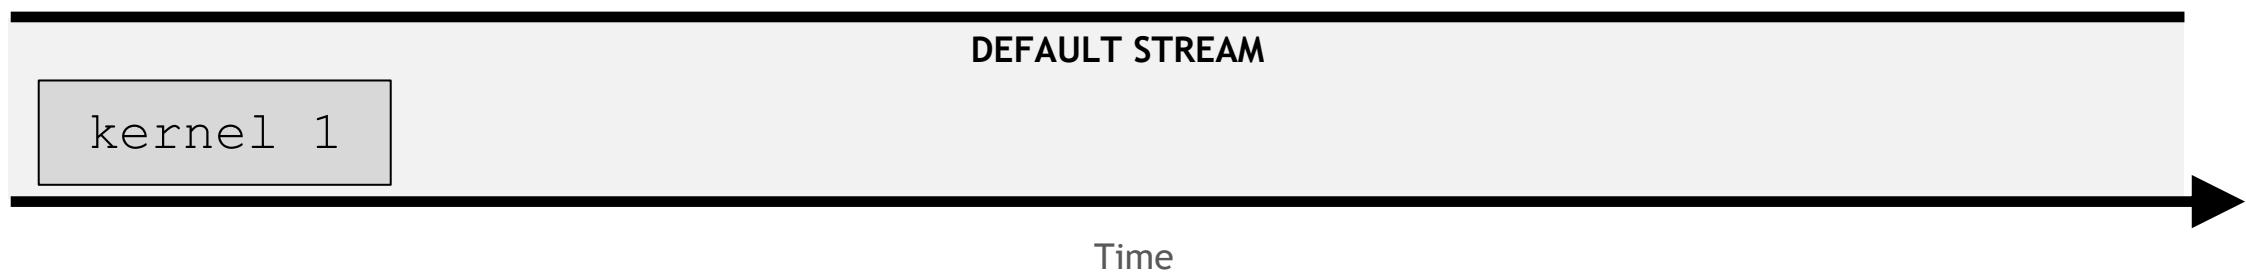


In any stream, including the default, an instruction in it (here a kernel launch) must complete before the next can begin

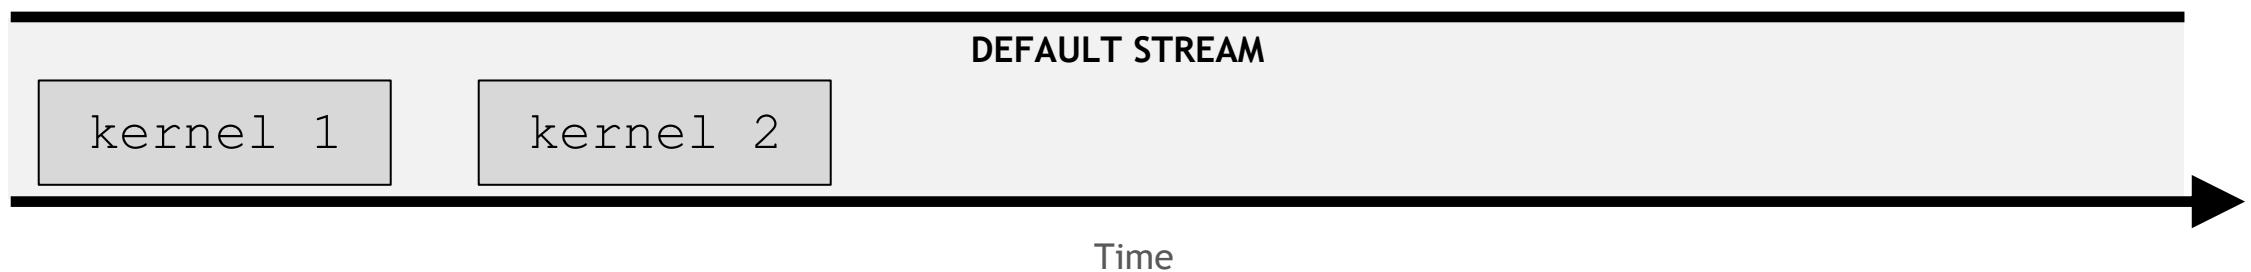


In any stream, including the default, an instruction in it (here a kernel launch) must complete before the next can begin

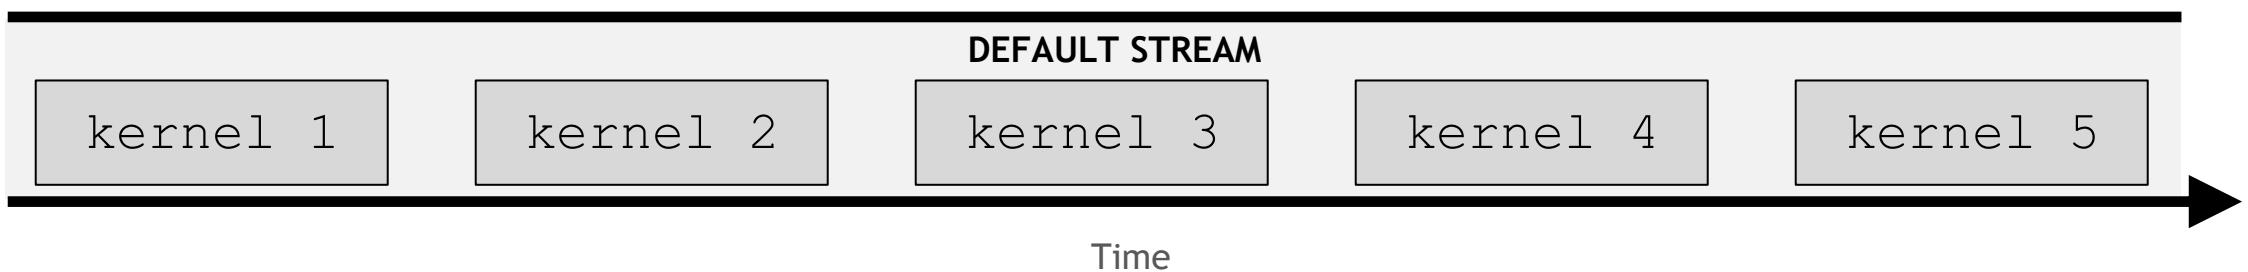


Non-default streams can also be created for kernel execution

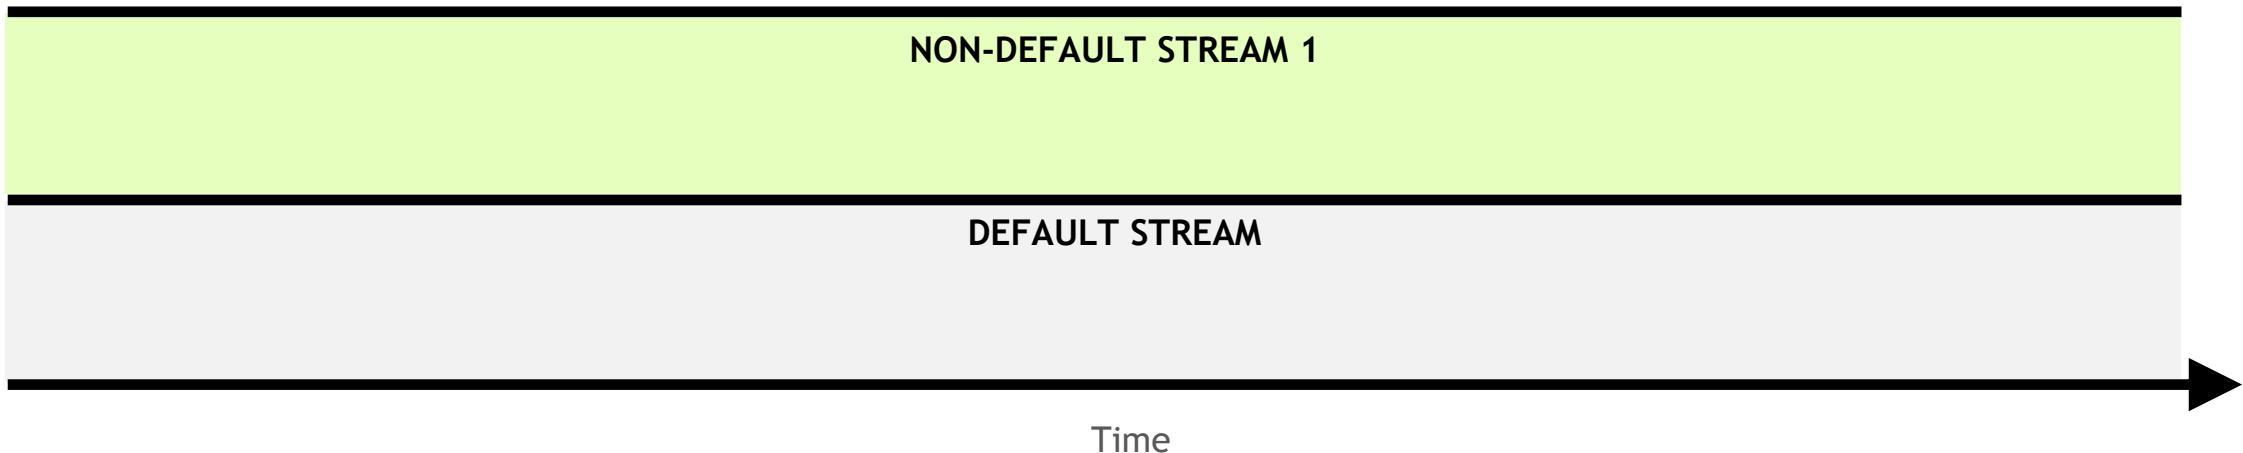


Non-default streams can also be created for kernel execution

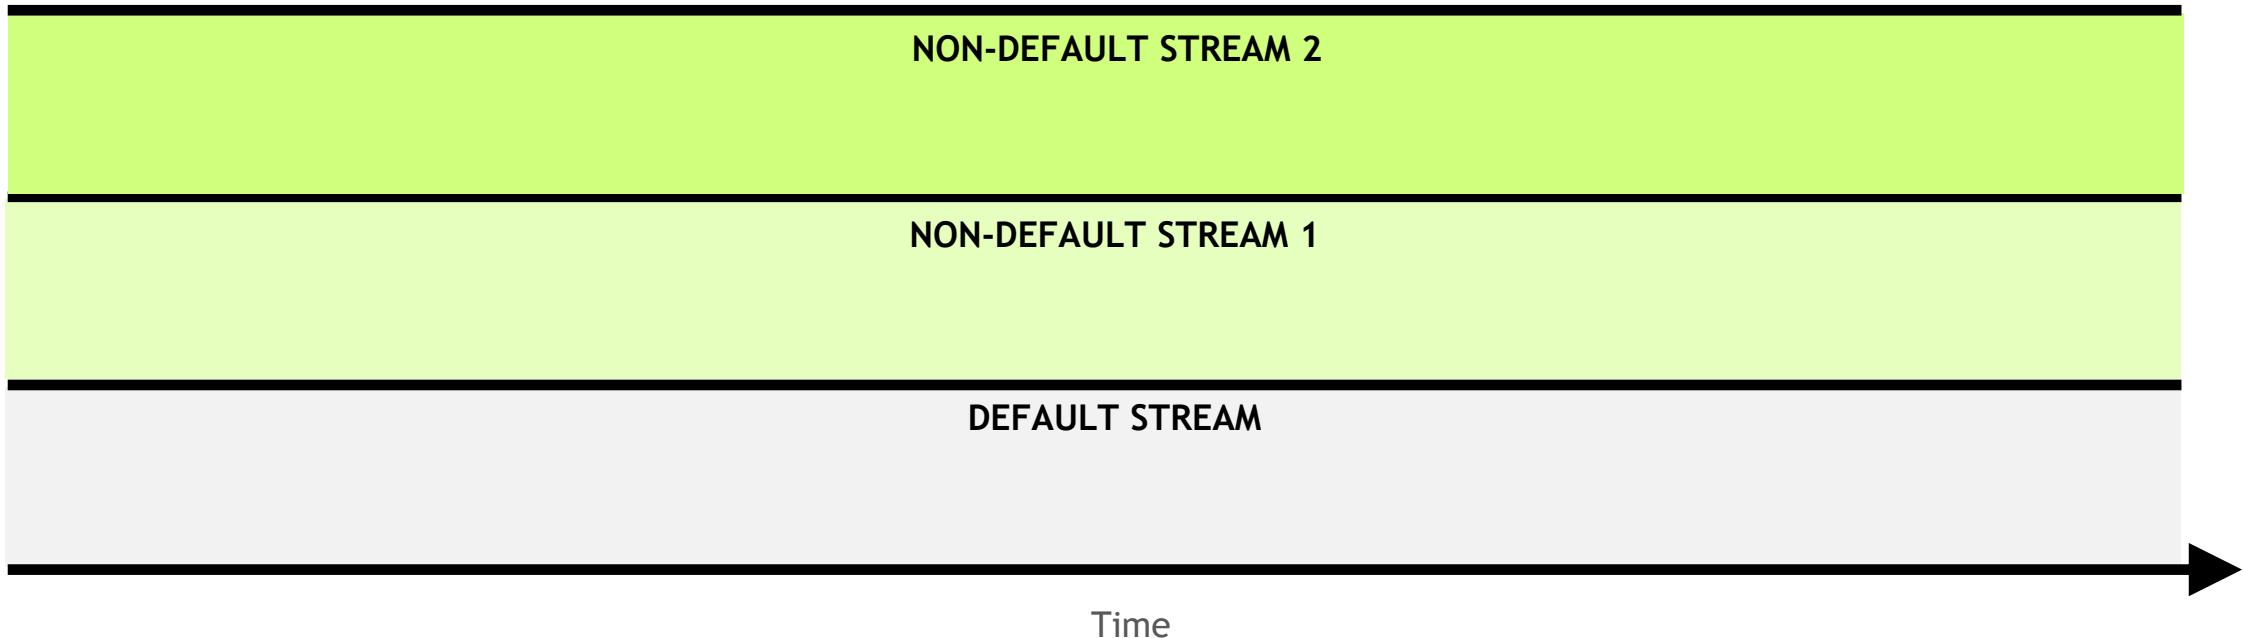


Kernels within any single stream must execute in order

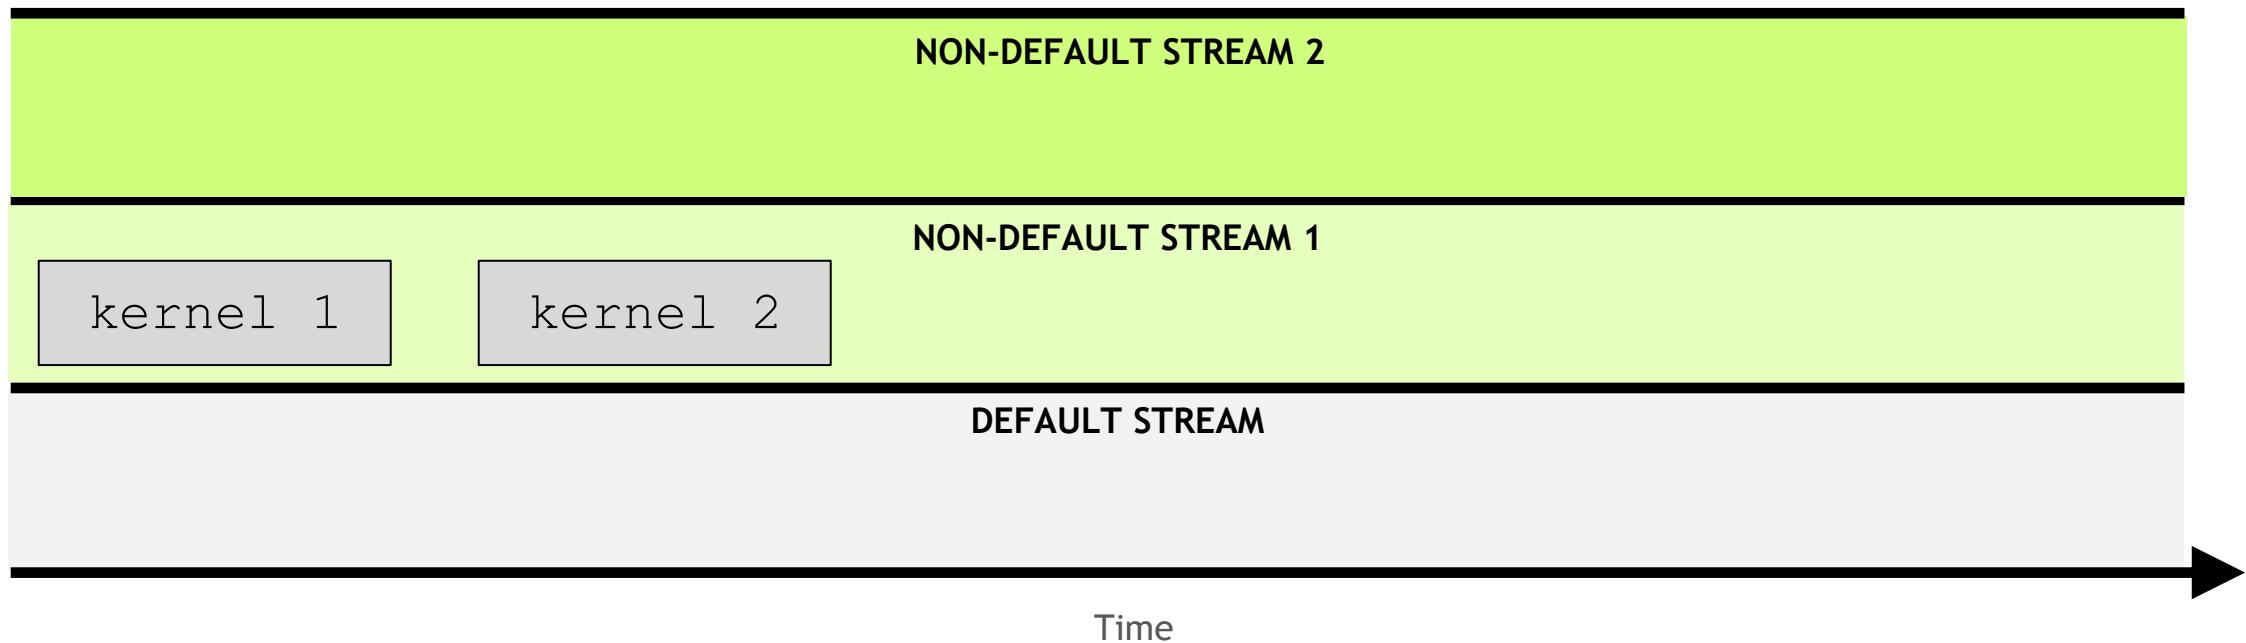


However, kernels in **different, non-default streams**, can interact concurrently

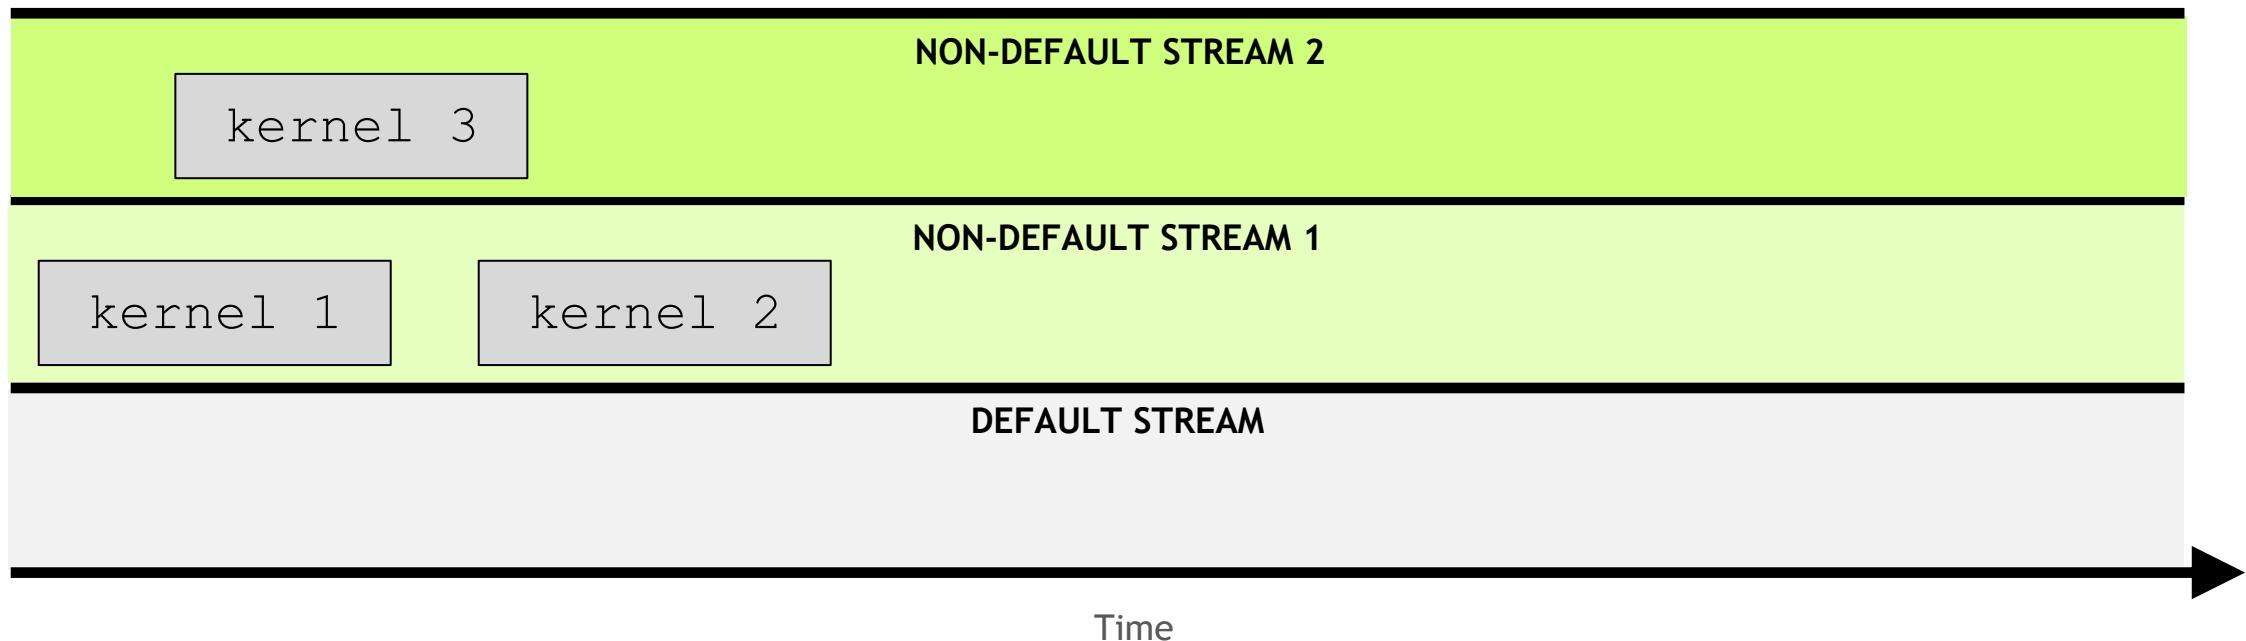


However, kernels in **different, non-default streams**, can interact concurrently

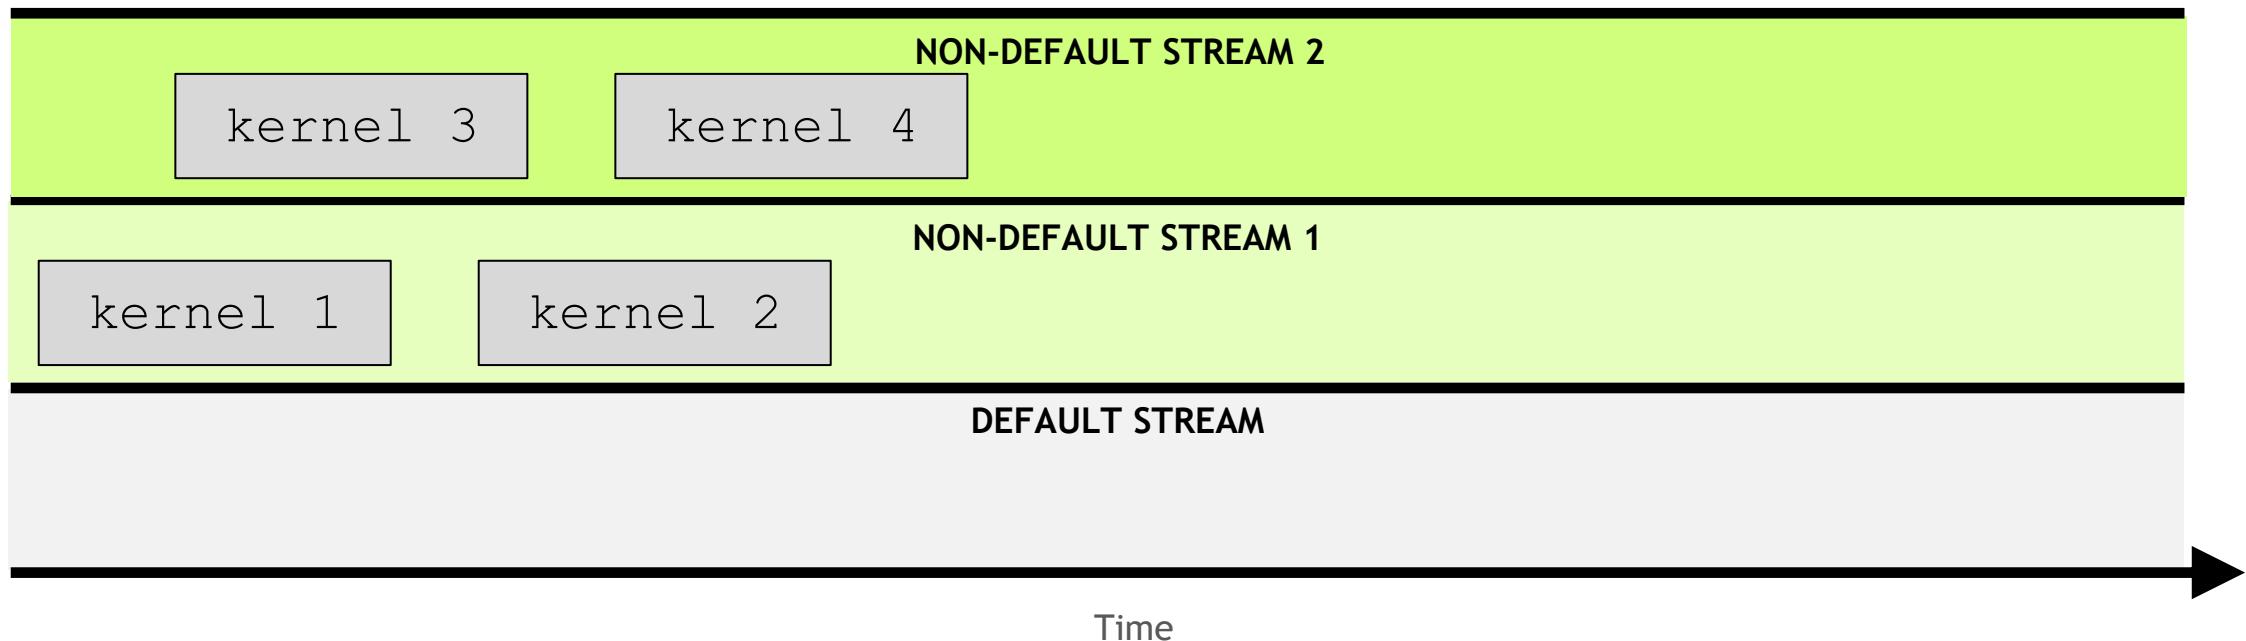


However, kernels in **different, non-default streams**, can interact concurrently

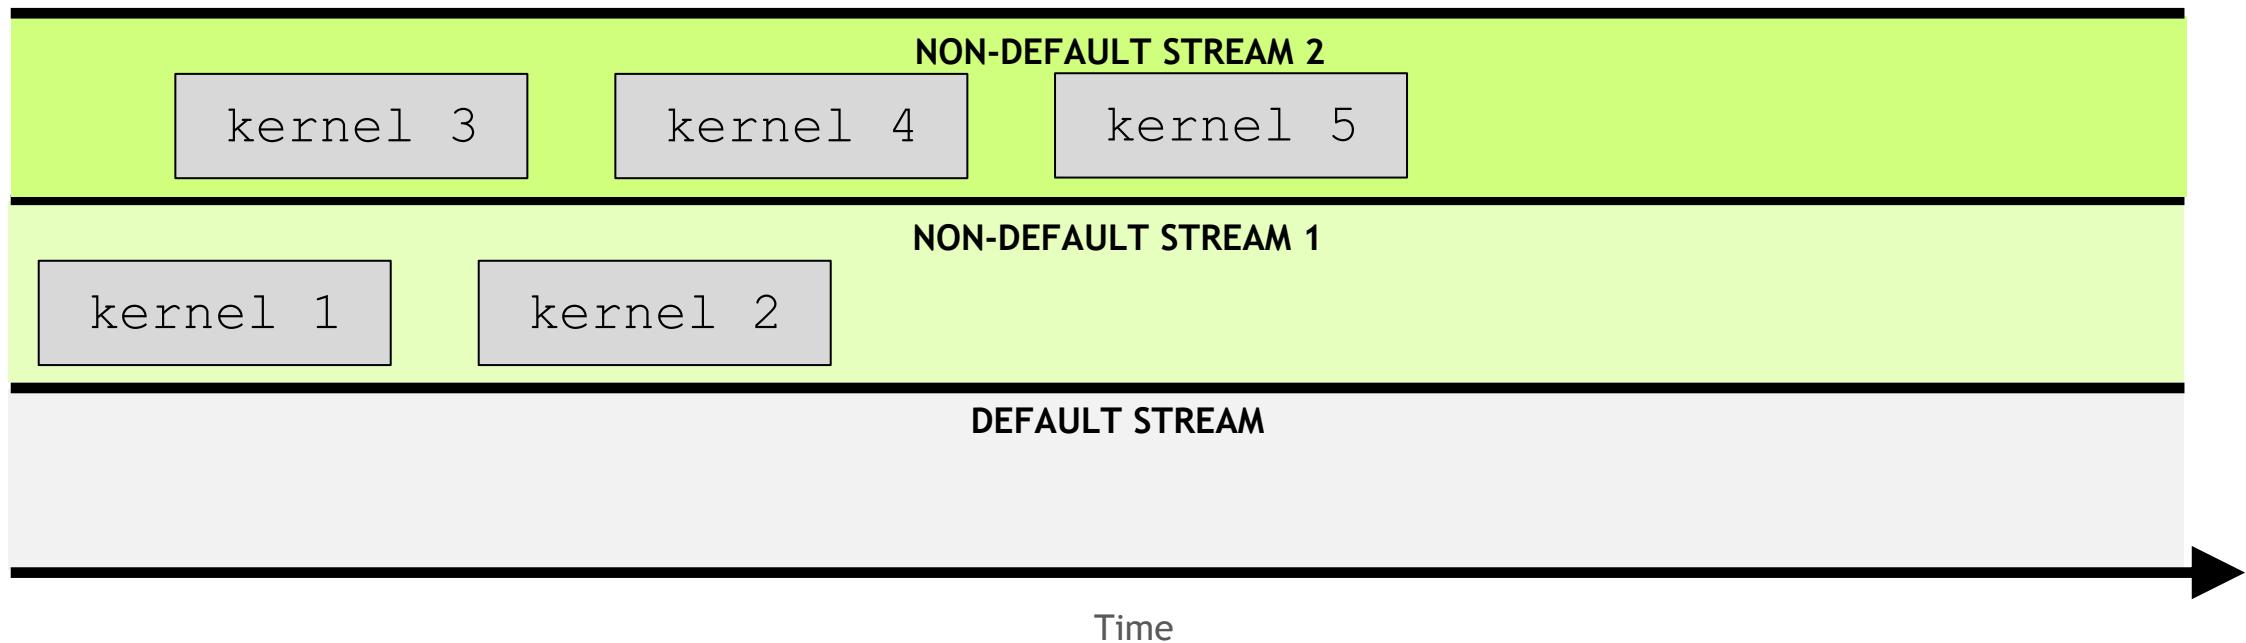


However, kernels in **different, non-default streams**, can interact concurrently

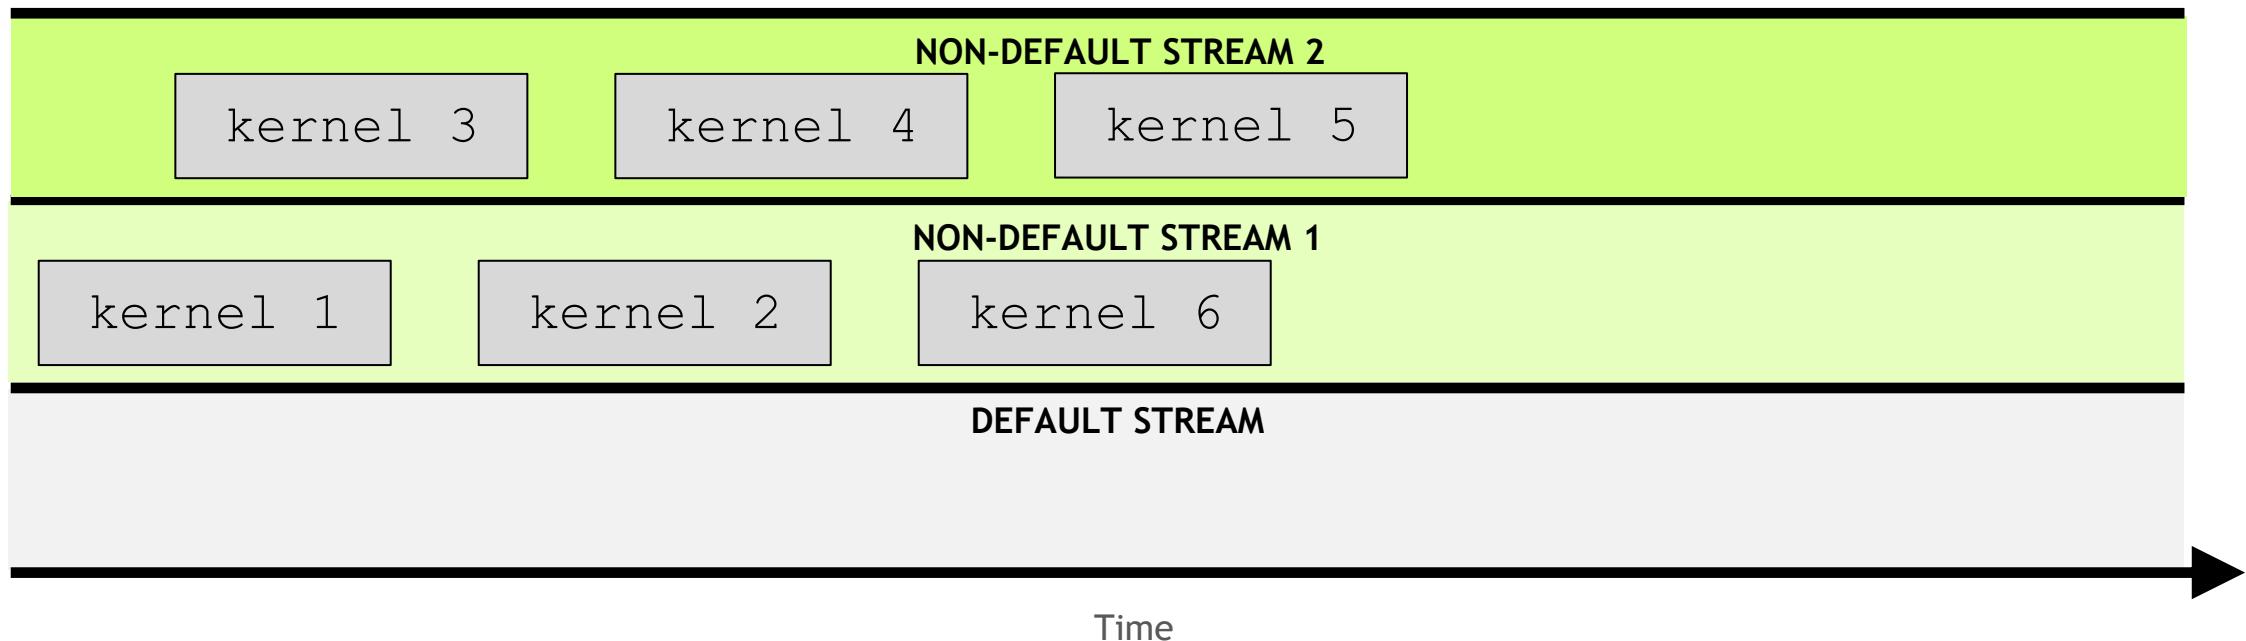


The default stream is special: it
blocks all kernels in all other
streams

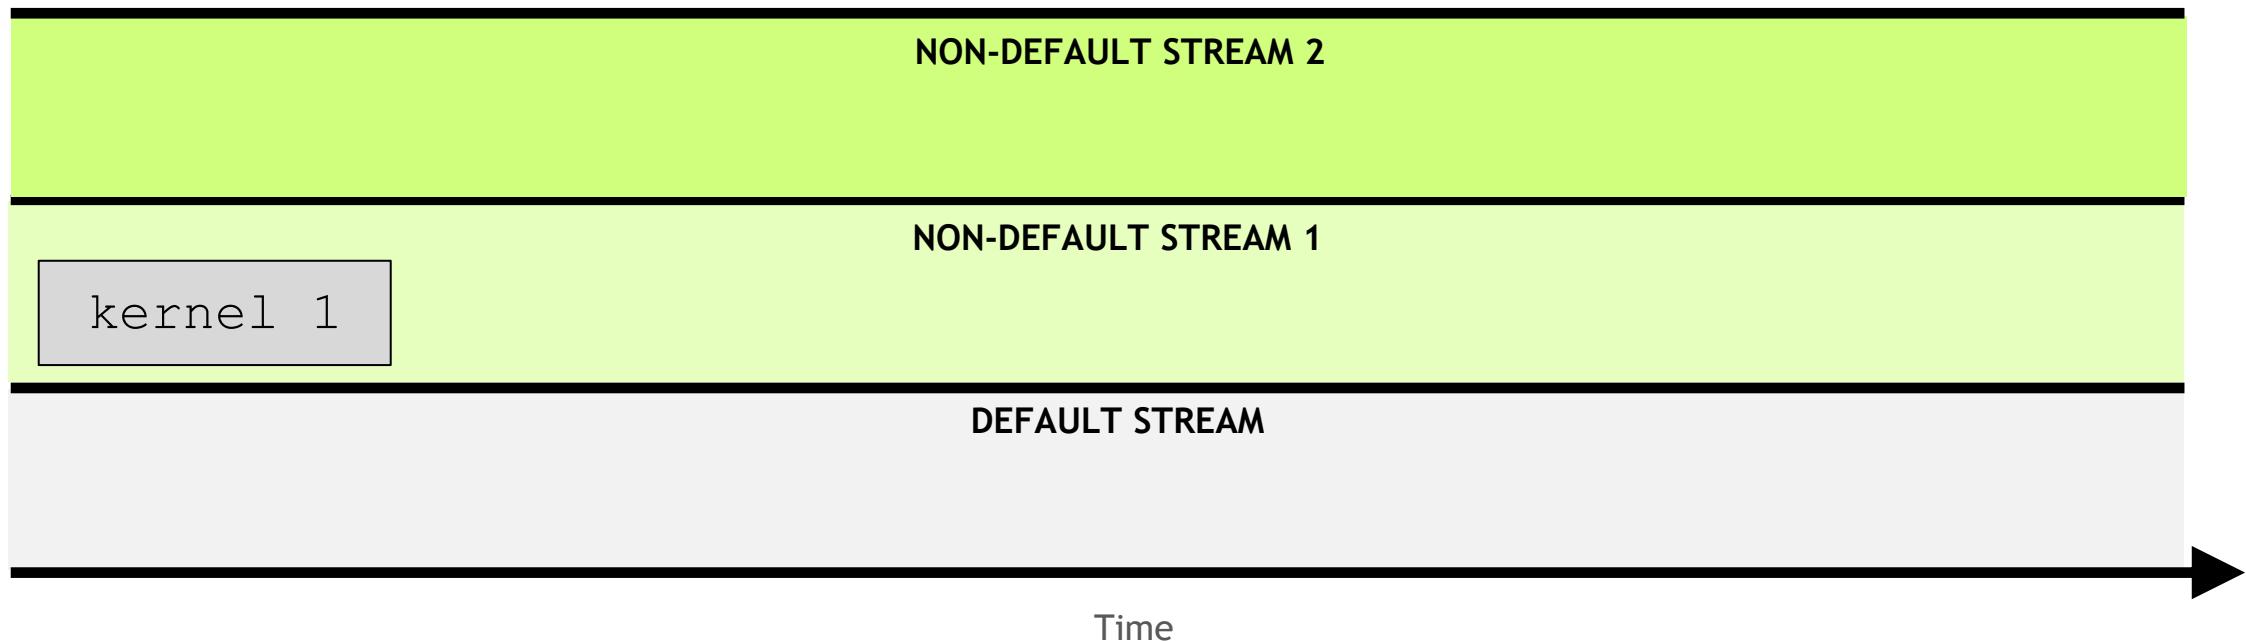


The default stream is special: it
blocks all kernels in all other
streams

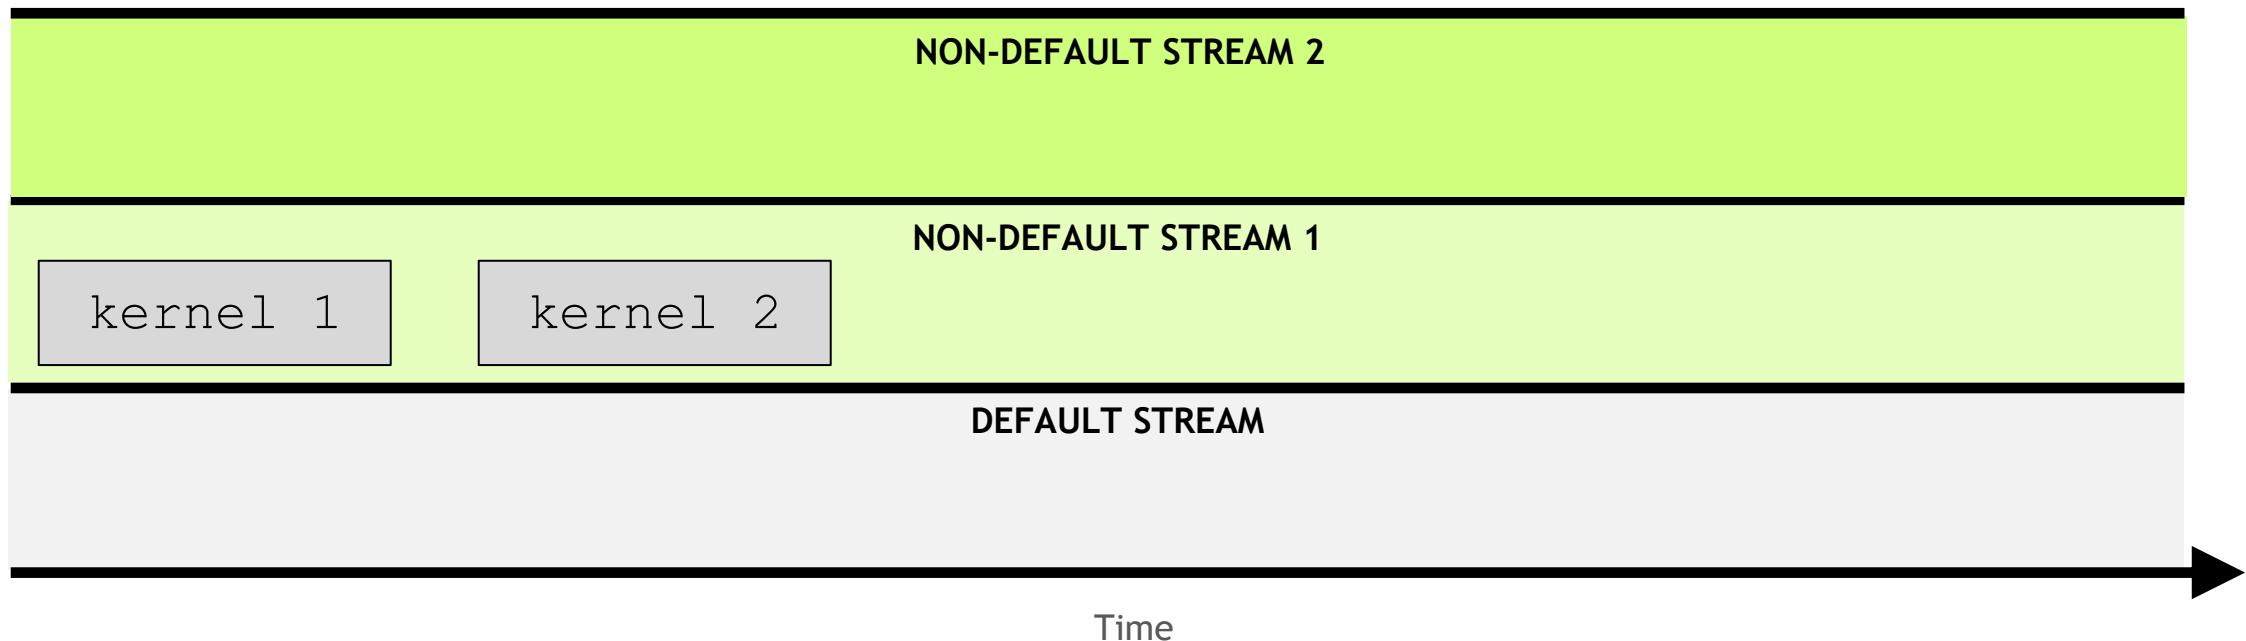


The default stream is special: it
blocks all kernels in all other
streams

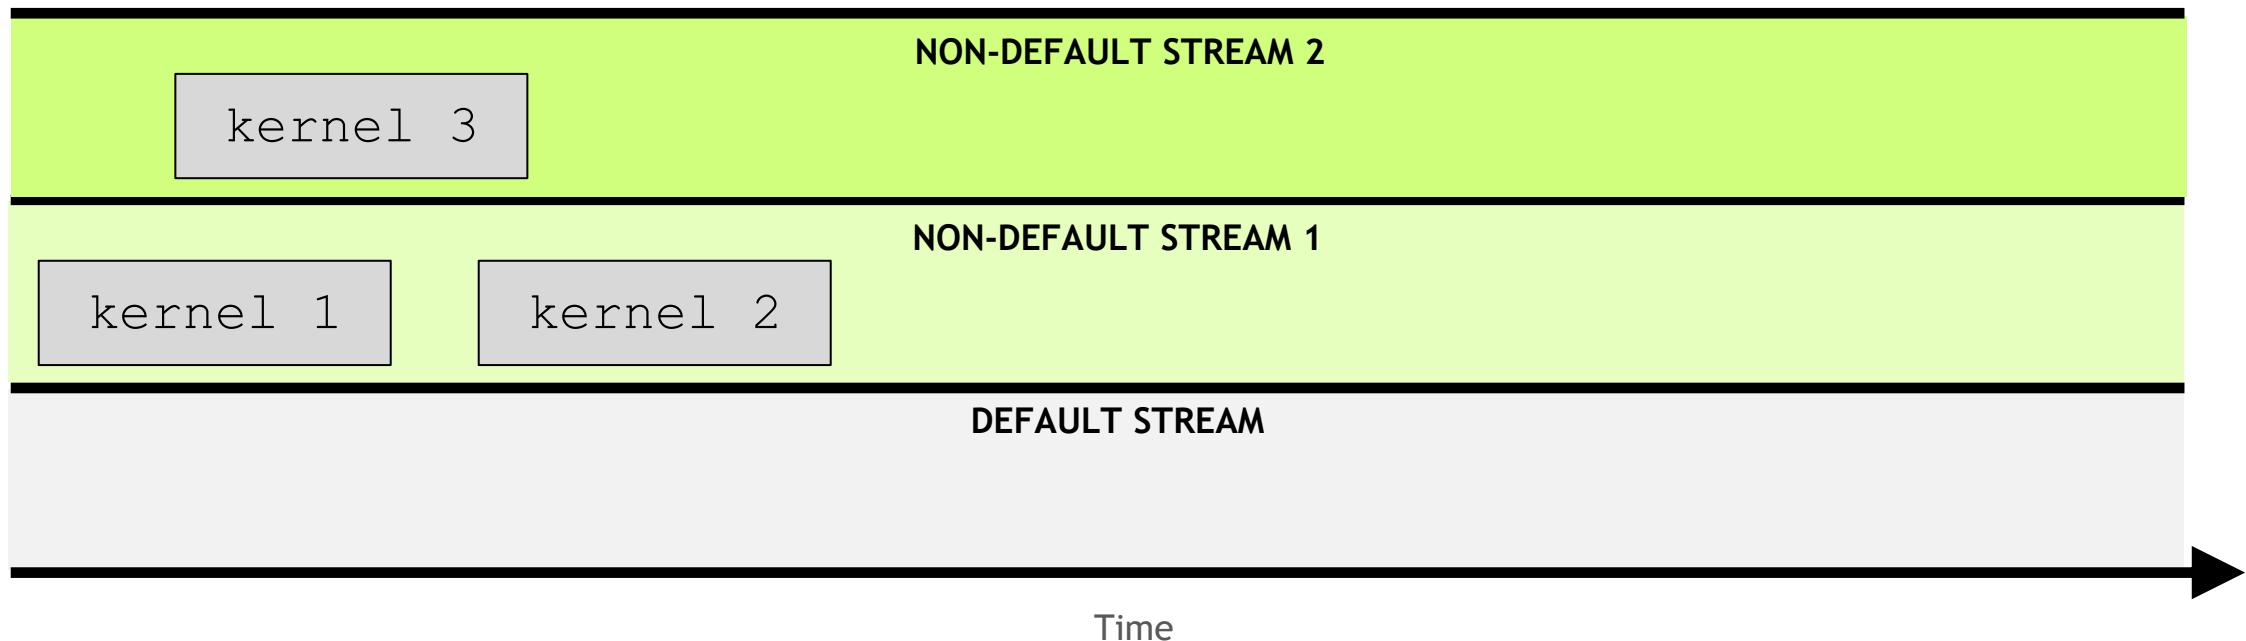


The default stream is special: it
blocks all kernels in all other
streams

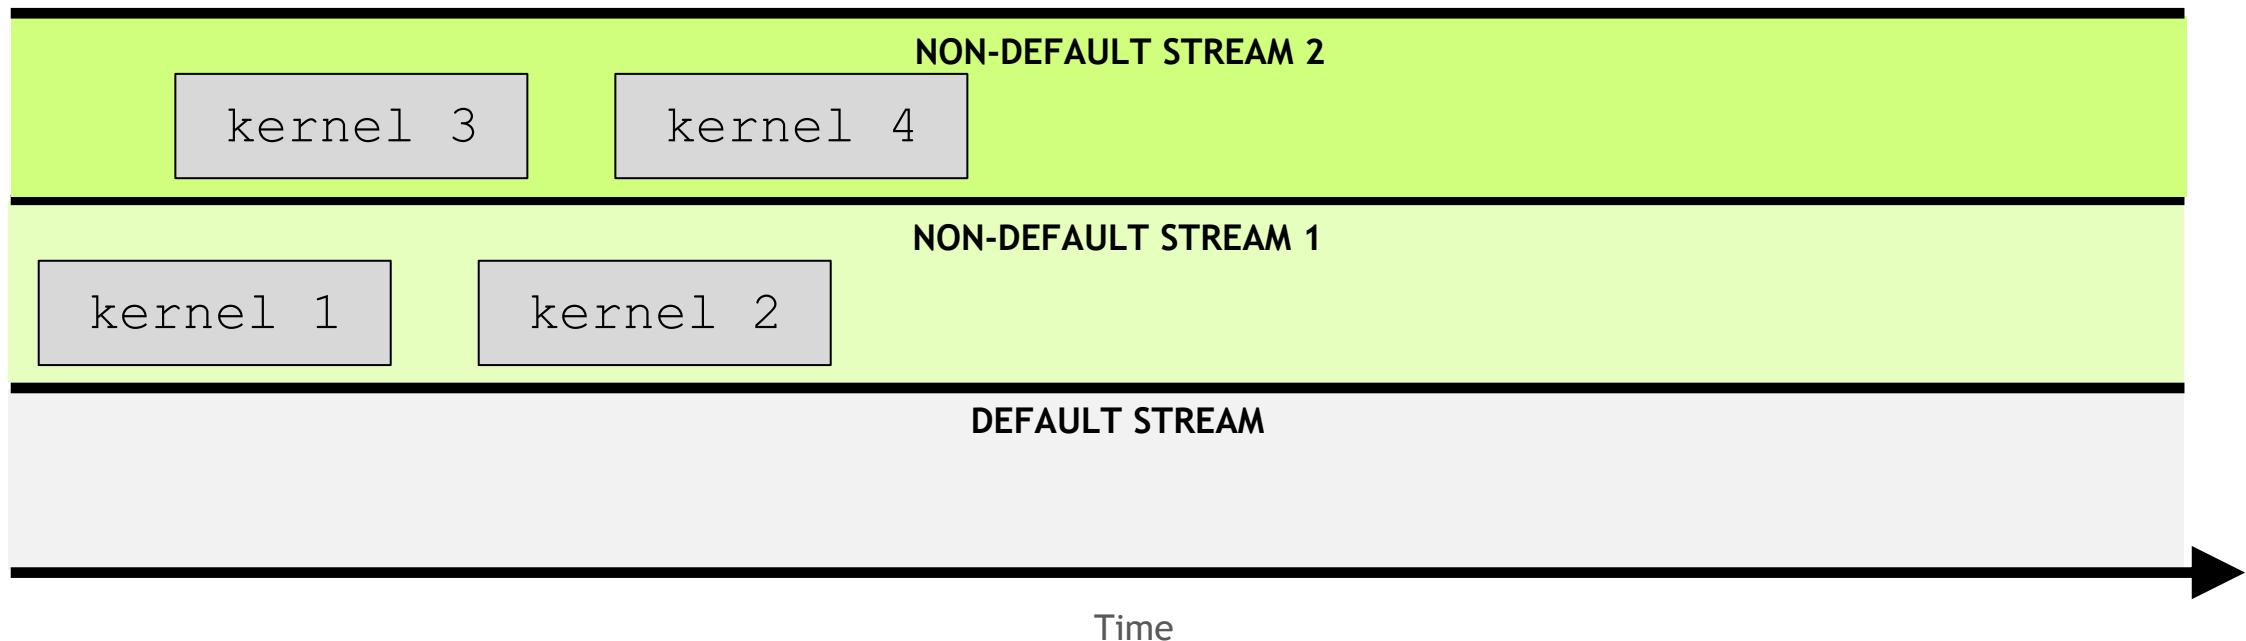


The default stream is special: it
blocks all kernels in all other streams

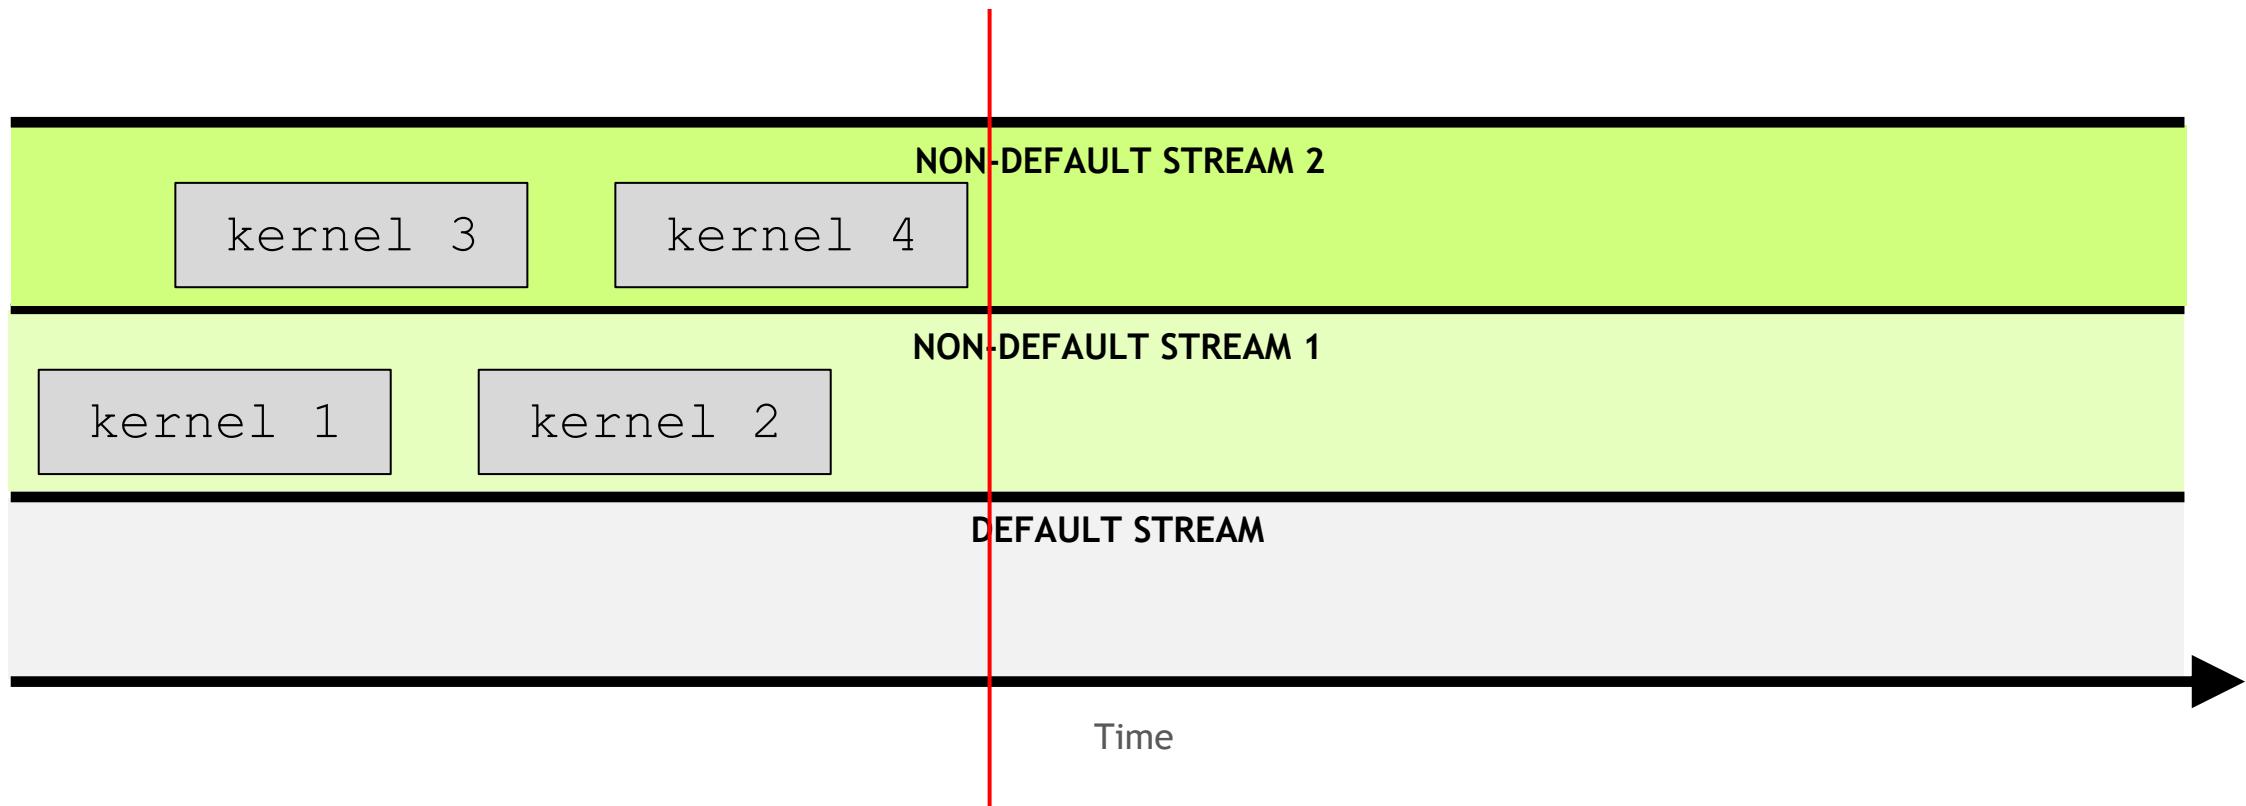


The default stream is special: it
blocks all kernels in all other
streams

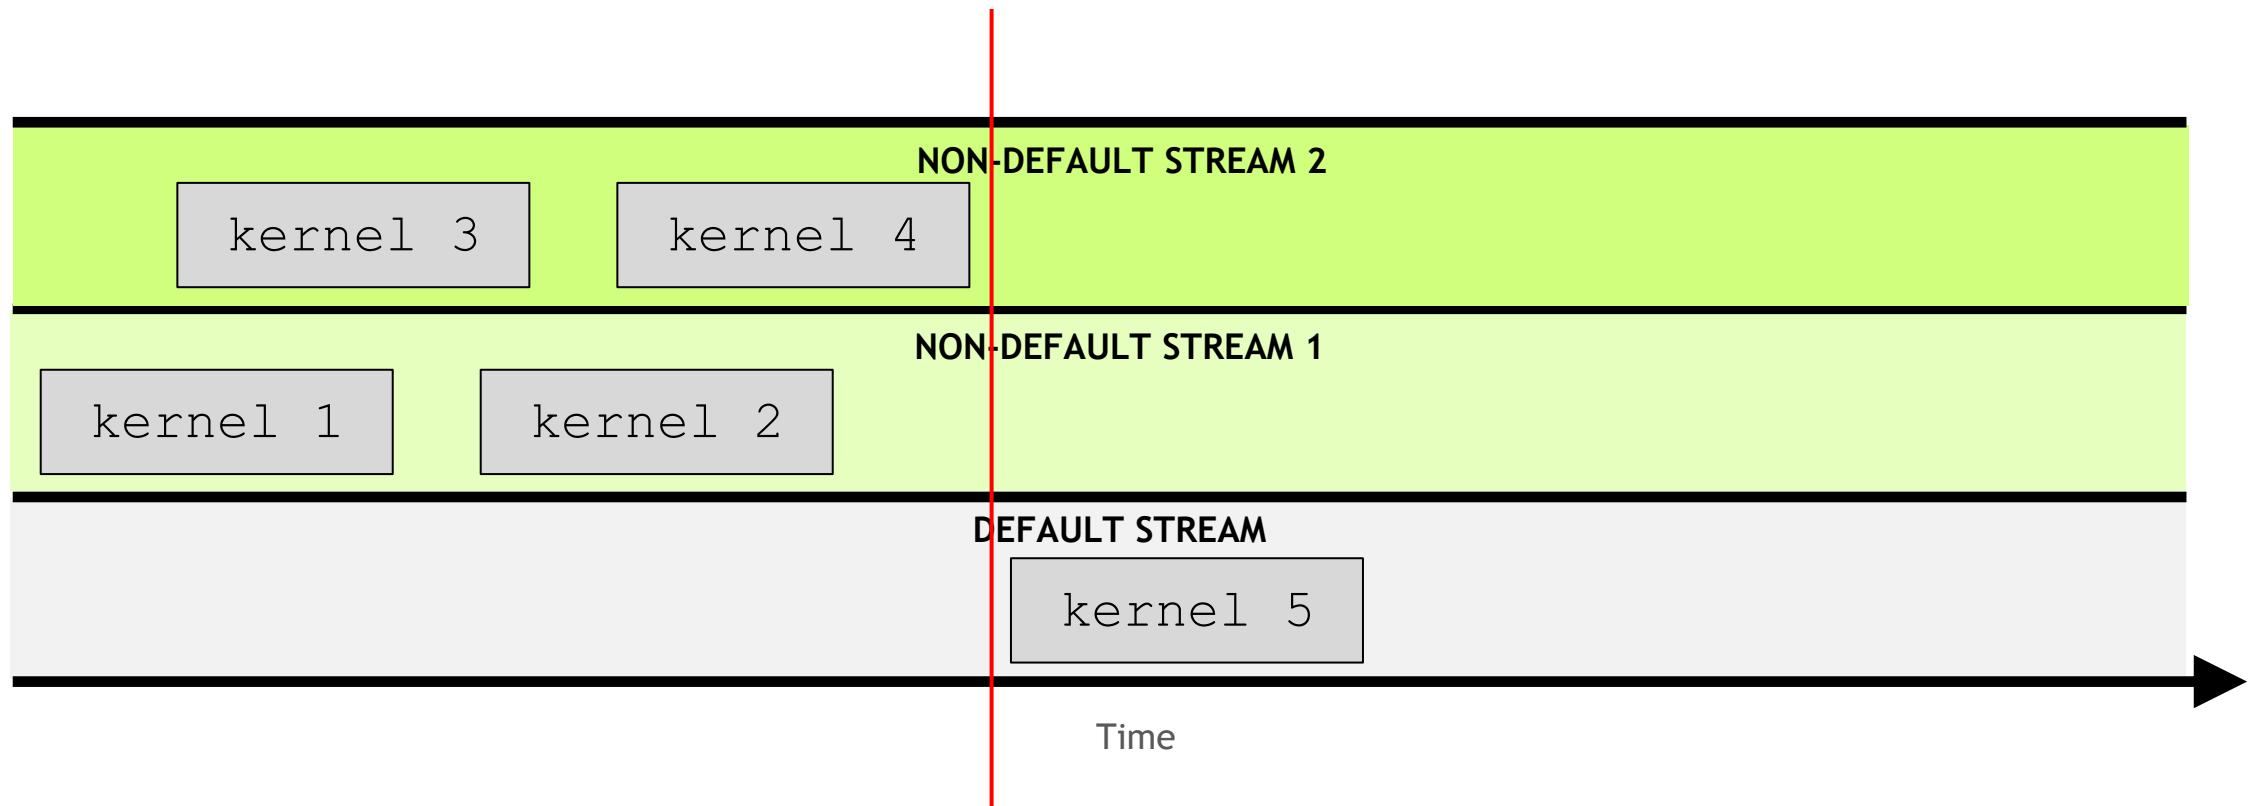


The default stream is special: it
blocks all kernels in all other streams

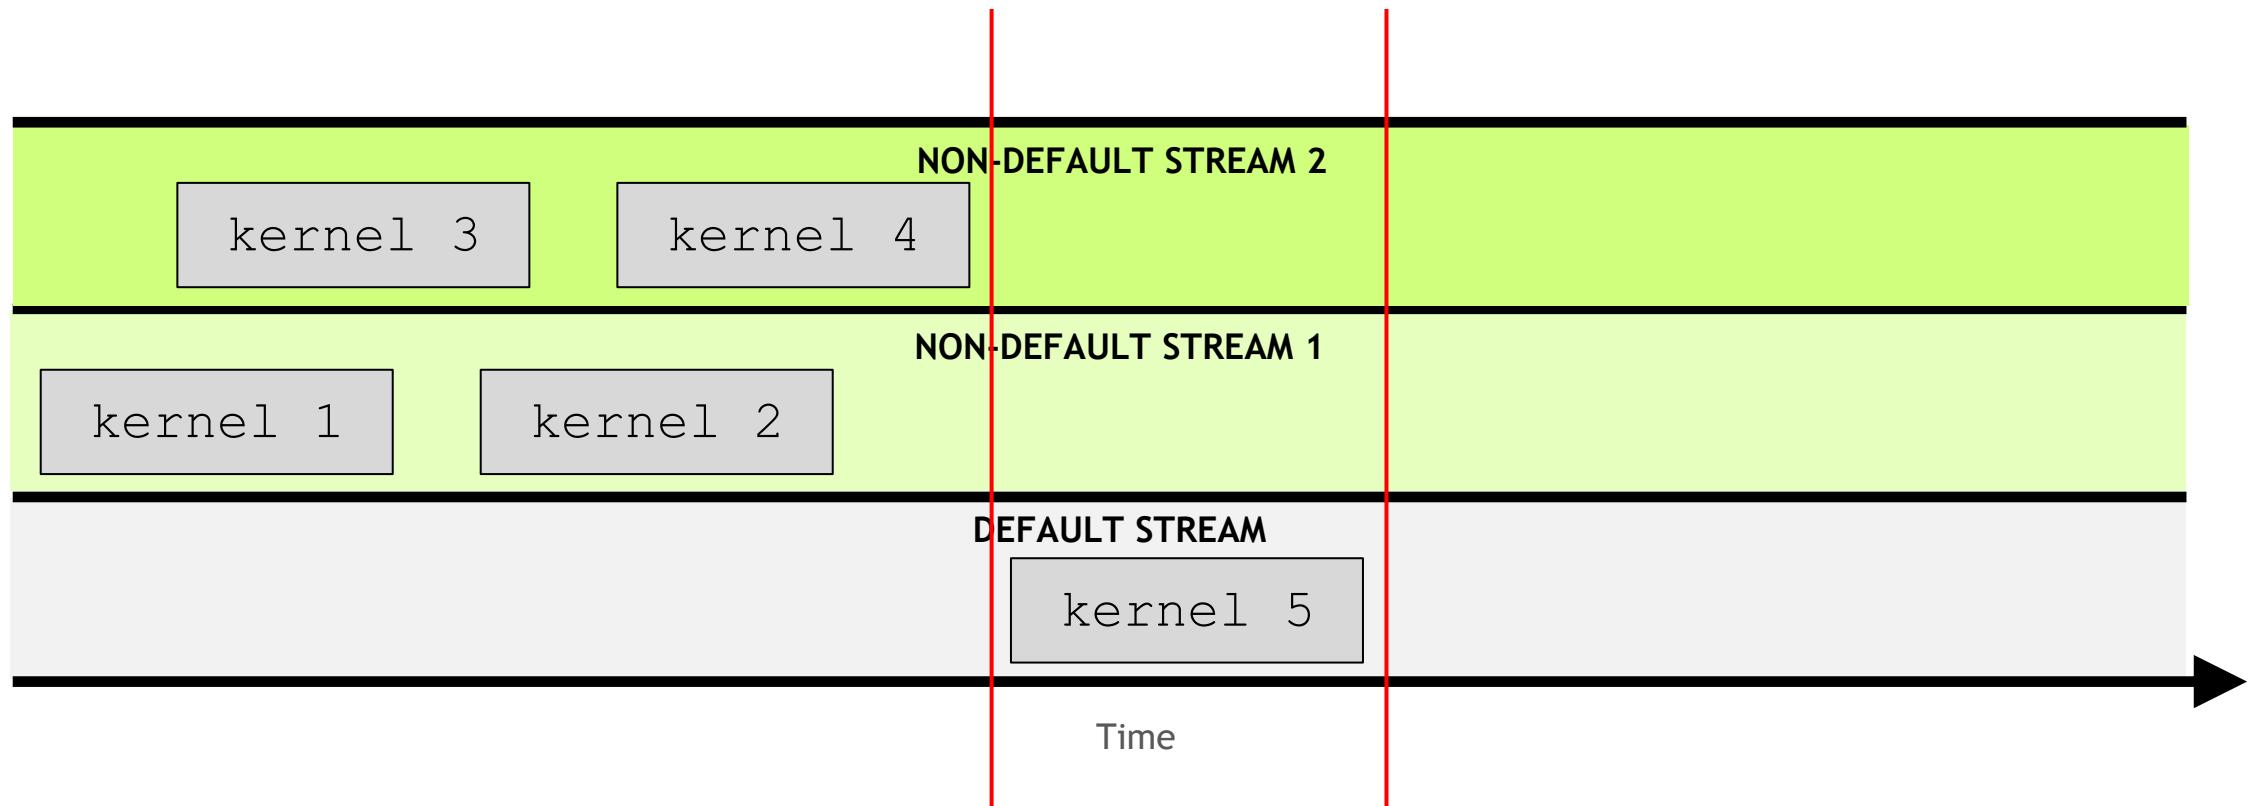


The default stream is special: it
blocks all kernels in all other streams

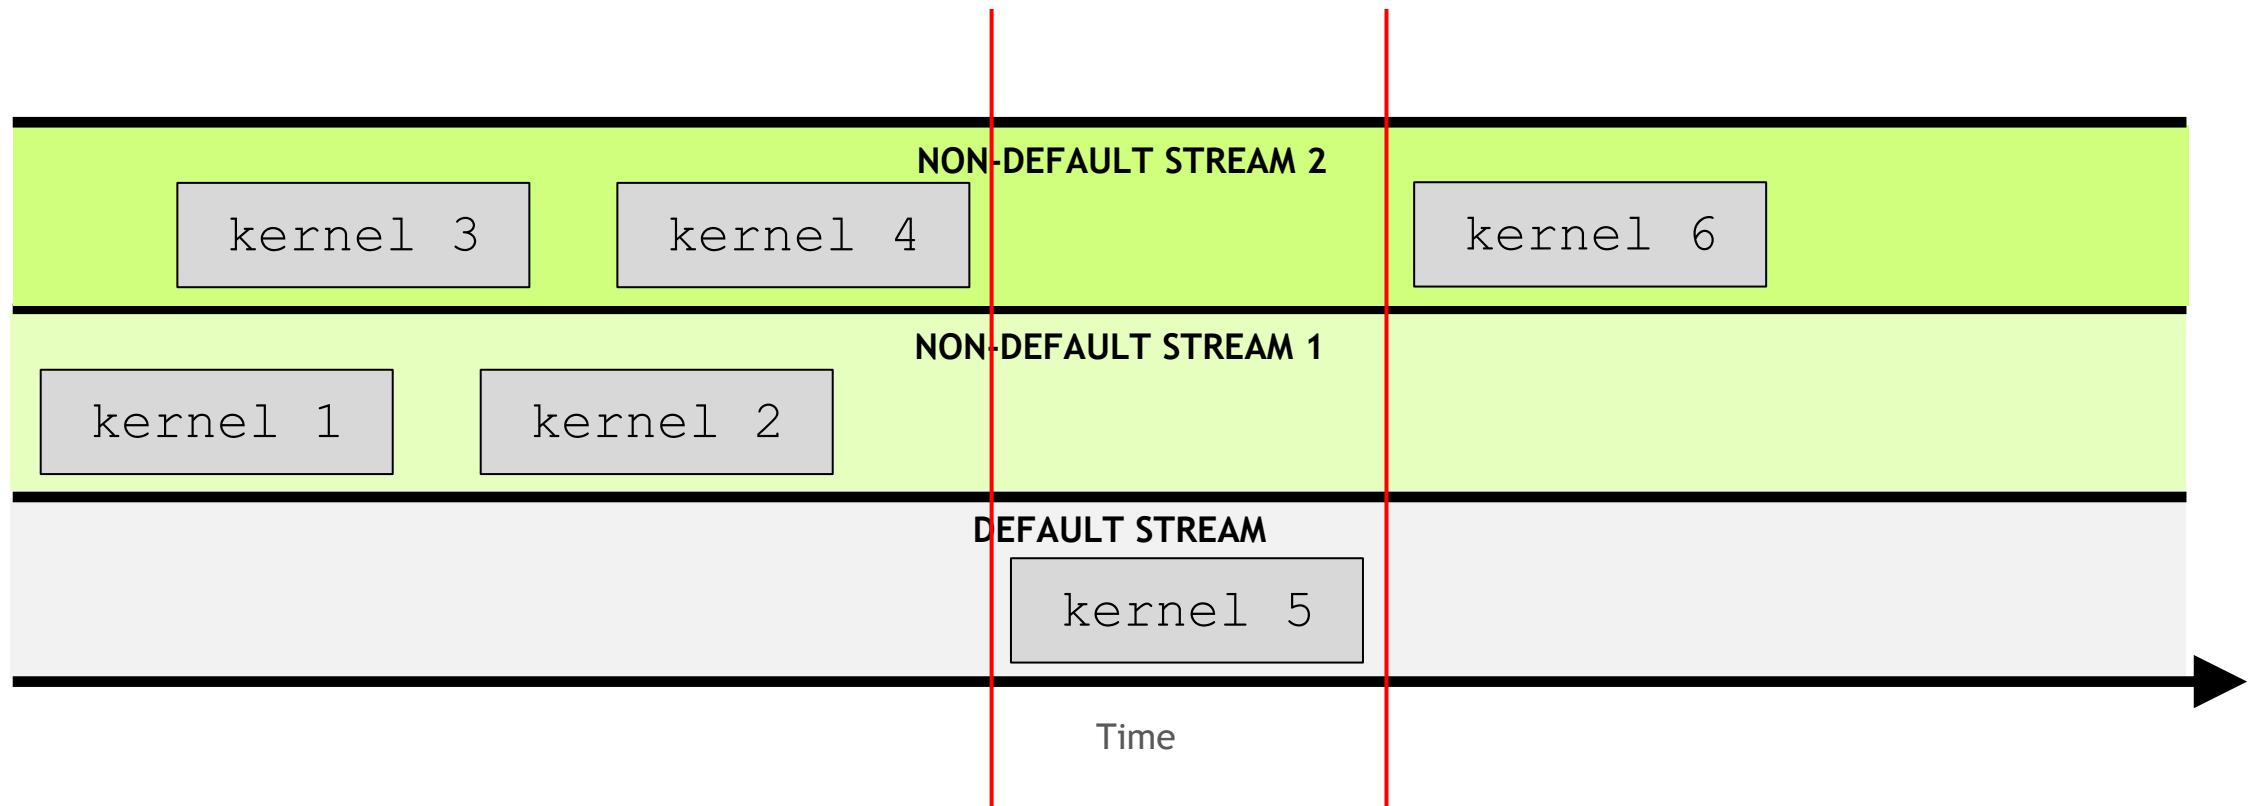

The default stream is special: it
blocks all kernels in all other streams

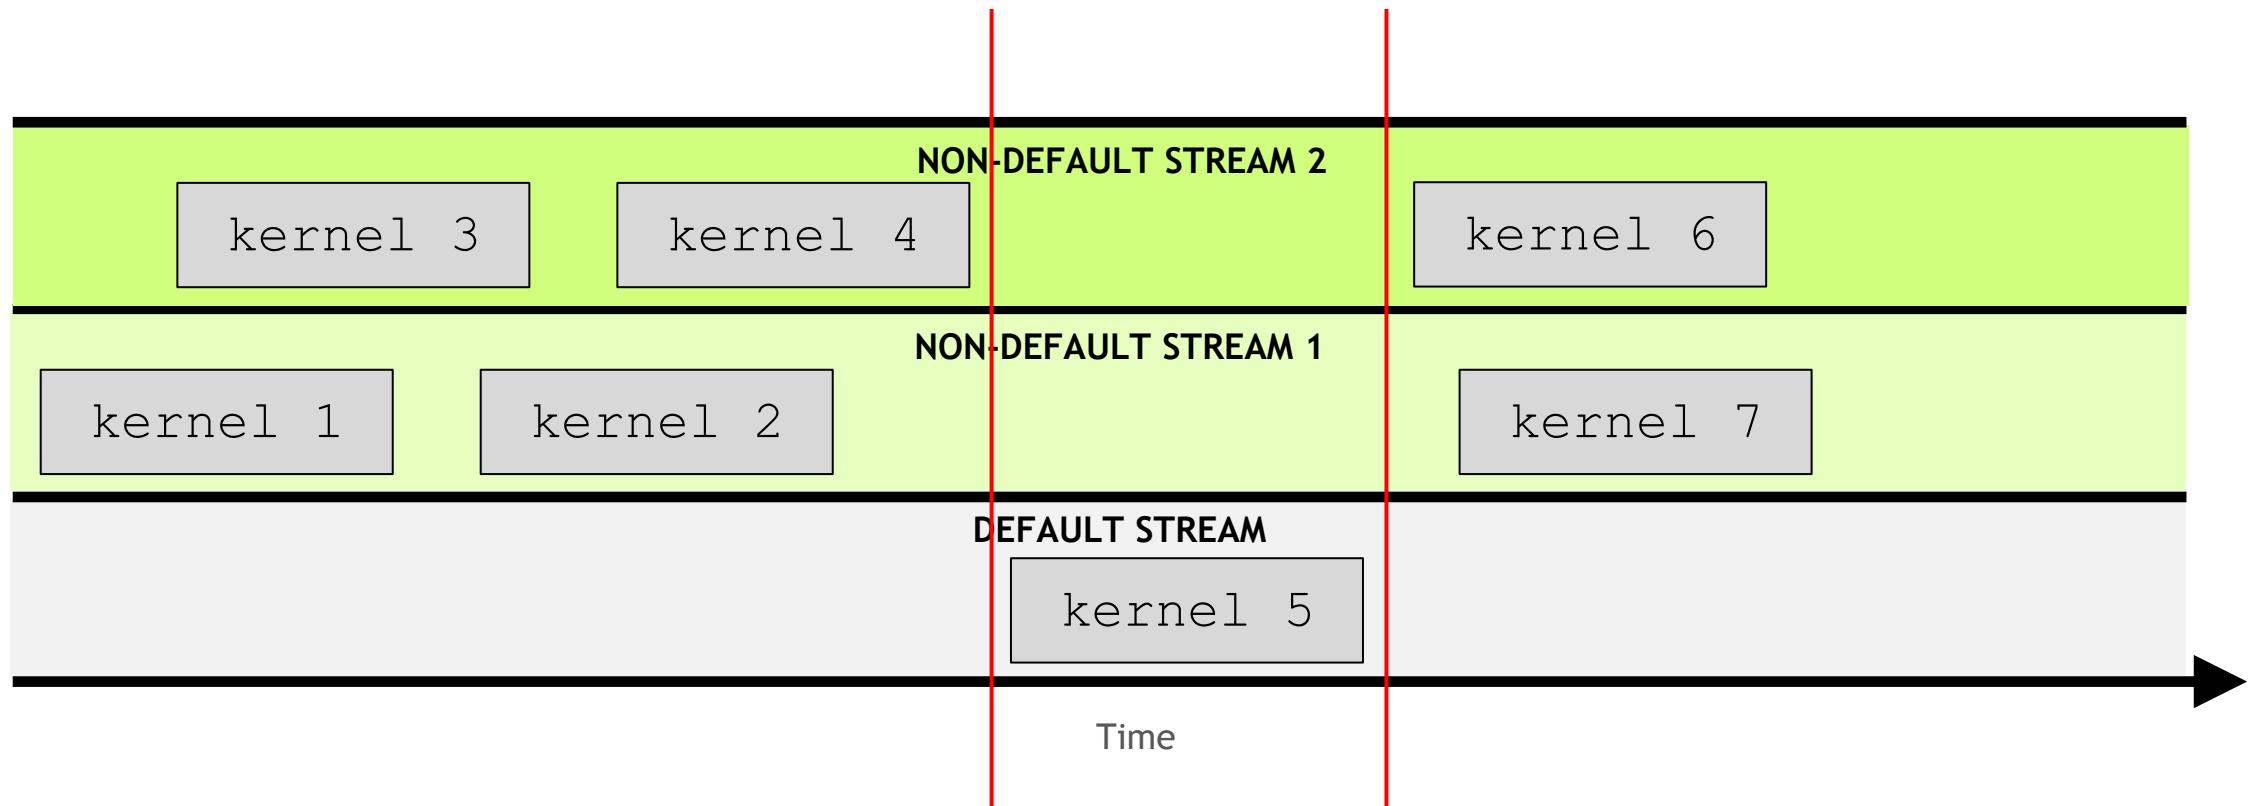

The default stream is special: it
blocks all kernels in all other
streams

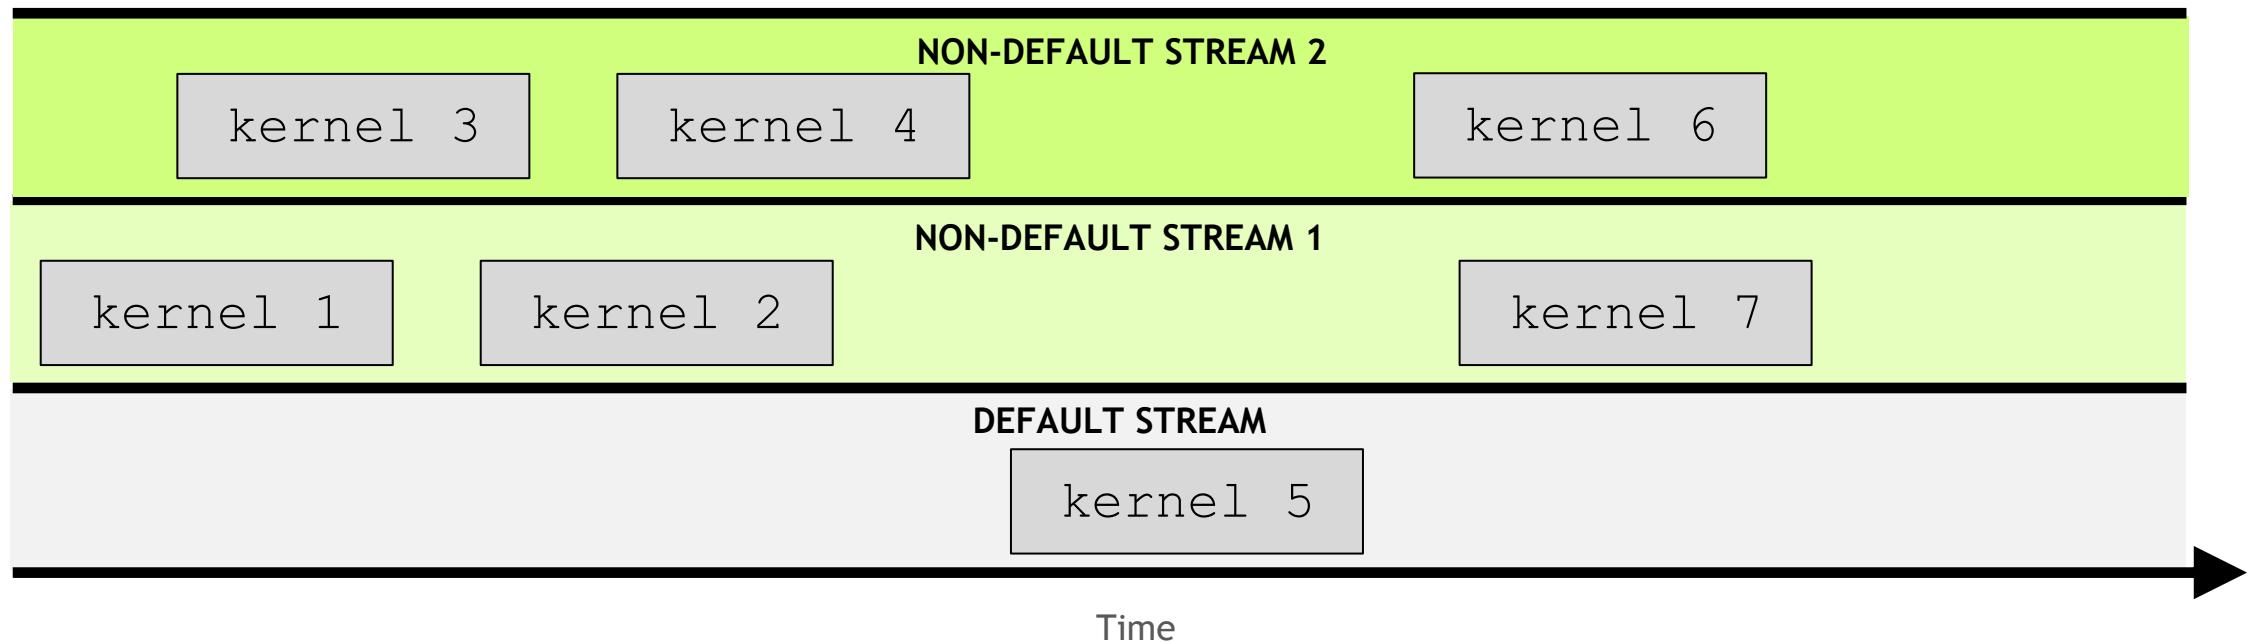

samples \ simple-streams

- Default Stream


```
__global__ void printNumber(int number)
{
    printf("%d\n", number);
}
```

```
int main()
{
    for (int i = 0; i < 5; ++i)
    {
        printNumber<<<1, 1>>>(i);
    }
    cudaDeviceSynchronize();
}
```


- Concurrent Streams

```
__global__ void printNumber(int number)
{
    printf("%d\n", number);
}
```

```
int main()
{
    for (int i = 0; i < 5; ++i)
    {
        cudaStream_t stream;
        cudaStreamCreate(&stream);
        printNumber<<<1, 1, 0, stream>>>(i);
        cudaStreamDestroy(stream);
    }
    cudaDeviceSynchronize();
}
```

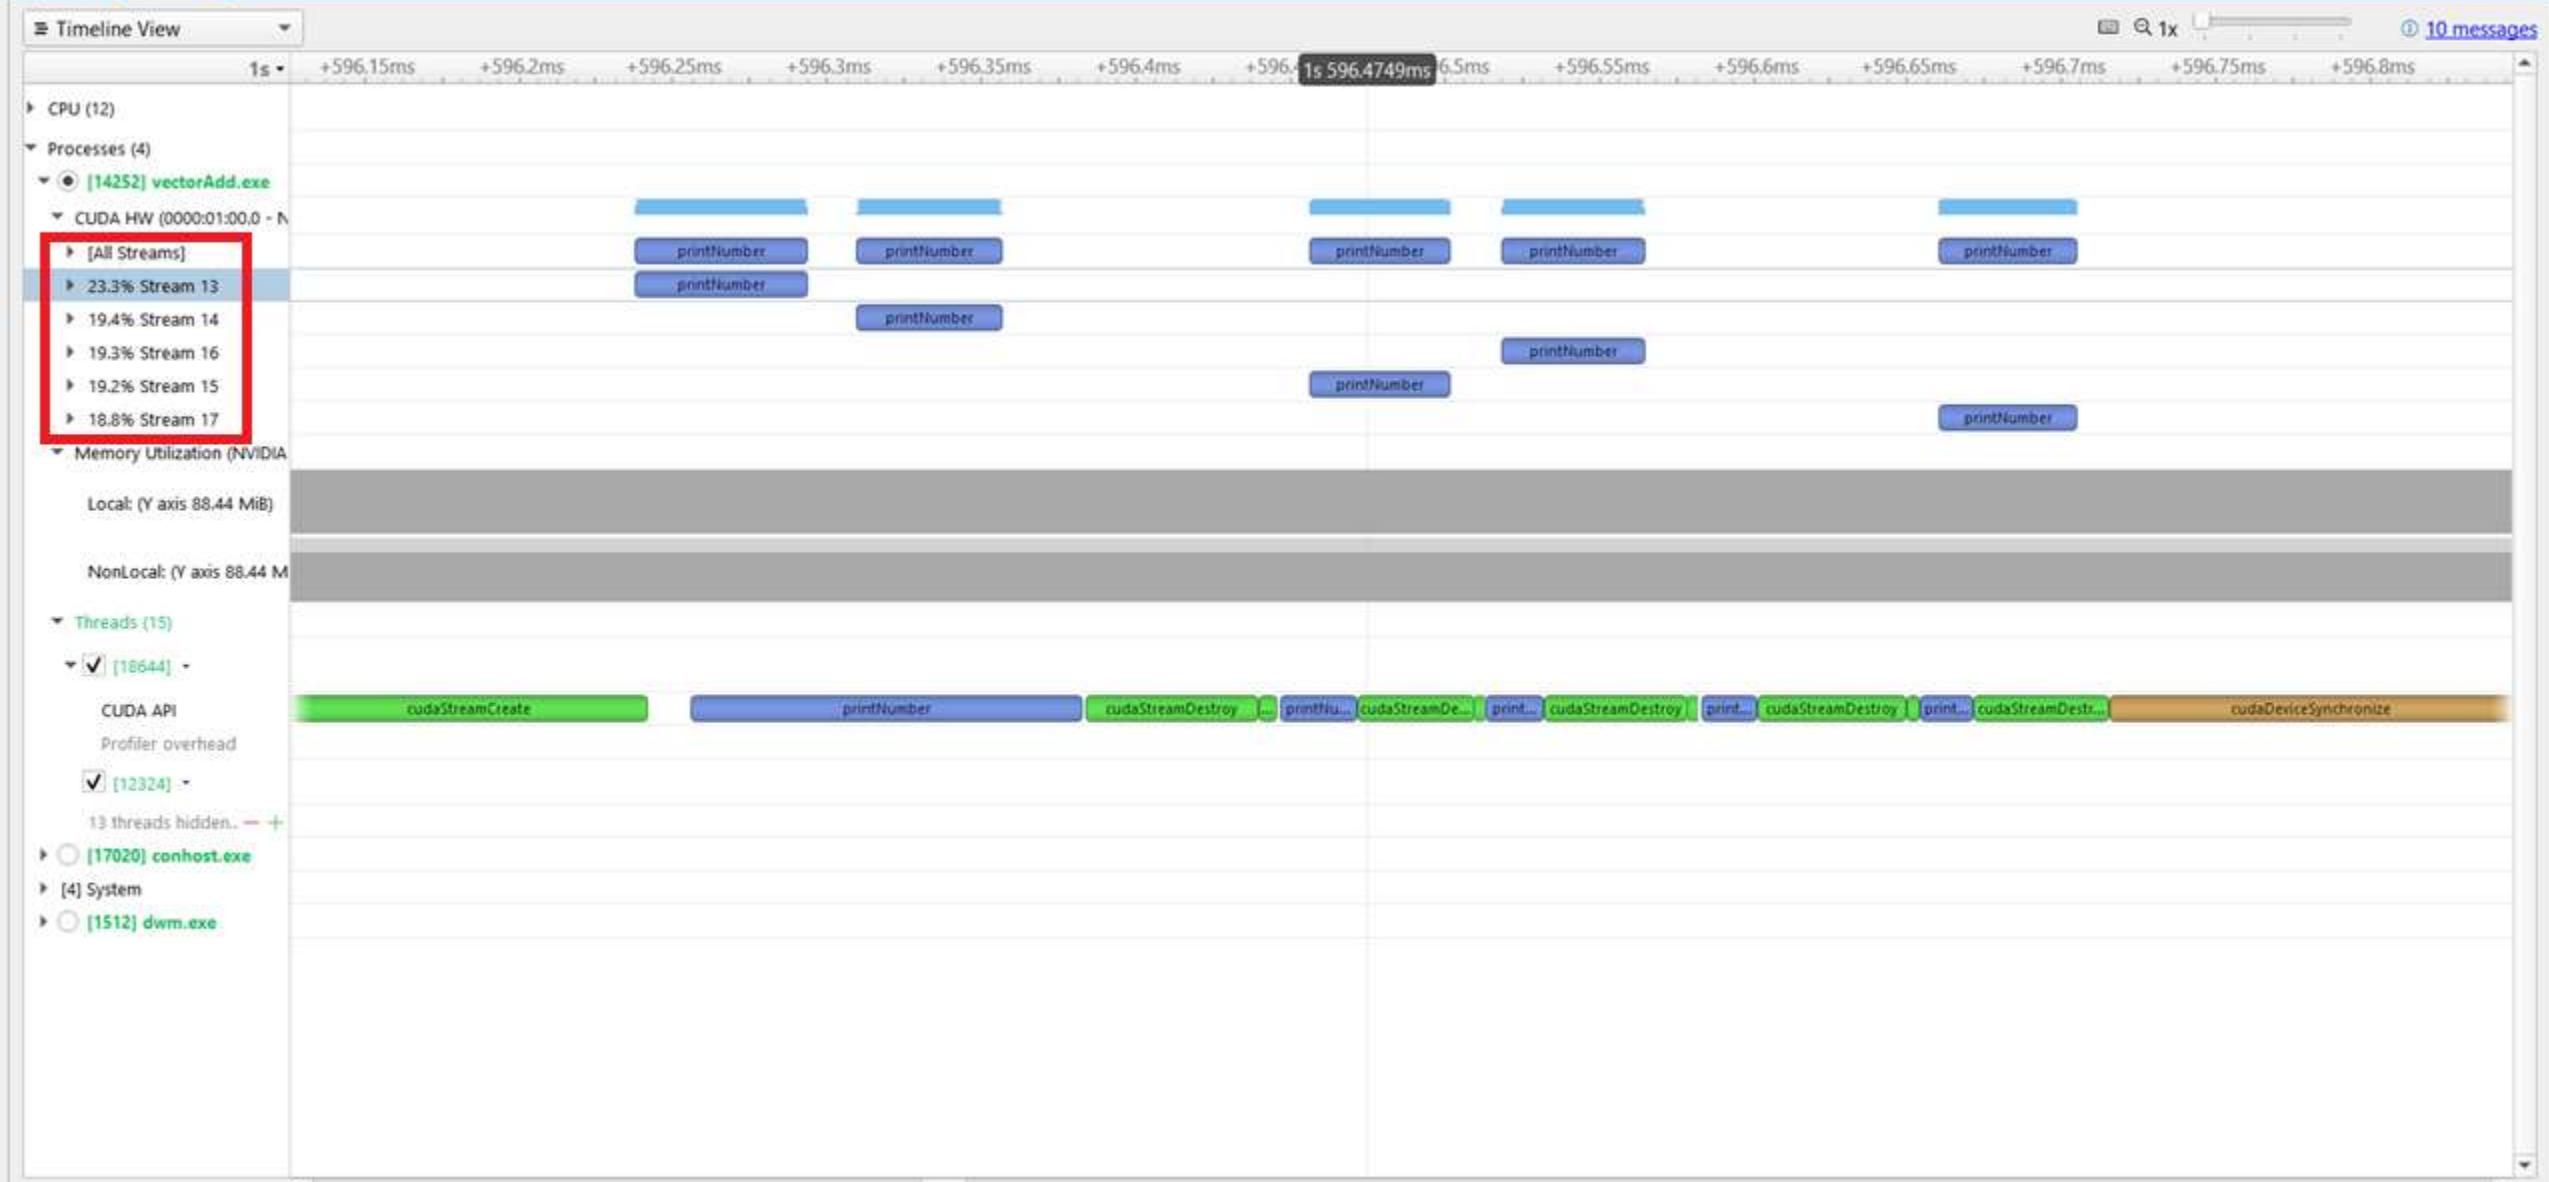

Simple Processing Flow

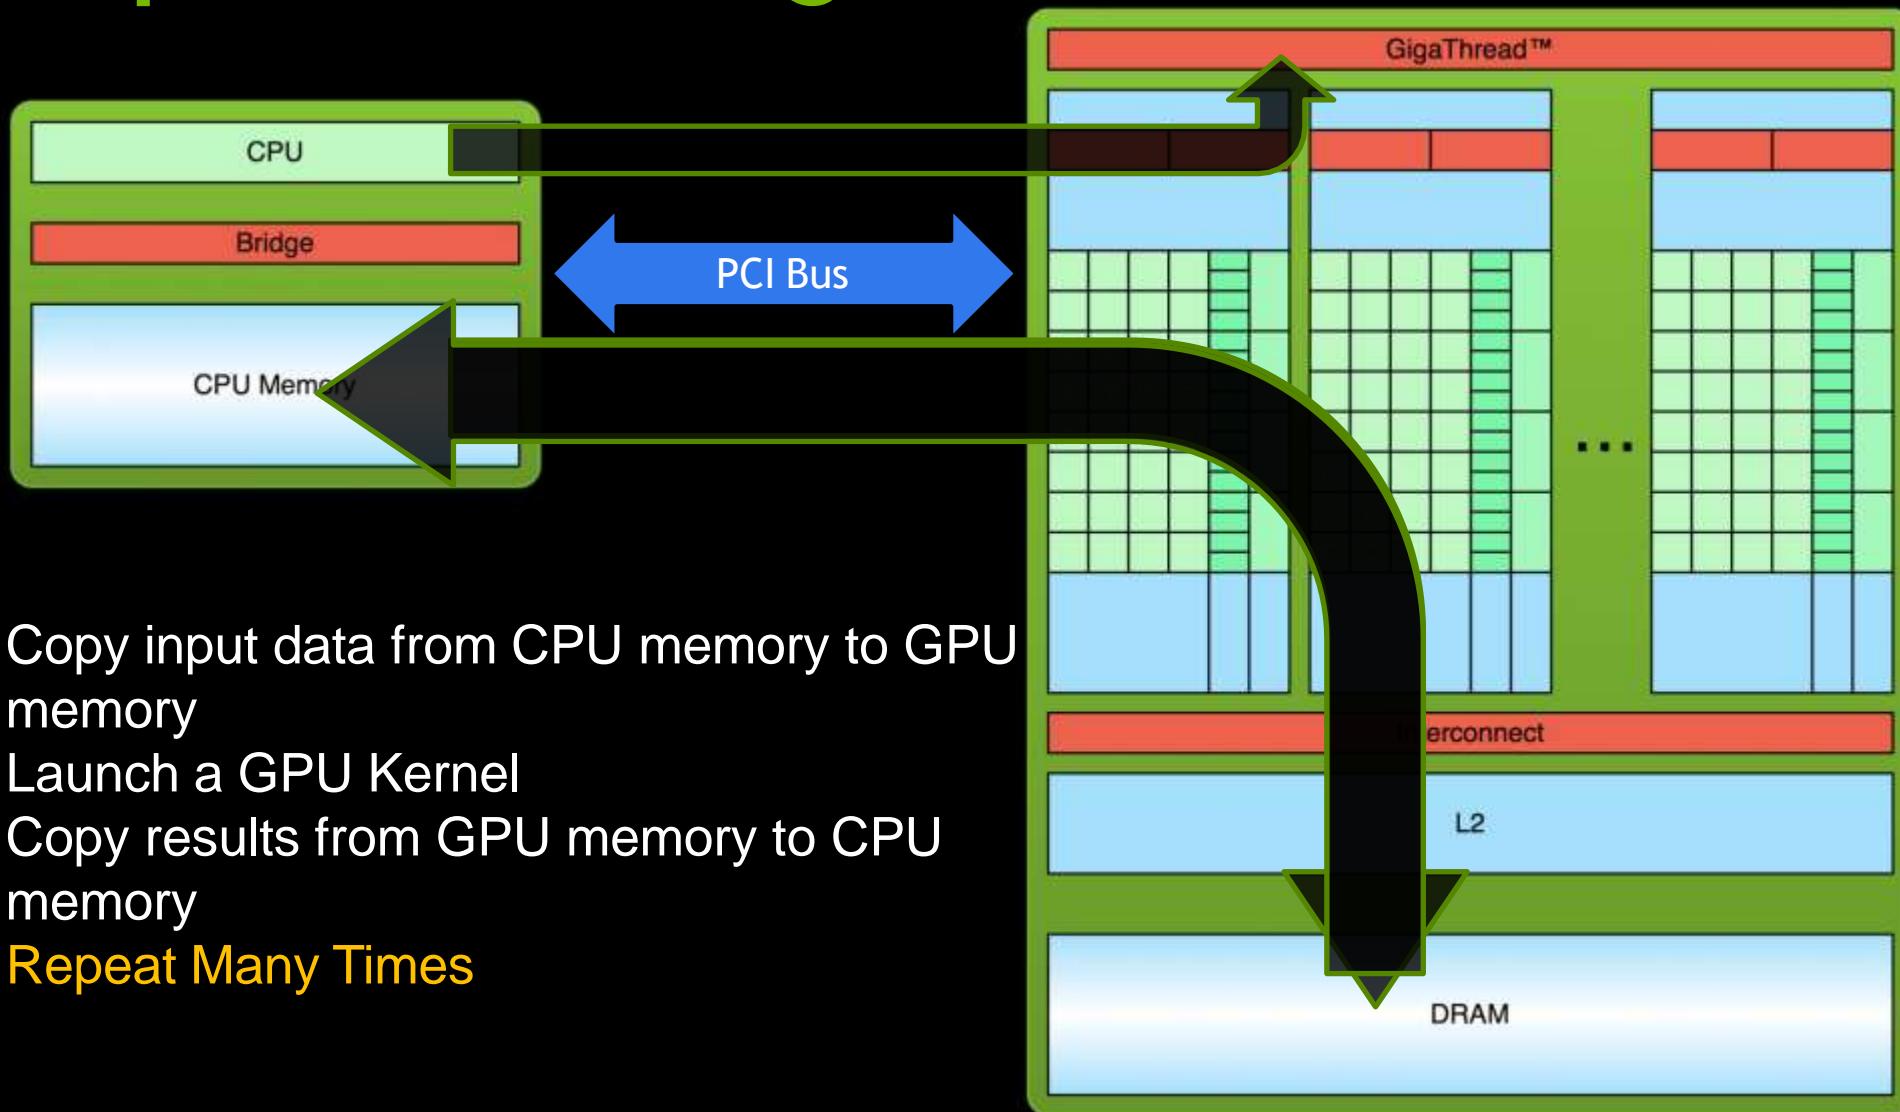


CONCURRENCY THROUGH PIPELINING

- Serial



- Concurrent- overlap kernel and D2H copy

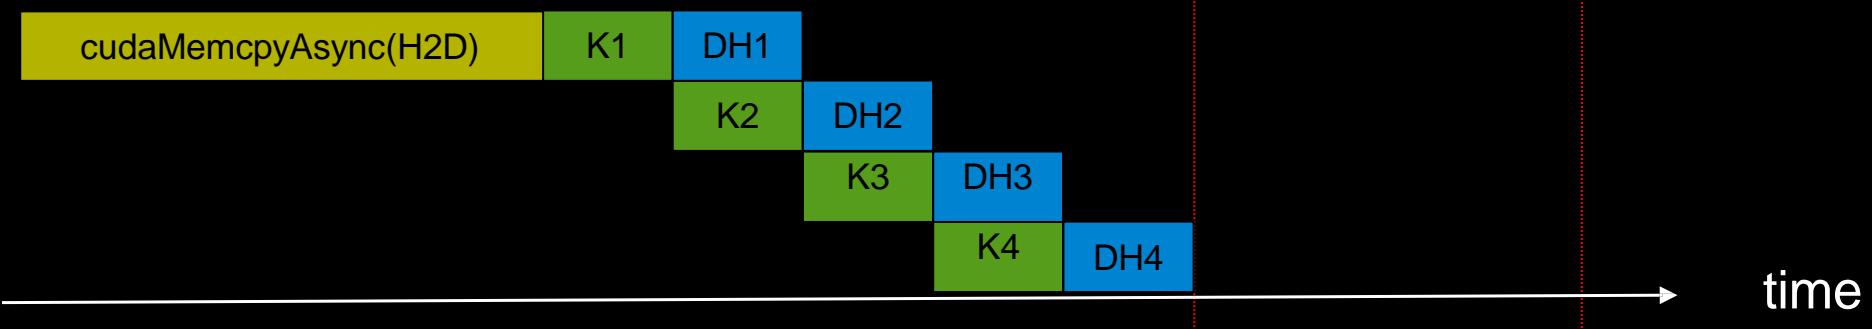


CONCURRENCY THROUGH PIPELINING


- Serial (1x)




- 2-way concurrency (up to 2x)

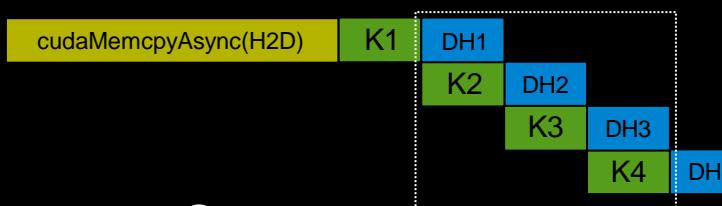


- 3-way concurrency (up to 3x)

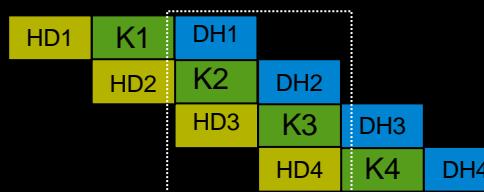

- 4-way concurrency (3x+)

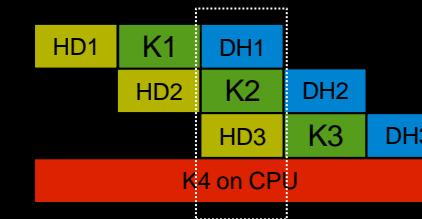

- 4+ way concurrency

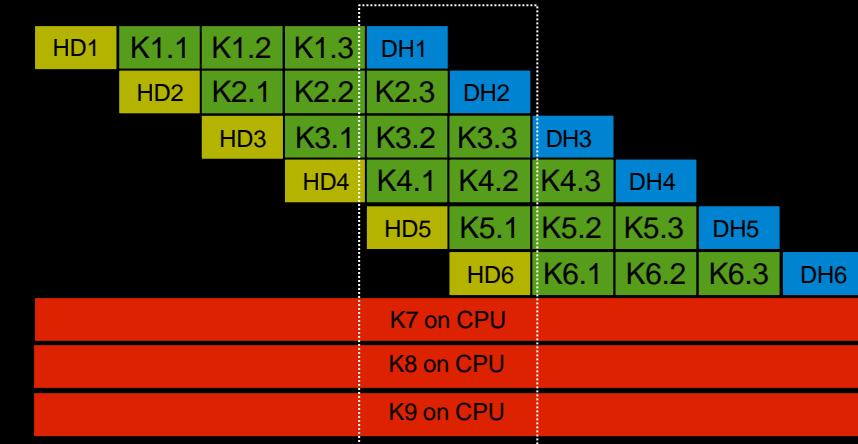


EXAMPLE - TILED DGEMM

- CPU (dual 6 core SandyBridge E5-2667 @2.9 Ghz, MKL)
 - 222 Gflop/s
- GPU (K20X)
 - Serial: 519 Gflop/s (2.3x)
 - 2-way: 663 Gflop/s (3x)
 - 3-way: 990 Gflop/s (4x)
- GPU + CPU
 - 4-way con.: 1180 Gflop/s (5.3x)
- Obtain maximum performance by leveraging concurrency
- All PCI-E traffic is hidden
 - Effectively removes device memory size limitations!

DGEMM: m=n=16384, k=1408


Nvidia Visual Profiler (nvvp)

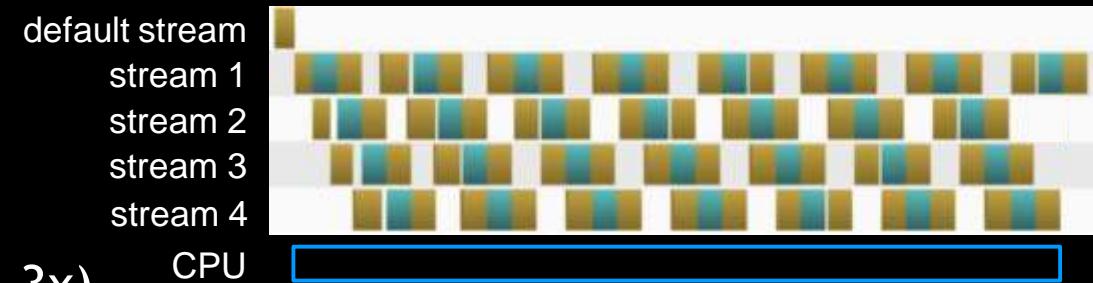

ENABLING CONCURRENCY WITH STREAMS

SYNCHRONICITY IN CUDA

- All CUDA calls are either synchronous or asynchronous w.r.t the host
 - Synchronous: enqueue work and wait for completion
 - Asynchronous: enqueue work and return immediately
- Kernel Launches are asynchronous Automatic overlap with host

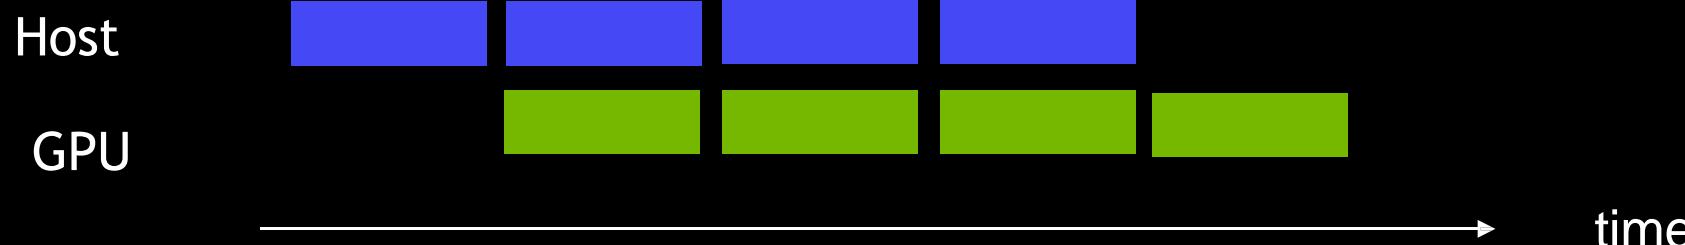

CUDA STREAMS

- A **stream** is a queue of device work
 - The host places work in the queue and continues on immediately
 - Device schedules work from streams when resources are free
- CUDA operations are placed within a stream
 - e.g. Kernel launches, memory copies
- Operations within the **same stream** are **ordered** (FIFO) and cannot overlap
- Operations in **different streams** are **unordered** and can overlap

MANAGING STREAMS

- **cudaStream_t stream;**
 - Declares a stream handle
- **cudaStreamCreate (&stream) ;**
 - Allocates a stream
- **cudaStreamDestroy (stream) ;**
 - Deallocates a stream
 - Synchronizes host until work in stream has completed

PLACING WORK INTO A STREAM

- Stream is the 4th launch parameter
 - kernel<<< blocks , threads, smem, **stream**>>>();
- Stream is passed into some API calls
 - cudaMemcpyAsync(dst, src, size, dir, **stream**);


DEFAULT STREAM

- Unless otherwise specified all calls are placed into a default stream
 - Often referred to as “Stream 0”
- Stream 0 has special synchronization rules
 - Synchronous with all streams
 - Operations in stream 0 cannot overlap other streams
- Exception: Streams with non-blocking flag set
 - `cudaStreamCreateWithFlags (&stream, cudaStreamNonBlocking)`
 - Use to get concurrency with libraries out of your control (e.g. MPI)

KERNEL CONCURRENCY


- Assume foo only utilizes 50% of the GPU
- Default stream

```
foo<<<blocks, threads>>>();  
foo<<<blocks, threads>>>();
```

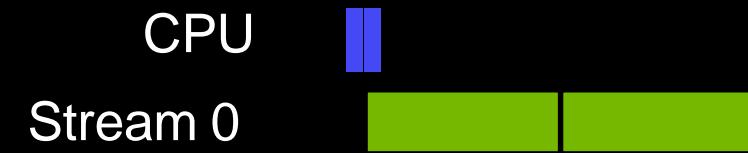

- Default & user streams


```
cudaStream_t stream1;  
cudaStreamCreate(&stream1);  
foo<<<blocks, threads>>>();  
foo<<<blocks, threads, 0, stream1>>>();  
cudaStreamDestroy(stream1);
```

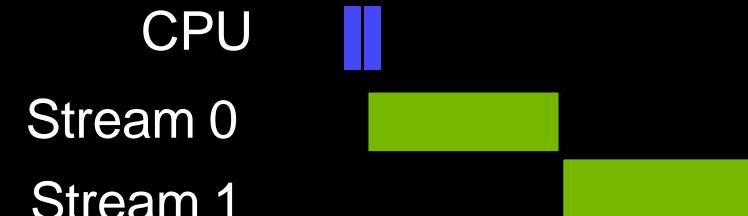

KERNEL CONCURRENCY

- Assume foo only utilizes 50% of the GPU
- Default & user streams

```
cudaStream_t stream1;  
  
cudaStreamCreateWithFlags (&stream1, cudaStreamNonBlocking);  
  
foo<<<blocks, threads>>>();  
  
foo<<<blocks, threads, 0, stream1>>>();  
  
cudaStreamDestroy (stream1);
```

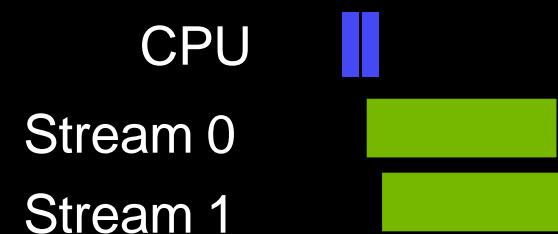

KERNEL CONCURRENCY

- Assume foo only utilizes 50% of the GPU User streams

```
cudaStream_t stream1, stream2;
```

```
cudaStreamCreate(&stream1);
```

```
cudaStreamCreate(&stream2);
```

```
foo<<<blocks, threads, 0, stream1>>>(); Stream 1
```

```
foo<<<blocks, threads, 0, stream2>>>(); Stream 2
```

```
cudaStreamDestroy(stream1); cudaStreamDestroy(stream2);
```

CPU ||



REVIEW

- The host is automatically asynchronous with kernel launches
- Use streams to control asynchronous behavior
 - Ordered within a stream (FIFO)
 - Unordered with other streams
 - Default stream is synchronous with all streams.

Concurrent Memory Copies

CONCURRENT MEMORY COPIES

- First we must review CUDA memory

THREE TYPES OF MEMORY

- Device Memory
 - Allocated using `cudaMalloc`
 - Cannot be paged
- Pageable Host Memory
 - Default allocation (e.g. `malloc`, `calloc`, `new`, etc)
 - Can be paged in and out by the OS
- Pinned (Page-Locked) Host Memory
 - Allocated using special allocators
 - Cannot be paged out by the OS

ALLOCATING PINNED MEMORY

- **cudaMallocHost(...)** / **cudaHostAlloc(...)**
 - Allocate/Free pinned memory on the host
 - Replaces malloc/free/new
- **cudaFreeHost(...)**
 - Frees memory allocated by cudaMallocHost or cudaHostAlloc
- **cudaHostRegister(...)** / **cudaHostUnregister(...)**
 - Pins/Unpins pageable memory (making it pinned memory)
 - Slow so don't do often
- Why pin memory?
 - Pagable memory is transferred using the host CPU
 - Pinned memory is transferred using the DMA engines
 - Frees the CPU for asynchronous execution
 - Achieves a higher percent of peak bandwidth

CONCURRENT MEMORY COPIES

- **cudaMemcpy(. . .)**
 - Places transfer into default stream
 - Synchronous: Must complete prior to returning
- **cudaMemcpyAsync(. . . , &stream)**
 - Places transfer into stream and returns immediately
- To achieve concurrency
 - Transfers must be in a non-default stream
 - Must use async copies
 - 1 transfer per direction at a time
 - Memory on the host must be pinned

PAGED MEMORY EXAMPLE

```
int *h_ptr, *d_ptr;  
  
h_ptr=malloc(bytes);  
cudaMalloc(&d_ptr,bytes);  
  
cudaMemcpy(d_ptr,h_ptr,bytes,cudaMemcpyHostToDevice);  
  
free(h_ptr);  
cudaFree(d_ptr);
```

PINNED MEMORY: EXAMPLE 1

```
int *h_ptr, *d_ptr;  
  
cudaMallocHost(&h_ptr,bytes);  
cudaMalloc(&d_ptr,bytes);  
  
cudaMemcpy(d_ptr,h_ptr,bytes,cudaMemcpyHostToDevice);  
  
cudaFreeHost(h_ptr);  
cudaFree(d_ptr);
```


PINNED MEMORY: EXAMPLE 2

```
int *h_ptr, *d_ptr;  
  
h_ptr=malloc(bytes) ;  
cudaHostRegister(h_ptr,bytes,0) ;  
cudaMalloc(&d_ptr,bytes) ;  
  
cudaMemcpy(d_ptr,h_ptr,bytes,cudaMemcpyHostToDevice) ;  
  
cudaHostUnregister(h_ptr) ;  
free(h_ptr) ; cudaFree(d_ptr) ;
```

CONCURRENCY EXAMPLES


Synchronous

```
cudaMemcpy(...);  
foo<<<...>>>();
```

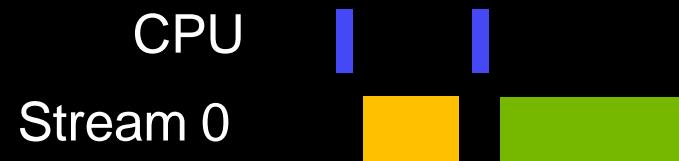


Asynchronous Same Stream

```
cudaMemcpyAsync(..., stream1);  
foo<<<..., stream1>>>();
```

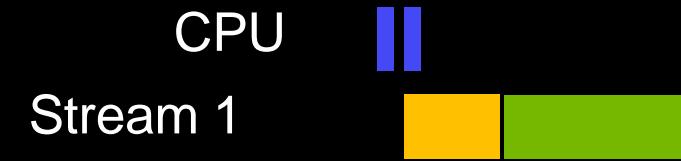

Asynchronous Different Streams

```
cudaMemcpyAsync(..., stream1);  
foo<<<..., stream2>>>();
```

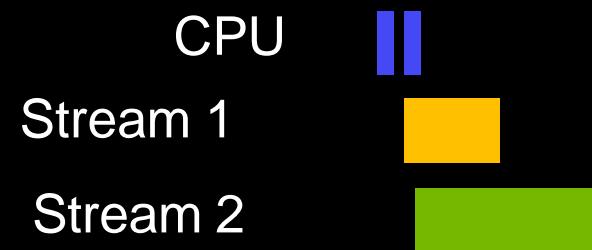

REVIEW


- Memory copies can execute concurrently if (and only if)
 - The memory copy is in a different non-default stream
 - The copy uses pinned memory on the host
 - The asynchronous API is called
 - There isn't another memory copy occurring in the same direction at the same time.

Synchronization

SYNCHRONIZATION APIs

- Synchronize everything
 - `cudaDeviceSynchronize()`
 - Blocks host until all issued CUDA calls are complete
- Synchronize host w.r.t. a specific stream
 - `cudaStreamSynchronize(stream)`
 - Blocks host until all issued CUDA calls in stream are complete
- Synchronize host or devices using events

More
Synchronization

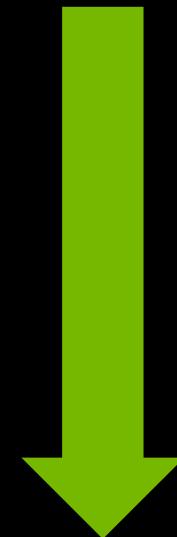

Less
Synchronization

CUDA EVENTS

- Provide a mechanism to signal when operations have occurred in a stream
 - Useful for profiling and synchronization
- Events have a boolean state:
 - Occurred
 - Not Occurred
 - **Important: Default state = occurred**

MANAGING EVENTS

- **cudaEventCreate (&event)**
 - Creates an event
- **cudaEventDestroy (&event)**
 - Destroys an event
- **cudaEventCreateWithFlags (&ev, cudaEventDisableTiming)**
 - Disables timing to increase performance and avoid synchronization issues
- **cudaEventRecord (&event, stream)**
 - Set the event state to not occurred
 - Enqueue the event into a stream
 - Event state is set to occurred when it reaches the front of the stream

SYNCHRONIZATION USING EVENTS

- Synchronize using events
 - `cudaEventQuery` (event)
 - Returns CUDA_SUCCESS if an event has occurred
 - `cudaEventSynchronize` (event)
 - Blocks host until stream completes all outstanding calls
 - `cudaStreamWaitEvent` (stream, event)
 - Blocks stream until event occurs
 - Only blocks launches after this call
 - Does not block the host!
- Common multi-threading mistake:
 - Calling `cudaEventSynchronize` before `cudaEventRecord`

CUDA_LAUNCH_BLOCKING

- Environment variable which forces synchronization
 - `export CUDA_LAUNCH_BLOCKING=1`
 - All CUDA operations are synchronous w.r.t the host
- Useful for debugging race conditions
 - If it runs successfully with `CUDA_LAUNCH_BLOCKING` set but doesn't without you have a race condition.

REVIEW

- Synchronization with the host can be accomplished via
 - `cudaDeviceSynchronize()`
 - `cudaStreamSynchronize(stream)`
 - `cudaEventSynchronize(event)`
- Synchronization between streams can be accomplished with
 - `cudaStreamWaitEvent(stream,event)`
- Use `CUDA_LAUNCH_BLOCKING` to identify race conditions


Streaming Performance

PROFILING TOOLS

- Windows
 - Nsight Visual Studio Edition
 - NVIDIA Visual Profiler
- Linux, Mac
 - Nsight Eclipse Edition
 - NVIDIA Visual Profiler
 - nvprof

NVVP PROFILER TIMELINE


- Host API Calls
- Multi-threaded
- Multi-GPU
- Multi-process
- Kernels
- Memory copies
- Streams

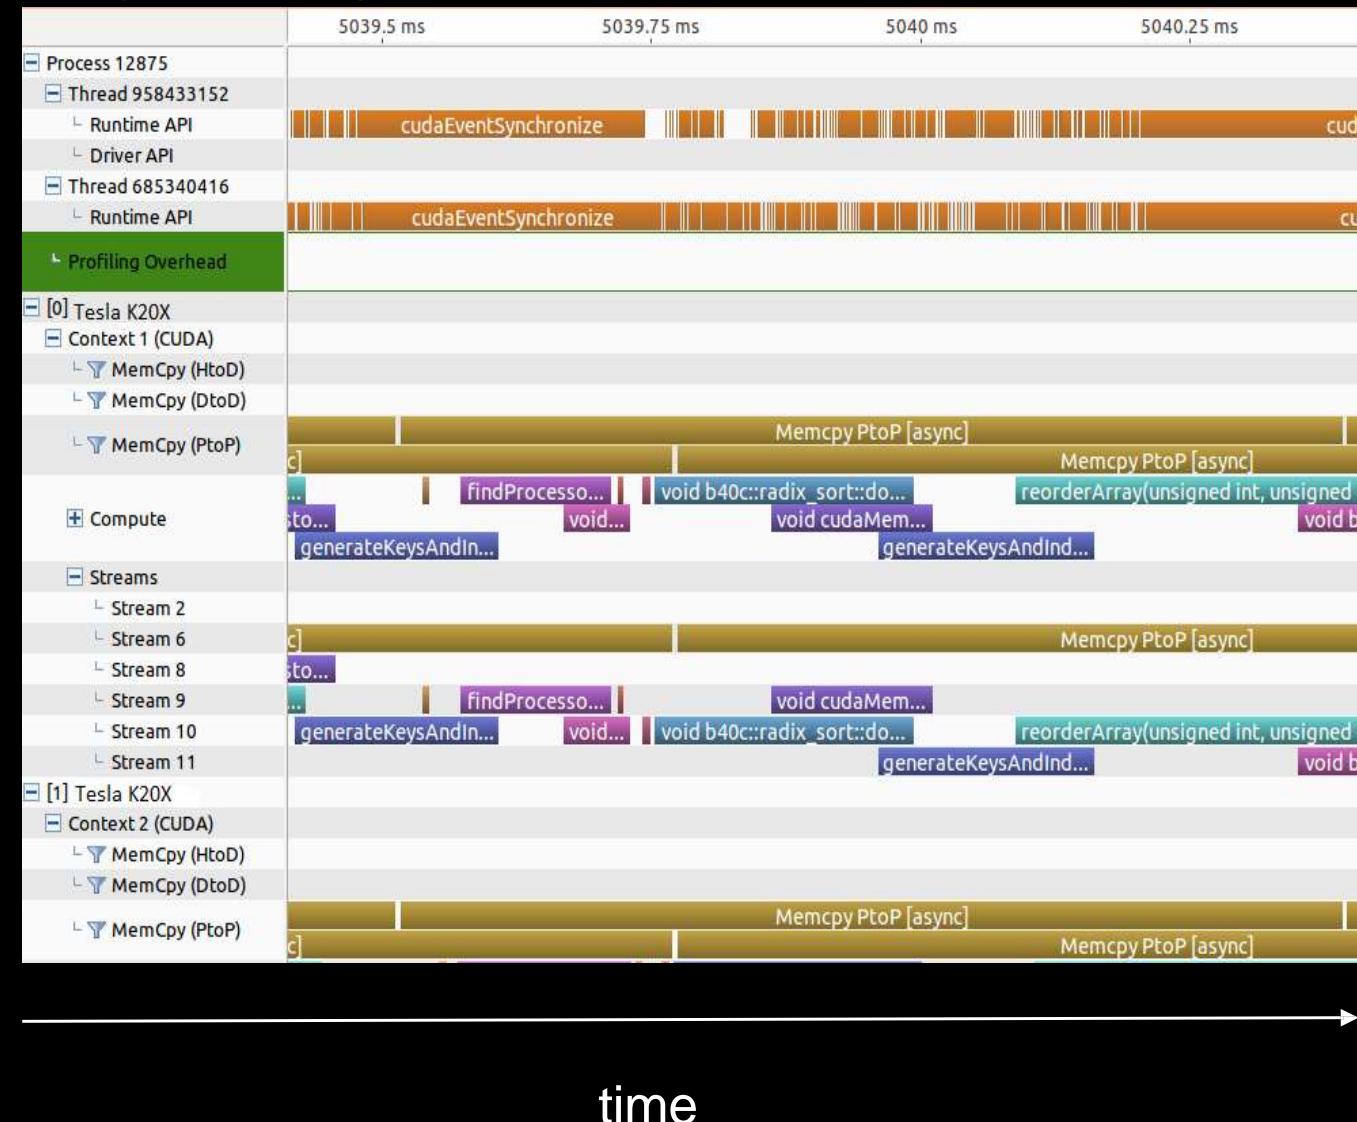

OPTIMAL TIMELINE


Less than 10 us idle time between successive operations

Concurrent
Operations

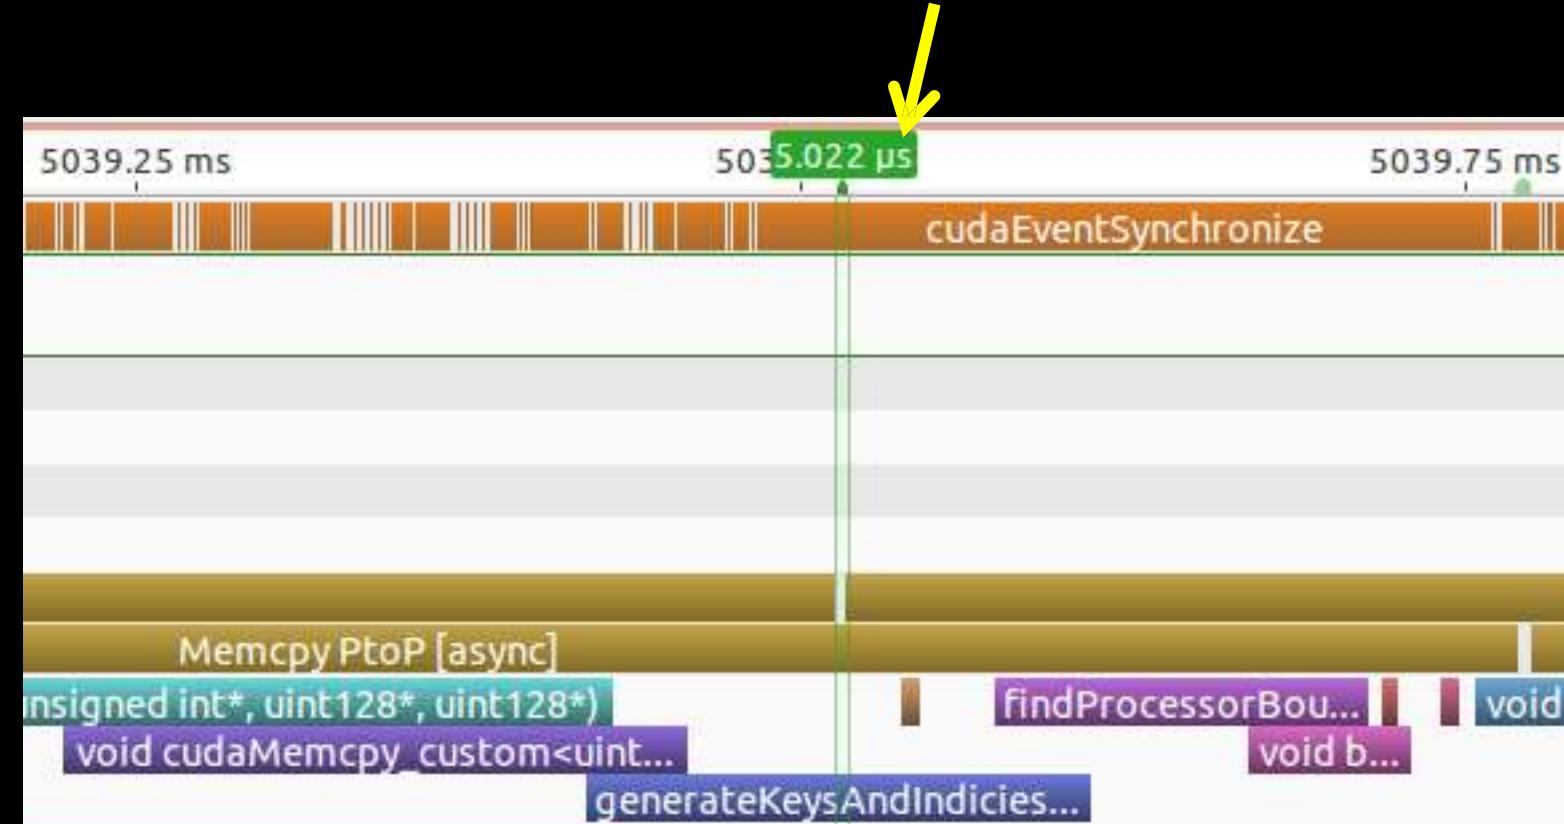

OPTIMAL TIMELINE


Host is running ahead of
the device >30 us

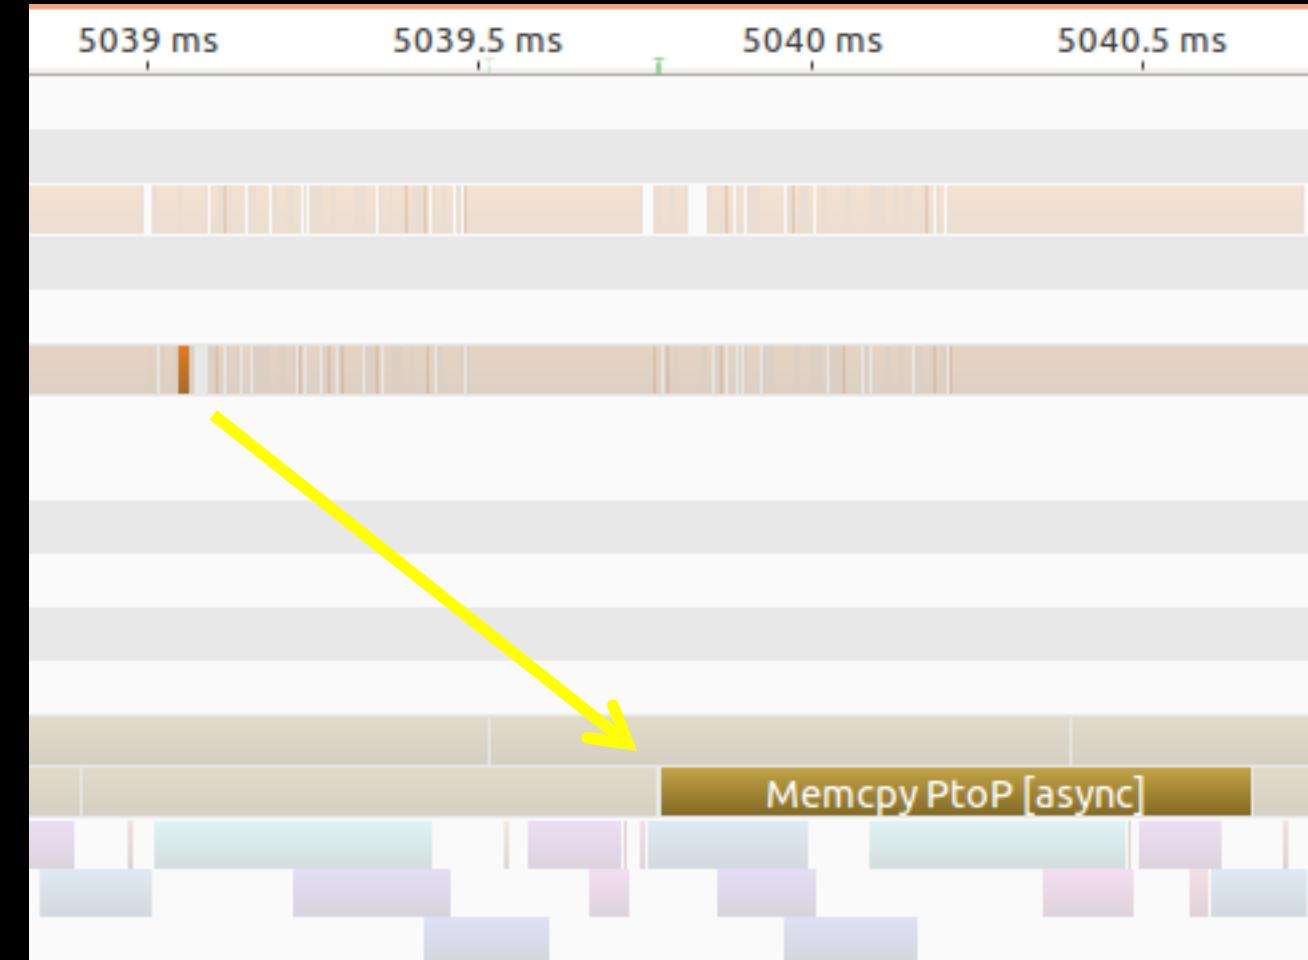

COMMON STREAMING PROBLEMS

CASE STUDY 1-A

```
for(int i=0;i<repeat;i++)  
{  
    kernel<<<1,1,0,stream1>>>();  
    kernel<<<1,1>>>();  
}
```

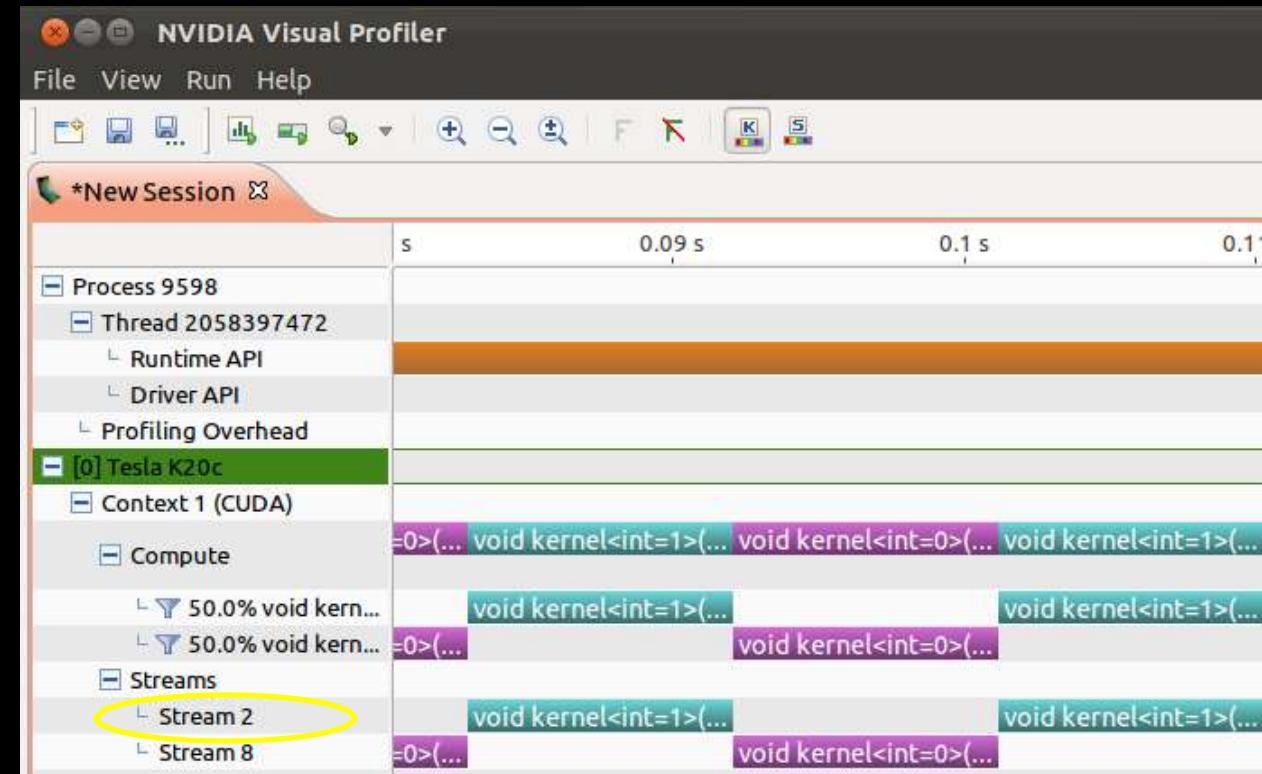


Problem:
One kernel is in the default stream

Stream 2 is the
default stream

CASE STUDY 1-A


```
for(int i=0;i<repeat;i++) {  
    kernel<<<1,1,0,stream1>>>();  
    kernel<<<1,1,0,stream2>>>();  
}
```

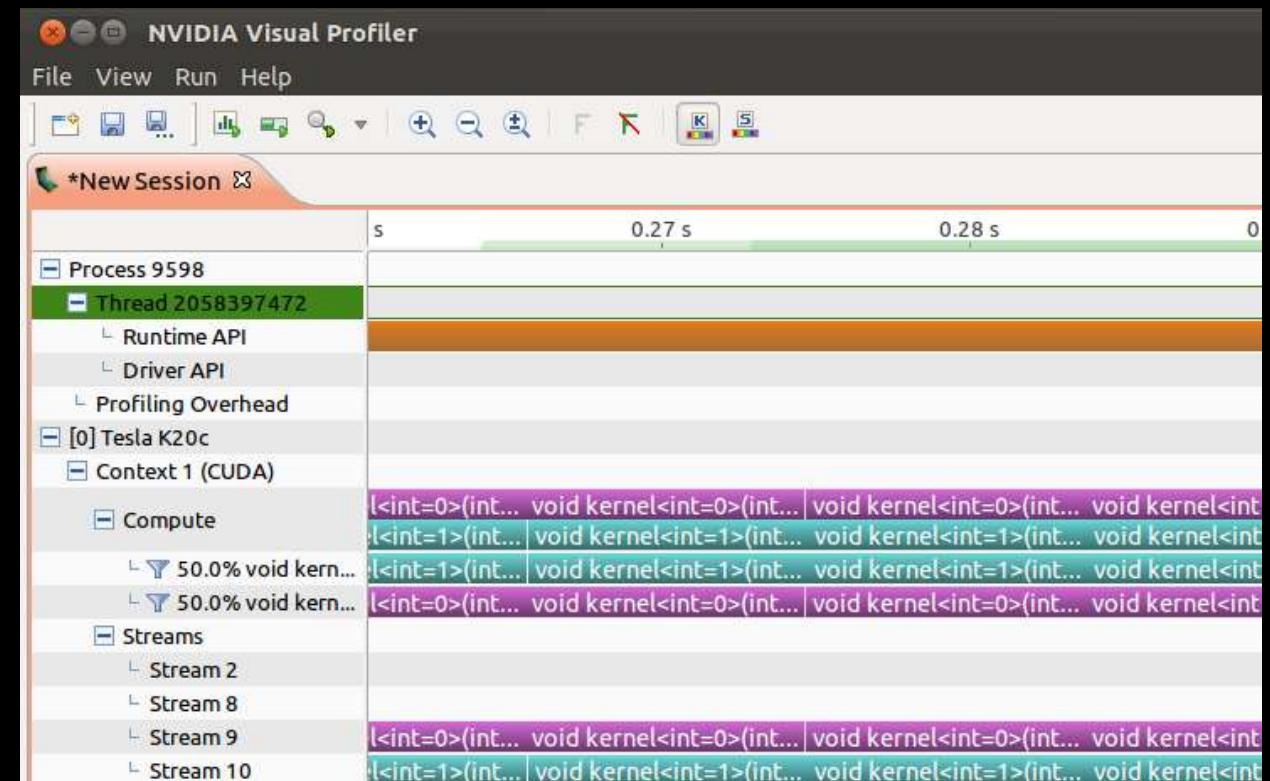

Solution:
Place each kernel in its own stream

CASE STUDY 1-B

```
for(int i=0;i<repeat;i++) {  
    kernel<<<1,1,0,stream1>>>();  
    cudaEventRecord(event1);  
    kernel<<<1,1,0,stream2>>>();  
    cudaEventRecord(event2);  
  
    cudaEventSynchronize(event1);  
    cudaEventSynchronize(event2);  
}
```

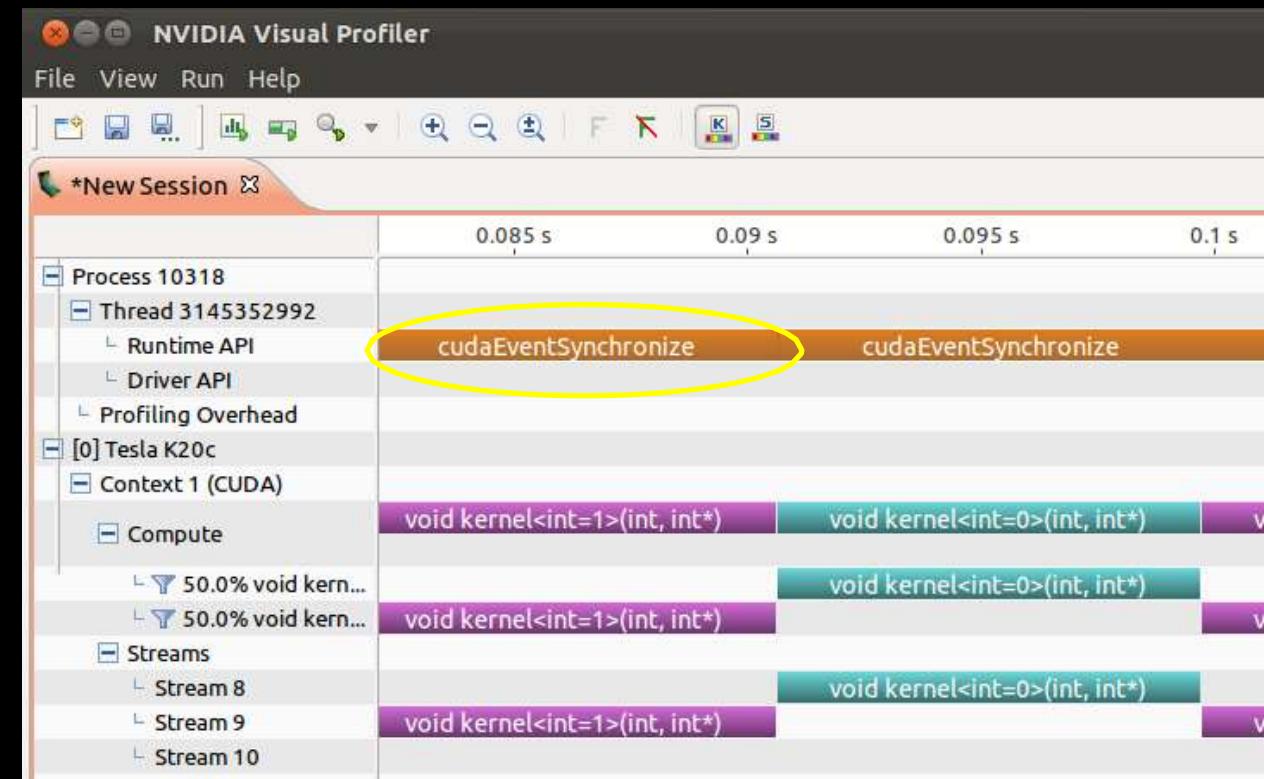


Are events causing the problem?

CASE STUDY 1-B

```
for(int i=0;i<repeat;i++) {  
    kernel<<<1,1,0,stream1>>>();  
    cudaEventRecord(event1);  
    kernel<<<1,1,0,stream2>>>();  
    cudaEventRecord(event2);  
  
    cudaEventSynchronize(event1);  
    cudaEventSynchronize(event2);  
}
```

Problem:


cudaEventRecord by without a stream goes into the default stream

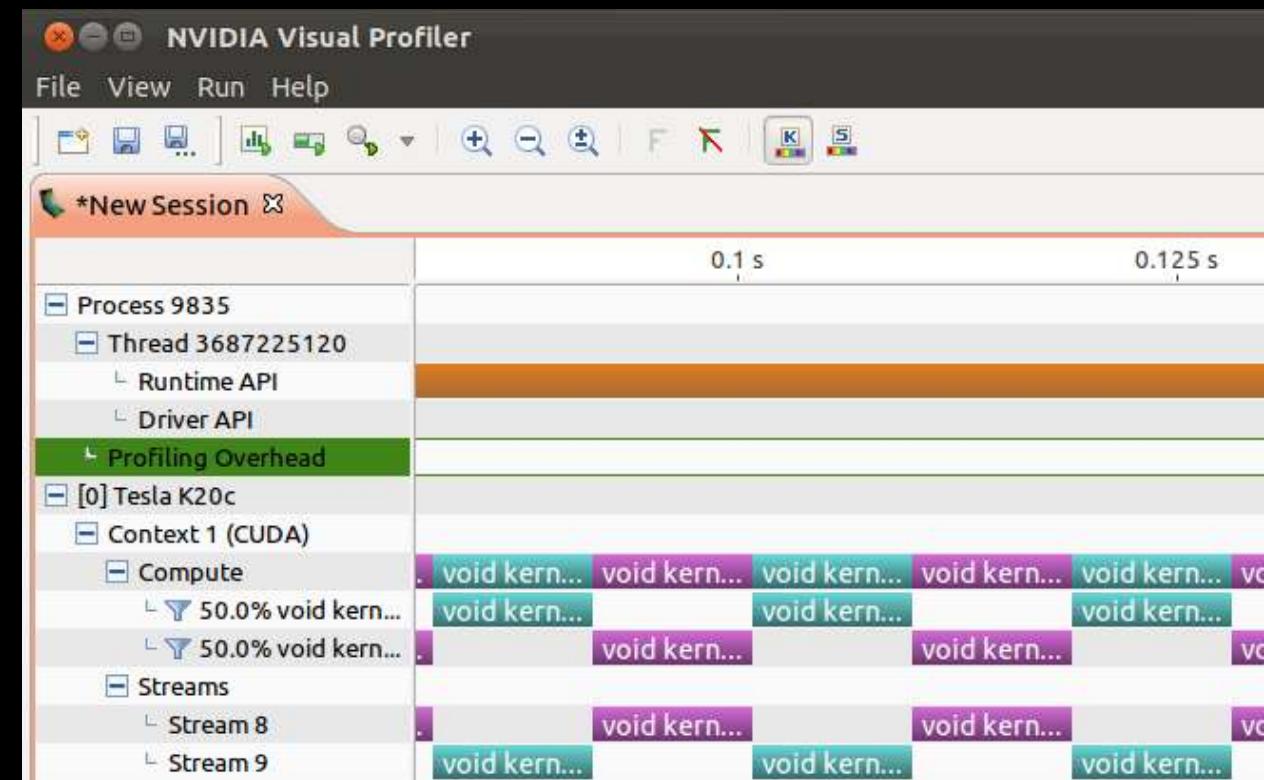

CASE STUDY 1-B

```
for(int i=0;i<repeat;i++) {  
    kernel<<<1,1,0,stream1>>>();  
    cudaEventRecord(event1,stream1);  
    kernel<<<1,1,0,stream2>>>();  
    cudaEventRecord(event2,stream2);  
  
    cudaEventSynchronize(event1);  
    cudaEventSynchronize(event2);  
}
```

Solution:
Record events into non-default streams

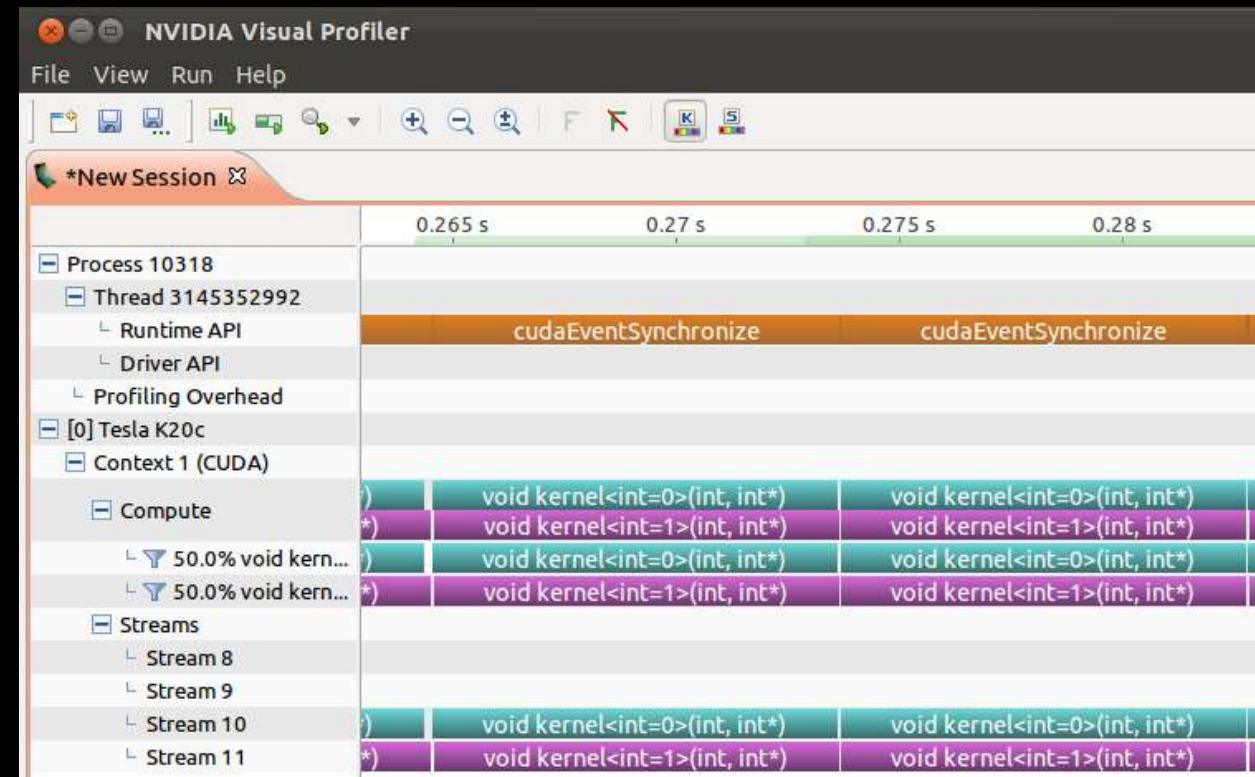

PROBLEM 1: USING THE DEFAULT STREAM

■ Symptoms

- One stream will not overlap other streams
 - In Cuda 5.0 stream 2 = default stream
- Search for `cudaEventRecord(event)` , `cudaMemcpyAsync()`, etc.
 - If stream is not specified it is placed into the default stream
- Search for kernel launches in the default stream
 - `<<<a,b>>>`


■ Solutions

- Move work into a non-default stream
- `cudaEventRecord(event,stream)`, `cudaMemcpyAsync(...,stream)`
- Alternative: Allocate other streams as non-blocking streams

CASE STUDY 2-A

```
for(int i=0;i<repeat;i++) {  
    cudaMemcpy(d_ptr,h_ptr,bytes, cudaMemcpyHostToDevice);  
    kernel<<<1,1,0,stream2>>>();  
    cudaDeviceSynchronize();  
}
```


Problem:
Memory copy is synchronous

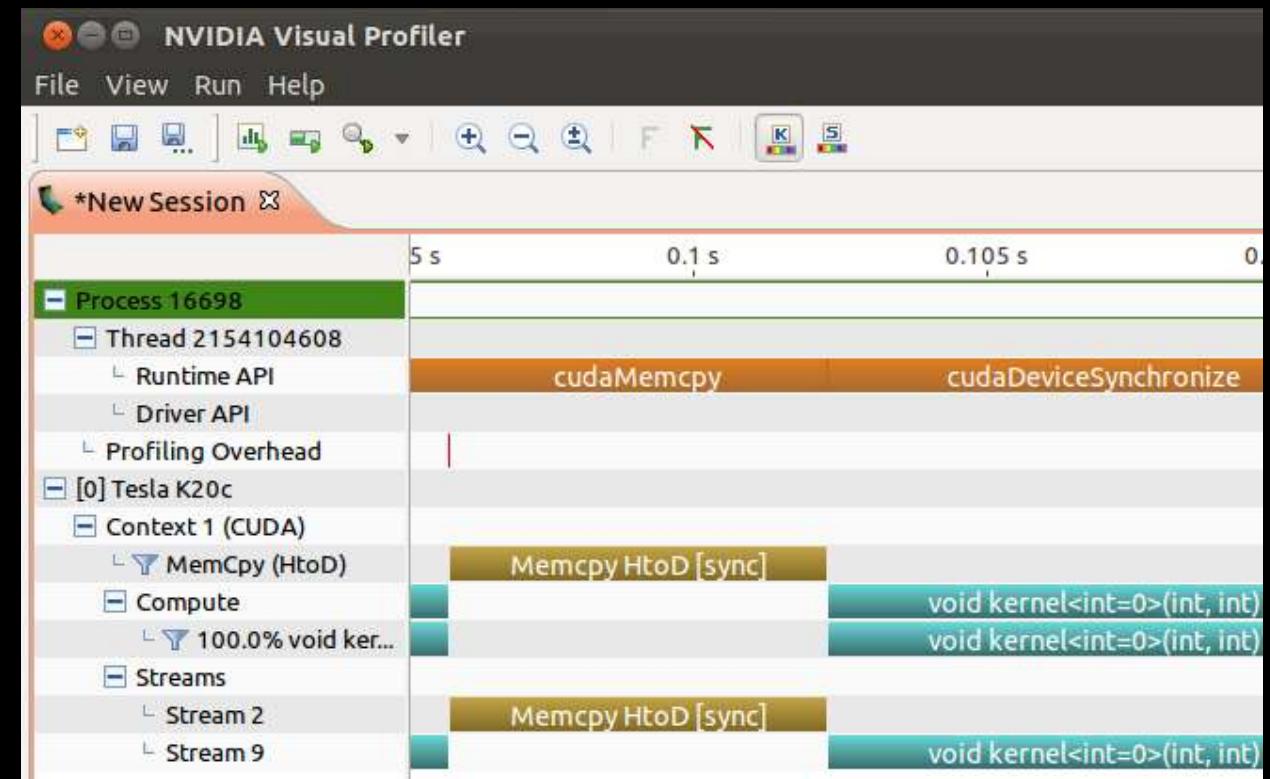

CASE STUDY 2-A

```
for(int i=0;i<repeat;i++) {  
    cudaMemcpyAsync(d_ptr,h_ptr,bytes, cudaMemcpyHostToDevice, stream1);  
    kernel<<<1,1,0,stream2>>>();  
    cudaDeviceSynchronize();  
}
```


Solution:
Use asynchronous API

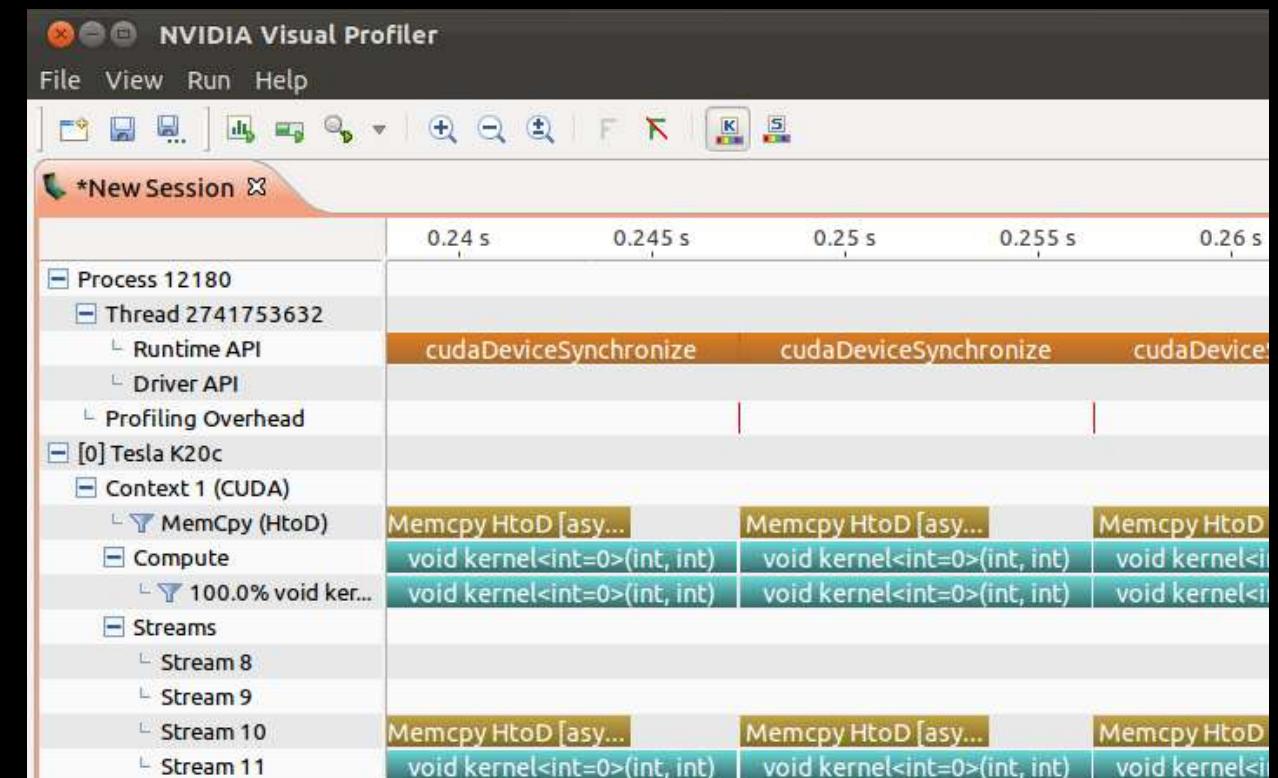

CASE STUDY 2-B


```
for(int i=0;i<repeat;i++) {  
    cudaMemcpyAsync(d_ptr,h_ptr,bytes, cudaMemcpyHostToDevice, stream1);  
    kernel<<<1,1,0,stream2>>>();  
    cudaDeviceSynchronize();  
}
```

Problem: ??

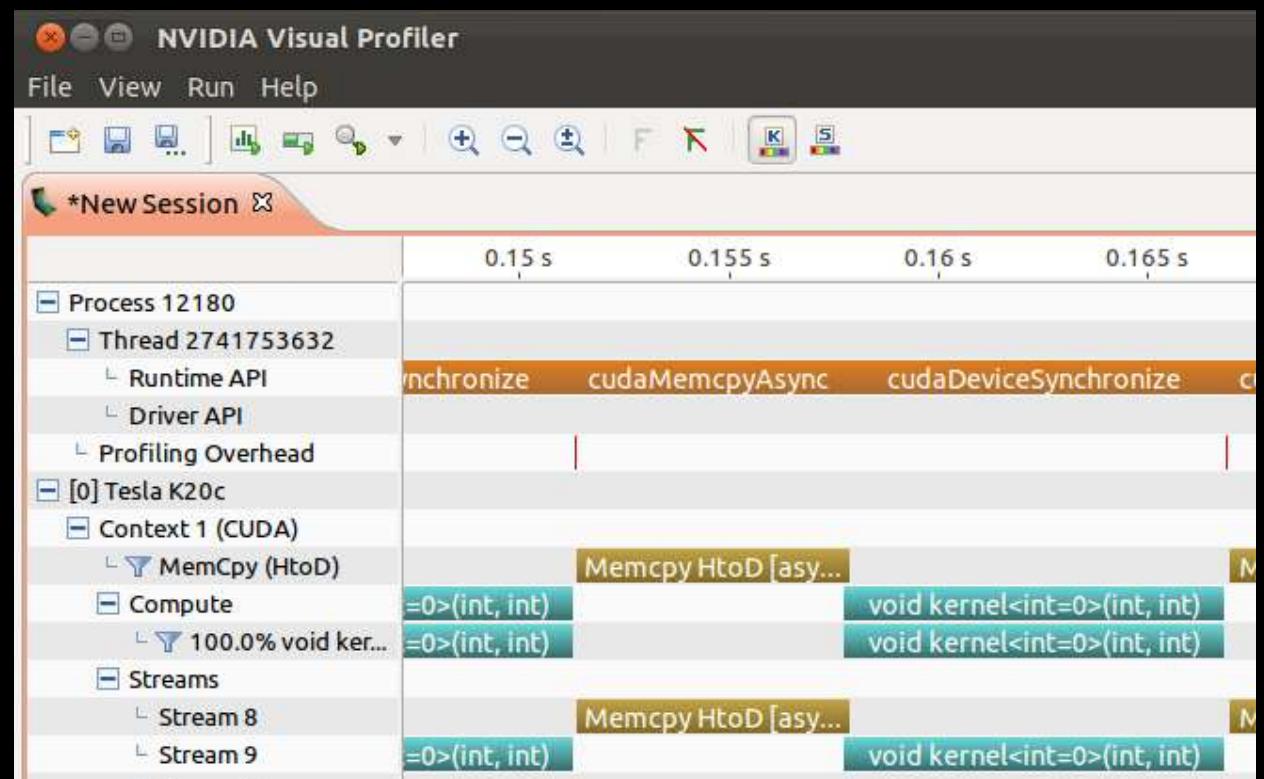

CASE STUDY 2-B


```
for(int i=0;i<repeat;i++) {  
    cudaMemcpyAsync(d_ptr,h_ptr,bytes, cudaMemcpyHostToDevice, stream1);  
    kernel<<<1,1,0,stream2>>>();  
    cudaDeviceSynchronize();  
}
```

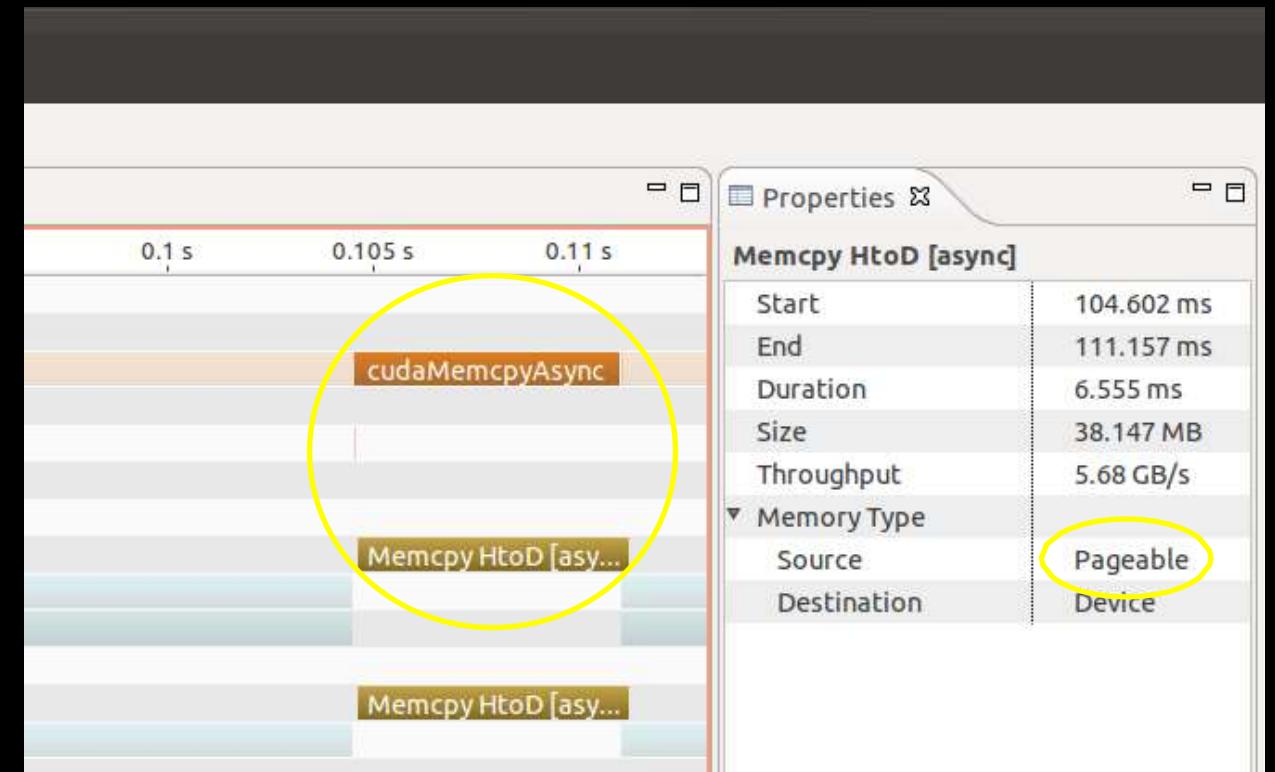

Host doesn't get ahead
Cuda 5.5 reports “Pageable” type

CASE STUDY 2-B

```
cudaHostRegister(h_ptr,bytes,0);
for(int i=0;i<repeat;i++) {
    cudaMemcpyAsync(d_ptr,h_ptr,bytes, cudaMemcpyHostToDevice, stream1);
    kernel<<<1,1,0,stream2>>>();
    cudaDeviceSynchronize();
}
cudaHostUnregister(h_ptr);
```

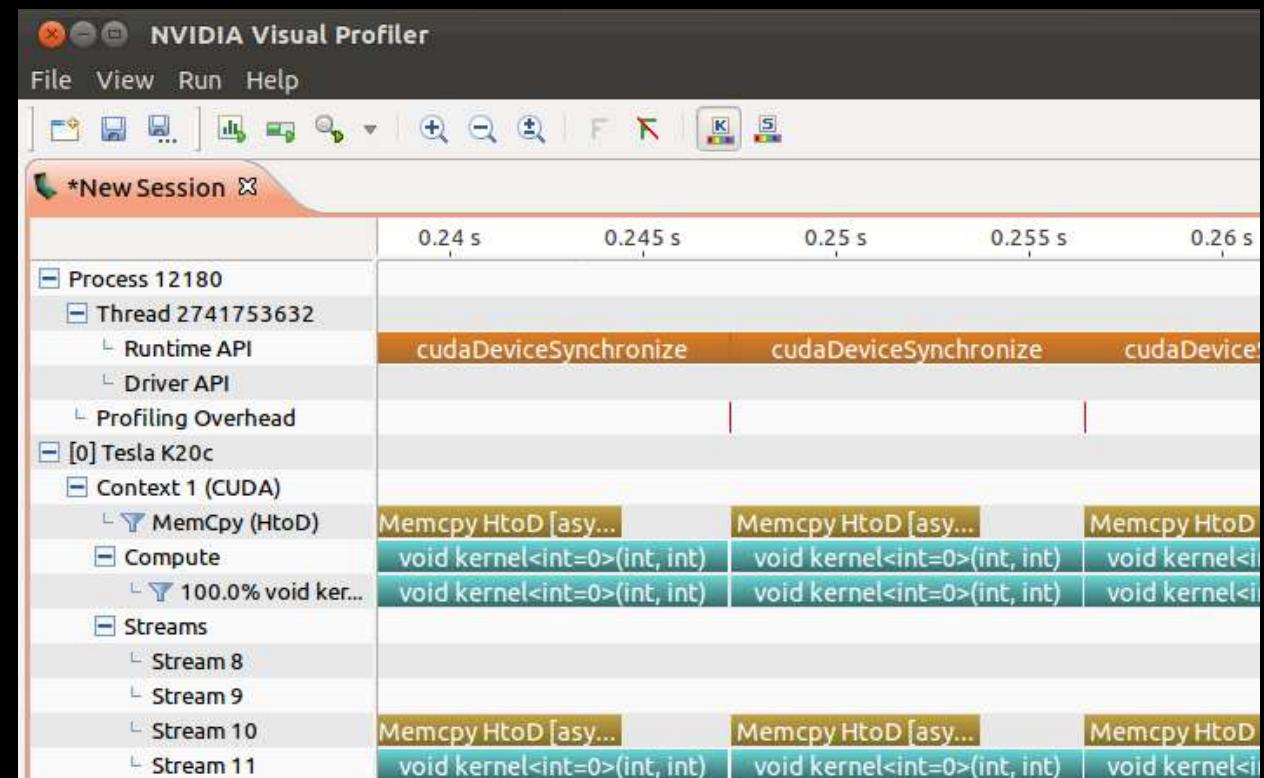

Solution:

Pin host memory using `cudaHostRegister` or `cudaMallocHost`

PROBLEM 2: MEMORY TRANSFERS ISSUES

- Symptoms


- Memory copies do not overlap
- Host spends excessive time in memory copy API
- Cuda reports “Pageable” memory (Cuda 5.5+)

- Solutions

- Use asynchronous memory copies
- Use pinned memory for host memory
 - `cudaMallocHost` or `cudaHostRegister`

CASE STUDY 3

```
void launchwork(cudaStream_t stream) {  
    int *mem;  
    cudaMalloc(&mem,bytes);  
    kernel<<<1,1,0,stream>>>(mem);  
    cudaFree(mem);  
}  
...  
  
for(int i=0;i<repeat;i++) {  
    launchwork(stream1);  
    launchwork(stream2);  
}
```

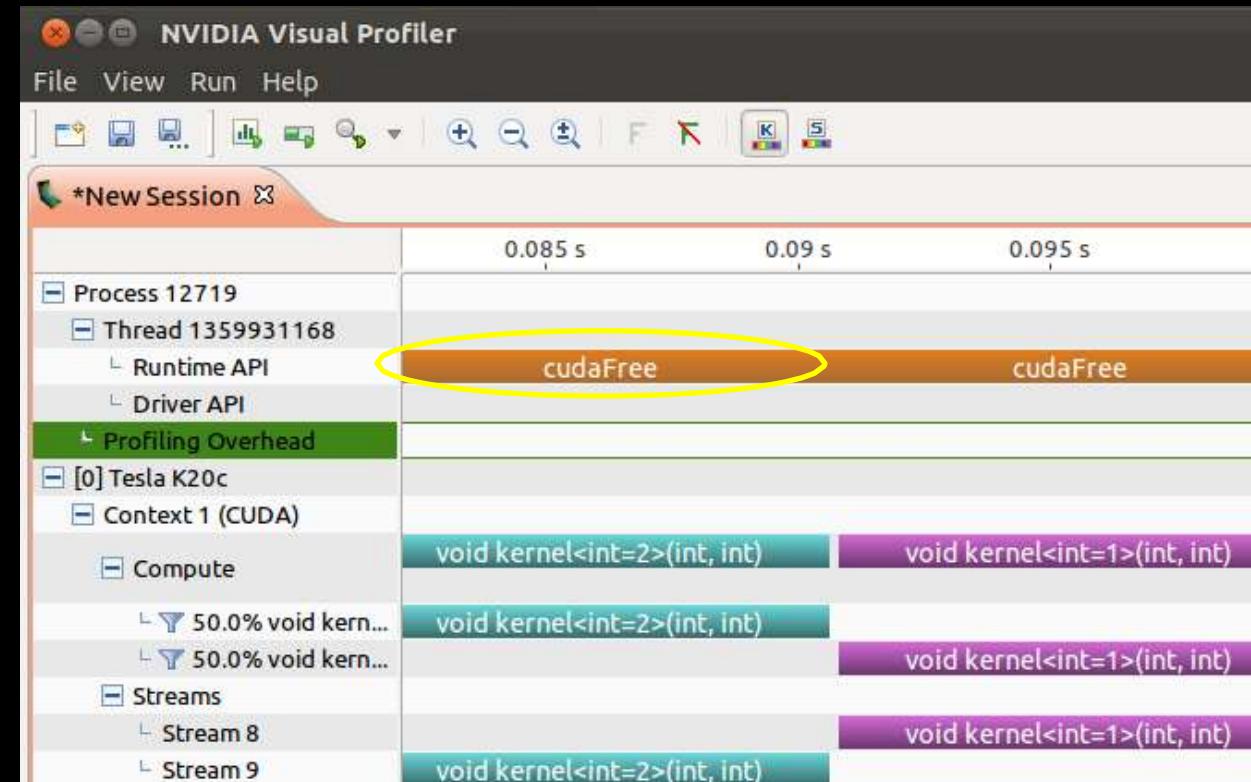


Problem:

Allocation & deallocation synchronize the device

Host blocked in allocation/free

CASE STUDY 3

```
void launchwork(cudaStream_t stream, int *mem) {  
    kernel<<<1,1,0,stream>>>(mem);  
}  
...  
  
for(int i=0;i<repeat;i++) {  
    launchwork<1>(stream1,mem1);  
    launchwork<2>(stream2,mem2);  
}
```

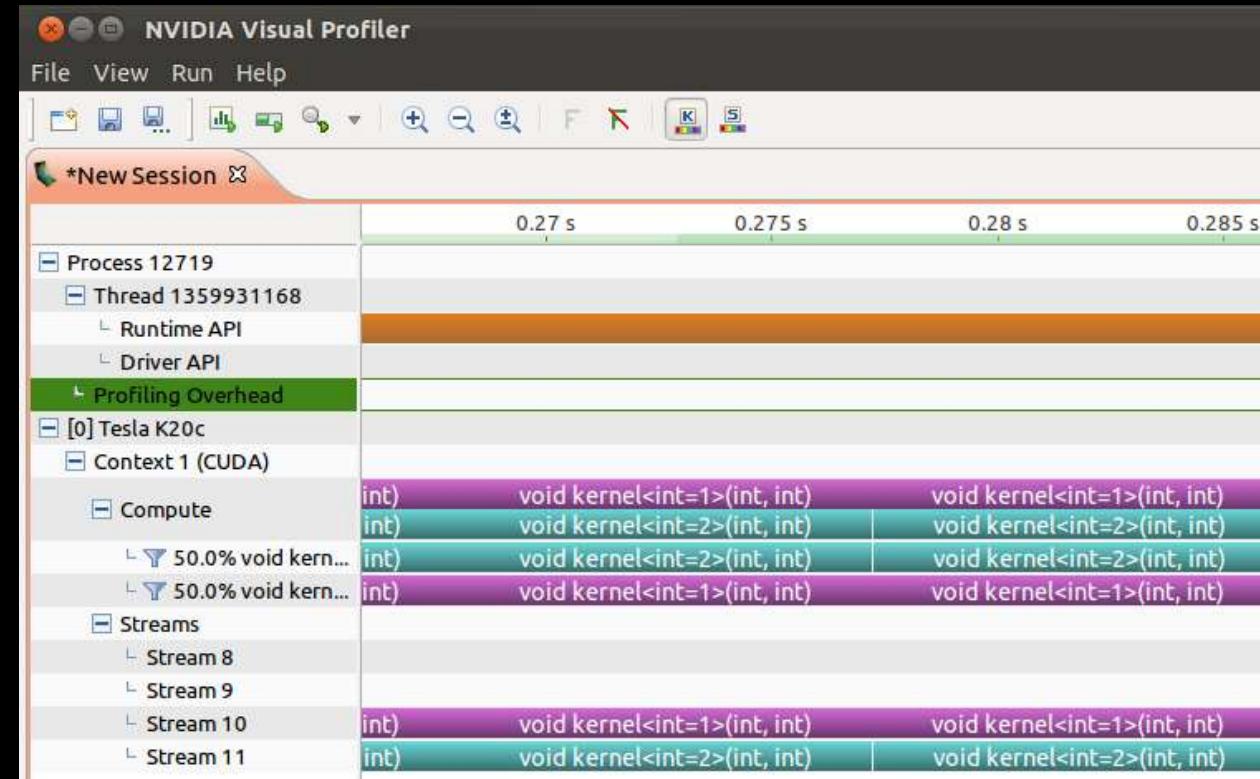

Solution:

Reuse cuda memory and objects including streams and events


PROBLEM 3: IMPLICIT SYNCHRONIZATION

- Symptoms
 - Host does not get ahead
 - Host shows excessive time in certain API calls
 - `cudaMalloc`, `cudaFree`, `cudaEventCreate`, `cudaEventDestroy`, `cudaStreamCreate`,
`cudaStreamCreate`, `cudaHostRegister`, `cudaHostUnregister`,
`cudaFuncSetCacheConfig`
- Solution:
 - Reuse memory and data structures

CASE STUDY 4

```
for(int i=0;i<repeat;i++)  
{  
    hostwork();  
    kernel<<<1,1,0,stream1>>>();  
    hostwork();  
    kernel<<<1,1,0,stream2>>>();  
}
```

Problem:
Host is limiting performance

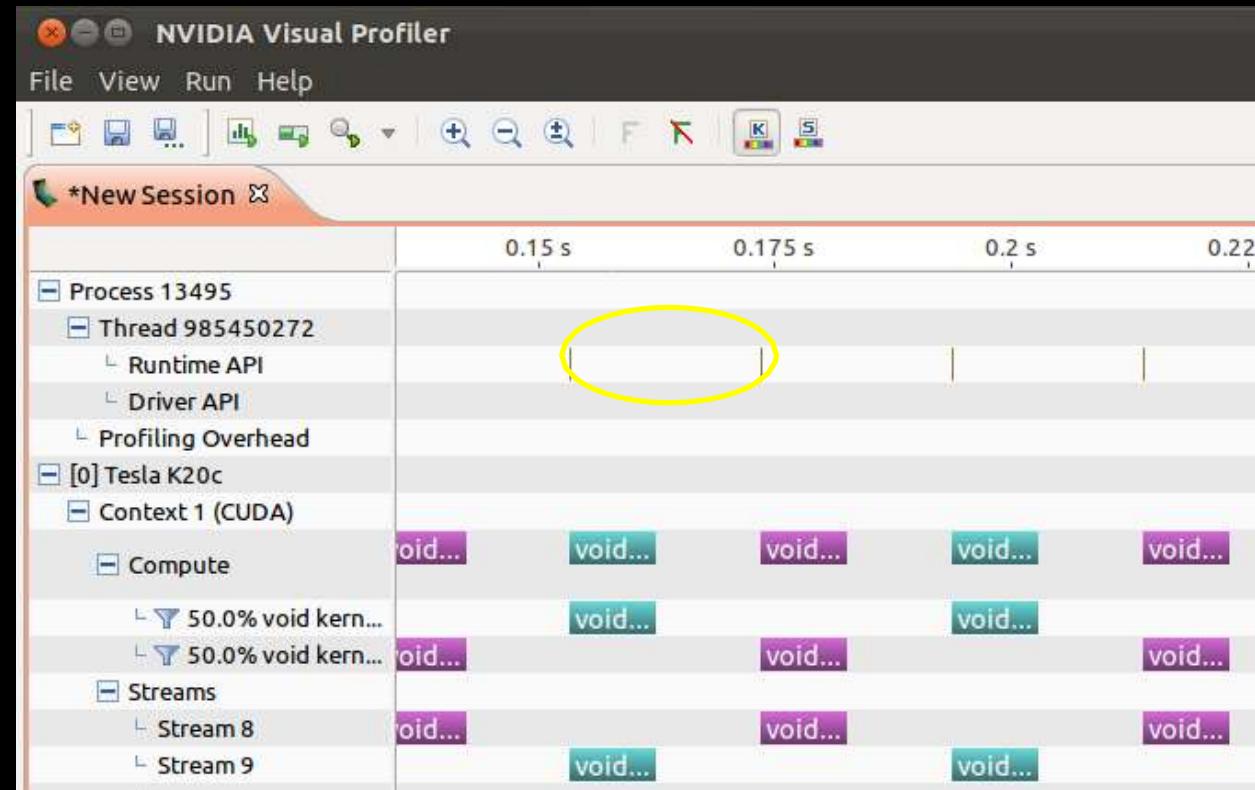


Host is outside of API calls

PROBLEM 4: LIMITED BY HOST

- Symptoms
 - Host is outside of cuda APIs
 - Large gaps in timeline where the host and device are empty
- Solution
 - Move more work to the GPU
 - Multi-thread host code

CASE STUDY 5

```
for(int i=0;i<repeat;i++)
{
    kernel<<<1,1,0,stream1>>>();
    kernel<<<1,1,0,stream2>>>();
}
```

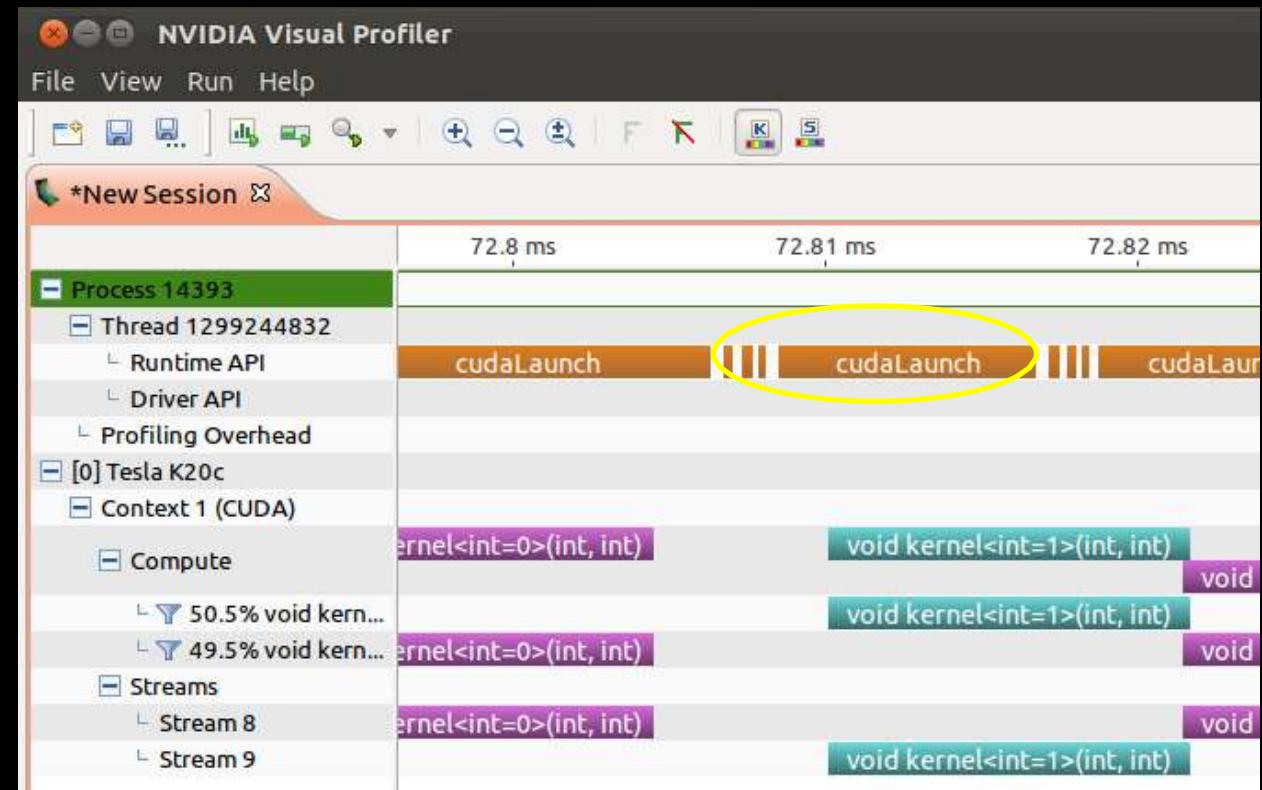


Host is in cudaLaunch or other APIs

CASE STUDY 5

```
for(int i=0;i<repeat;i++)  
{  
    kernel<<<1,1,0,stream1>>>();  
    kernel<<<1,1,0,stream2>>>();  
}
```

Problem:
Not enough work to cover launch overhead

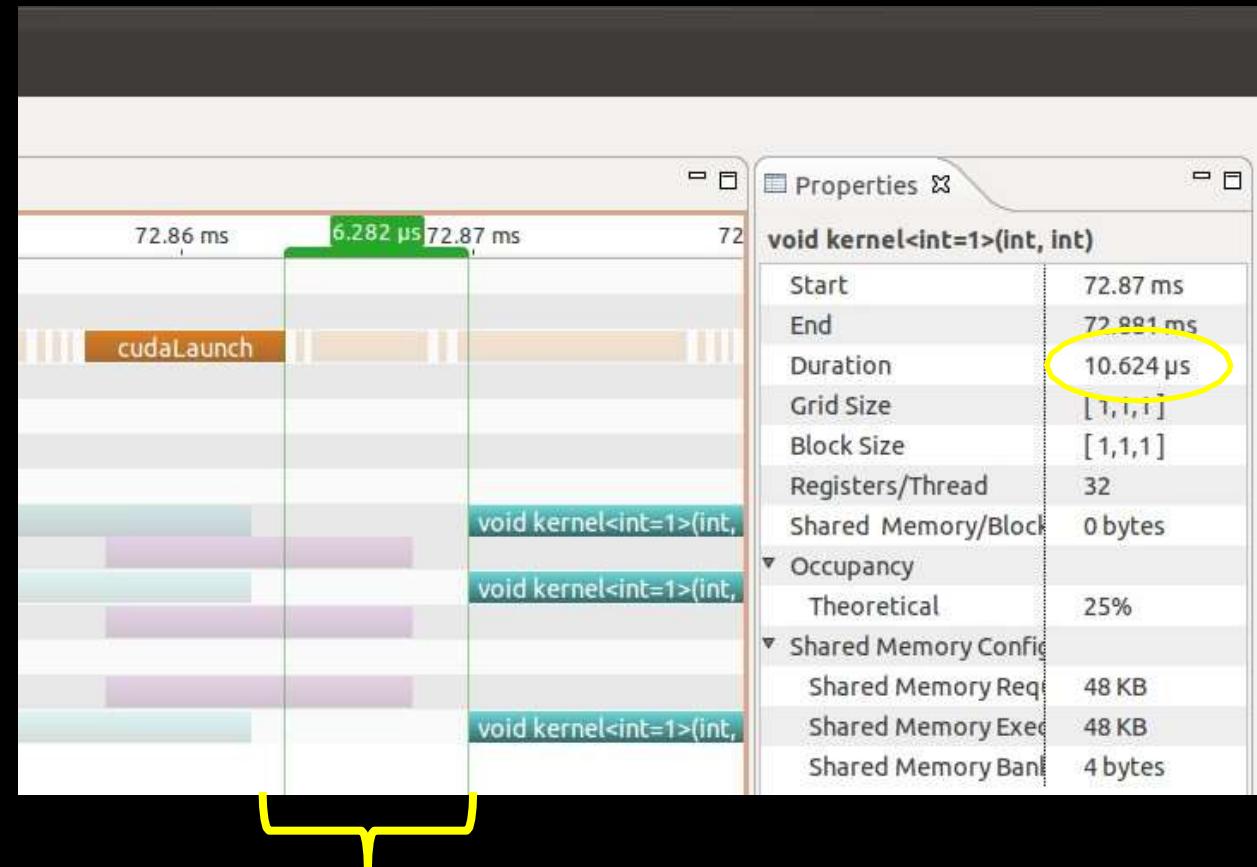

Host is not far ahead
Kernel runtime is short (<30us)

PROBLEM 5: LIMITED BY LAUNCH OVERHEAD

- Symptoms

- Host does not get ahead
 - Kernels are short <30 us
 - Time between successive kernels is >10 us

- Solutions

- Make longer running kernels
 - Fuse nearby kernels together
 - Batch work within a single kernel
 - Solve larger problems

PROBLEM 6: EXCESSIVE SYNCHRONIZATION


- Symptoms

- Host does not get ahead
- Large gaps of idle time in timeline
- Host shows synchronization API calls

- Solutions

- Use events to limit the amount of synchronization
- Use `cudaStreamWaitEvent` to prevent host synchronization
- Use `cudaEventSynchronize`

PROBLEM 7: PROFILER OVERHEAD

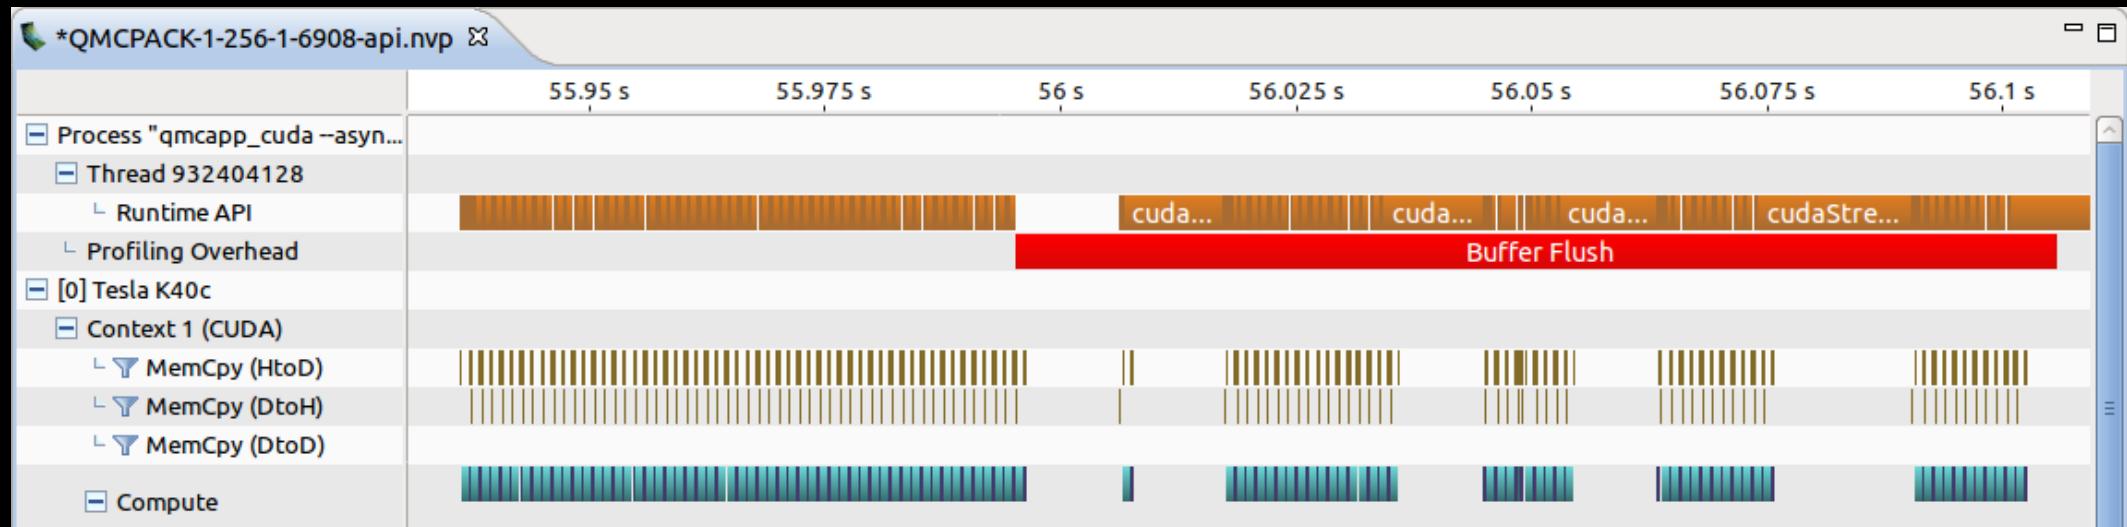


- Symptoms: Large gaps in timeline, Timeline shows profiler overhead
- Real code likely does not have the same problem
- Solution: Avoid `cudaDeviceSynchronize()` & `cudaStreamSynchronize()`

```
cudaEventRecord(event, stream);
```

```
cudaEventSynchronize(event);
```


FERMI CONCURRENCY

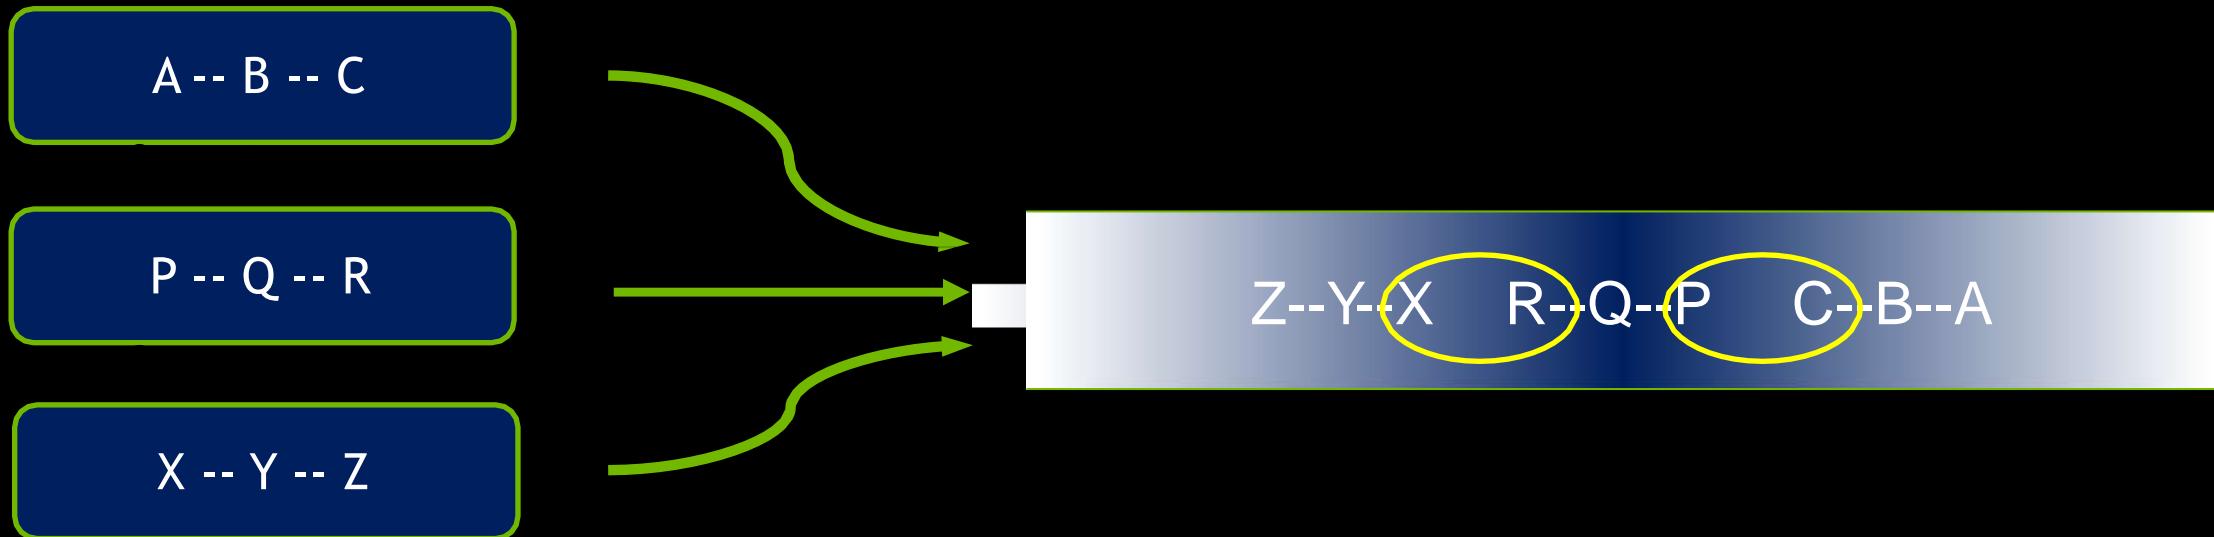

Fermi allows 16-way concurrency

- But CUDA streams multiplex into a single queue
- Issue order matters for concurrency
- For more info see the streams webinar
 - <https://developer.nvidia.com/gpu-computing-webinars>

KEPLER IMPROVED CONCURRENCY

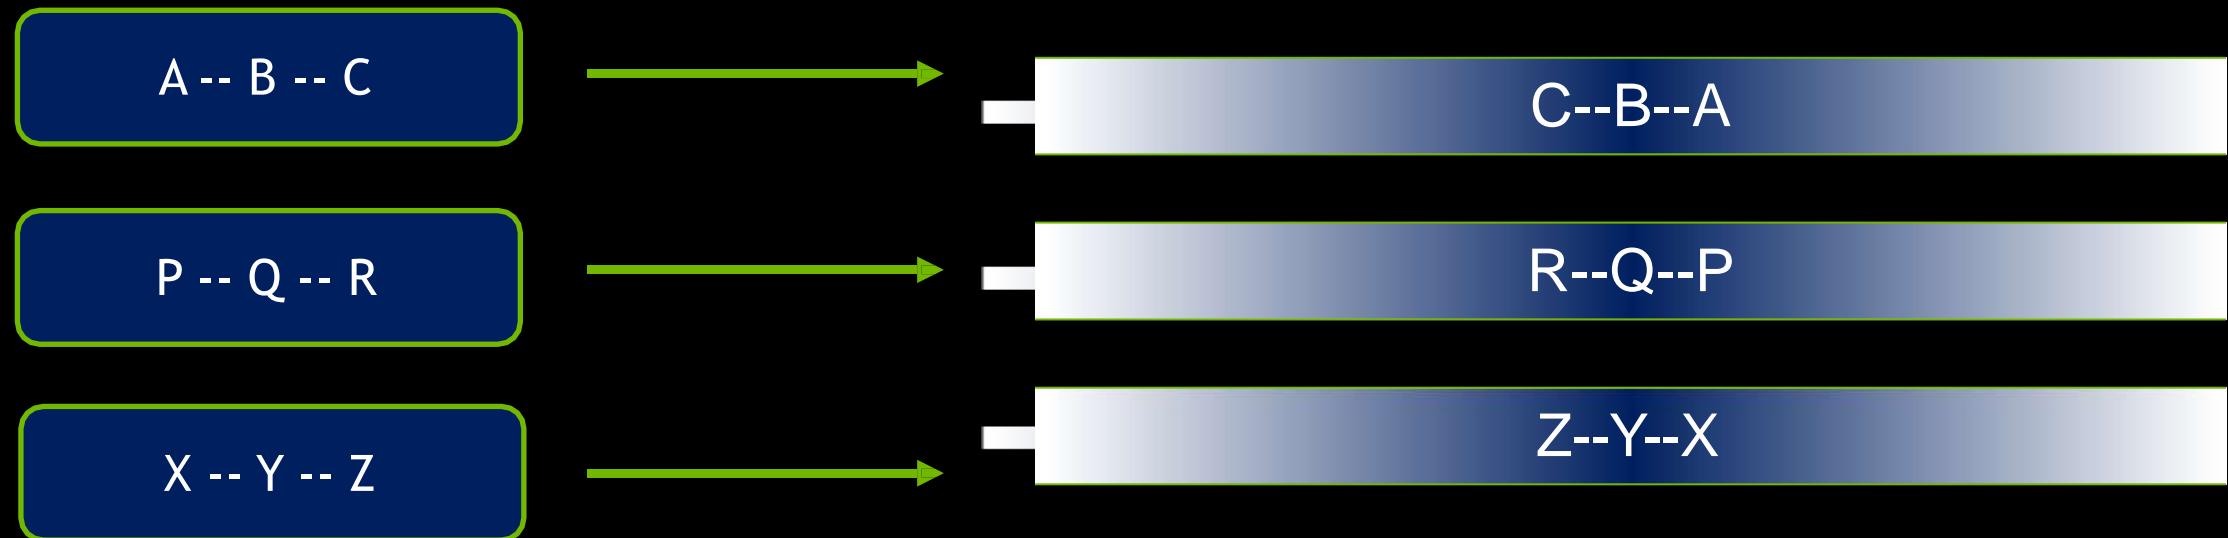

Kepler allows 32-way concurrency

- One work queue per stream
- Concurrency at full-stream level
- No inter-stream dependencies

REVIEW

- Common Streaming Problems
 - 1. Using the default stream
 - 2. Memory transfer issues
 - 3. Implicit synchronization
 - 4. Limited by host throughput
 - 5. Limited by launch overhead
 - 6. Excessive synchronization
 - 7. Profiler overhead
 - 8. False serialization on Fermi

ADVANCED STREAMING TOPICS

STREAM CALLBACKS

- Cuda 5.0 now allows you to add stream callbacks (K20 or newer)
 - Useful for launching work on the host when something has completed

```
void CUDART_CB MyCallback(void *data) {  
    ...  
}  
...  
MyKernel<<<100, 512, 0, stream>>>();  
cudaStreamAddCallback(stream, MyCallback, (void*)i, 0);
```

- Callbacks are processed by a driver thread
 - The same thread processes all callbacks
 - You can use this thread to signal other threads

PRIORITY STREAMS

- You can give streams priority
 - High priority streams will preempt lower priority streams.
 - Currently executing blocks will complete but new blocks will only be scheduled after higher priority work has been scheduled.
- Query available priorities:
 - `cudaDeviceGetStreamPriorityRange(&low, &high)`
 - Kepler: low: -1, high: 0
 - Lower number is higher priority
- Create using special API:
 - `cudaStreamCreateWithPriority(&stream, flags, priority)`
- Cuda 5.5+

REVIEW

- Enabling concurrency is vital to achieving peak performance
- Use MPS+MPI to get concurrency automatically
- Or use streams to add concurrency
 - Watch out for common mistakes
 - Using stream 0
 - Synchronous memory copies
 - Not using pinned memory
 - Overuse of synchronization primitives

samples \ data-init-in-streams


```
/*
 * Create 3 streams to run initialize the 3 data vectors in parallel.
 */

cudaStream_t stream1, stream2, stream3;
cudaStreamCreate(&stream1);
cudaStreamCreate(&stream2);
cudaStreamCreate(&stream3);

/*
 * Give each `initWith` launch its own non-standard stream.
 */

initWith<<<numberOfBlocks, threadsPerBlock, 0, stream1>>>(3, a, N);
initWith<<<numberOfBlocks, threadsPerBlock, 0, stream2>>>(4, b, N);
initWith<<<numberOfBlocks, threadsPerBlock, 0, stream3>>>(0, c, N);
```

samples \ data-init-in-streams

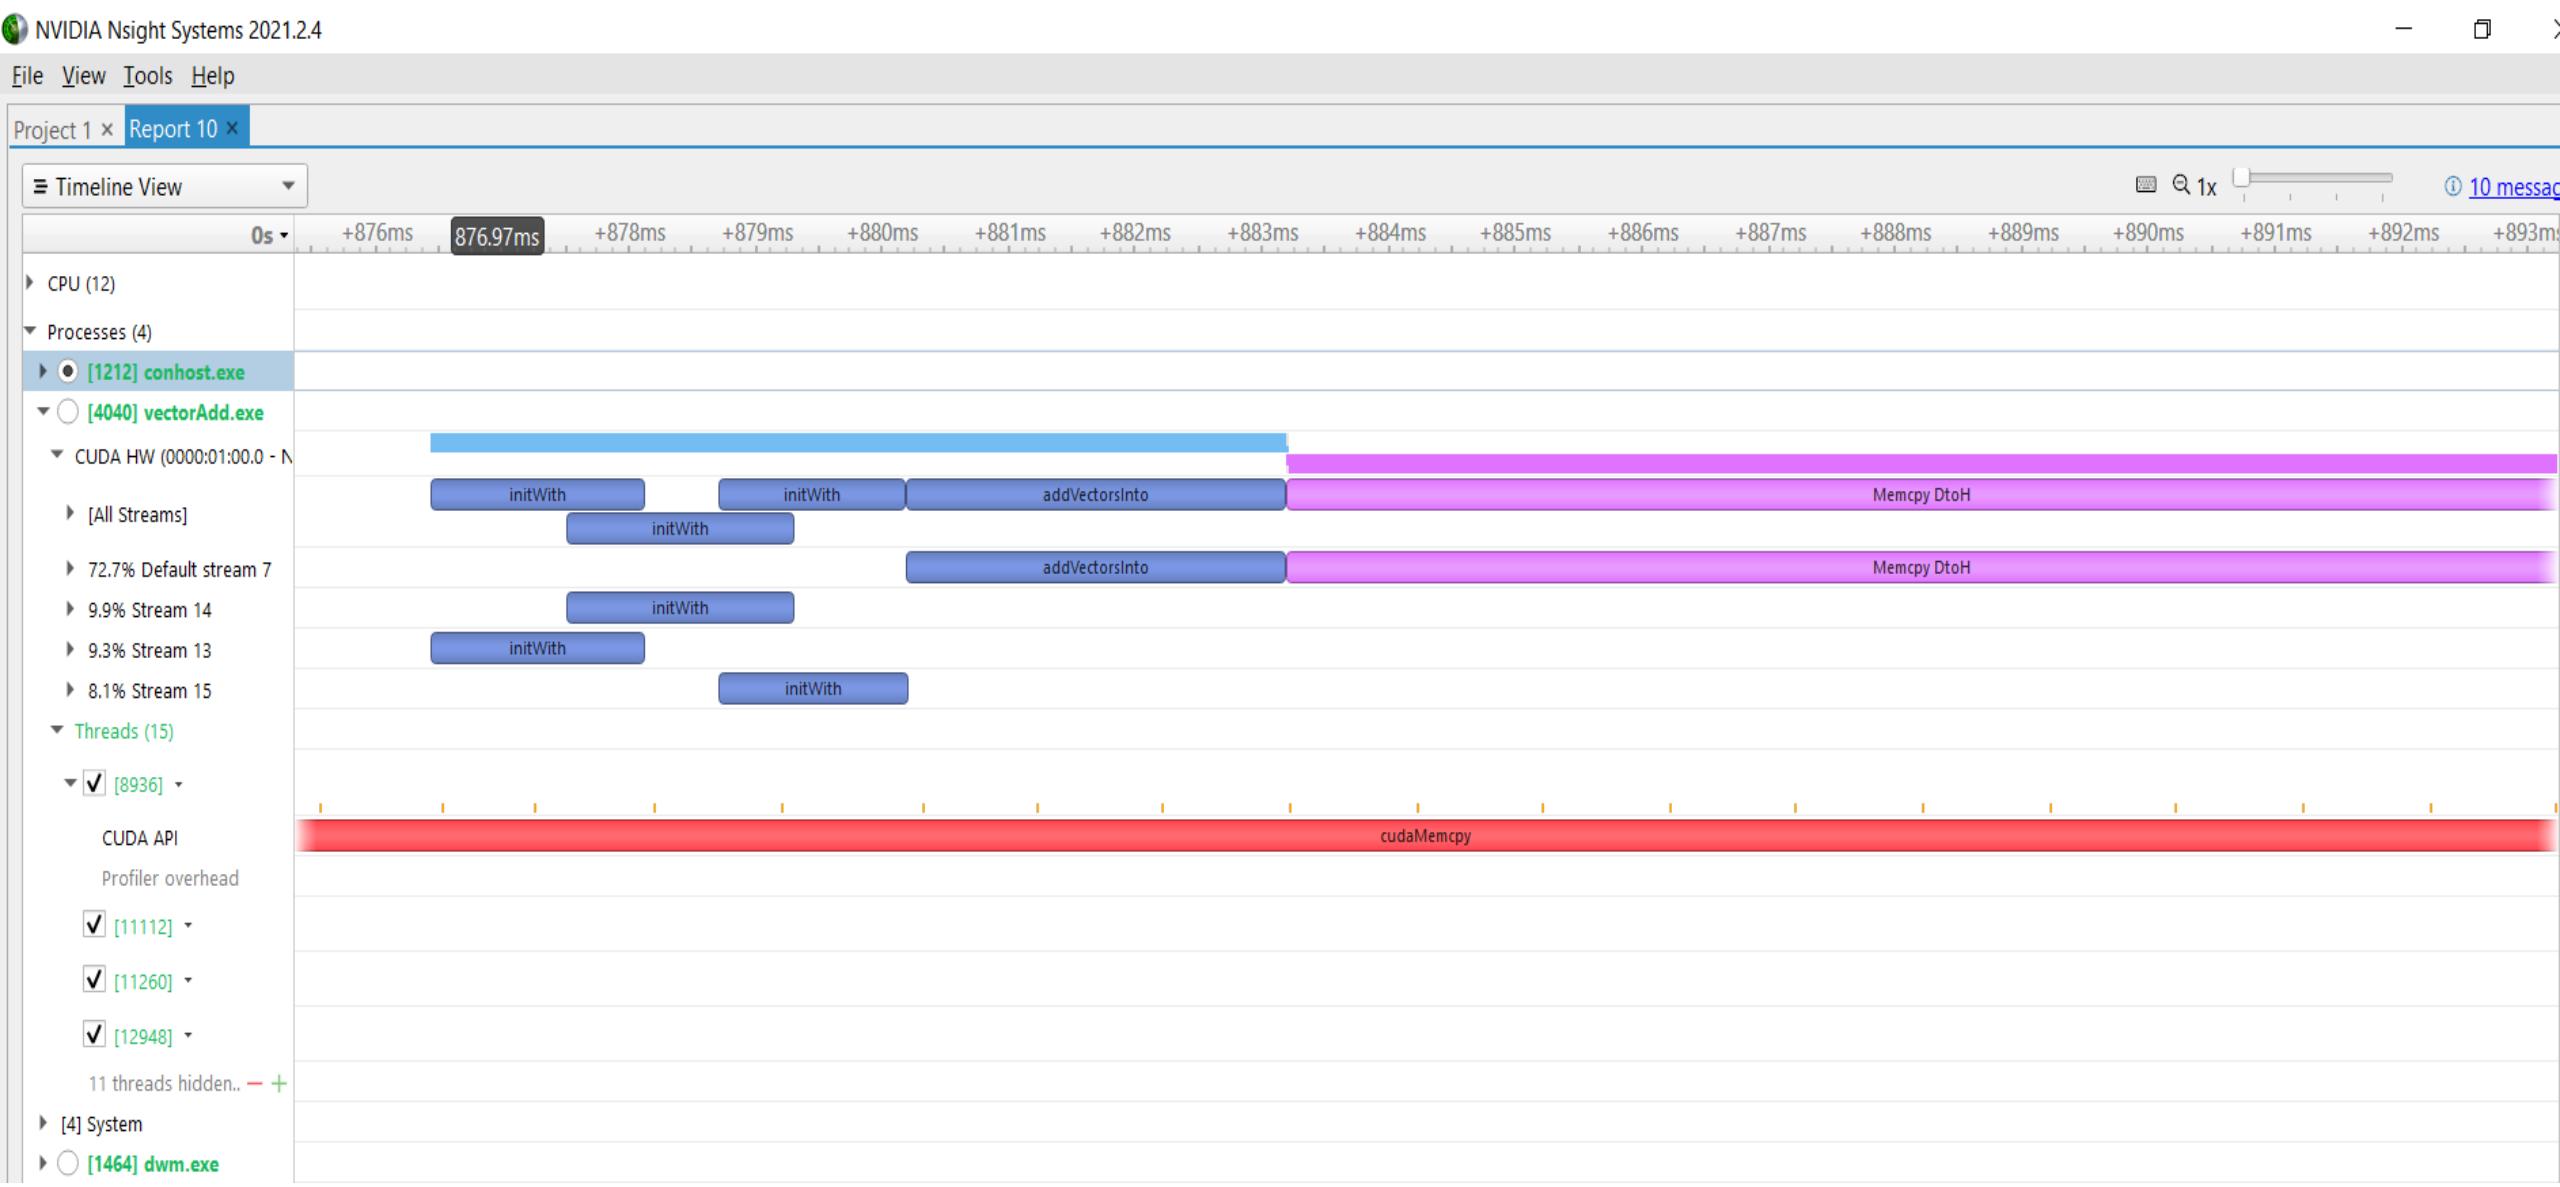

samples \ streams-overlapped-transfer

```
/*
 * Synchronize - we are using different non-standard streams for initialisation
 * and calcs, so we need to explicitly synchronize to ensure all data has been
 * initialised before starting the calculations
 */
asyncErrInit = cudaDeviceSynchronize();
if(asyncErrInit != cudaSuccess) printf("Error init: %s\n", cudaGetErrorString(asyncErrInit));

for (int i = 0; i < 4; ++i)
{
    cudaStream_t stream;
    cudaStreamCreate(&stream);

    addVectorsInto<<<numberOfBlocks/4, threadsPerBlock, 0, stream>>>(&c[i*N/4], &a[i*N/4], &b[i*N/4], N/4);
    cudaMemcpyAsync(&h_c[i*N/4], &c[i*N/4], size/4, cudaMemcpyDeviceToHost, stream);
    cudaStreamDestroy(stream);
}
```

samples \ streams-overlapped-transfer

NVIDIA Nsight Systems 2021.2.4

File View Tools Help

Project 1 x Report 8 x

Timeline View

Q 1x

+836ms +838ms +840ms +842ms +844ms +846ms +848ms +850ms +852ms +854ms

▶ CPU (12)

▼ Processes (4)

▼ [11064] vectorAdd.exe

▼ CUDA HW (0000:01:00.0 - N

▶ [All Streams]

▶ 19.1% Stream 16

▶ 18.6% Stream 19

▶ 18.3% Stream 17

▶ 18.3% Stream 18

▶ 9.4% Stream 14

▶ 8.5% Stream 13

▶ 7.9% Stream 15

initWith

initWith

addVecto...

Memcpy DtoH

Memcpy DtoH

Memcpy DtoH

Memcpy DtoH

initWith

addVecto...

Memcpy DtoH

addVecto...

Memcpy DtoH

addVecto...

addVecto...

Memcpy DtoH

initWith

initWith

initWith

Memcpy DtoH

Memcpy DtoH

Memcpy DtoH

samples\streams-cipher (single stream)

```
int main (int argc, char * argv[]) {
    const char * encrypted_file = "/dli/task/encrypted";

    Timer timer;

    const uint64_t num_entries = 1UL << 26;
    const uint64_t num_iters = 1UL << 10;
    const bool openmp = true;

    uint64_t * data_cpu, * data_gpu;
    cudaMallocHost(&data_cpu, sizeof(uint64_t)*num_entries);
    cudaMalloc    (&data_gpu, sizeof(uint64_t)*num_entries);

    read_encrypted_from_file(encrypted_file, data_cpu, sizeof(uint64_t)*num_entries);

    cudaMemcpy(data_gpu, data_cpu, sizeof(uint64_t)*num_entries, cudaMemcpyHostToDevice);

    // Create non-default stream.
    cudaStream_t stream;
    cudaStreamCreate(&stream);

    // Launch kernel in non-default stream.
    decrypt_gpu<<<80*32, 64, 0, stream>>>(data_gpu, num_entries, num_iters);

    // Destroy non-default stream.
    cudaStreamDestroy(stream);


    cudaMemcpy(data_cpu, data_gpu, sizeof(uint64_t)*num_entries, cudaMemcpyDeviceToHost);

    const bool success = check_result_cpu(data_cpu, num_entries, openmp);

    cudaFreeHost(data_cpu);
    cudaFree    (data_gpu);
}
```

samples\13-streams_cipher\baseline_solution.cu

samples\streams-cipher (single stream)

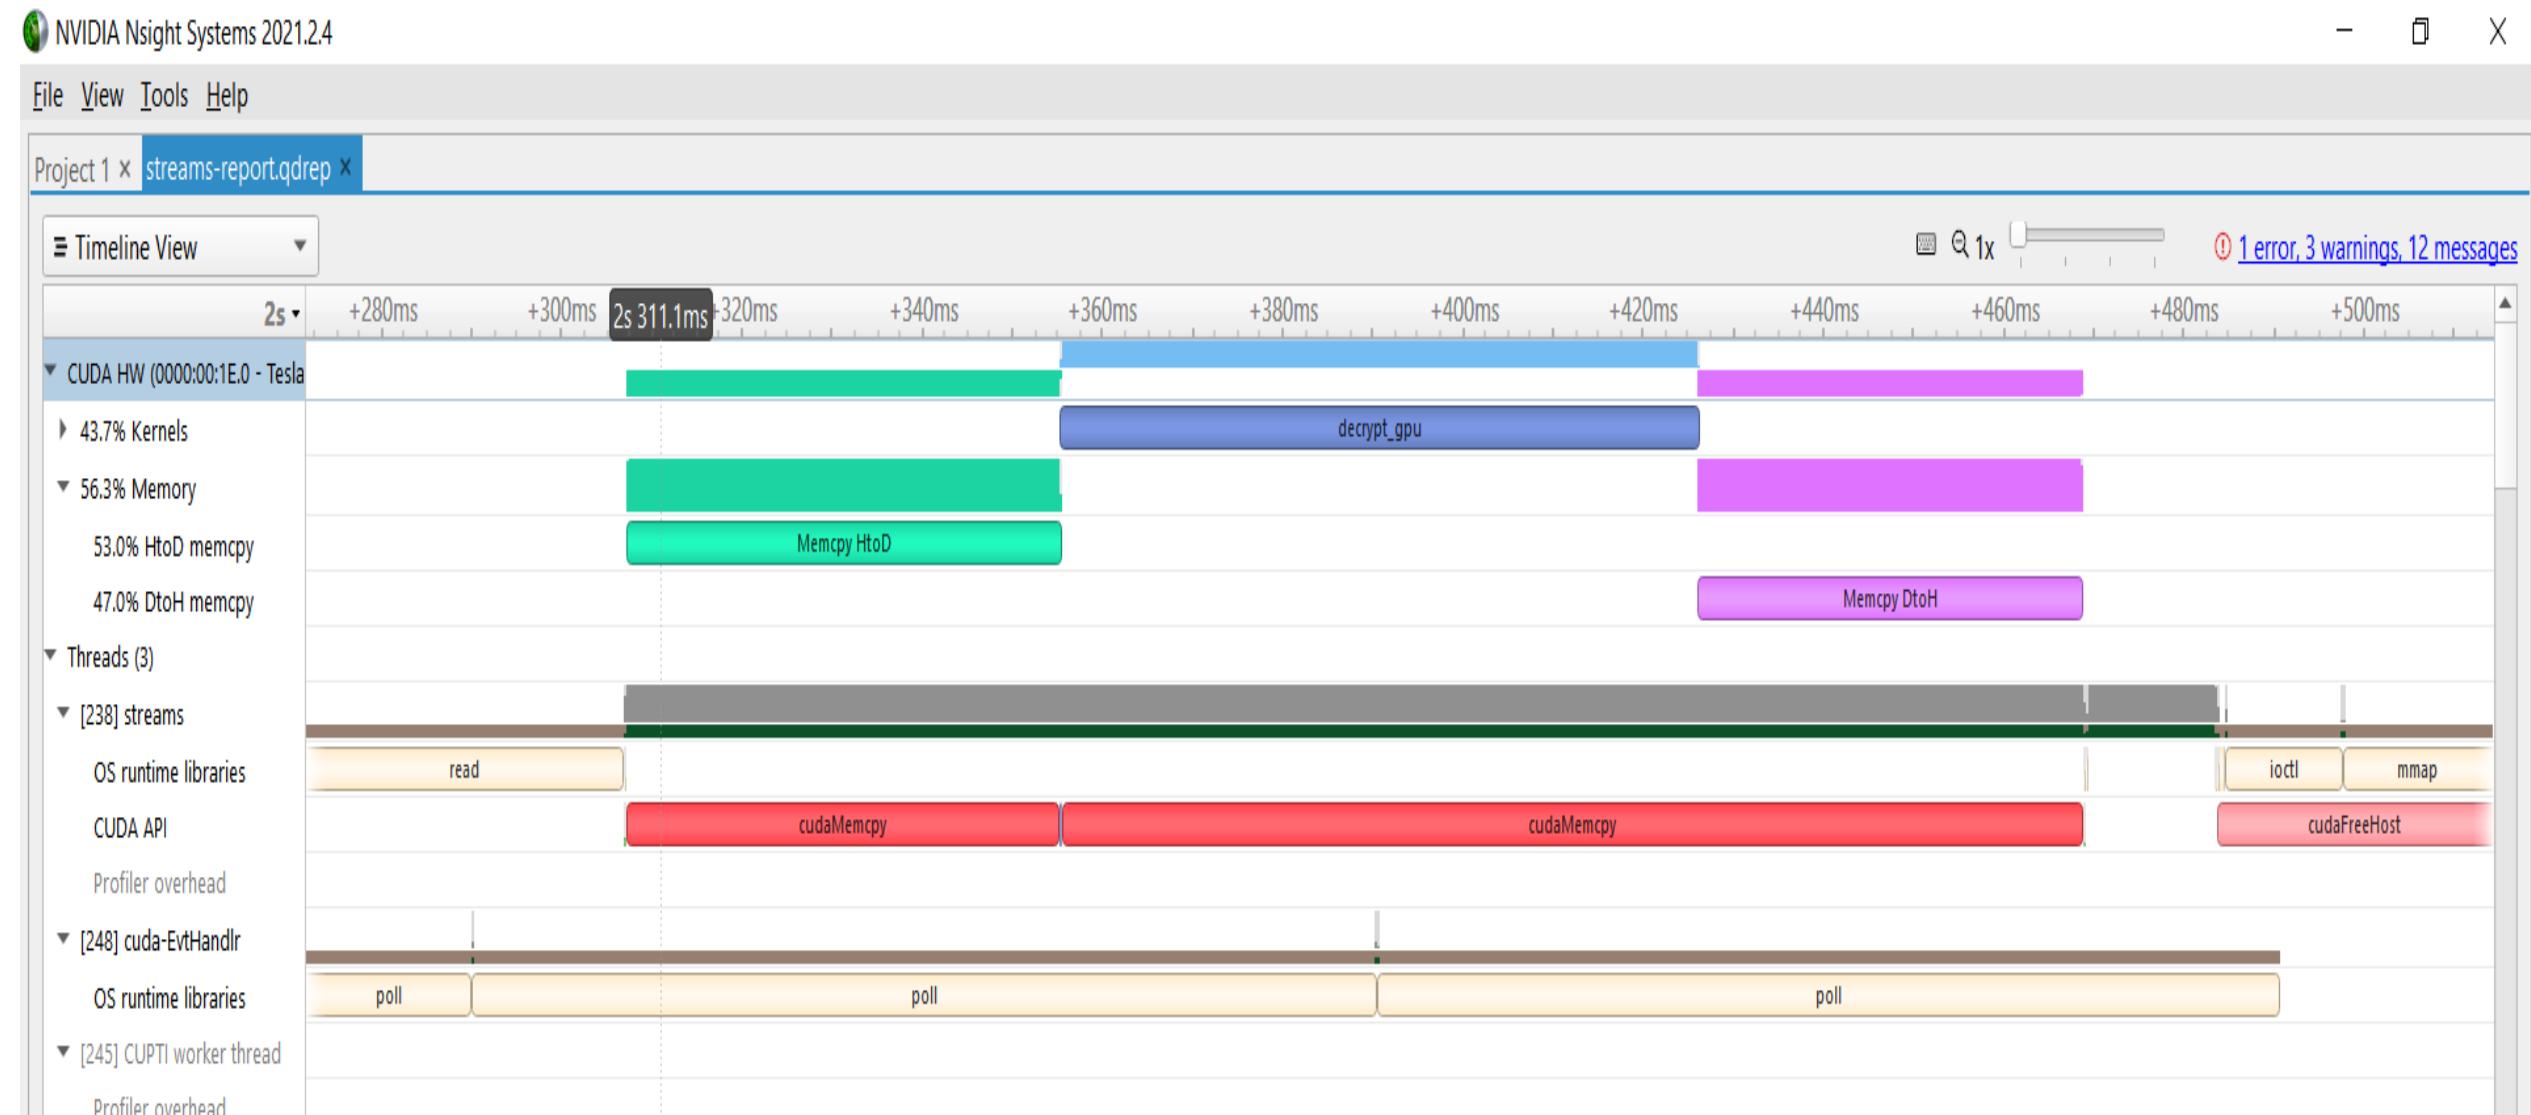

samples\13-streams_cipher\baseline_solution-report.qdrep

samples\streams-cipher (concurrent streams)

```
int main (int argc, char * argv[]) {  
  
    const char * encrypted_file = "/dli/task/encrypted";  
    const uint64_t num_entries = 1UL << 26;  
    const uint64_t num_iters = 1UL << 10;  
    const bool openmp = true;  
  
    // Define the number of streams.  
    const uint64_t num_streams = 32;  
  
    // Use round-up division to calculate chunk size.  
    const uint64_t chunk_size = sdiv(num_entries, num_streams);  
  
    uint64_t * data_cpu, * data_gpu;  
    cudaMallocHost(&data_cpu, sizeof(uint64_t)*num_entries);  
    cudaMalloc(&data_gpu, sizeof(uint64_t)*num_entries);  
    check_last_error();  
  
    read_encrypted_from_file(encrypted_file, data_cpu, sizeof(uint64_t)*num_entries);  
  
    // Create array for storing streams.  
    cudaStream_t streams[num_streams];  
  
    // Create number of streams and store in array.  
    for (uint64_t stream = 0; stream < num_streams; stream++)  
        cudaStreamCreate(&streams[stream]);
```

samples\streams-cipher (concurrent streams)

```
// For each stream...
for (uint64_t stream = 0; stream < num_streams; stream++) {

    // ...calculate index into global data (`lower`) and size of data for it to process (`width`).
    const uint64_t lower = chunk_size*stream;
    const uint64_t upper = min(lower+chunk_size, num_entries);
    const uint64_t width = upper-lower;

    // ...copy stream's chunk to device.
    cudaMemcpyAsync(data_gpu+lower, data_cpu+lower,
                   sizeof(uint64_t)*width, cudaMemcpyHostToDevice,
                   streams[stream]);

    // ...compute stream's chunk.
    decrypt_gpu<<<80*32, 64, 0, streams[stream]>>>
        (data_gpu+lower, width, num_iters);


    // ...copy stream's chunk to host.
    cudaMemcpyAsync(data_cpu+lower, data_gpu+lower,
                   sizeof(uint64_t)*width, cudaMemcpyDeviceToHost,
                   streams[stream]);
}

for (uint64_t stream = 0; stream < num_streams; stream++)
    // Synchronize streams before checking results on host.
    cudaStreamSynchronize(streams[stream]);


const bool success = check_result_cpu(data_cpu, num_entries, openmp);
```

samples\streams-cipher (concurrent streams)

NVIDIA Nsight Systems 2021.2.4

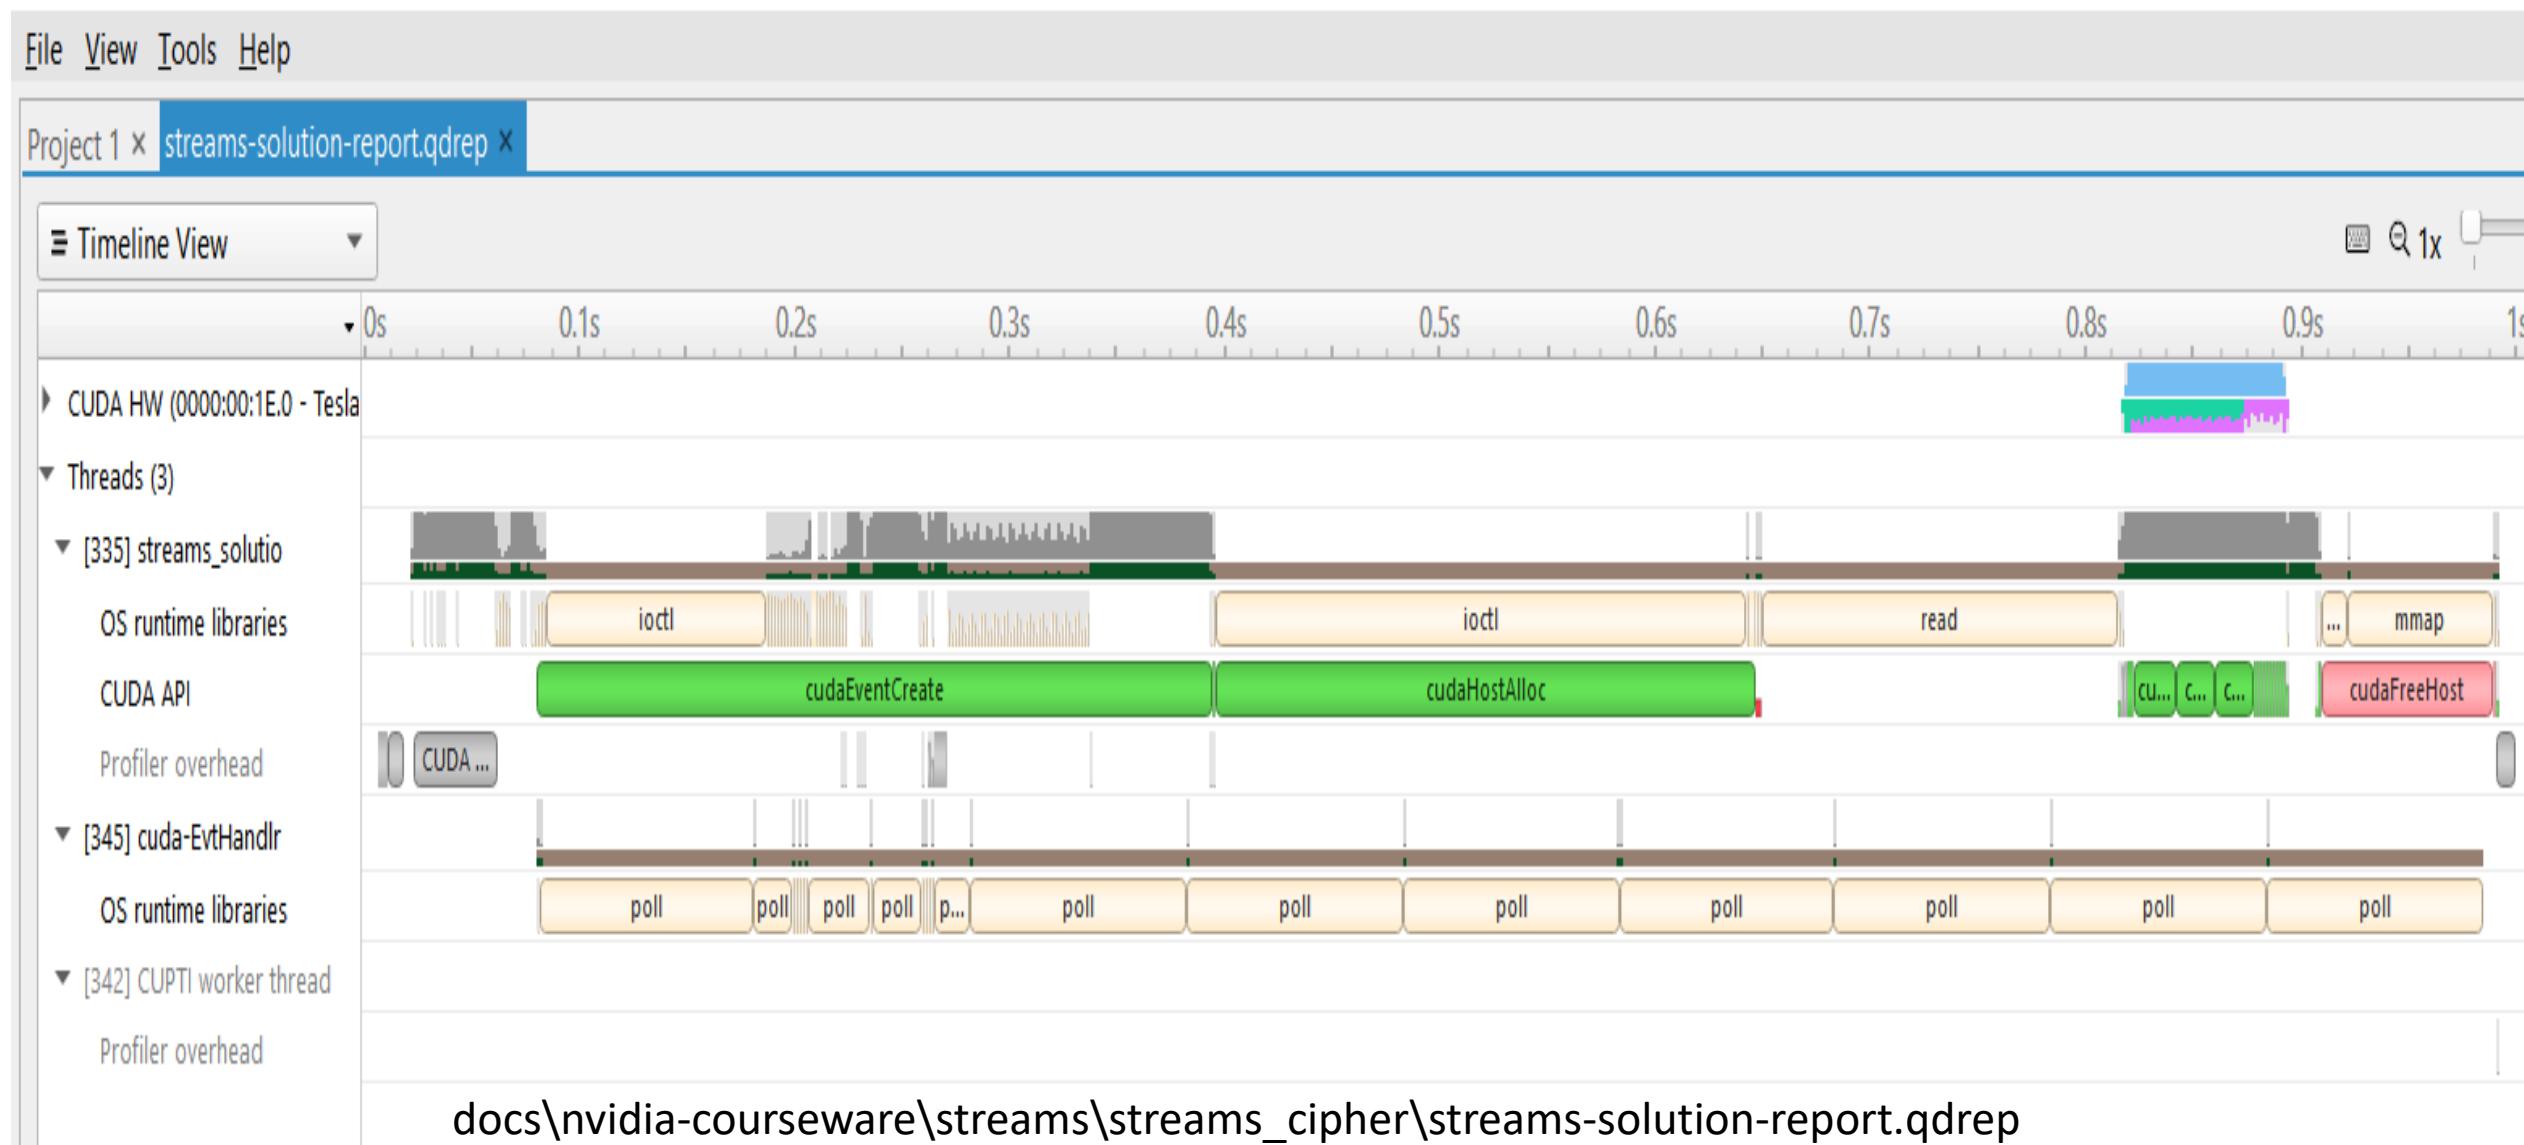

samples\streams-cipher (concurrent streams) – zoomed timeline

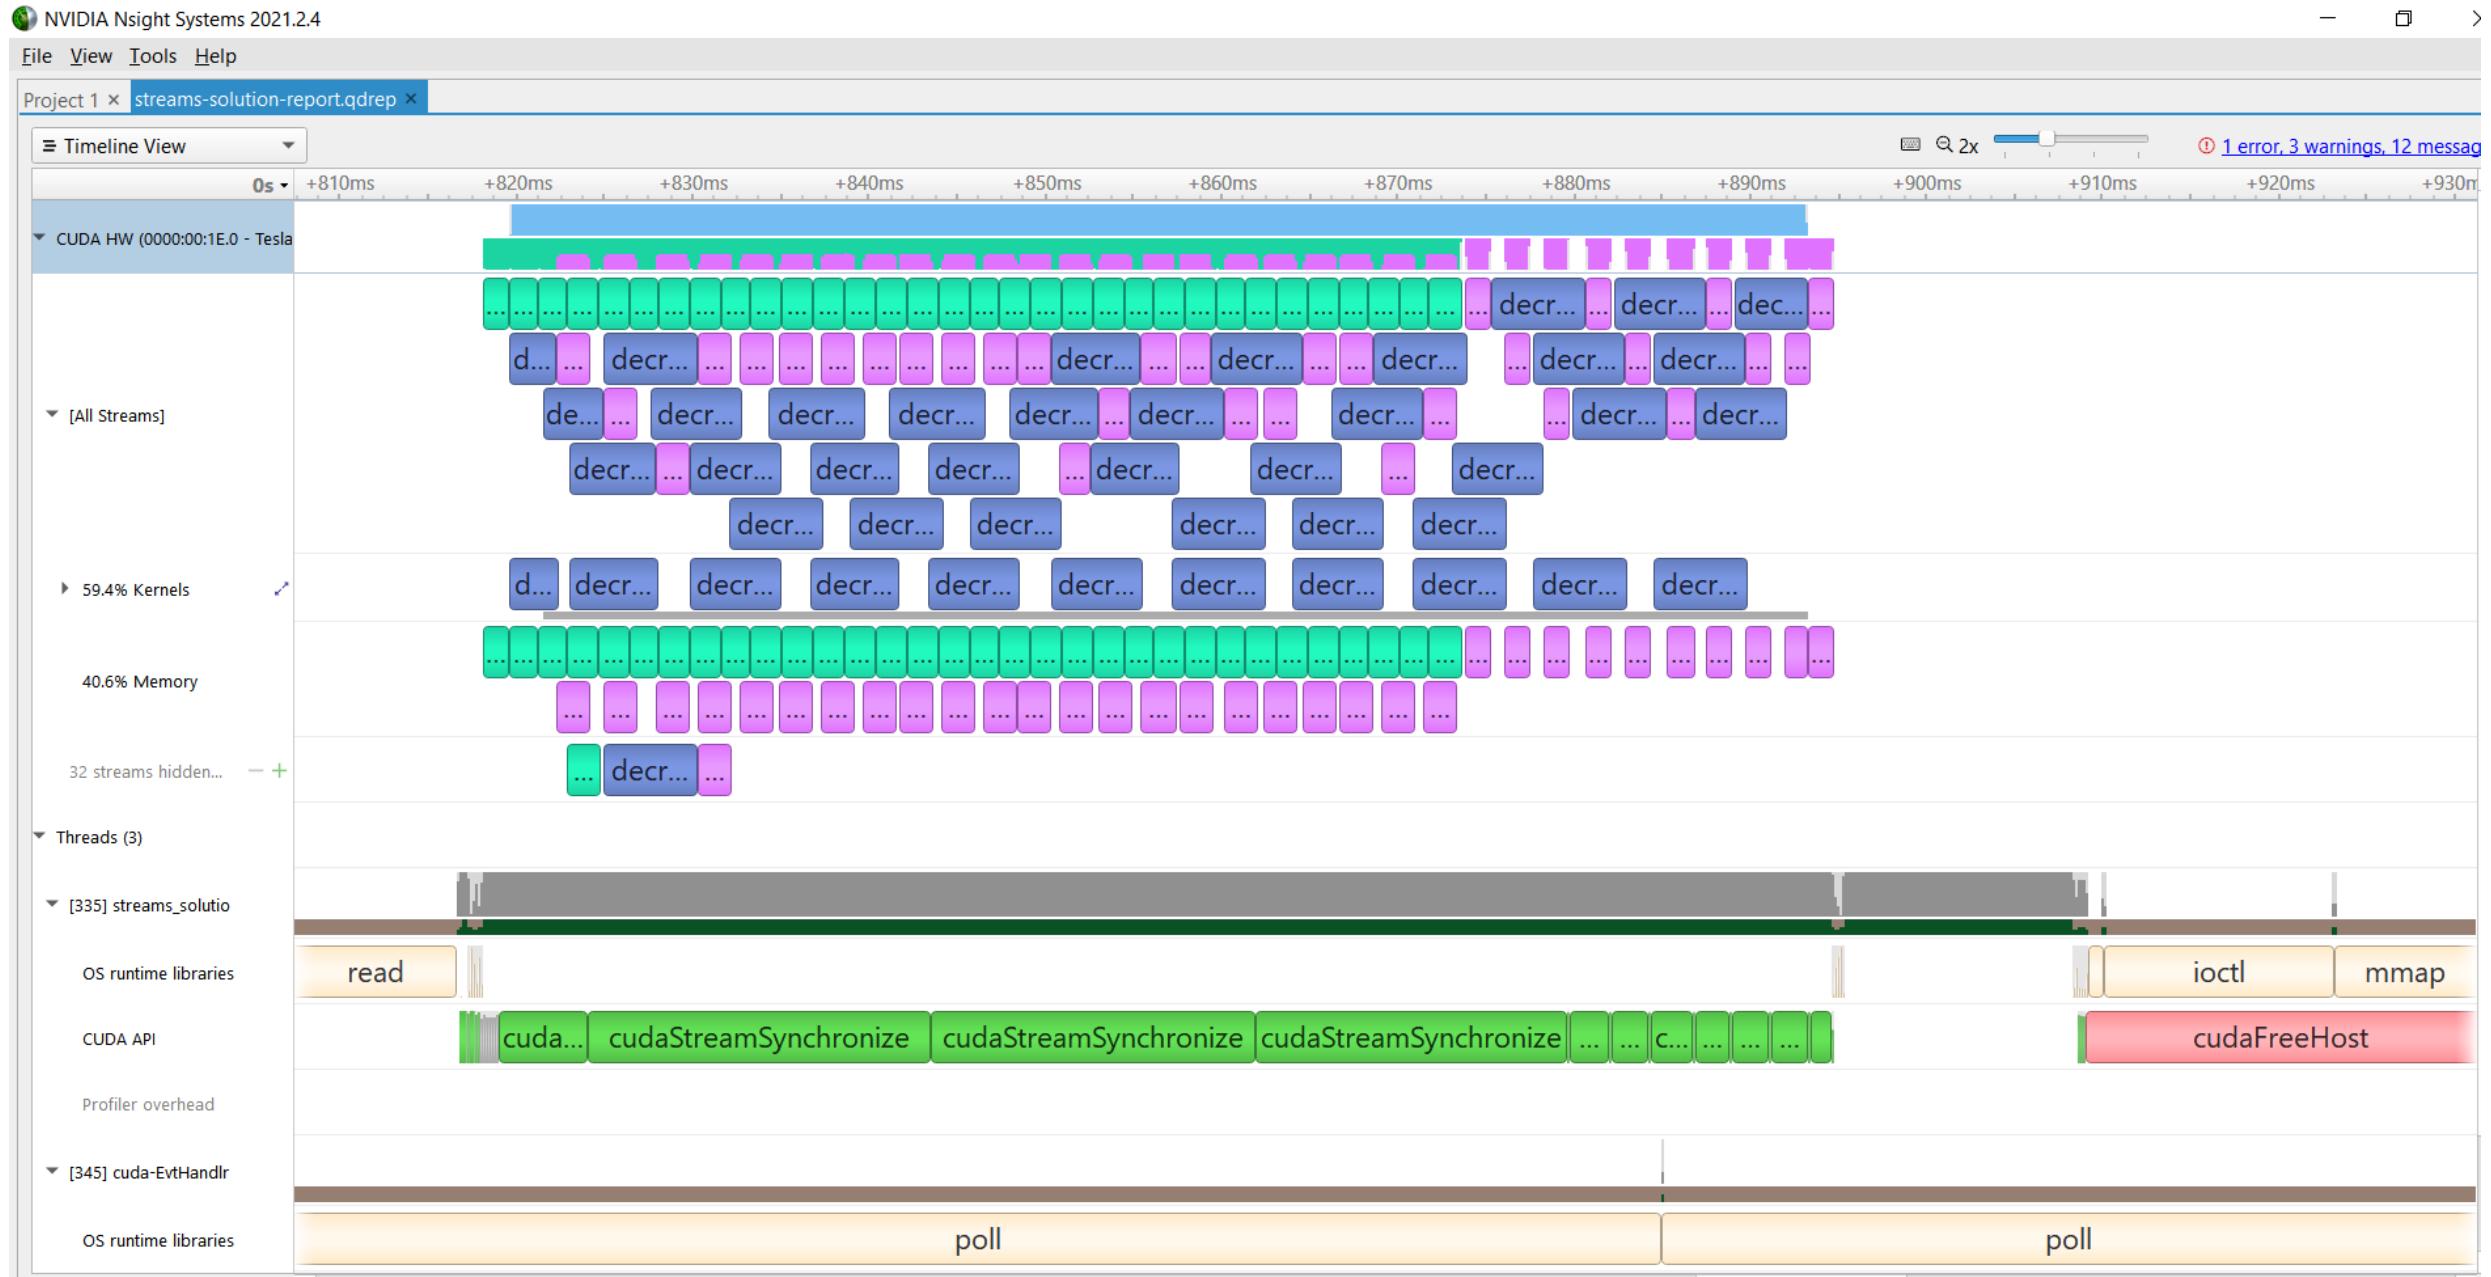

UPDATE: PINNED (NON-PAGEABLE) MEMORY

- ▶ Pinned memory enables:
 - ▶ faster Host<->Device copies memcopies asynchronous with CPU memcopies
 - ▶ asynchronous with GPU

Usage

- ▶ `cudaHostAlloc` / `cudaFreeHost`
- ▶
 - ▶ instead of `malloc` / `free` or `new` / `delete`
- ▶ `cudaHostRegister` / `cudaHostUnregister`
 - ▶ pin regular memory (e.g. allocated with `malloc`) after allocation

Implication:

pinned memory is essentially removed from host virtual (pageable) memory

UPDATE: CUDALAUNCHHOSTFUNC()

- ▶ Allows definition of a host-code function that will be issued into a CUDA stream
- ▶ Follows stream semantics: function will not be called until stream execution reaches that point
- ▶ Uses a thread spawned by the GPU driver to perform the work
- ▶ Has limitations: do not use any CUDA runtime API calls (or kernel launches) in the function
- ▶ Useful for deferring CPU work until GPU results are ready
- ▶ `cudaLaunchHostFunc()` replaces legacy `cudaStreamAddCallback()`

UPDATE: COPY-COMPUTE OVERLAP WITH MANAGED MEMORY

In particular, with demand-paging

- ▶ Follow same pattern, except use `cudaMemPrefetchAsync()` instead of `cudaMemcpyAsync()`
- ▶ Stream semantics will guarantee that any needed migrations are performed in proper order
- ▶ However, `cudaMemPrefetchAsync()` has more work to do than `cudaMemcpyAsync()` (updating of page tables in CPU and GPU)
- ▶ This means the call can take substantially more time to return than an “ordinary” async call - can introduce unexpected gaps in timeline
- ▶ Behavior varies for “busy” streams vs. idle streams. Counterintuitively, “busy” streams may result in better throughput
- ▶ Read about it:
 - ▶ <https://devblogs.nvidia.com/maximizing-unified-memory-performance-cuda/>

CUDAEVENT

- ▶ cudaEvent is an entity that can be placed as a “marker” in a stream
- ▶ A cudaEvent is said to be “recorded” when it is issued
- ▶ A cudaEvent is said to be “completed” when stream execution reaches the point where it was recorded
- ▶ Most common use: timing

```
cudaEvent_t start, stop;          // cudaEvent has its own type
cudaEventCreate(&start);          // cudaEvent must be created
cudaEventCreate(&stop);           // before use
cudaEventRecord(start);          // “recorded” (issued) into default stream
Kernel<<<b, t>>>(...);        // could be any set of CUDA device activity
cudaEventRecord(stop);
cudaEventSynchronize(stop);       // wait for stream execution to reach “stop”
cudaEventElapsedTime(&float_var, start, stop); // measure Kernel duration
```

- ▶ Also useful for arranging complex concurrency scenarios
- ▶ Event-based timing may give unexpected results for host activity or complex concurrency scenarios

Multi-GPU

MULTI-GPU - DEVICE MANAGEMENT

- ▶ Not a replacement for OpenMP, MPI, etc.
- ▶ Application can query and select GPUs

```
cudaGetDeviceCount (int *count)

cudaSetDevice (int device)

cudaGetDevice (int *device)

cudaGetDeviceProperties (cudaDeviceProp *prop, int device)
```

- ▶ Multiple host threads can share a device
- ▶ A single host thread can manage multiple devices

```
cudaSetDevice (i) to select current device

cudaMemcpyPeerAsync (...) for peer-to-peer copies
```

MULTI-GPU - STREAMS

- ▶ Streams (and cudaEvent) have implicit/automatic *device association*
- ▶ Each device also has its own unique default stream
- ▶ Kernel launches will fail if issued into a stream not associated with current device
- ▶ `cudaStreamWaitEvent()` can synchronize streams belonging to separate devices, `cudaEventQuery()` can test if an event is “complete”
- ▶ Simple device concurrency:

```
cudaSetDevice(0);
cudaStreamCreate(&stream0);           //associated with device 0
cudaSetDevice(1);
cudaStreamCreate(&stream1);           //associated with device 1
Kernel<<<b, t, 0, stream1>>>(...); // these kernels have the possibility
cudaSetDevice(0);
Kernel<<<b, t, 0, stream0>>>(...); // to execute concurrently
```

MULTI-GPU - DEVICE-TO-DEVICE DATA COPYING

- ▶ If system topology supports it, data can be copied directly from one device to another over a fabric (PCIE, or NVLink)
- ▶ Device must first be explicitly placed into a peer relationship (“clique”)
- ▶ Must enable “peering” for both directions of transfer (if needed)
- ▶ Thereafter, memory copies between those two devices will not “stage” through a system memory buffer (GPUDirect P2P transfer)

```
cudaSetDevice(0);
cudaDeviceCanAccessPeer(&canPeer, 0, 1); // test for 0, 1 peerable
,
cudaDeviceEnablePeerAccess(1,           // device 0 sees device 1 as a
0);                                "peer"
cudaSetDevice(1);
cudaDeviceEnablePeerAccess(dst_ptr, 0, // device 1 sees device 0 as a dev 0 copy
0); // dev 0 is no longer a peer of dev 1
cudaDeviceDisablePeerAccess(0);
```

- ▶ Limit to the number of peers in your “clique”

OTHER CONCURRENCY SCENARIOS

- ▶ Host/Device execution concurrency:

```
Kernel<<<b, t>>>(...); // this kernel execution can overlap  
                           with  
cpuFunction(...);        // this host code
```

- ▶ Concurrent kernels:

```
Kernel<<<b, t, 0, streamA>>>(...); // these kernels have the possibility  
Kernel<<<b, t, 0, streamB>>>(...); // to execute concurrently
```

- ▶ In practice, concurrent kernel execution on the same device is hard to witness
- ▶ Requires kernels with relatively low resource utilization and relatively long execution time
- ▶ There are hardware limits to the number of concurrent kernels per device
- ▶ Less efficient than saturating the device with a single kernel


STREAM PRIORITY

- ▶ CUDA streams allow an optional definition of a *priority*
- ▶ This affects execution of concurrent kernels (only).
- ▶ The GPU block scheduler will attempt to schedule blocks from high priority (stream) kernels before blocks from low priority (stream) kernels
- ▶ Current implementation only has 2 priorities
- ▶ Current implementation does not cause preemption of blocks

```
// get the range of stream priorities for this device
int priority_high, priority_low;
cudaDeviceGetStreamPriorityRange(&priority_low, &priority_high);
// create streams with highest and lowest available priorities
cudaStream_t st_high, st_low;
cudaStreamCreateWithPriority(&st_high, cudaStreamNonBlocking, priority_high);
cudaStreamCreateWithPriority(&st_low, cudaStreamNonBlocking, priority_low);
```

CUDA GRAPHS (OVERVIEW)

- ▶ New feature in CUDA 10
- ▶ Allows for the definition of a sequence of stream(s) work (kernels, memory copy operations, callbacks, host functions, graphs)
- ▶ Each work item is a *node* in the graph
- ▶ Allows for the definition of *dependencies* (e.g. these 3 nodes must finish before this one can begin)
- ▶ Dependencies are effectively graph edges
- ▶ Once defined, a graph may be executed by launching it into a stream
- ▶ Once defined, a graph may be re-used
- ▶ Has both a manual definition method and a “capture” method

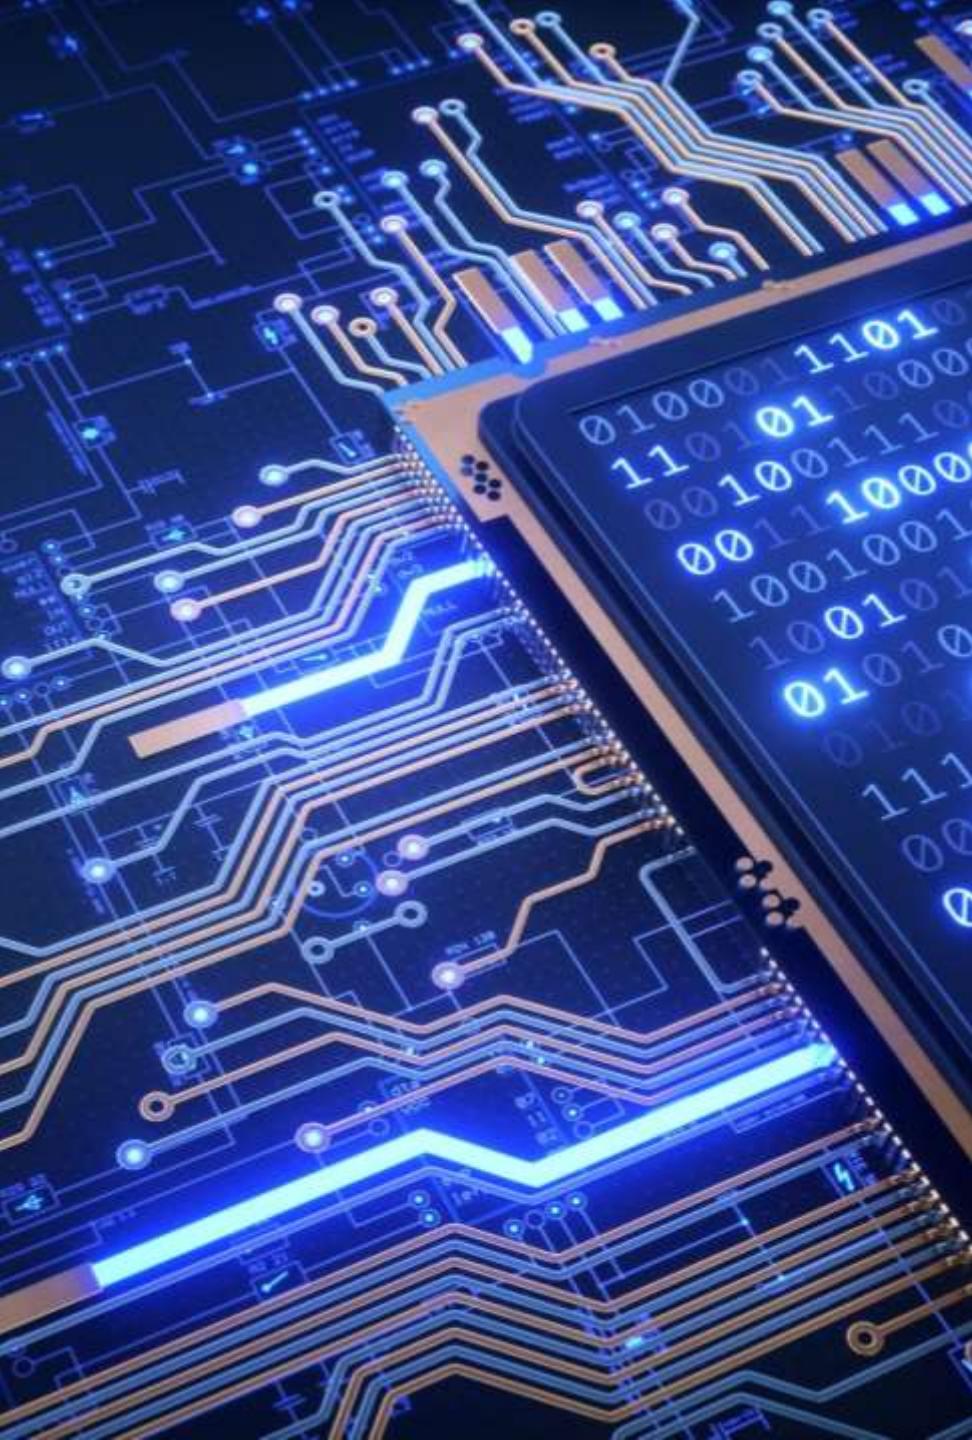

DAY 4


- Dynamic Parallelism
 - Quicksort
 - Mandelbrot
- Parallel Reduction
- Cooperative Thread Groups
- Image Processing
 - Textures
 - Sobel Filter
 - Box Filter
 - Histogram
 - Transpose
 - Separable Convolution

Get the updated training content from:
<https://github.com/kbvis3d/toshiba-cuda-2021>

Streams and Dynamic Parallelism

Synchronicity in CUDA

- All CUDA calls are either synchronous or asynchronous relative to the host
 - Synchronous – enqueue work and wait for completion
 - Asynchronous – enqueue work and return immediately
- Use asynchronous operations to introduce another level of parallelism
 - Better utilization of the system
 - Use all the available resources on your system concurrently
 - CPU cores
 - GPU(s)
- What is the CPU doing during GPU kernels?
- Waiting for the GPU, typically...
- Use it for an independent task in parallel!
- Eg. Re-ordering data, writing to a file

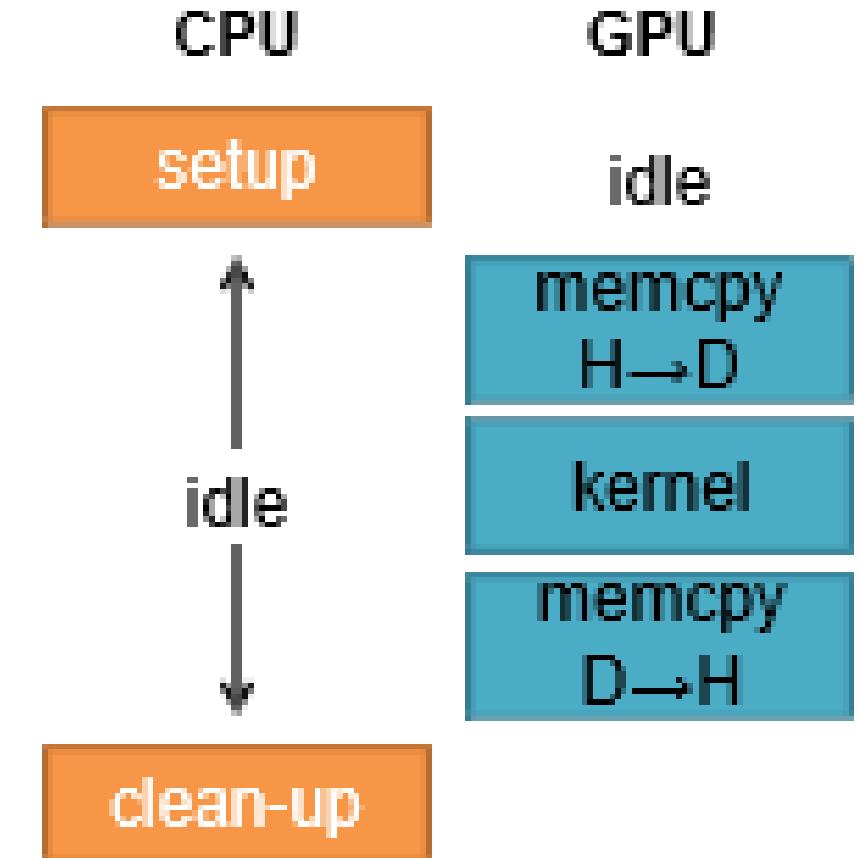

Concurrent CPU-GPU Computation

- Kernel invocations are asynchronous
- Need to synchronize CPU and GPU
 - Explicit:
 cudaDeviceSynchronize()
 - Implicit: cudaMemcpy()
- Order matters: launch kernels then call CPU functions

```
void foo()
{
    cpuCode1();


    KernelA<<<grid,block>>>(...);
    KernelB<<<grid,block>>>(...);

    cpuCode2();

    cudaDeviceSynchronize();

    // or cudaMemcpy for
    // implicit synchronization
    // cudaMemcpy(...,
    // cudaMemcpyDeviceToHost)
}
```

Task Timeline

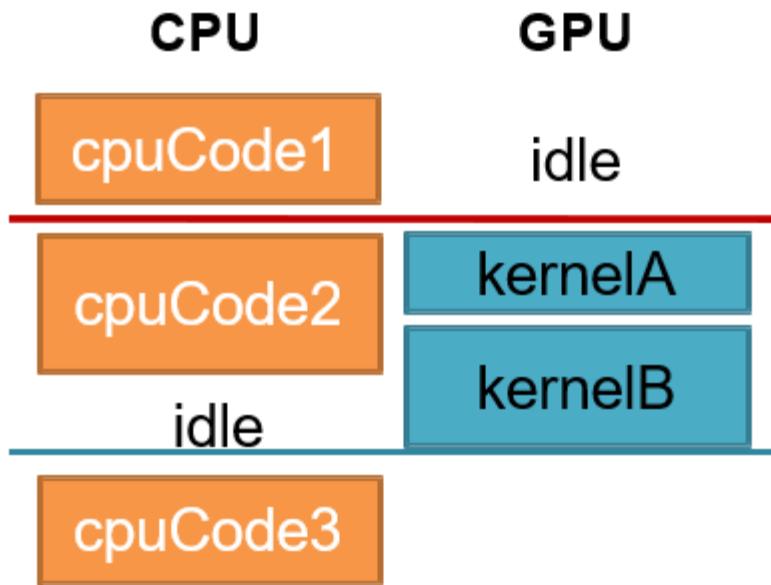

```
void foo()
{
    cpuCode1();

    KernelA<<<grid,block>>>(...);
    KernelB<<<grid,block>>>(...);

    cpuCode2();


    // Explicit synchronization
    cudaDeviceSynchronize();

    // Or implicit synchronization
    // cudaMemcpy(...)

    cpuCode3();
}
```


Concurrent Transfers

- Copy data over bus while kernels are executing on GPUs
- Check **asyncEngineCount** property in **cudaGetDeviceProperties()**
 - 0: No overlap is supported
 - 1: One data transfer can overlap with kernel execution
 - 2: Bidirectional data transfers can overlap with kernel execution
 - These devices have 2 DMA Engines!

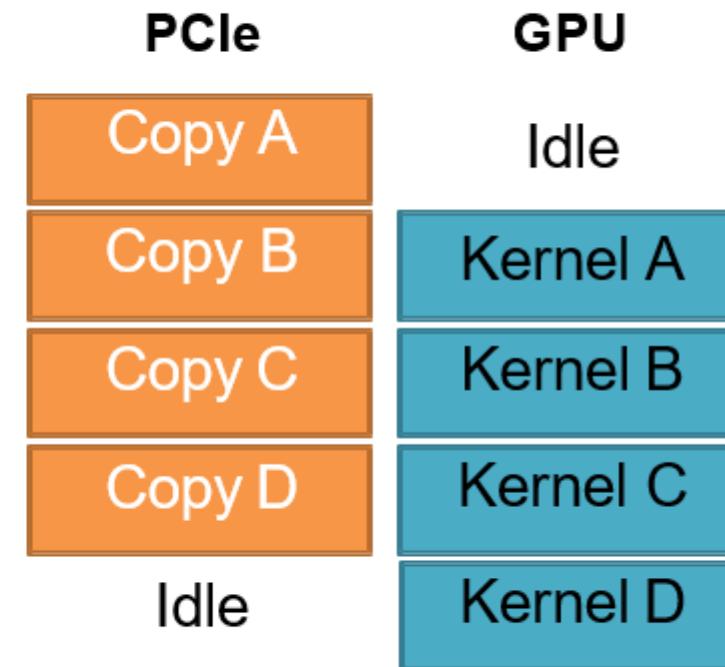

Asynchronous Communications

- Implemented via asynchronous variations of `cudaMemcpy*`()
- Stream = sequence (queue) of operations that execute *in order* on GPU
 - No ordering constraints on operations between different streams
- Operations can execute asynchronously if they:
 - 1) Are from different streams
 - 2) Use different hardware resources
 - 3) The necessary hardware resources are available

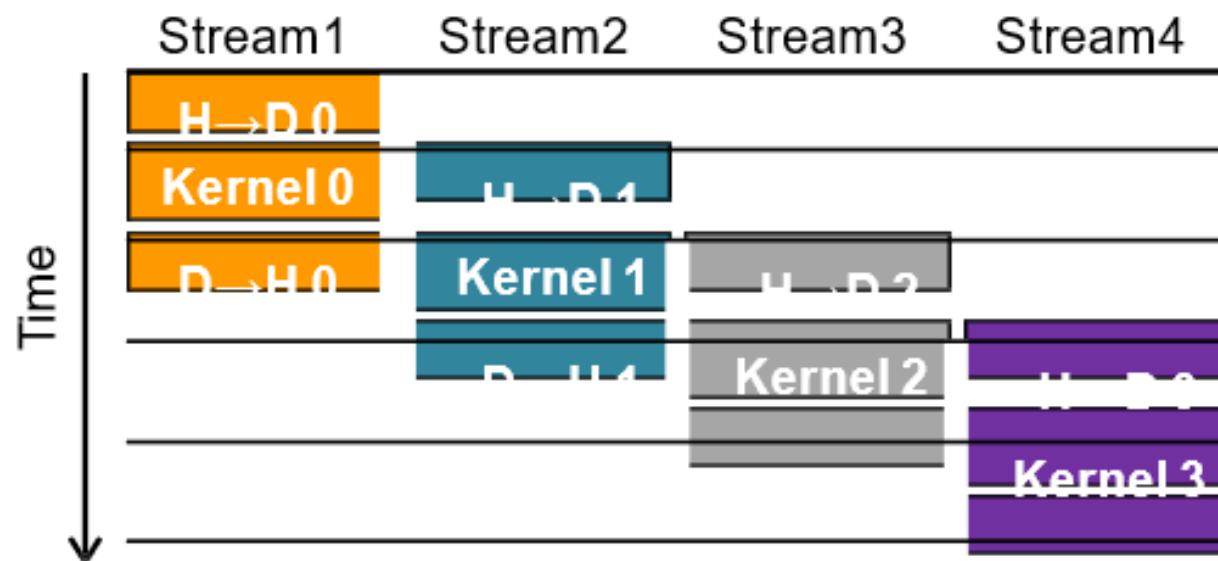

Page-Locked Host Memory (1)

- Page-locked (“pinned”) host memory required for asynchronous transfers
- `cudaMemcpyAsync()` does not require page-locked host memory
 - HOWEVER then transfers are synchronous
- `cudaMallocHost()` or `cudaHostAlloc()` and `cudaFreeHost()`
 - Allocate/free page-locked memory
- `cudaHostRegister()/cudaHostUnregister()`
 - Make existing memory page-locked

Page-Locked Host Memory (2)

- Page-locked memory is typically faster with regular `cudaMemcpy()` too!
 - 6.2 vs 10.9 GB/s on K80, PCIe x16 Gen3 (Device to Host)
 - 3.0 vs 13.1 GB/s on P100, PCIe x16 Gen 3 (Device to Host)
- Use with caution!
 - Allocating too much page-locked memory can reduce system performance
 - Calls to `cudaMallocHost()` will fail long before allocations by `malloc()`

Syntax – Asynchronous Communications

- Asynchronous Data Transfers
 - `cudaMemcpyAsync(void* dst, void* src, size_t nbytes,
enum cudaMemcpyKind direction,
cudaStream_t stream = 0)`
- Handles created and destroyed using API
 - `cudaError_t cudaStreamCreate(cudaStream_t* stream)`
 - `cudaError_t cudaStreamDestroy(cudaStream_t stream)`
- Launch kernels to different streams using the 4th argument in the chevron syntax <<<>>>
 - `myKernel<<<gSize, bSize, smBytes, stream>>>(...)`

Default Stream

- Unless otherwise specified all operations are enqueued in the default stream or “Stream 0”
- Default stream has special synchronization properties
 - Synchronous with all streams
 - Operations in default stream cannot overlap with operations from any other stream
- Exception: Streams with non-blocking flag set
 - `cudaStreamCreateWithFlags(&stream,
cudaStreamNonBlocking)`
 - Allows operations in current stream to run concurrently with default stream
 - Use to get concurrency with operations out of your control (eg. libraries)

Syntax Example

```
void foo(...)  
{  
    cudaStream_t stream1, stream2;  
  
    cudaStreamCreate(&stream1);  
    cudaStreamCreate(&stream2);  
  
    cudaMemcpyAsync(d_bar, h_bar, sizeof(bar),  
                   cudaMemcpyHostToDevice, stream1);  
  
    kernelA<<<grid, block, 0, stream2>>>(...);  
    kernelB<<<grid, block, 0, stream1>>>(...);  
  
    ...  
  
    cudaStreamDestroy(stream1);  
    cudaStreamDestroy(stream2);  
}
```

These can overlap because they:

- 1) are on different streams
- 2) use different resources


- These are asynchronous with CPU execution
- Synchronization is required!

Synchronization

1. cudaDeviceSynchronize()

CPU ↔ all operations on current device

```
cudaMemcpyAsync(...HostToDevice, stream1);  
  
cudaMemcpyAsync(...HostToDevice, stream2);  
Kernel<<<..., stream1>>>(...);  
  
cudaMemcpyAsync(...DeviceToHost, stream1);  
Kernel<<<..., stream2>>>(...);  
  
cudaMemcpyAsync(...DeviceToHost, stream2);  
cudaMemcpyAsync(...DeviceToHost, stream2);  
Kernel<<<..., stream2>>>(...);  
Kernel<<<..., stream2>>>(...);  
Kernel<<<..., stream2>>>(...);  
cudaMemcpyAsync(...DeviceToHost, stream2);  
  
cudaDeviceSynchronize();  
cpuCode();
```

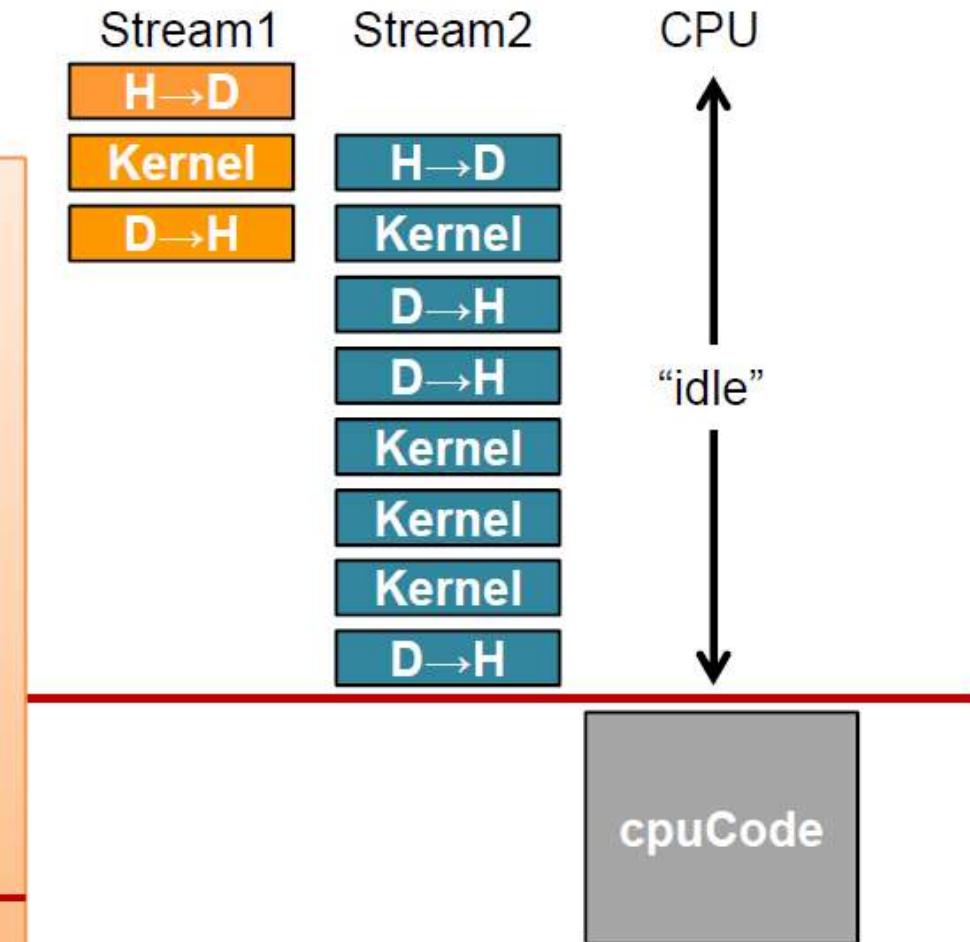


Synchronization

2. cudaStreamSynchronize()

- CPU ↔ all operations in a stream

```
cudaMemcpyAsync(...HostToDevice, stream1);  
  
cudaMemcpyAsync(...HostToDevice, stream2);  
Kernel<<<..., stream1>>>(...);  
  
cudaMemcpyAsync(...DeviceToHost, stream1);  
Kernel<<<..., stream2>>>(...);  
  
cudaMemcpyAsync(...DeviceToHost, stream2);  
cudaMemcpyAsync(...DeviceToHost, stream2);  
Kernel<<<..., stream2>>>(...);  
Kernel<<<..., stream2>>>(...);  
Kernel<<<..., stream2>>>(...);  
cudaMemcpyAsync(...DeviceToHost, stream2);  
  
cudaStreamSynchronize(stream1);  
  
cpuCode();
```

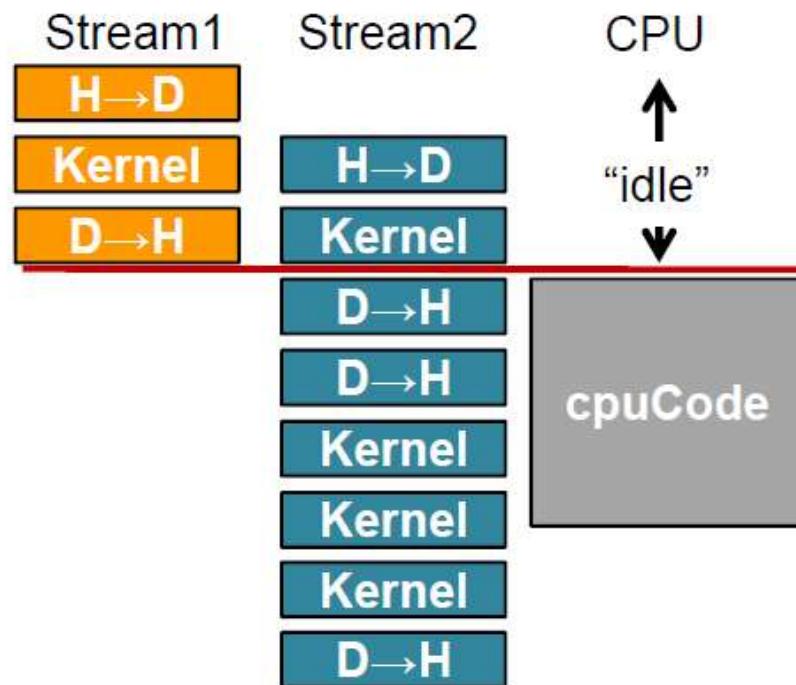

Events (1)

- Events provide a mechanism to determine when operations in a stream are complete
 - ‘Dummy’ operations that do no work BUT
 - Useful for profiling and synchronization
- Events have a boolean state
 - Occurred (cudaSuccess)
 - Not Occurred
 - Default state = Occurred

Events (2)

- Create and destroy events
 - `cudaEventCreate(cudaEvent_t* e)`
 - `cudaEventDestroy(cudaEvent_t e)`
- Record an event
 - `cudaEventRecord(cudaEvent_t e, cudaStream_t s = 0)`
 - Sets the event state to not occurred
 - Enqueues the event into a stream
 - Event state is set to occurred when all previous operations in the stream are complete
 - If stream is default stream, all prior operations in ALL other streams must be complete too!

Event Synchronization



3. cudaEventSynchronize()

- CPU ↔ specific point in a stream's queue of operations

```
cudaMemcpyAsync(...HostToDevice, stream1);
Kernel<<<..., stream1>>>(...);
cudaMemcpyAsync(...DeviceToHost, stream1);
cudaEventRecord(event1, stream1);
Kernel<<<..., stream1>>>(...);

cudaMemcpyAsync(...HostToDevice, stream2);
Kernel<<<..., stream2>>>(...);
cudaMemcpyAsync(...DeviceToHost, stream2);
cudaMemcpyAsync(...DeviceToHost, stream2);
Kernel<<<..., stream2>>>(...);
Kernel<<<..., stream2>>>(...);
Kernel<<<..., stream2>>>(...);
cudaMemcpyAsync(...DeviceToHost, stream2);

cudaEventSynchronize(event1);
cpuCode();
```

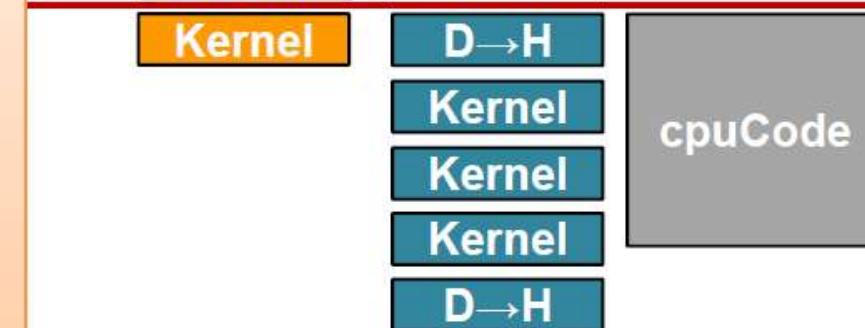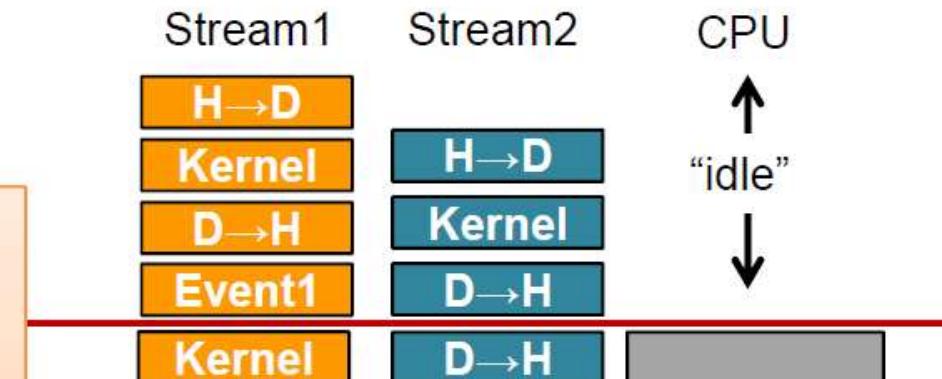

Event Synchronization


4. cudaStreamWaitEvent()

- One stream synchronizes on an event

```
cudaMemcpyAsync(...HostToDevice, stream1);
cudaMemcpyAsync(...HostToDevice, stream2);
Kernel<<<..., stream1>>>(...);
cudaEventRecord(event1, stream1);
cudaMemcpyAsync(...DeviceToHost, stream1);

cudaStreamWaitEvent(stream2, event1, 0);
Kernel<<<..., stream2>>>(...);
Kernel<<<..., stream2>>>(...);
cudaMemcpyAsync(...DeviceToHost, stream2);

cpuCode();
```

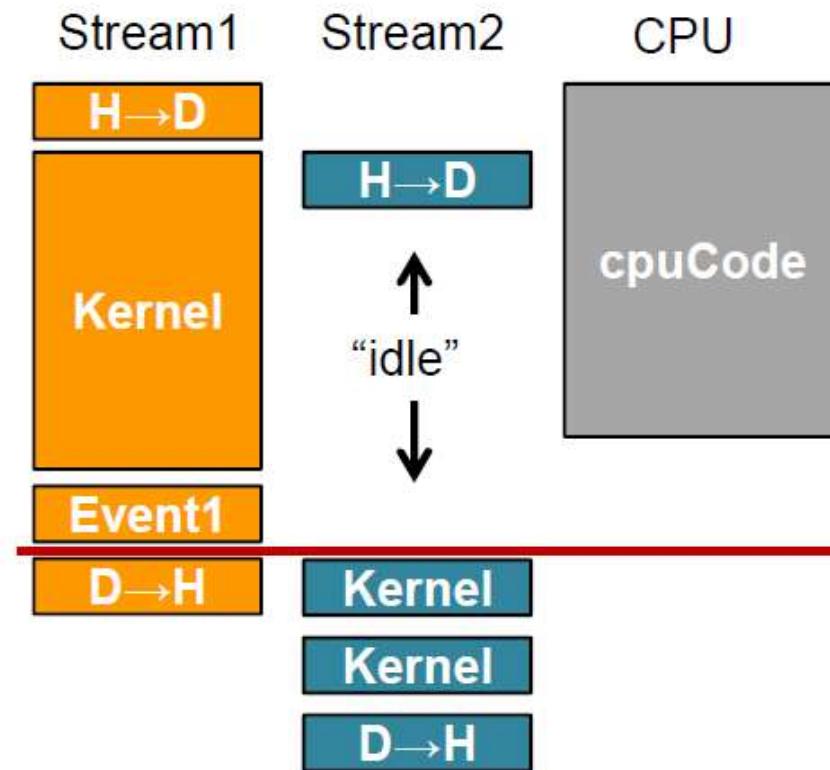

samples / asyncAPI

```
// create cuda event handles
cudaEvent_t start, stop;
checkCudaErrors(cudaEventCreate(&start));
checkCudaErrors(cudaEventCreate(&stop));

StopWatchInterface *timer = NULL;
sdkCreateTimer(&timer);
sdkResetTimer(&timer);

checkCudaErrors(cudaDeviceSynchronize());
float gpu_time = 0.0f;

// asynchronously issue work to the GPU (all to stream 0)
sdkStartTimer(&timer);
cudaEventRecord(start, 0);
cudaMemcpyAsync(d_a, a, nbytes, cudaMemcpyHostToDevice, 0);
increment_kernel<<<blocks, threads, 0, 0>>>(d_a, value);
cudaMemcpyAsync(a, d_a, nbytes, cudaMemcpyDeviceToHost, 0);
cudaEventRecord(stop, 0);
sdkStopTimer(&timer);
```

samples / asyncAPI

```
    unsigned long int counter = 0;  
#ifdef WAIT_FOR_EVENT  
    // have CPU do some work while waiting for stage 1 to finish  
    while (cudaEventQuery(stop) == cudaErrorNotReady)  
    {  
        counter++;  
    }  
#else  
    cudaEventSynchronize(stop);  
#endif  
  
checkCudaErrors(cudaEventElapsedTime(&gpu_time, start, stop));  
  
// print the cpu and gpu times  
printf("time spent executing by the GPU: %.2f\n", gpu_time);  
printf("time spent by CPU in CUDA calls: %.2f\n", sdkGetTimerValue(&timer));  
printf("CPU executed %lu iterations while waiting for GPU to finish\n", counter);
```

Concurrent Kernel Execution


- Most (all?) modern GPUs can execute multiple kernels concurrently
 - Check **concurrentKernels** property in **cudaGetDeviceProperties**
 - Maximum number of concurrent kernels

cc3.0	cc3.2	cc3.5-5.2	cc5.3	cc6.0	cc6.1	cc6.2	cc7.0
16	4	32	16	128	32	16	128


- Kernels must be from the same process
- Kernels must be from different, **non-default**, streams

Concurrent Kernel Execution



Serial Kernels

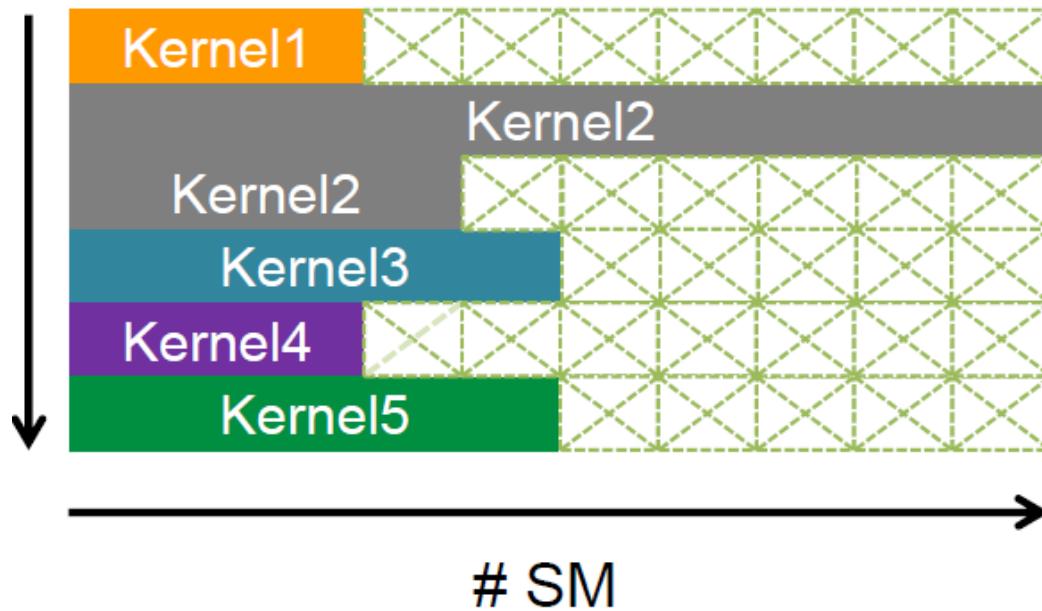

Concurrent Kernels

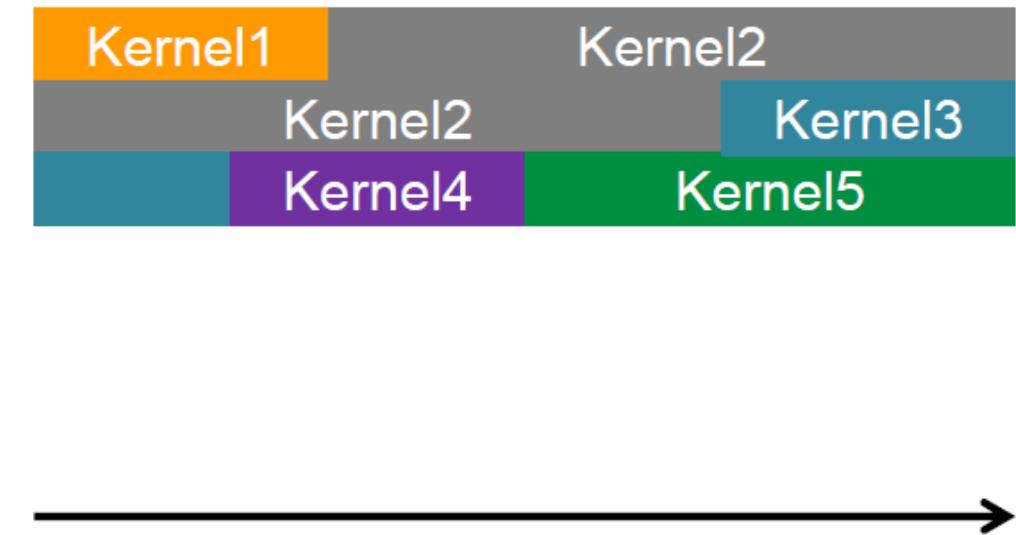

Concurrent Kernel Execution

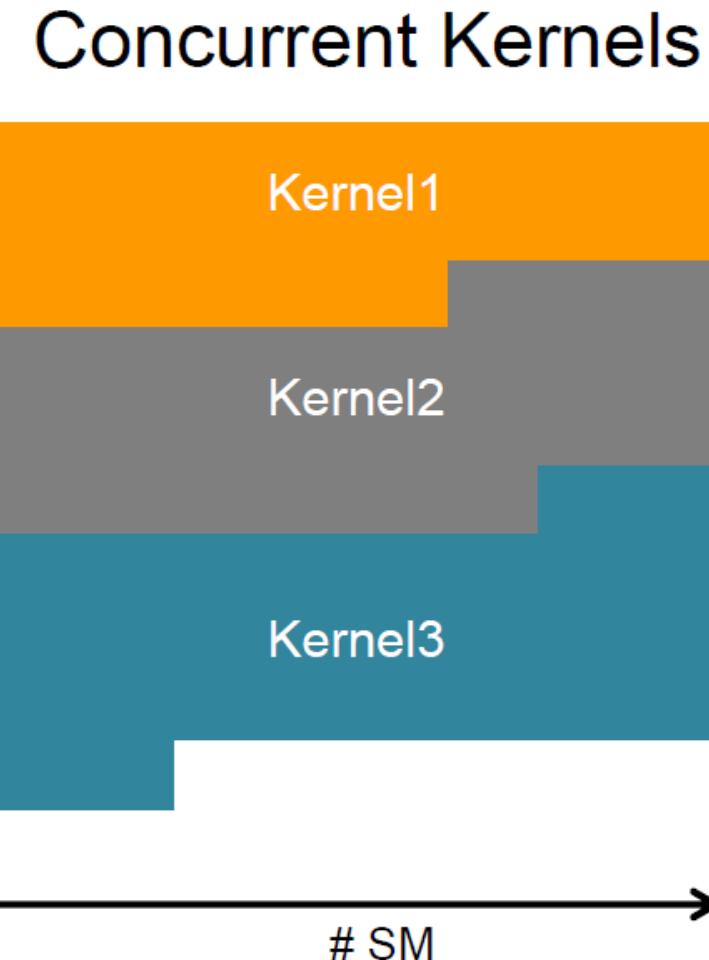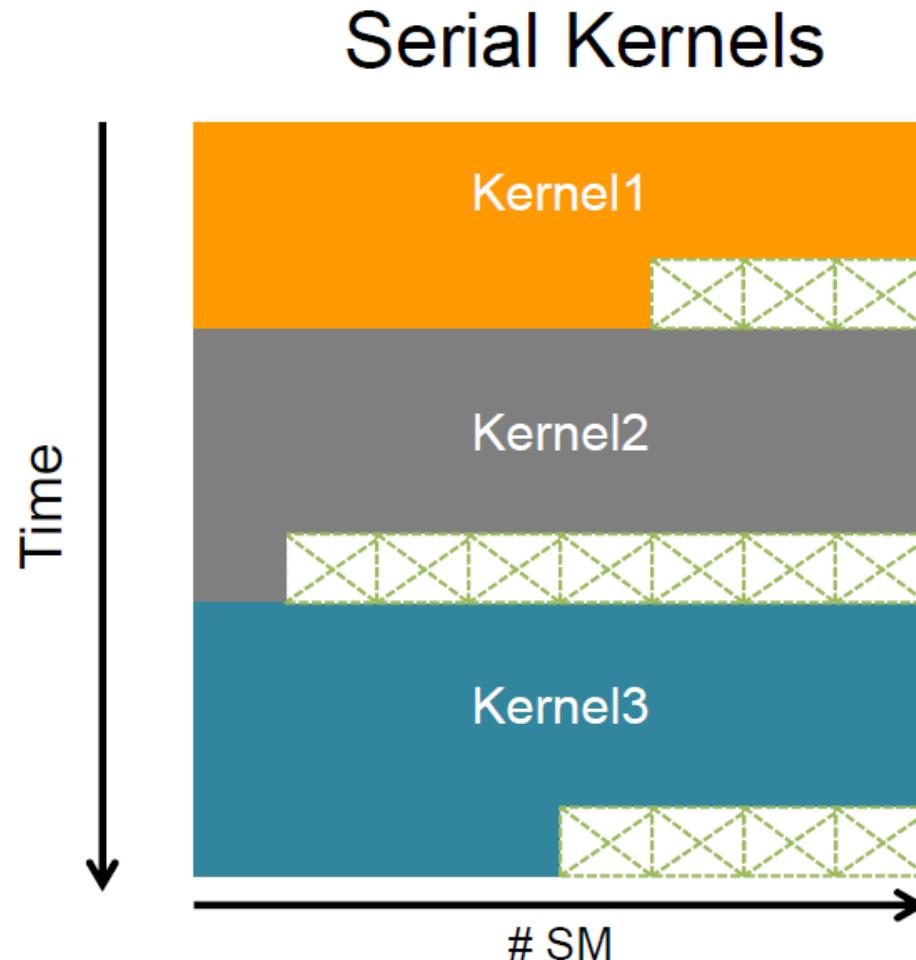


Pipelining in CUDA

- Pipelining is common in CUDA as you have multiple resources, with each resource specialized for different tasks:
 - CPU – serial algorithms, I/O
 - GPU SMs – parallel algorithms
 - GPU DMA engines – CPU→GPU transfers


Profilers and Asynchronous Operations

Timeline views
useful for visualizing
actual execution
order of
asynchronous
operations

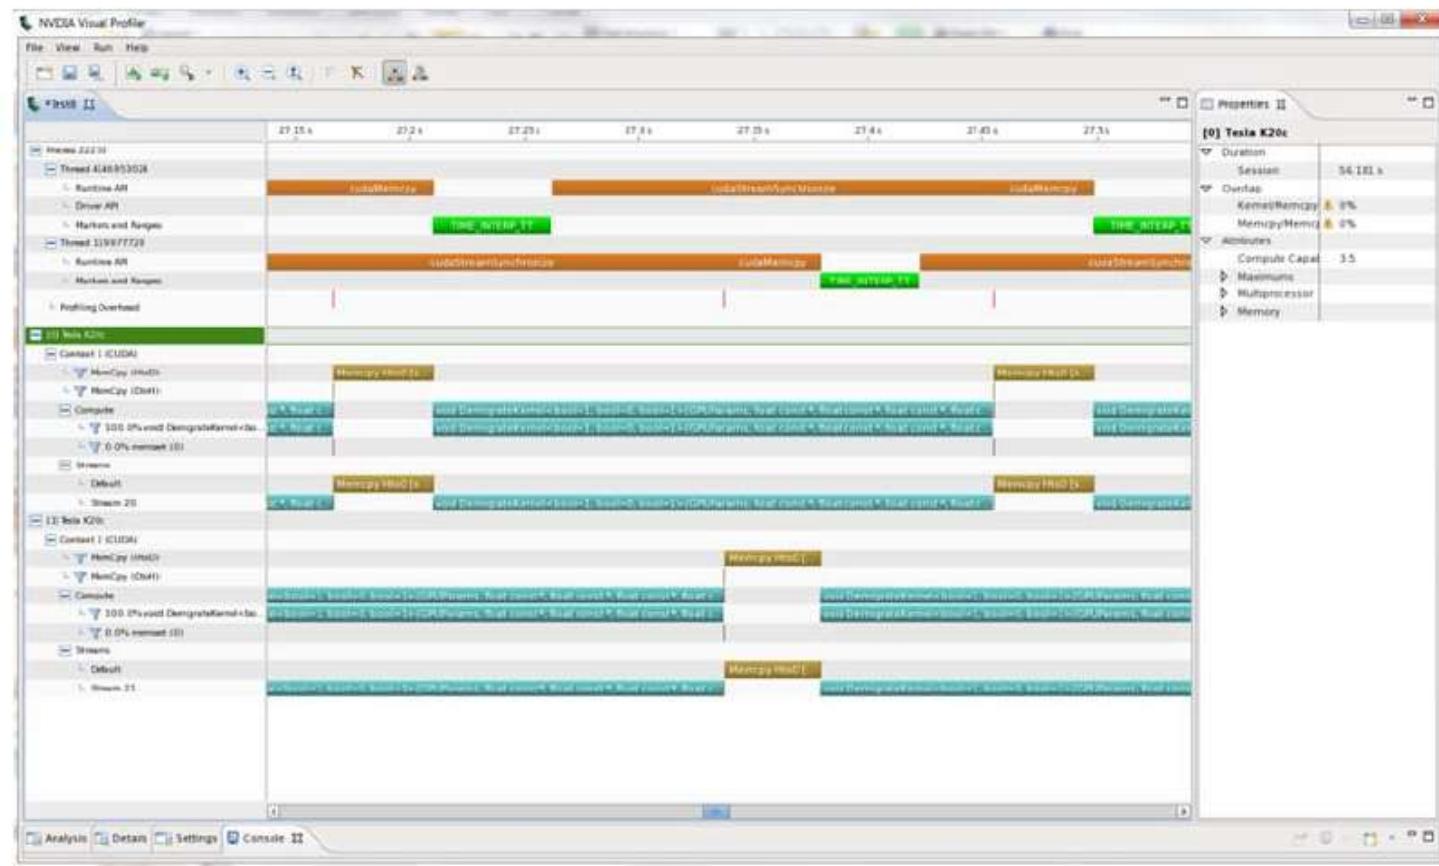


Dynamic Parallelism

- Allows threads in GPU kernels to launch other GPU kernels
 - GPUs can operate more autonomously from host CPU

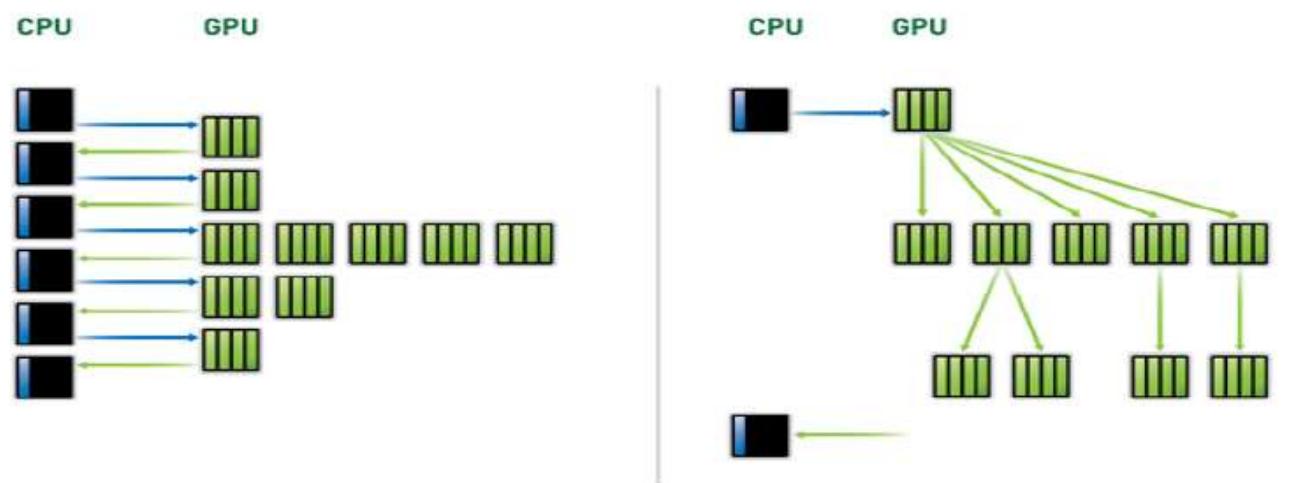


CPU Kernel Launches vs. Dynamic Parallelism

Grids are fully nested

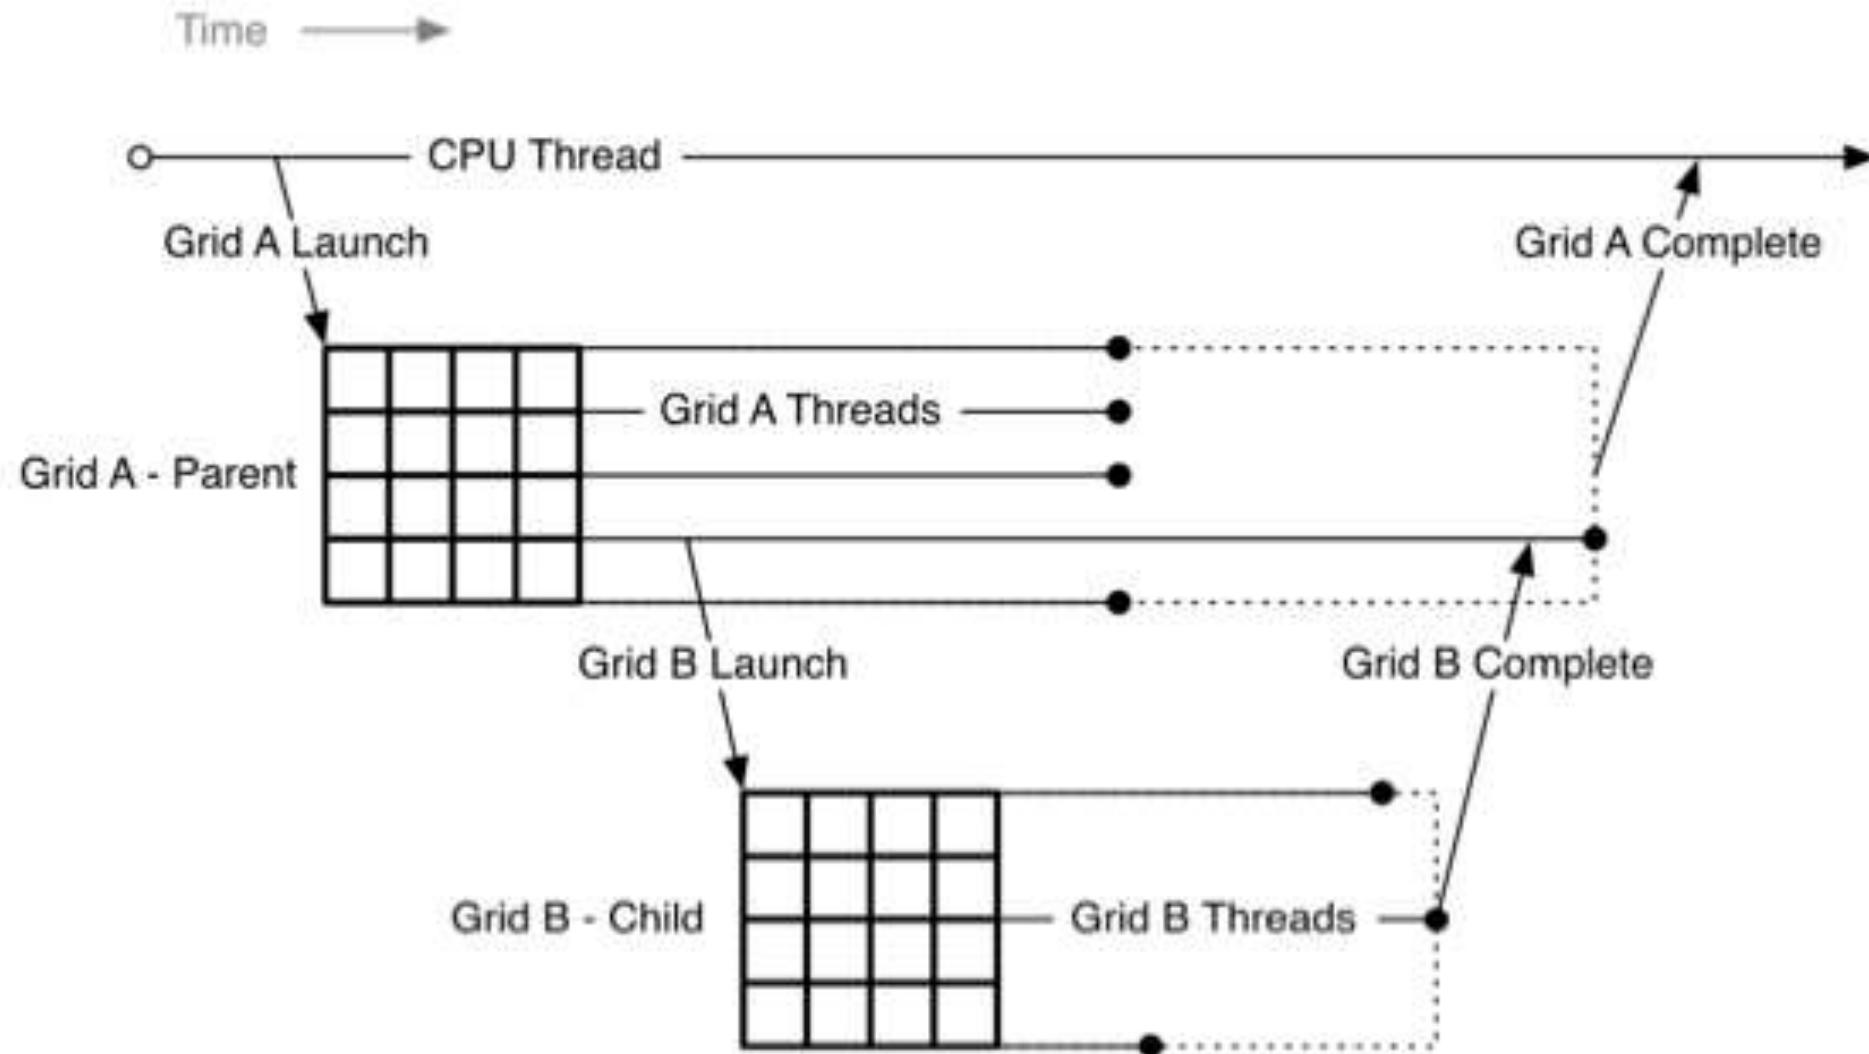


Dynamic Parallelism

- Dynamic Parallelism is well-suited to algorithms that use recursive subdivision

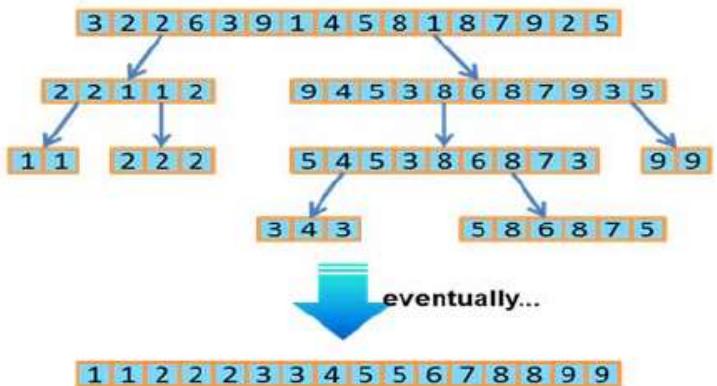

Quicksort Algorithm

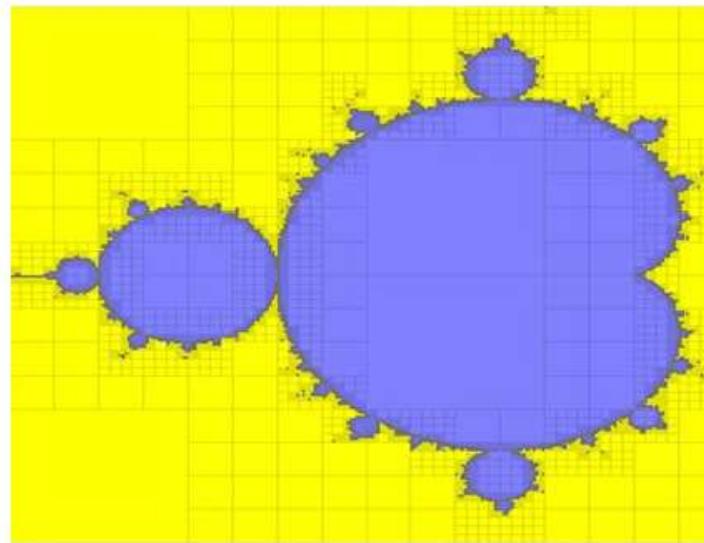

Mariani-Silver Mandelbrot
Set Algorithm

Dynamic Parallelism (Continued)

- Potential advantages of Dynamic Parallelism:
 - Simpler code for recursive problems
 - Eliminates device to host data transfers required for host to launch subsequent kernels
 - More efficient
 - Launch kernels from GPU as needed without any need for host synchronization that might introduce false data dependencies
 - eg. Non-Dynamic QuickSort implementation you need to wait for all kernels at one level of the tree are complete before launching any kernels at the next level!

Dynamic Parallelism

- Use <<<>>> syntax from within a kernel
- Synchronization
 - `cudaDeviceSynchronize()` synchronizes kernels launched from current thread block
 - All work launched by a thread block is implicitly synchronized when the block exits
 - Parent doesn't finish until children have finished

```
_global__ void childKernel()
{
    printf("Hello ");
}

_global__ void parentKernel()
{
    cudaError_t e;
    childKernel<<<1,1>>>();
    cudaDeviceSynchronize();
    e = cudaGetLastError();
    if(e) return;

    printf("World!\n");
}

void host_code()
{
    parentKernel<<<1,1>>>();
    ...
}
```

Dynamic Parallelism & Memory Model

- Parent and child grids share the same global and constant memory storage
 - You can pass pointers to global/constant memory to child kernels
- Thread-private variables still have thread scope
 - Can't pass pointers to thread-private variables to child kernels
- Shared memory still has thread block scope
 - Can't pass pointers to shared memory to child kernels

```
__global__ void Child(int* );
__global__ void Child2(int );

__constant__ int constantX[10];

__global__ void ParentKernel(int *globalX)
{
    __shared__ int sharedX[10];
    int localX = 5;

    Child<<<1,1>>>(sharedX); ✗
    Child<<<1,1>>>(&localX); ✗
    Child2<<<1,1>>>(sharedX[0]); ✓
    Child2<<<1,1>>>(localX); ✓

    Child<<<1,1>>>(globalX); ✓
    Child<<<1,1>>>(constantX); ✓
}
```

Dynamic Parallelism

- `cudaDeviceSynchronize()`
 - Parent blocks may pause execution and backup state (program counters, registers/shared memory contents) to host memory and yield to allow child kernels to make forward progress
 - Block may resume executing on a different SM

Dynamic Parallelism


- Kernels launched within a thread-block are executed in order by default
 - Use streams/events to allow concurrent execution of kernels
- Streams and Events are supported
 - A stream and event created by a thread has thread block scope
 - Using streams and events created on the host has undefined behavior
- Create Streams and Events using flags:
 - `cudaStreamCreateWithFlags()` with `cudaStreamNonBlocking` flag
 - `cudaEventCreateWithFlags()` with `cudaEventDisableTiming` flag

Dynamic Parallelism & Streams

```
__global__ void parentKernel()
{
    cudaStream_t stream1, stream2;
    cudaStreamCreateWithFlags(&stream1, cudaStreamNonBlocking);
    cudaStreamCreateWithFlags(&stream2, cudaStreamNonBlocking);

    // launch child
    if(threadIdx.x == 0)
    {
        foo<<<1,1,0,stream1>>>();
    }
    else if(threadIdx.x == 32)
    {
        bar<<<1,1,0,stream2>>>();
    }
    ...
}
```

samples / cdpSimpleQuicksort

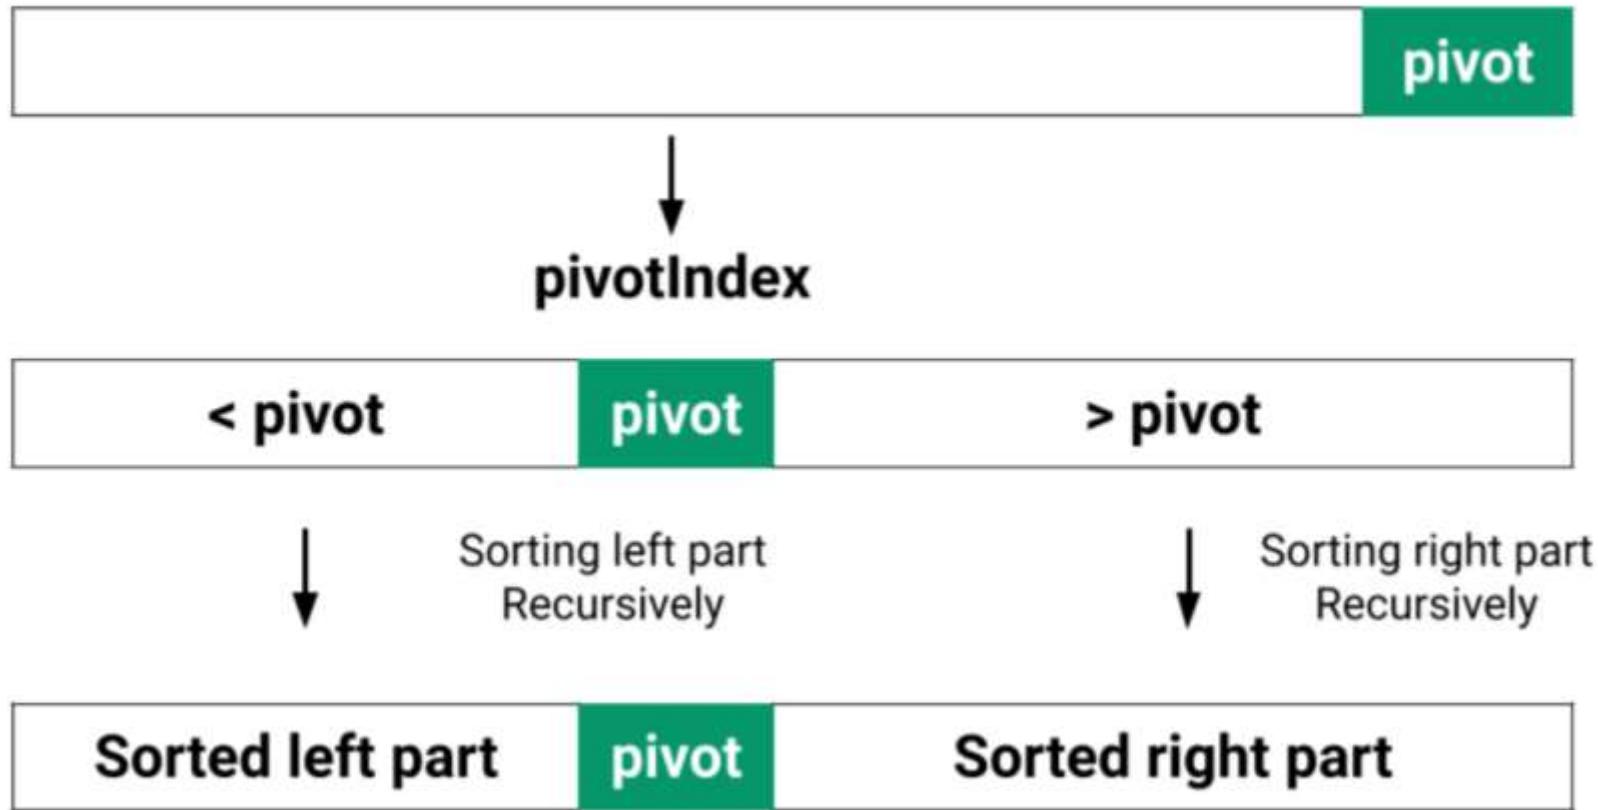

samples / cdpSimpleQuicksort




- Basic Quicksort – Left / Right partition of elements about a pivot
- Swap elements on either side of pivot if out of order
- Recursively partition left and right subranges:
 - Launch `cdp_simple_quicksort` recursively (dynamic parallel kernel launch) on left and right partitions
 - If depth is too great (partitions too small), use simple selection sort on partition elements

```
__global__ void cdp_simple_quicksort(unsigned int *data, int left, int right, int depth)
{
    // If we're too deep or there are few elements left, we use an insertion sort...
    if (depth >= MAX_DEPTH || right-left <= INSERTION_SORT)
    {
        selection_sort(data, left, right);
        return;
    }
    ...
}
```

samples / cdpSimpleQuicksort

```
// Launch a new block to sort the left part.  
if (left < (rptr-data))  
{  
    cudaStream_t s;  
    cudaStreamCreateWithFlags(&s, cudaStreamNonBlocking);  
    cdp_simple_quicksort<<< 1, 1, 0, s >>>(data, left, nright, depth+1);  
    cudaStreamDestroy(s);  
}  
  
// Launch a new block to sort the right part.  
if ((lptr-data) < right)  
{  
    cudaStream_t s1;  
    cudaStreamCreateWithFlags(&s1, cudaStreamNonBlocking);  
    cdp_simple_quicksort<<< 1, 1, 0, s1 >>>(data, nleft, right, depth+1);  
    cudaStreamDestroy(s1);  
}
```

Adaptive Workload Sizing

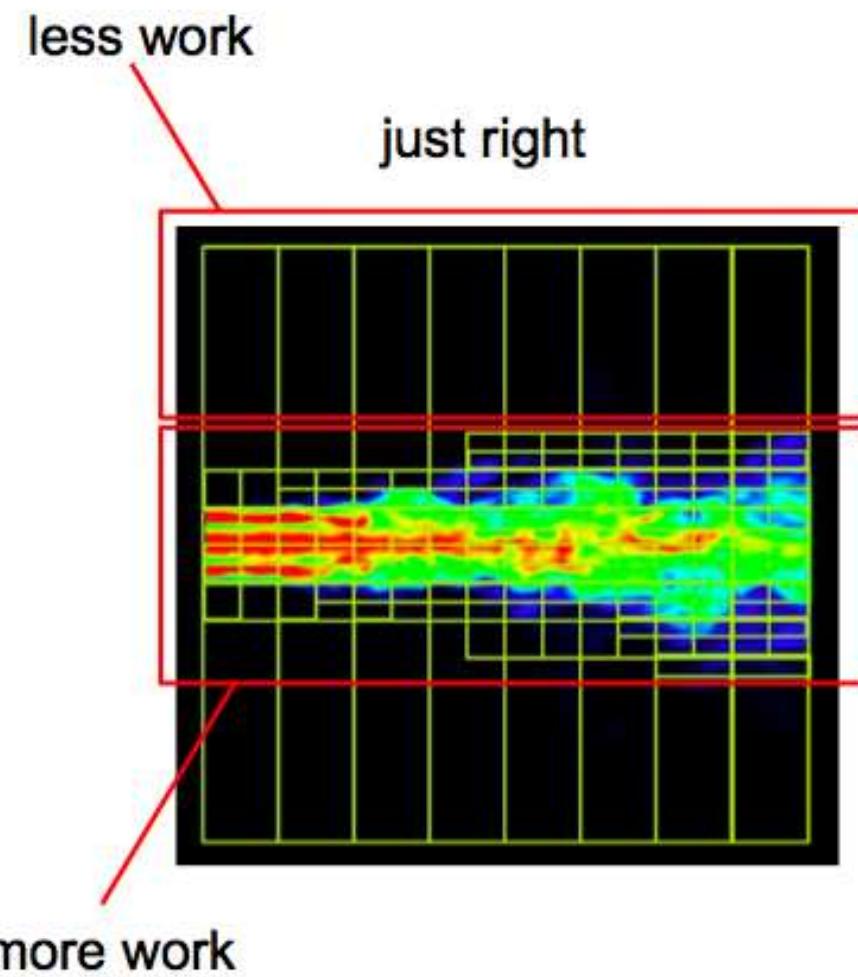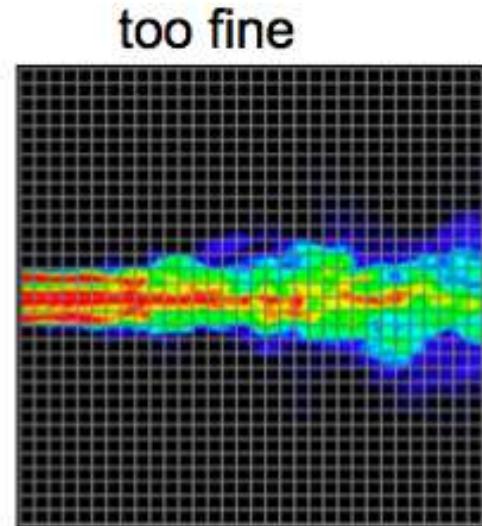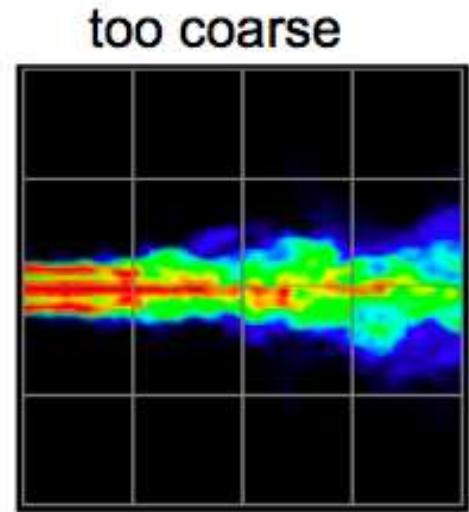

Passing Pointers to Child Grids

Can be passed

- global memory (incl. `__device__` variables and malloc'ed memory)
- zero-copy host memory
- constant memory (inherited and not writeable)

Cannot be passed

- shared memory (`__shared__` variables)
- local memory (incl. stack variables)

The results of dereferencing a pointer in a child grid that cannot be legally passed to it are undefined. The following code on the left is illegal, while the code on the right is OK.

```
// common __global__ void child_k(void *p) { // ... *p = res; // ... }
```

```
__global__ void parent_k(void) {
    // ...
    int v = 0;
    child_k <<< 1, 256 >>> (&v);
    // ...
}
```

```
__device__ int v;
__global__ void parent_k(void) {
    // ...
    child_k <<< 1, 256 >>> (&v);
    // ...
}
```



samples / mandelbrot-dynamic


The **Mandelbrot set** is perhaps the best known fractal. It is defined as

$$z_0 = c$$

$$z_{n+1} = z_n^2 + c$$

$$M = \{c \in \mathbb{C} : \exists R \forall n : |z_n| < R\}.$$


The interior of Figure 2 (the black part), is the Mandelbrot Set.

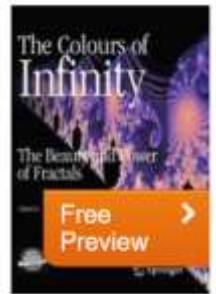

The Colours of Infinity

The Beauty and Power of Fractals

Editors: **Lesmoir-Gordon, Nigel** (Ed.)

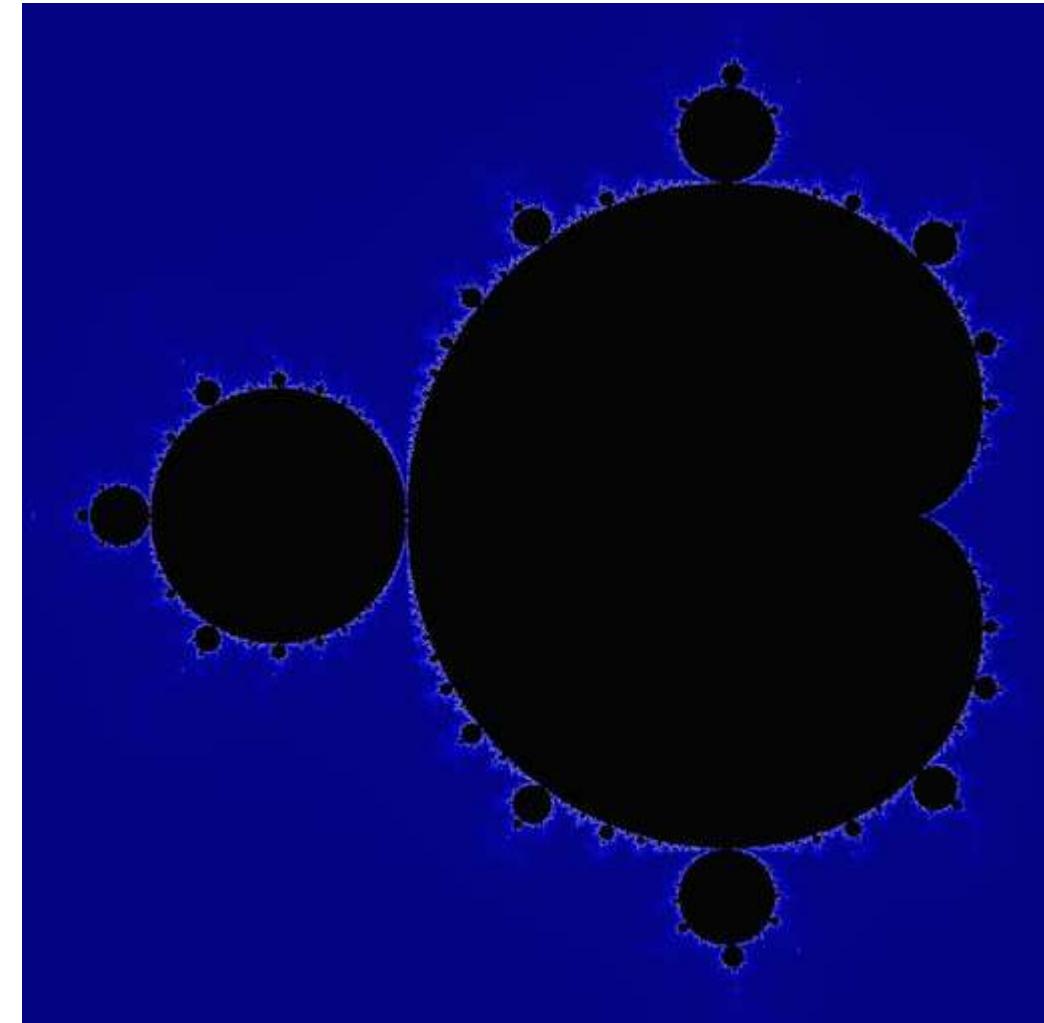

Escape Time Iteration

```
#define MAX_DWELL 512
// w, h --- width and height of the image, in pixels
// cmin, cmax --- coordinates of bottom-left and top-right image corners
// x, y --- coordinates of the pixel
__host__ __device__ int pixel_dwell(int w, int h,
                                    complex cmin, complex cmax,
                                    int x, int y) {
    complex dc = cmax - cmin;
    float fx = (float)x / w, fy = (float)y / h;
    complex c = cmin + complex(fx * dc.re, fy * dc.im);
    complex z = c;
    int dwell = 0;

    while(dwell < MAX_DWELL && abs2(z) < 2 * 2) {
        z = z * z + c;
        dwell++;
    }

    return dwell;
}
```

Function: pixel_dwell()

The value of dwell determines whether the point is in the Mandelbrot set.

Simple Per-Pixel Kernel

```
// kernel
__global__ void mandelbrot_k(int *dwells,
                             int w, int h,
                             complex cmin, complex cmax) {
    int x = threadIdx.x + blockDim.x * blockIdx.x;
    int y = threadIdx.y + blockDim.y * blockIdx.y;
    if(x < w && y < h)
        dwells[y * w + x] = pixel_dwell(w, h, cmin, cmax, x, y);
}


int main(void) {
    // ... details omitted ...

    // kernel launch
    int w = 4096, h = 4096;
    dim3 bs(64, 4), grid(divup(w, bs.x), divup(h, bs.y));
    mandelbrot_k <<<grid, bs>>>(d_dwells, w, h,
                                      complex(-1.5, 1), complex(0.5, 1));

    // ...
}
```

Mariani-Silver Hierarchical Algorithm

```
mariani_silver(rectangle)
    if (border(rectangle) has common dwell)
        fill rectangle with common dwell
    else if (rectangle size < threshold)
        per-pixel evaluation of the rectangle
    else
        for each sub_rectangle in subdivide(rectangle)
            mariani_silver(sub_rectangle)
```

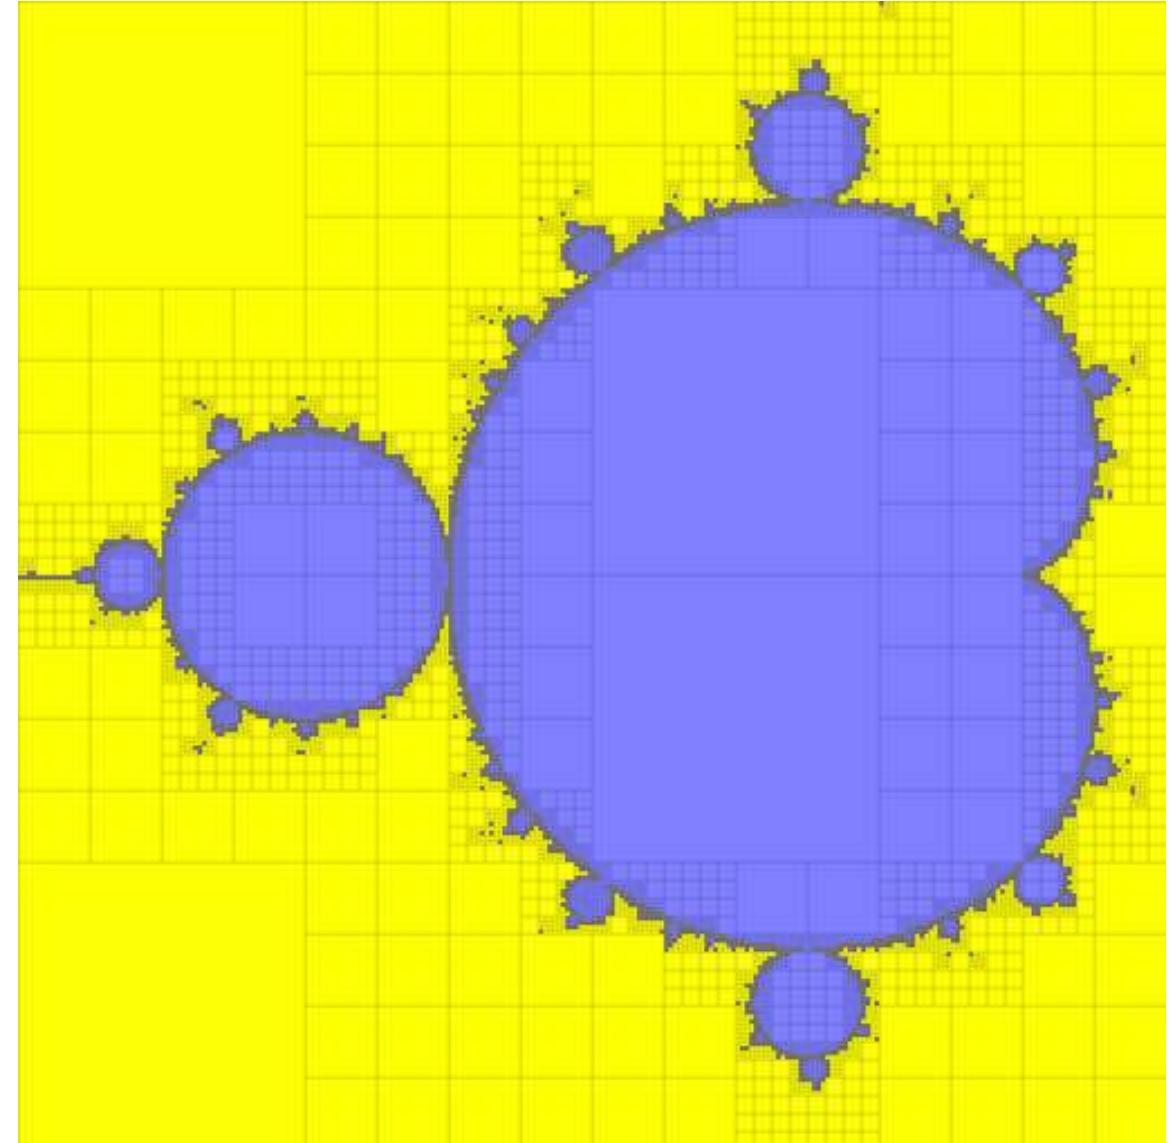

Adaptive Kernel with Dynamic Parallelism


<https://developer.nvidia.com/blog/introduction-cuda-dynamic-parallelism/>

```
__global__ void mandelbrot_block_k(int *dwells,
                                    int w, int h,
                                    complex cmin, complex cmax,
                                    int x0, int y0,
                                    int d, int depth) {

    x0 += d * blockIdx.x, y0 += d * blockIdx.y;
    int common_dwell = border_dwell(w, h, cmin, cmax, x0, y0, d);
    if (threadIdx.x == 0 && threadIdx.y == 0) {
        if (common_dwell != DIFF_DWELL) {
            // uniform dwell, just fill
            dim3 bs(BSX, BSY), grid(divup(d, BSX), divup(d, BSY));
            dwell_fill<<<grid, bs>>>(dwells, w, x0, y0, d, comm_dwell);
        } else if (depth + 1 < MAX_DEPTH && d / SUBDIV > MIN_SIZE) {
            // subdivide recursively
            dim3 bs(blockDim.x, blockDim.y), grid(SUBDIV, SUBDIV);
            mandelbrot_block_k<<<grid, bs>>>
                (dwells, w, h, cmin, cmax, x0, y0, d / SUBDIV, depth+1);
        } else {
            // leaf, per-pixel kernel
            dim3 bs(BSX, BSY), grid(divup(d, BSX), divup(d, BSY));
            mandelbrot_pixel_k<<<grid, bs>>>
                (dwells, w, h, cmin, cmax, x0, y0, d);
        }
        cucheck_dev(cudaGetLastError());
    }
} // mandelbrot_block_k
```

Reduction of border dwells across threads returns final result in thread 0

```
/** evaluates the common border dwell, if it exists */
__device__ int border_dwell
(int w, int h, complex cmin, complex cmax, int x0, int y0, int d) {
    // check whether all boundary pixels have the same dwell
    int tid = threadIdx.y * blockDim.x + threadIdx.x;
    int bs = blockDim.x * blockDim.y;
    int comm_dwell = NEUT_DWELL;
    // for all boundary pixels, distributed across threads
    for(int r = tid; r < d; r += bs) {
        // for each boundary: b = 0 is east, then counter-clockwise
        for(int b = 0; b < 4; b++) {
            int x = b % 2 != 0 ? x0 + r : (b == 0 ? x0 + d - 1 : x0);
            int y = b % 2 == 0 ? y0 + r : (b == 1 ? y0 + d - 1 : y0);
            int dwell = pixel_dwell(w, h, cmin, cmax, x, y);
            comm_dwell = same_dwell(comm_dwell, dwell);
        }
    } // for all boundary pixels
    // reduce across threads in the block
    __shared__ int ldwells[BSX * BSY];
    int nt = min(d, BSX * BSY);
    if(tid < nt)
        ldwells[tid] = comm_dwell;
    __syncthreads();
    for(; nt > 1; nt /= 2) {
        if(tid < nt / 2)
            ldwells[tid] = same_dwell(ldwells[tid], ldwells[tid + nt / 2]);
        __syncthreads();
    }
    return ldwells[0];
} // border_dwell
```

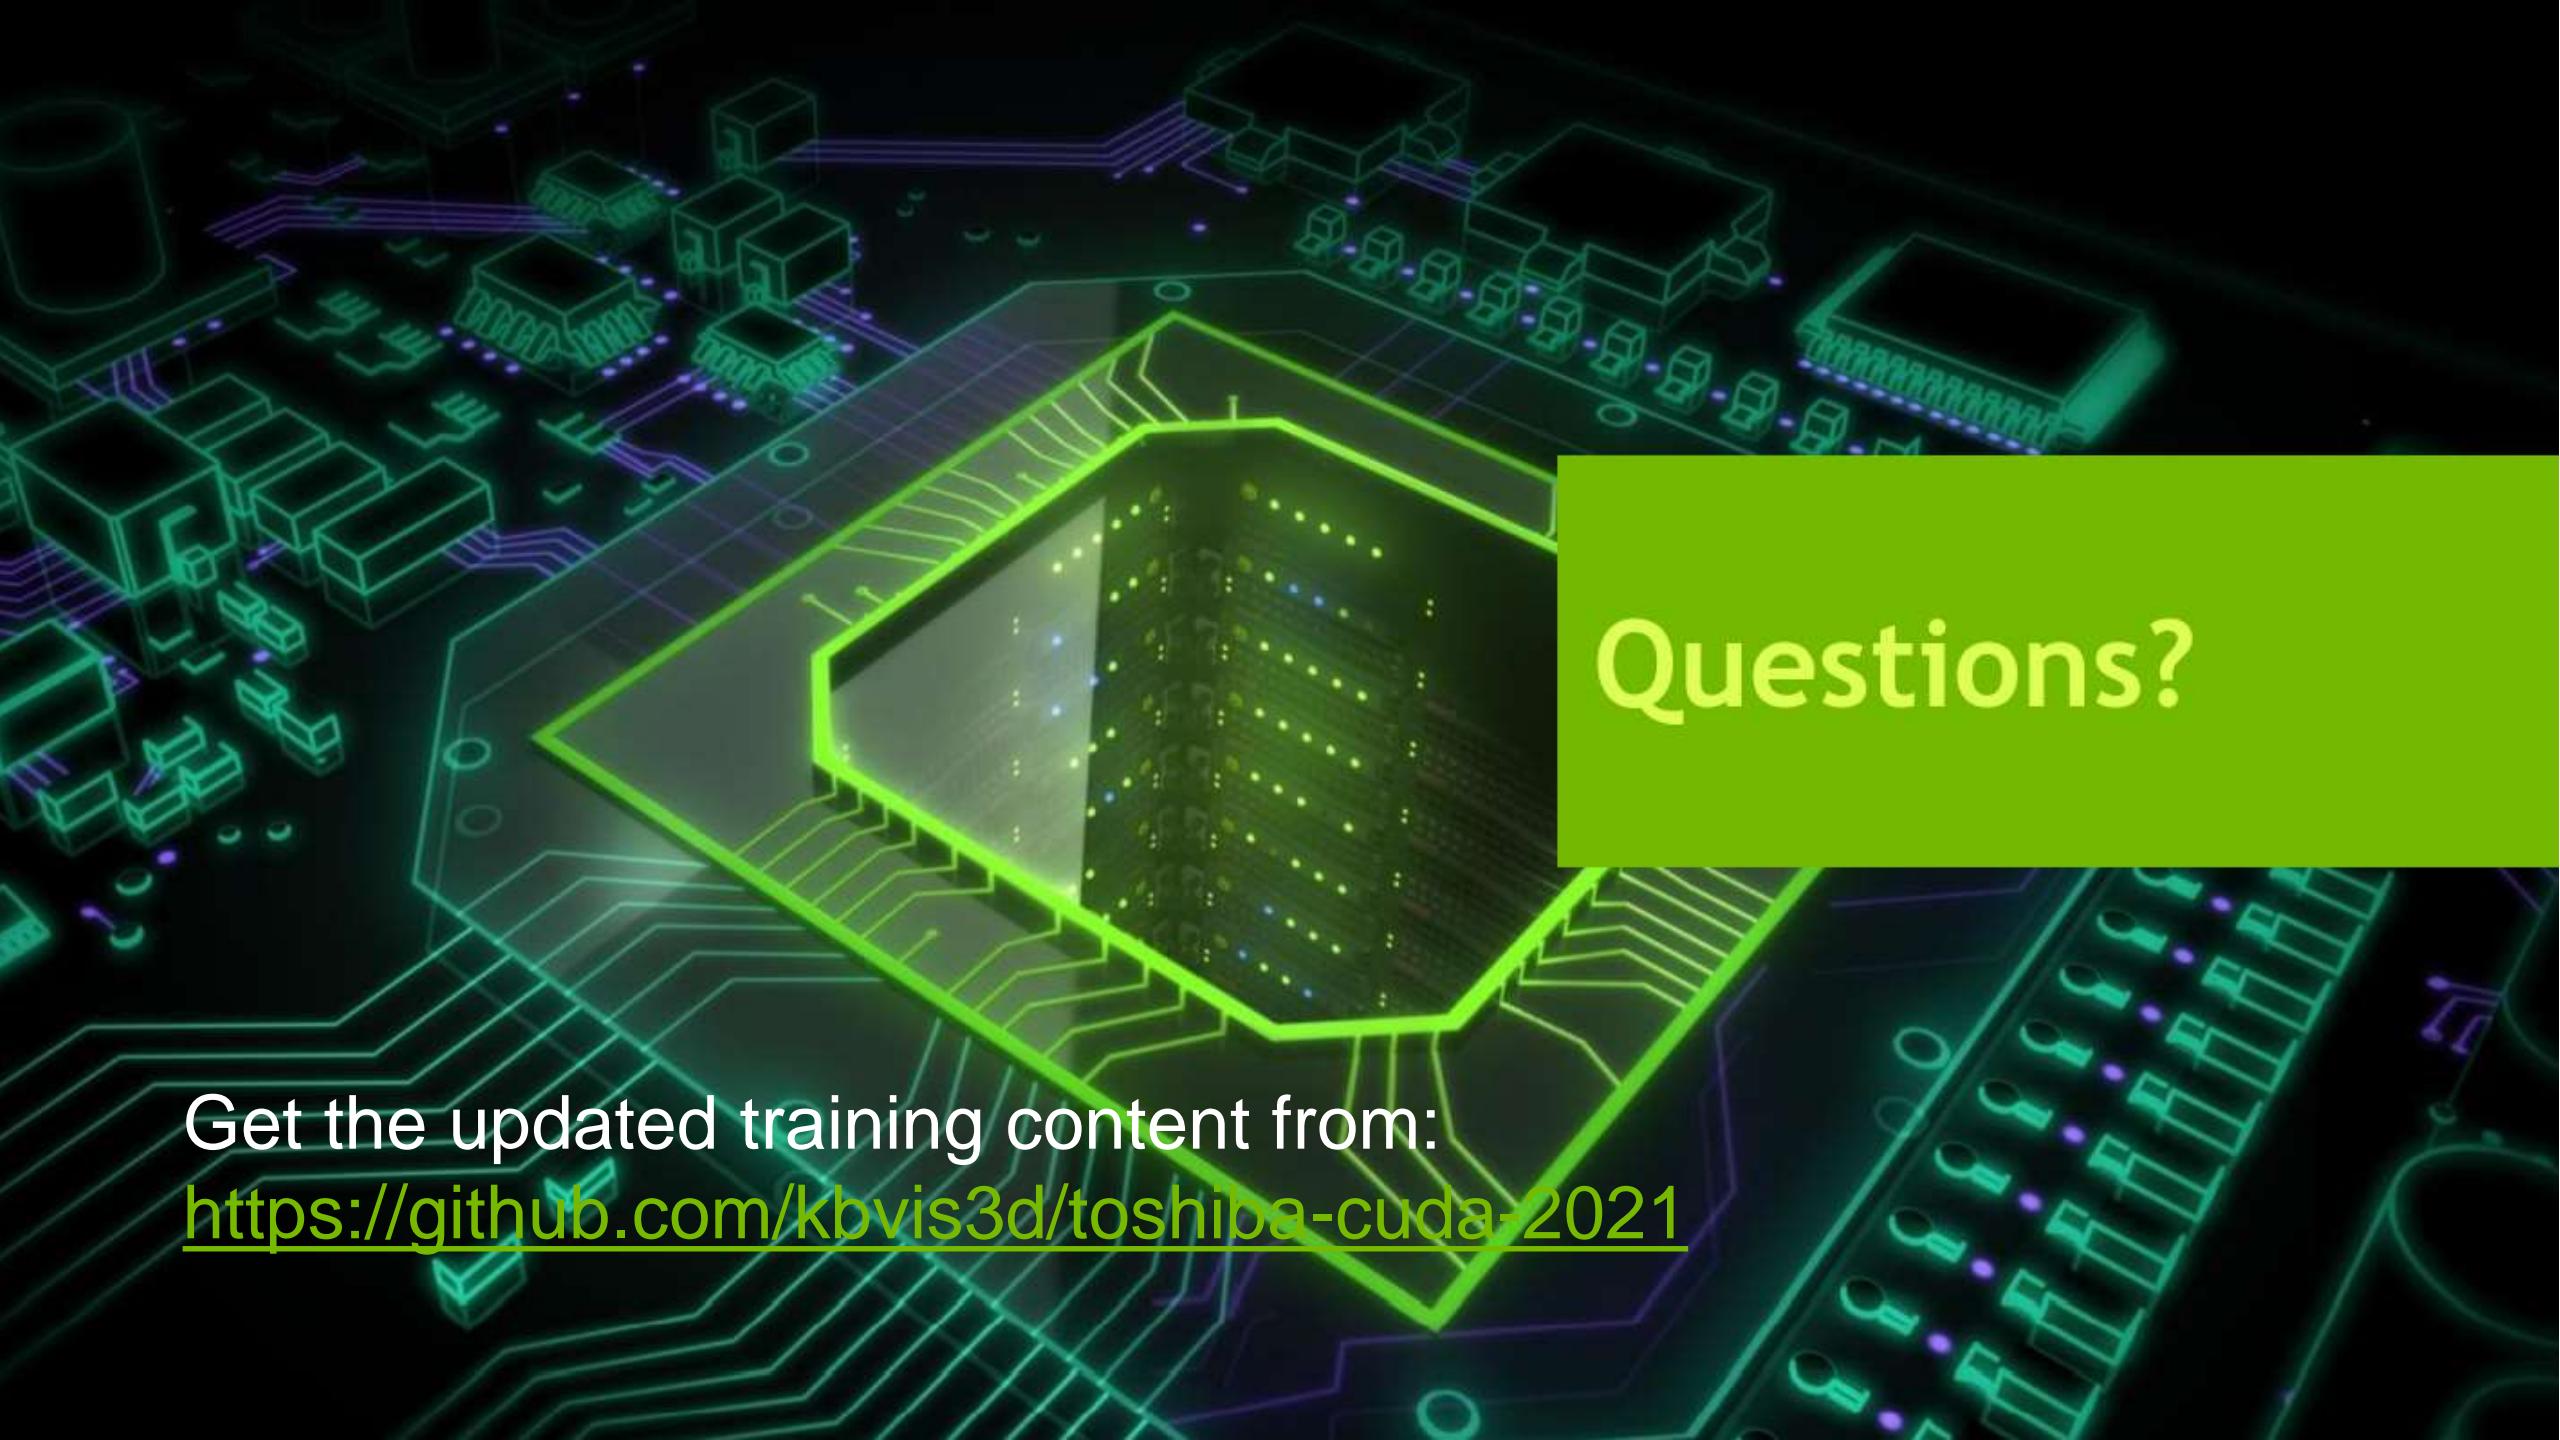

Questions?

Get the updated training content from:
<https://github.com/kbvis3d/toshiba-cuda-2021>




Advanced Topics: Reduce, Scan, Sort

Reduction



Tree-Based Parallel Reductions

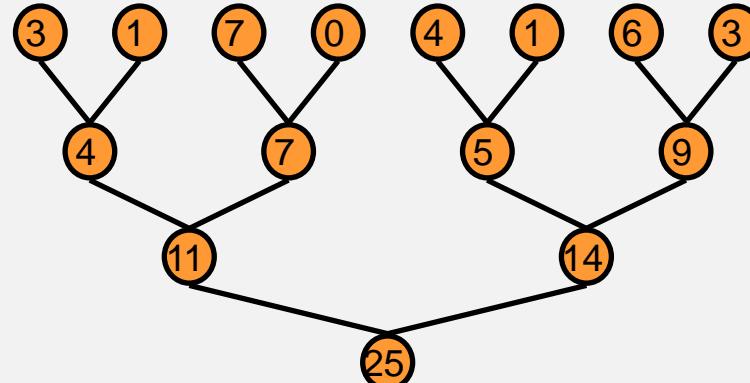


- Commonly done in traditional GPGPU
 - Ping-pong between render targets, reduce by $1/2$ at a time
 - Completely bandwidth bound using graphics API
 - Memory writes and reads are off-chip, no reuse of intermediate sums
- CUDA solves this by exposing on-chip shared memory
 - Reduce blocks of data in shared memory to save bandwidth




Parallel Reduction: Interleaved Addressing

- Arbitrarily bad bank conflicts
- Requires barriers if $N >$ warpsize
- Supports non-commutative operators

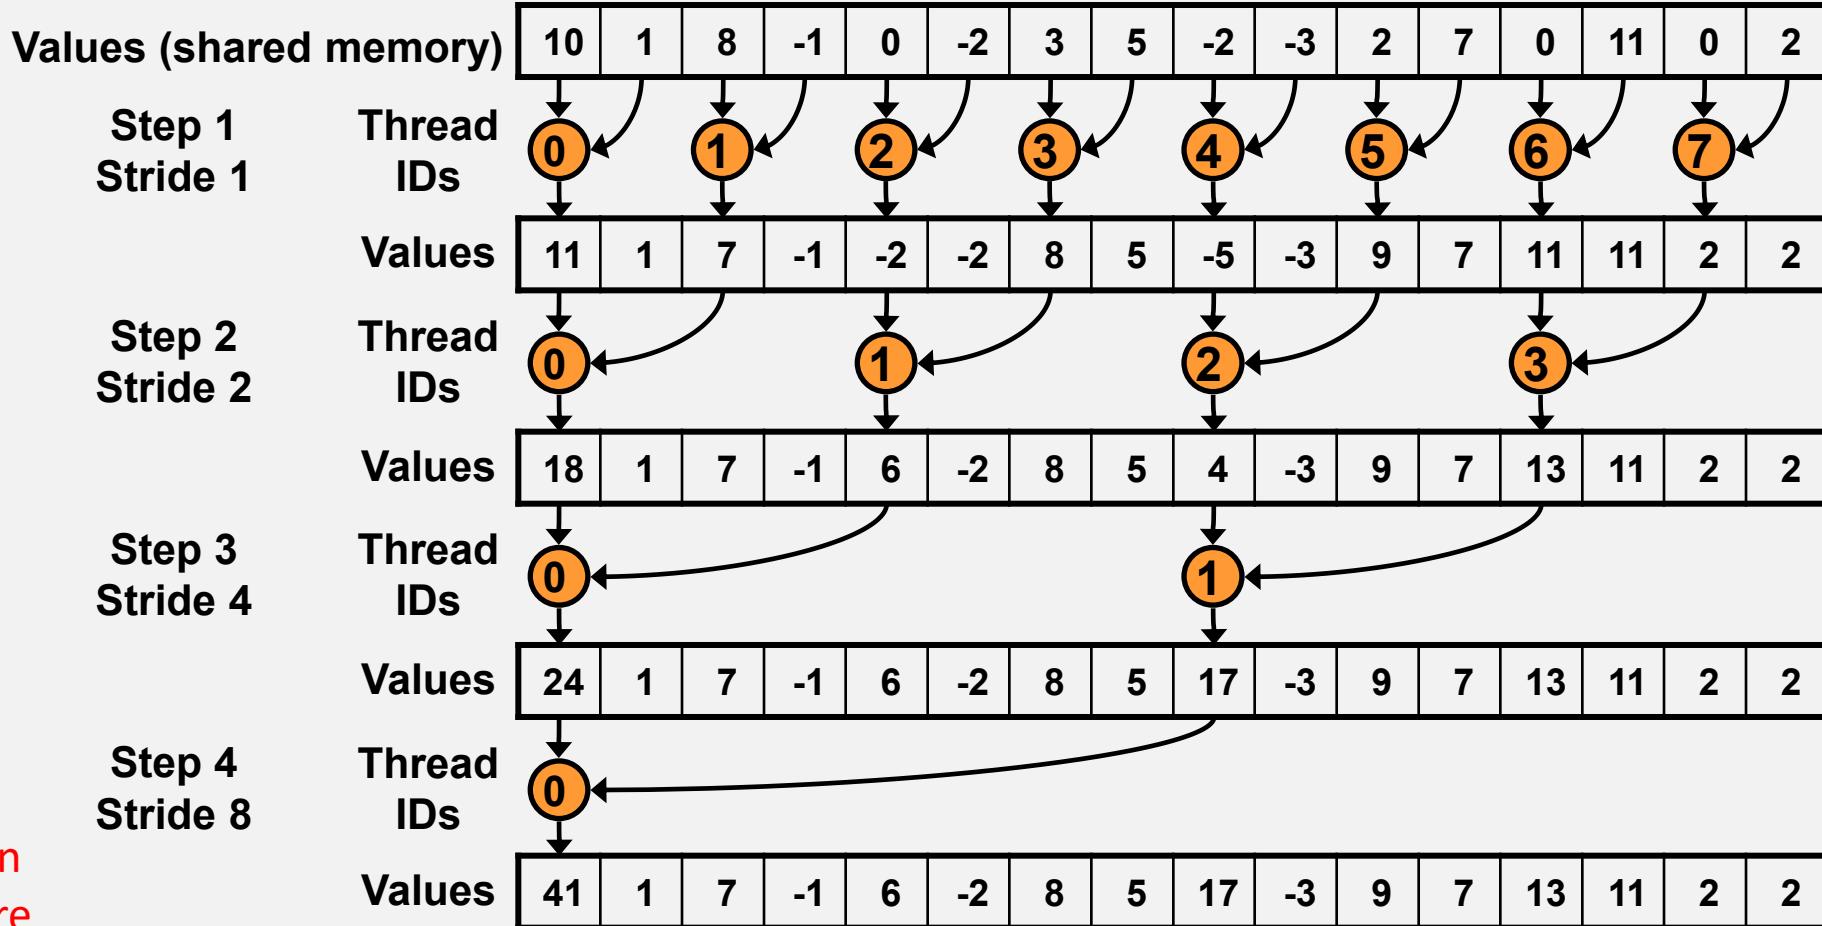

Interleaved addressing results in bank conflicts

CUDA Bank Conflicts

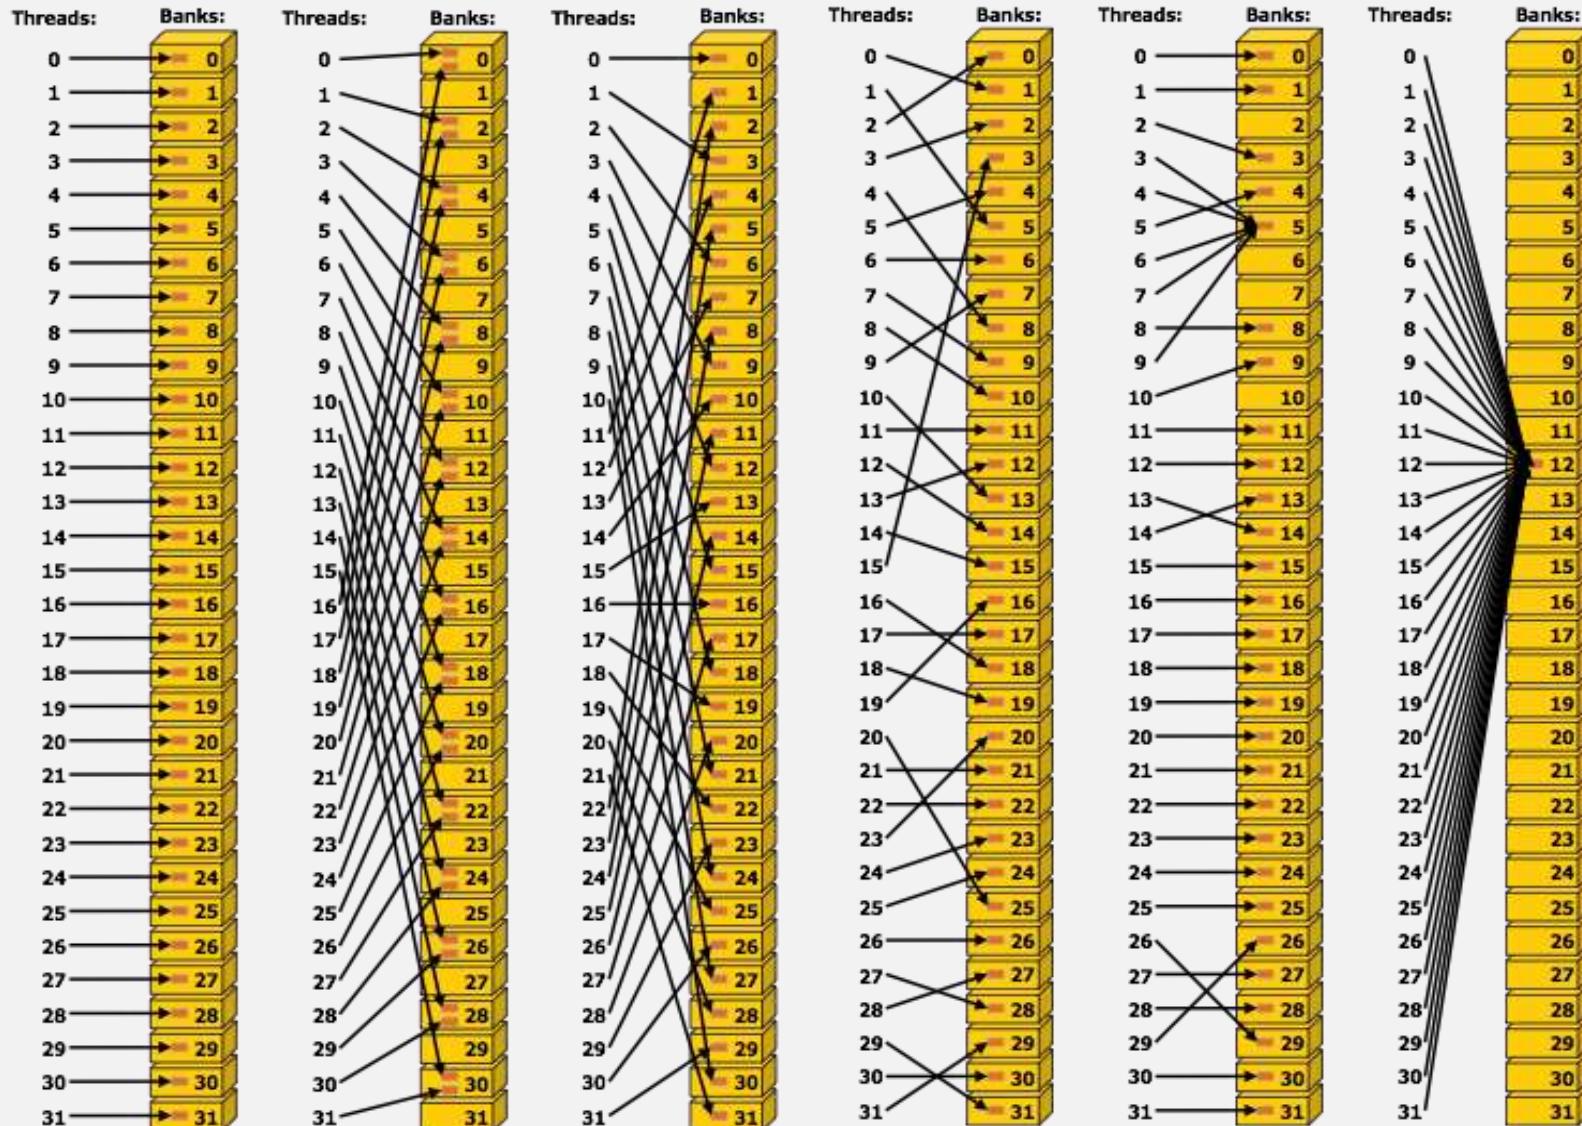

Left: Linear addressing with a stride of one 32-bit word (no bank conflict).

Middle: Linear addressing with a stride of two 32-bit words (2-way bank conflicts).

Right: Linear addressing with a stride of three 32-bit words (no bank conflict).


Left: Conflict-free access via random permutation.

Middle: Conflict-free access since threads 3, 4, 6, 7, and 9 access the same word within bank 5.

Right: Conflict-free broadcast access (all threads access the same word).




Parallel Reduction: Sequential Addressing

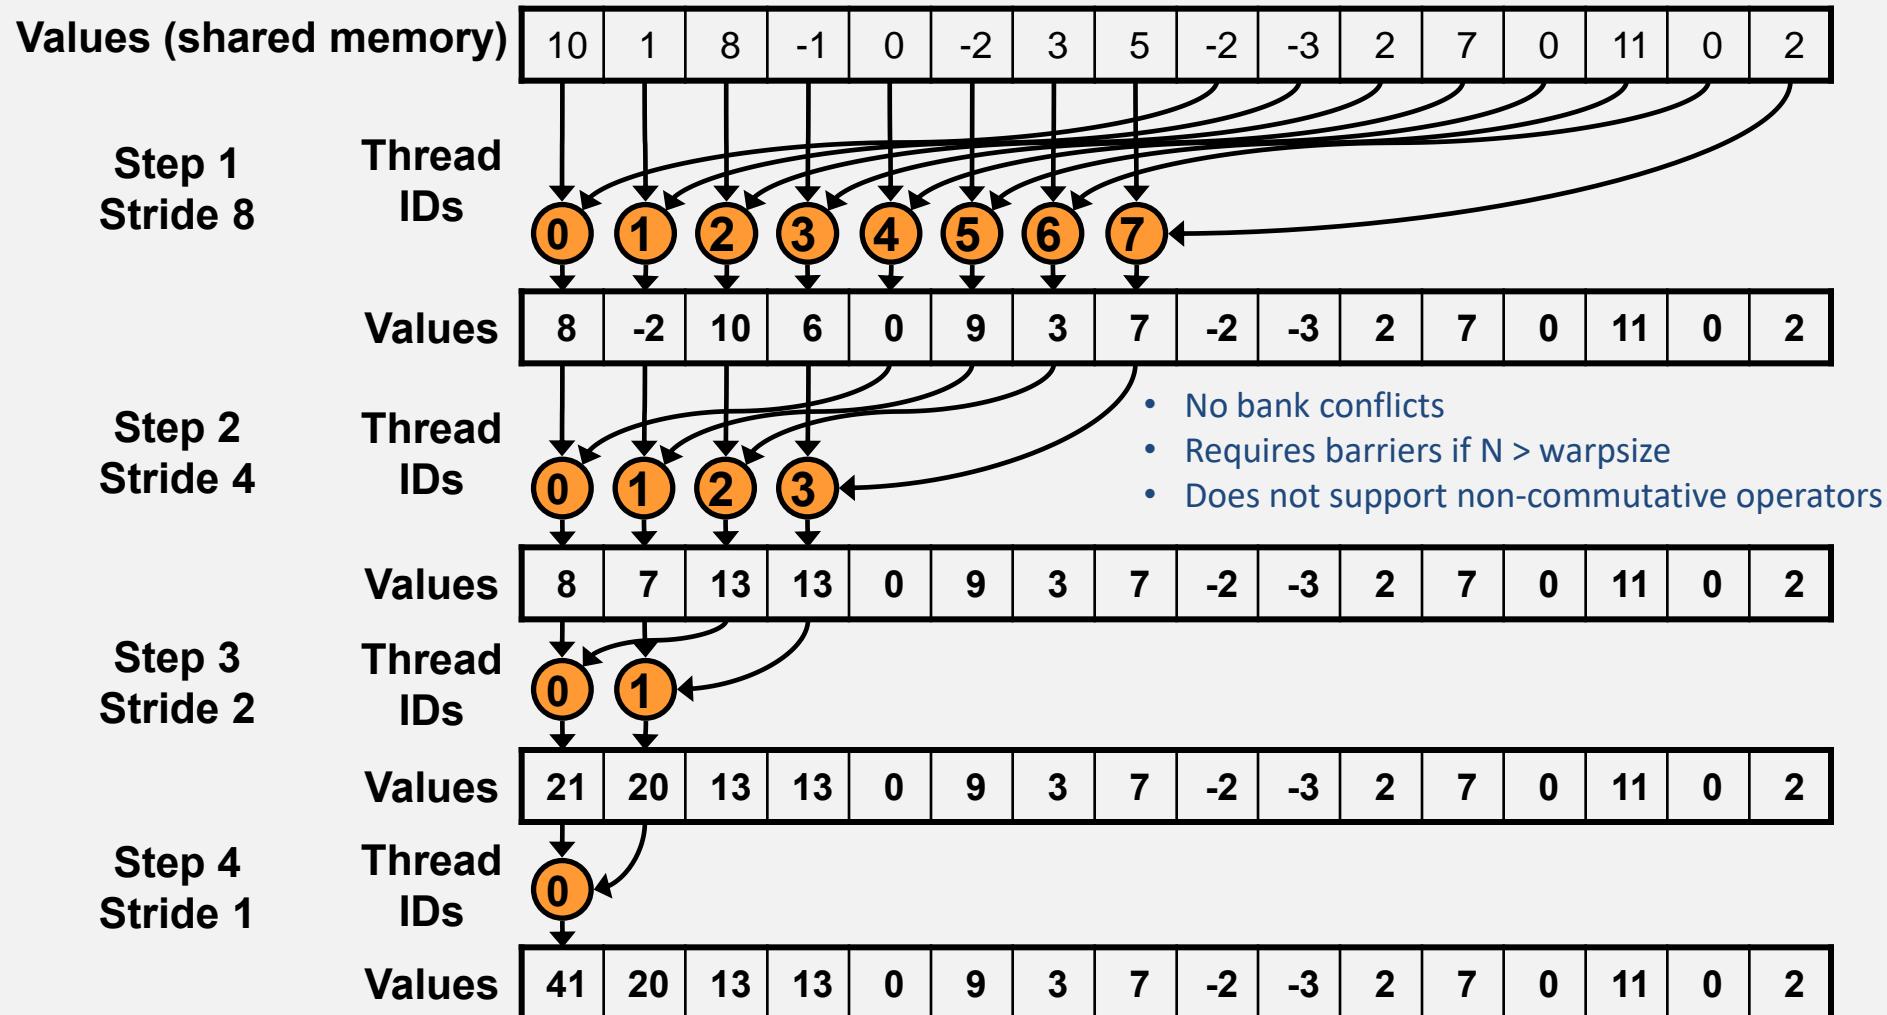

Reduction


- Only two-way bank conflicts
- Requires barriers if $N >$ warp size
- Requires $O(2N-2)$ storage
- Supports non-commutative operators

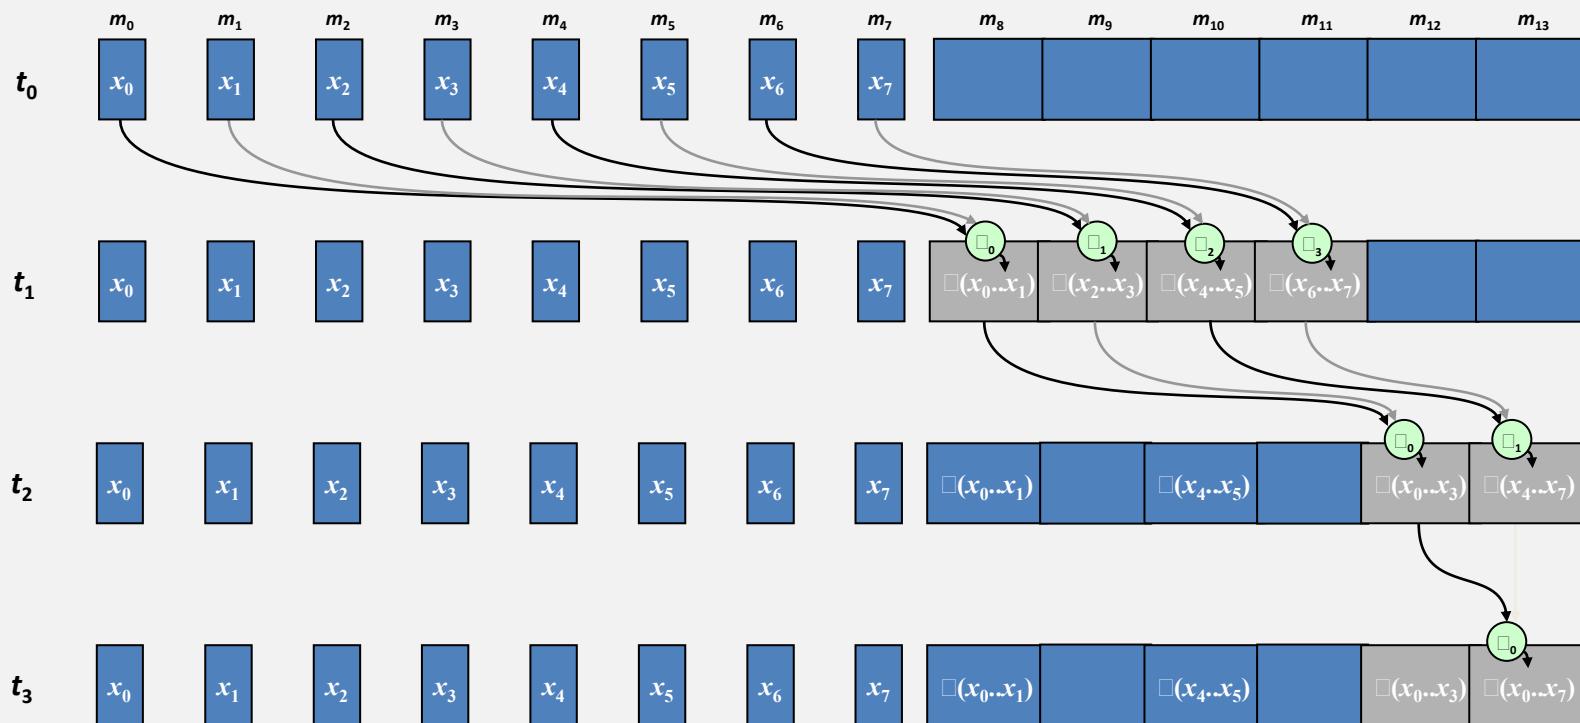


(Serial) Raking Reduction Phase


- No bank conflicts, only one barrier to after insertion into smem
- Supports non-commutative operators
- Requires subsequent warp scan to reduce accumulated partials

- Less memory bandwidth overall
- Exploits locality between items within a thread's registers

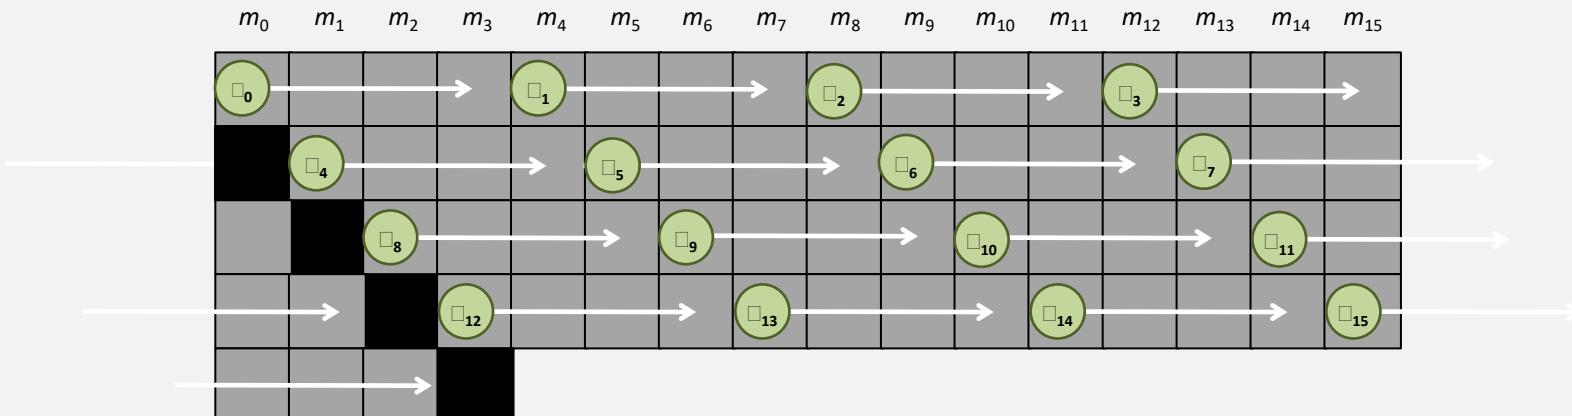


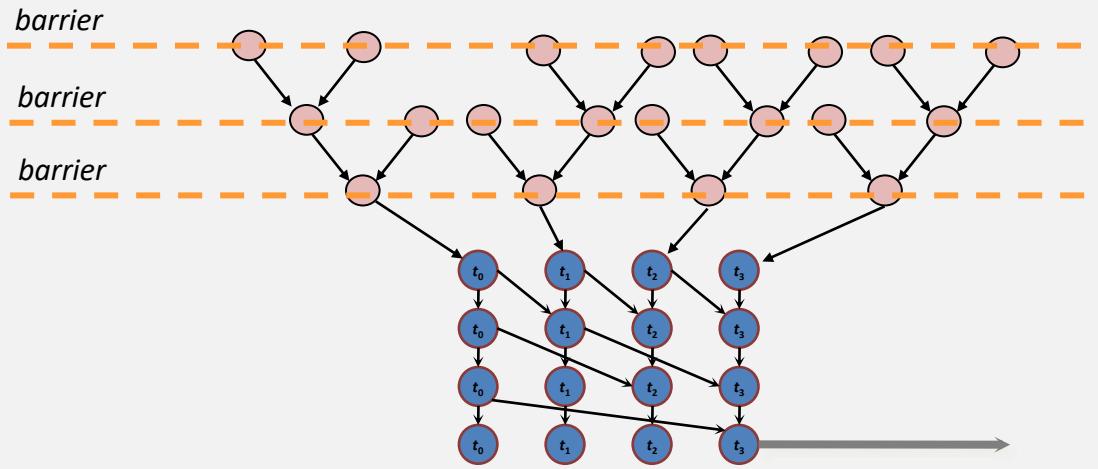

VS.

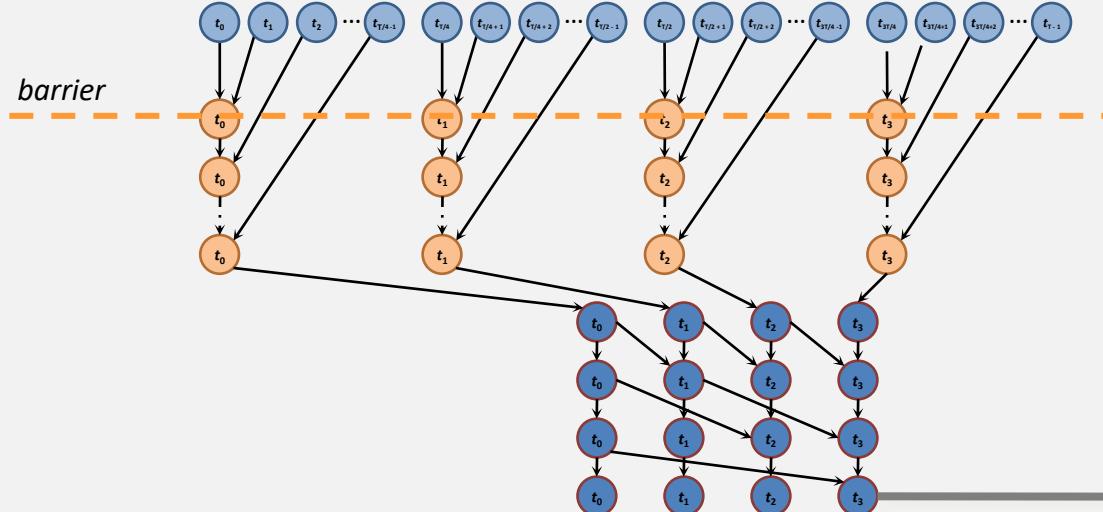

Reduction

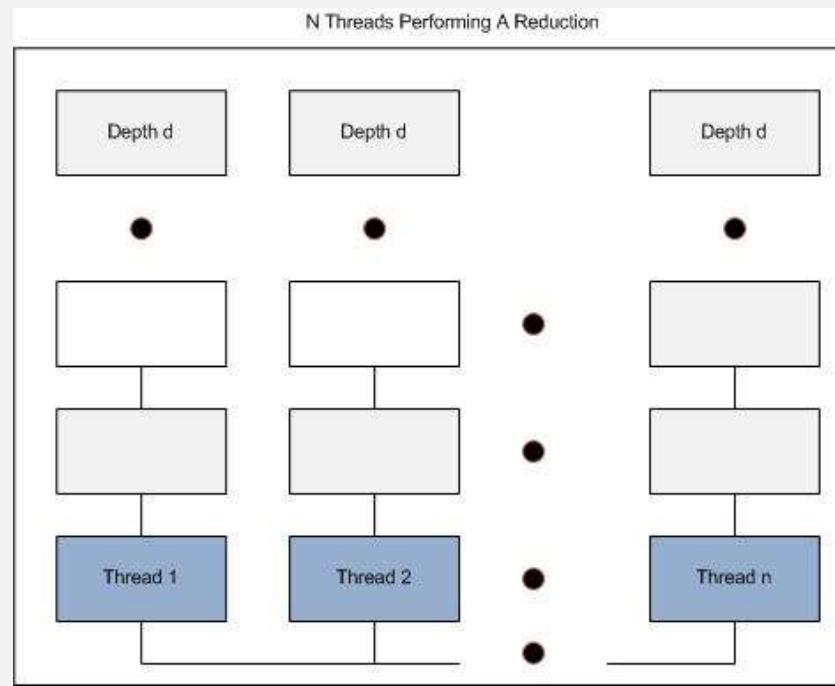

- Many-To-One
 - Parameter to Tune => **Thread Width** (total number of threads)

Reduction papers

- Mark Harris, Mapping Computational Concepts to GPUs, GPU Gems 2, Chapter 31, pp. 495–508, March 2005.
- Andrew Davidson and John D. Owens. Toward Techniques for Auto-Tuning GPU Algorithms. In Para 2010: State of the Art in Scientific and Parallel Computing, June 2010.
- NVIDIA SDK (reduction example)

samples / simpleCooperativeGroups

To use Cooperative Groups, include its header file.

```
#include <cooperative_groups.h>
```

Cooperative Groups types and interfaces are defined in the `cooperative_groups` C++ namespace, so you can either prefix all names and functions with `cooperative_groups::`, or load the namespace or its types with `using` directives.

```
using namespace cooperative_groups; // or...
using cooperative_groups::thread_group; // etc.
```

It's not uncommon to alias it to something shorter. Assume the following namespace alias exists in the examples in this post.

```
namespace cg = cooperative_groups;
```

Code containing any intra-block Cooperative Groups functionality can be compiled in the normal way using `nvcc` (note that many of the examples in this post use `C++11` features so you need to add the `--std=c++11` option to the compilation command line).

<https://developer.nvidia.com/blog/cooperative-groups/>

samples / simpleCooperativeGroups

Thread Groups

The fundamental type in Cooperative Groups is `thread_group`, which is a handle to a group of threads. The handle is only accessible to members of the group it represents. Thread groups expose a simple interface. You can get the size (total number of threads) of a group with the `size()` method:


```
unsigned size();
```

To find the index of the calling thread (between `0` and `size()-1`) within the group, use the `thread_rank()` method:




```
unsigned thread_rank();
```

Finally, you can check the validity of a group using the `is_valid()` method.

```
bool is_valid();
```


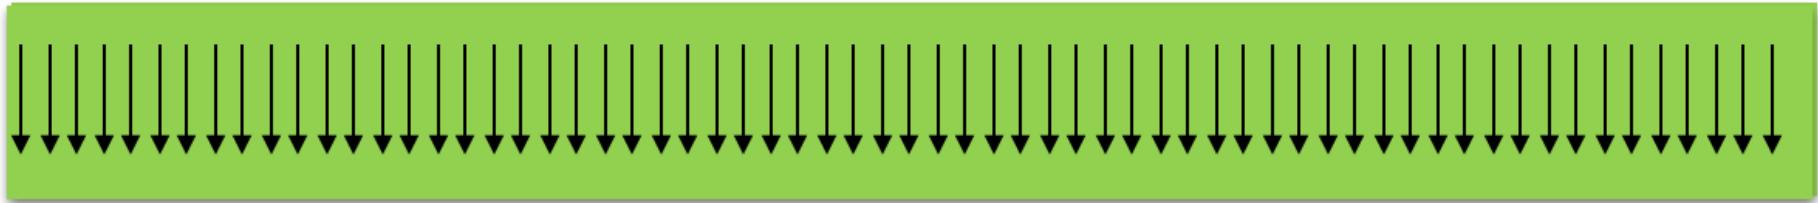


tiled_partition

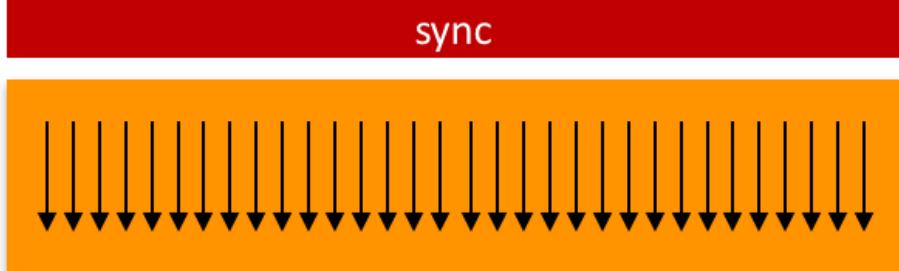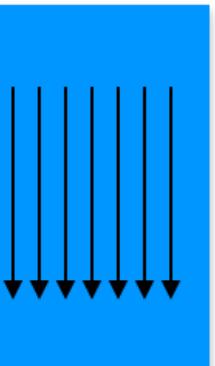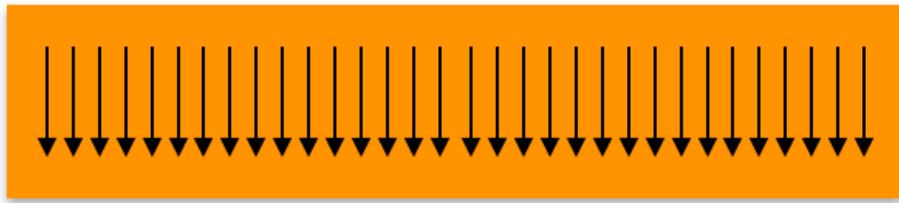

tiled_partition

tiled_partition

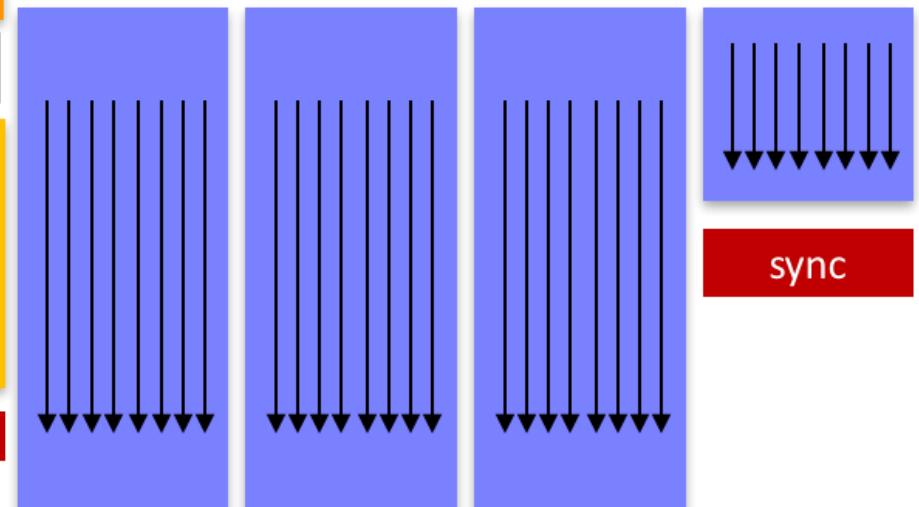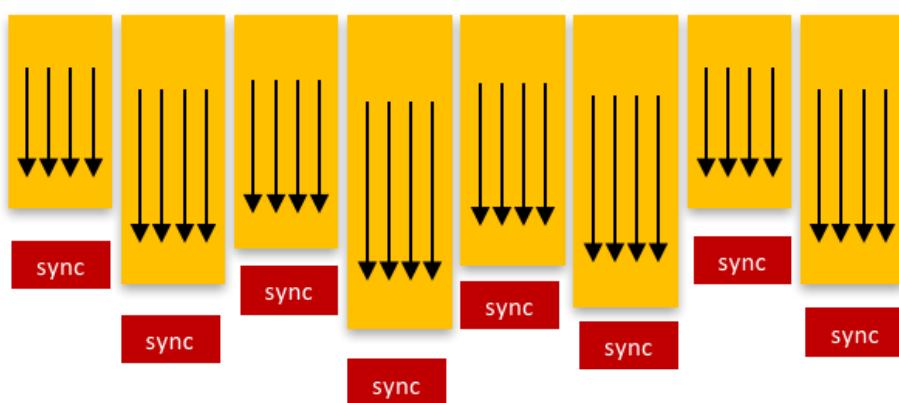

sync

samples / simpleCooperativeGroups

```
using namespace cooperative_groups;
__device__ int reduce_sum(thread_group g, int *temp, int val)
{
    int lane = g.thread_rank();

    // Each iteration halves the number of active threads
    // Each thread adds its partial sum[i] to sum[lane+i]
    for (int i = g.size() / 2; i > 0; i /= 2)
    {
        temp[lane] = val;
        g.sync(); // wait for all threads to store
        if(lane<i) val += temp[lane + i];
        g.sync(); // wait for all threads to load
    }
    return val; // note: only thread 0 will return full sum
}
```

```
__device__ int thread_sum(int *input, int n)
{
    int sum = 0;

    for(int i = blockIdx.x * blockDim.x + threadIdx.x;
        i < n / 4;
        i += blockDim.x * gridDim.x)
    {
        int4 in = ((int4*)input)[i];
        sum += in.x + in.y + in.z + in.w;
    }
    return sum;
}

__global__ void sum_kernel_block(int *sum, int *input, int n)
{
    int my_sum = thread_sum(input, n);

    extern __shared__ int temp[];
    auto g = this_thread_block();
    int block_sum = reduce_sum(g, temp, my_sum);

    if (g.thread_rank() == 0) atomicAdd(sum, block_sum);
}
```

samples / simpleCooperativeGroups

```
int n = 1<<24;
int blockSize = 256;
int nBlocks = (n + blockSize - 1) / blockSize;
int sharedBytes = blockSize * sizeof(int);

int *sum, *data;
cudaMallocManaged(&sum, sizeof(int));
cudaMallocManaged(&data, n * sizeof(int));
std::fill_n(data, n, 1); // initialize data
cudaMemset(sum, 0, sizeof(int));

sum_kernel_block<<<nBlocks, blockSize, sharedBytes>>>(sum, data, n);
```

samples / simpleCooperativeGroups

```
_global_ void sum_kernel_32(int *sum, int *input, int n)
{
    int my_sum = thread_sum(input, n);

    extern __shared__ int temp[];

    auto g = this_thread_block();
    auto tileIdx = g.thread_rank() / 32;
    int* t = &temp[32 * tileIdx];

    auto tile32 = tiled_partition(g, 32);
    int tile_sum = reduce_sum(tile32, t, my_sum);

    if (tile32.thread_rank() == 0) atomicAdd(sum, tile_sum);
}
```

Warp-level Collectives: shfl_down()

```
template <int tile_sz>
__device__ int reduce_sum_tile_shfl(thread_block_tile<tile_sz> g, int val)
{
    // Each iteration halves the number of active threads
    // Each thread adds its partial sum[i] to sum[lane+i]
    for (int i = g.size() / 2; i > 0; i /= 2) {
        val += g.shfl_down(val, i);
    }

    return val; // note: only thread 0 will return full sum
}

template<int tile_sz>
__global__ void sum_kernel_tile_shfl(int *sum, int *input, int n)
{
    int my_sum = thread_sum(input, n);

    auto tile = tiled_partition<tile_sz>(this_thread_block());
    int tile_sum = reduce_sum_tile_shfl<tile_sz>(tile, my_sum);

    if (tile.thread_rank() == 0) atomicAdd(sum, tile_sum);
}
```

NOTE: Use
__shfl_down_sync()
instead for Compute
Capability 7.x and above.

Warp-level Collectives

```
T __shfl_sync(unsigned mask, T var, int srcLane, int width=warpSize);
T __shfl_up_sync(unsigned mask, T var, unsigned int delta, int width=warpSize);
T __shfl_down_sync(unsigned mask, T var, unsigned int delta, int width=warpSize);
T __shfl_xor_sync(unsigned mask, T var, int laneMask, int width=warpSize);
```

__shfl_sync()

Direct copy from indexed lane

__shfl_up_sync()

Copy from a lane with lower ID relative to caller

__shfl_down_sync()

Copy from a lane with higher ID relative to caller

__shfl_xor_sync()

Copy from a lane based on bitwise XOR of own lane ID

The exchange occurs simultaneously for all active threads within the warp (and named in *mask*)

See: <https://docs.nvidia.com/cuda/cuda-c-programming-guide/#warp-shuffle-functions>

Warp-level Collectives

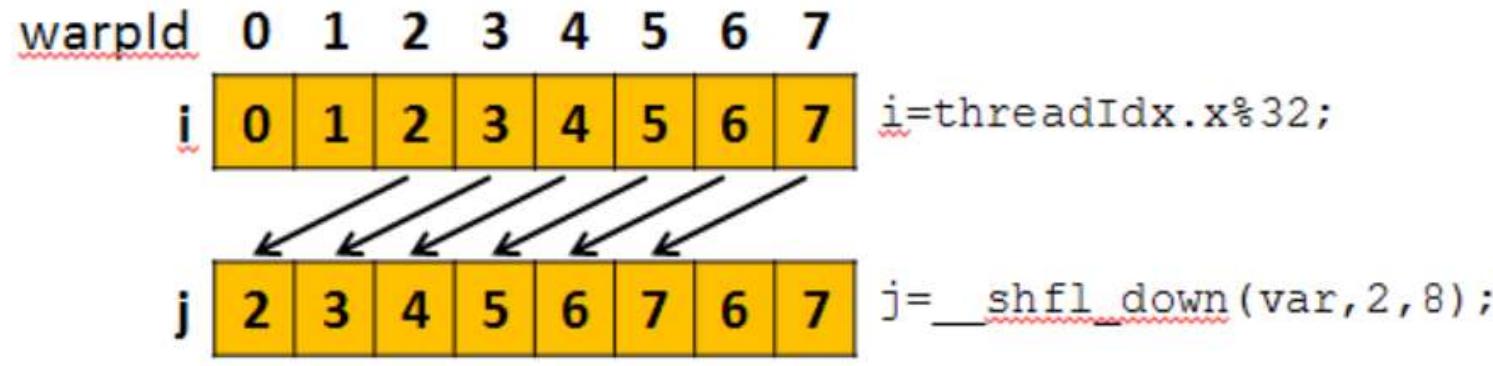


Figure 1: The shuffle down instruction.

There are three main advantages to using shuffle instead of shared memory:

1. Shuffle replaces a multi-instruction shared memory sequence with a single instruction, increasing effective bandwidth and decreasing latency.
2. Shuffle does not use any shared memory.
3. Synchronization is within a warp and is implicit in the instruction, so there is no need to synchronize the whole thread block with `__syncthreads()`.


Scan (within a block)

Parallel Prefix Sum (Scan)


- Given an array $A = [a_0, a_1, \dots, a_{n-1}]$ and a binary associative operator \oplus with identity I ,
- $\text{scan}(A) = [I, a_0, (a_0 \oplus a_1), \dots, (a_0 \oplus a_1 \oplus \dots \oplus a_{n-2})]$
- Example: if \oplus is addition, then scan on the set
 - $[3 1 7 0 4 1 6 3]$
- returns the set
 - $[0 3 4 11 11 15 16 22]$

Kogge-Stone Scan

Circuit family

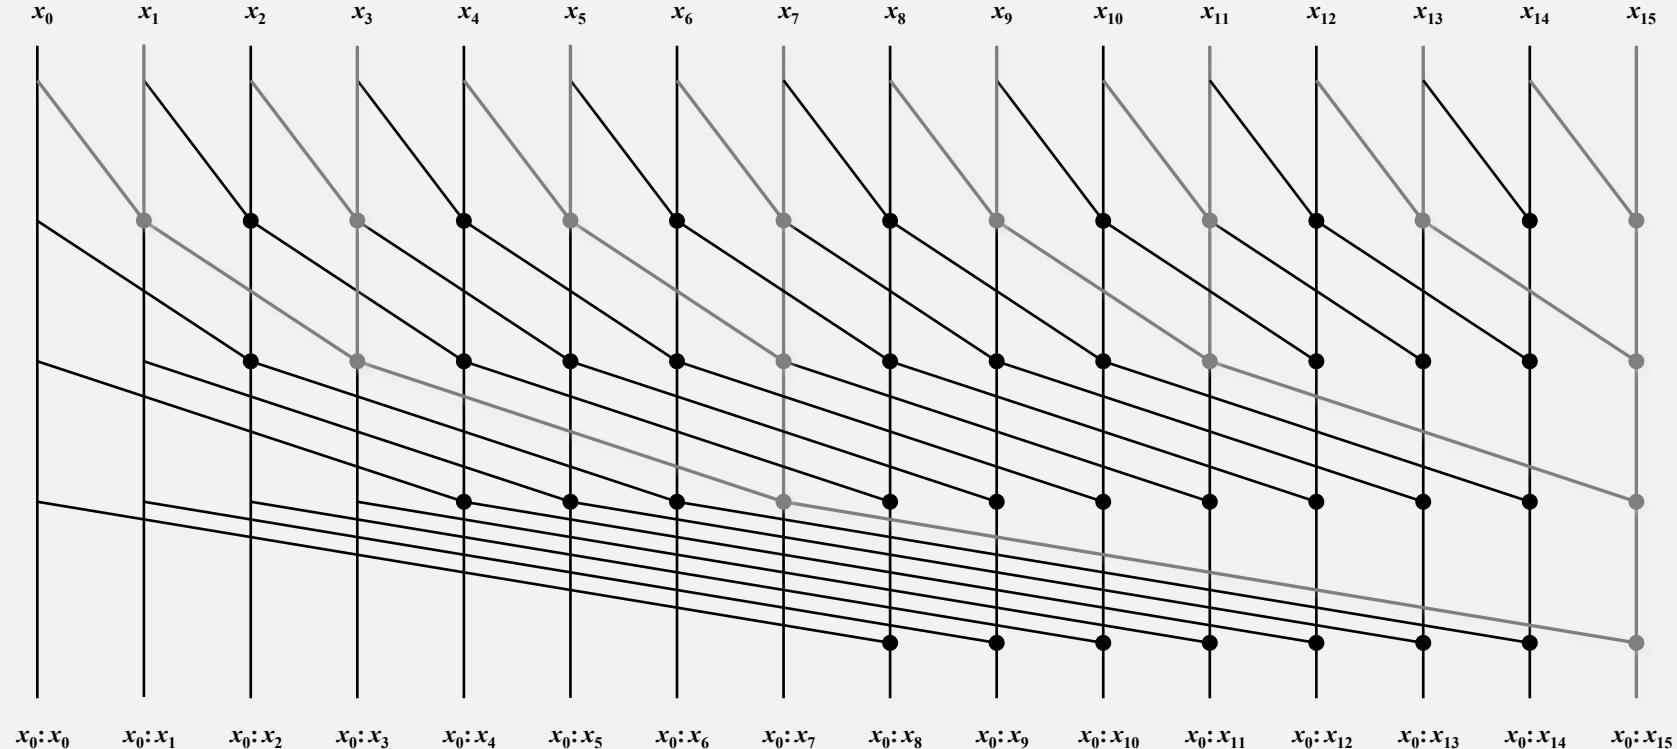


$O(n \log n)$ Scan

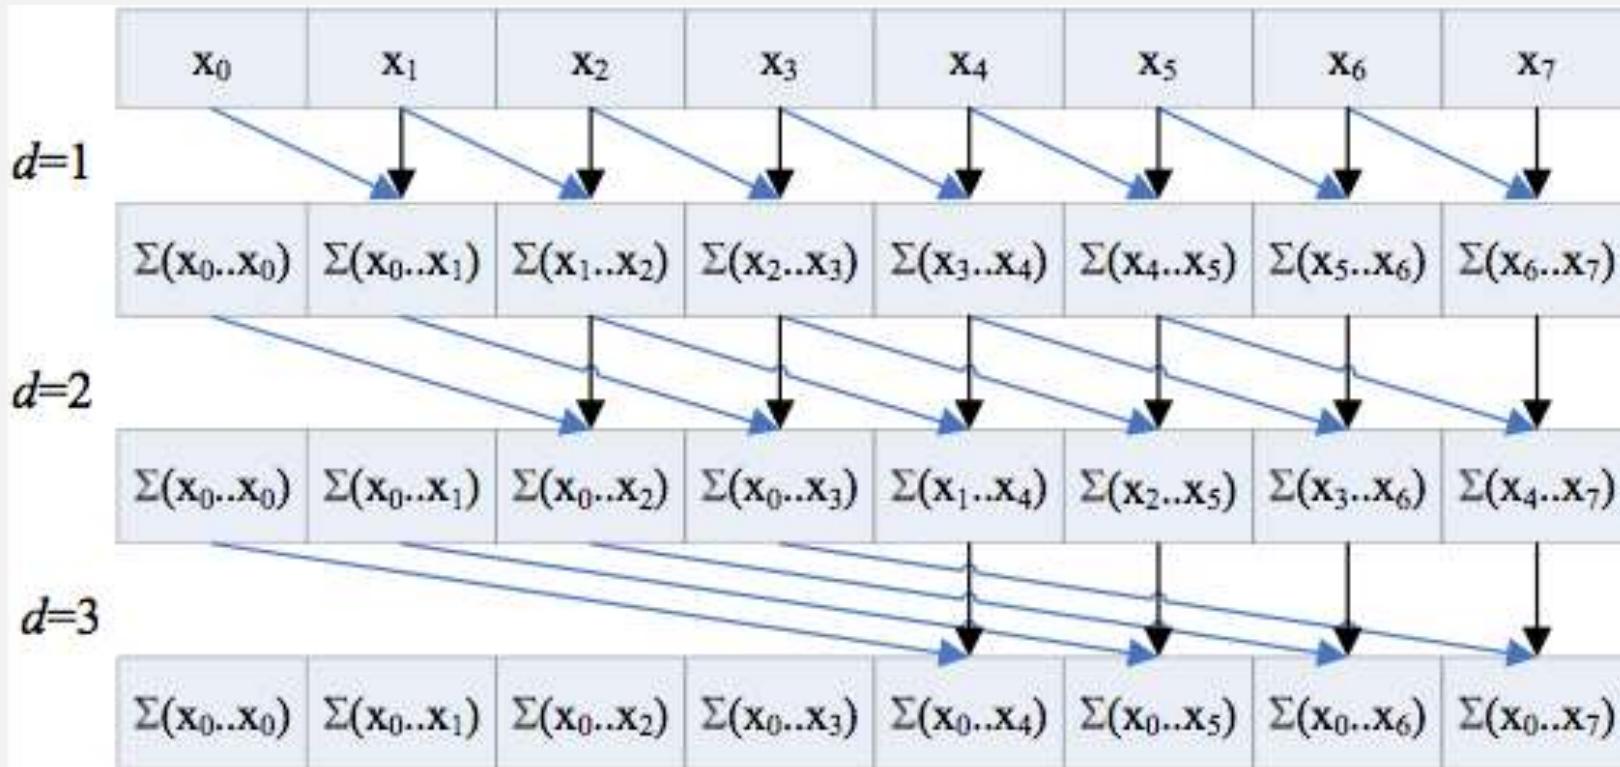

- Step efficient ($\log n$ steps)
- Not work efficient ($n \log n$ work)
- Requires barriers at each step (WAR dependencies)


Alt. Hillis-Steele Scan Implementation

No WAR conflicts, $O(2N)$ storage

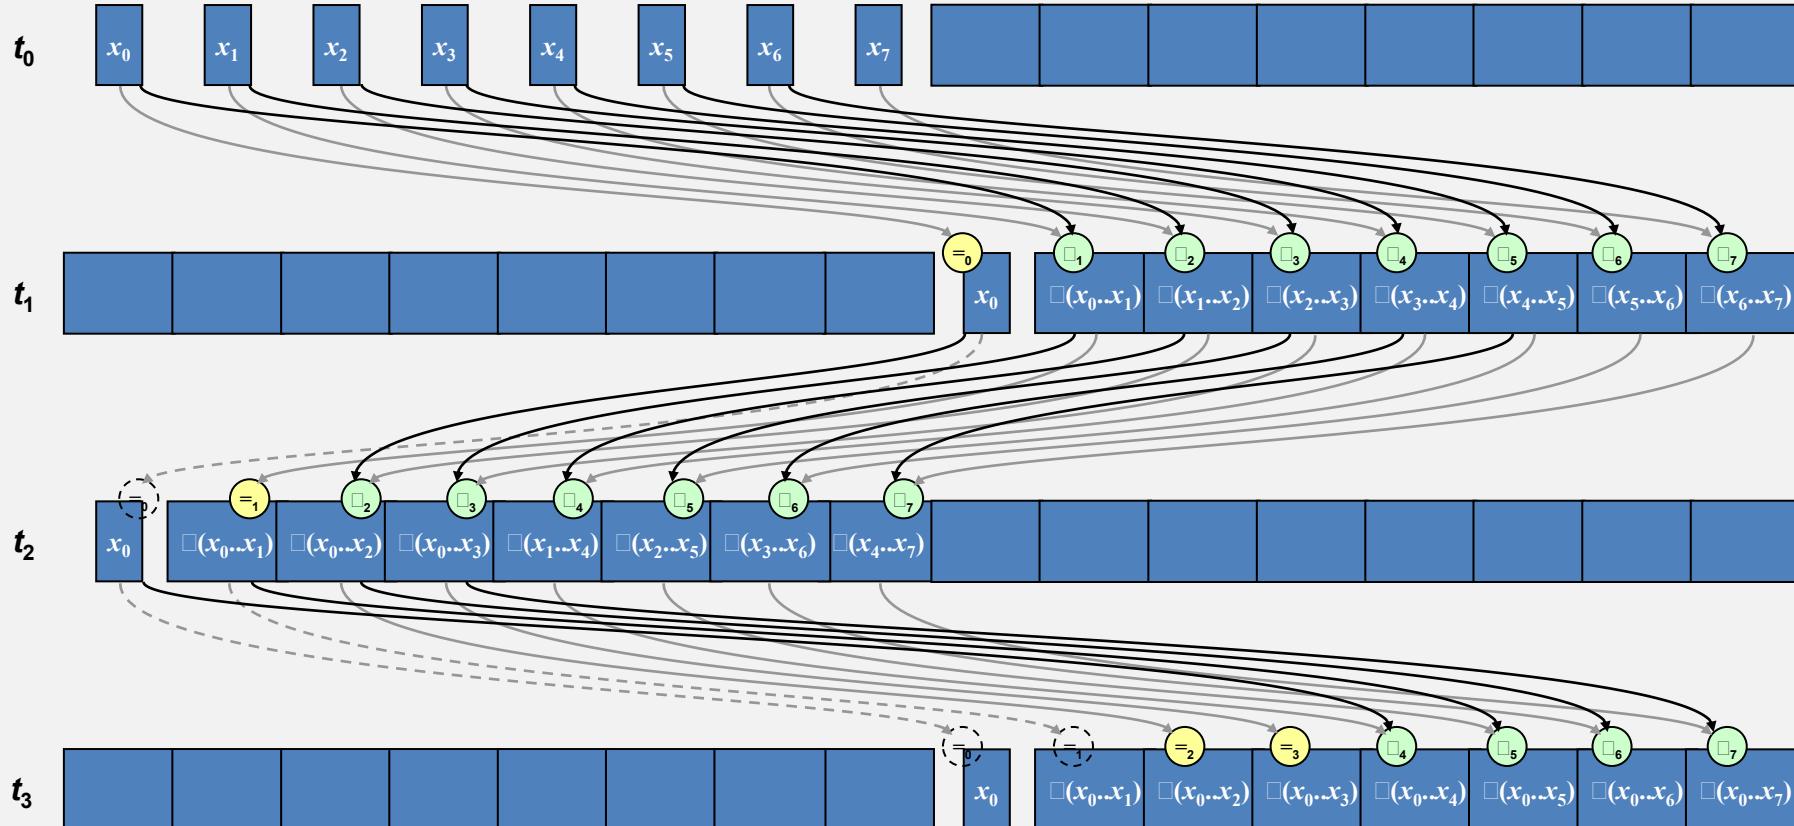

Alt. Hillis-Steele Scan


Warp-synchronous: SIMD without divergence or barriers

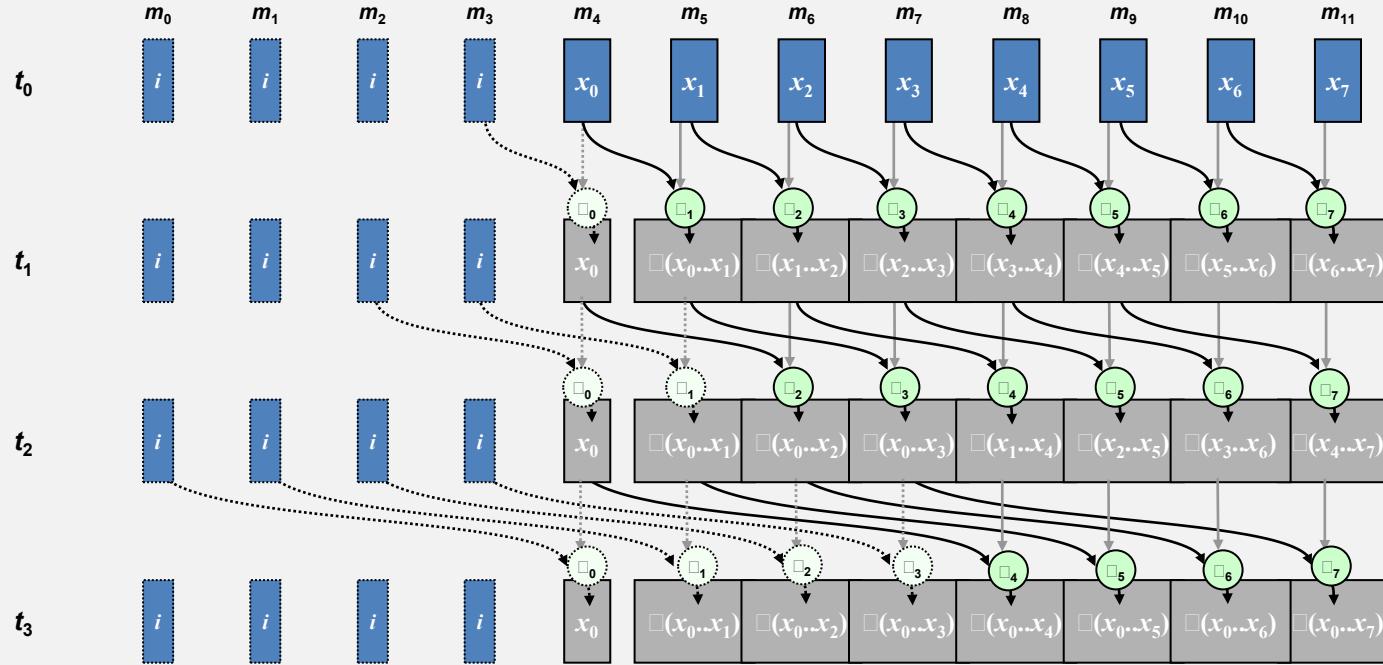



- What if we truly had a SIMD machine?
- Recall CUDA warps (32 threads) are strictly SIMD
- “Warp-synchronous”

Brent Kung Scan

Circuit family

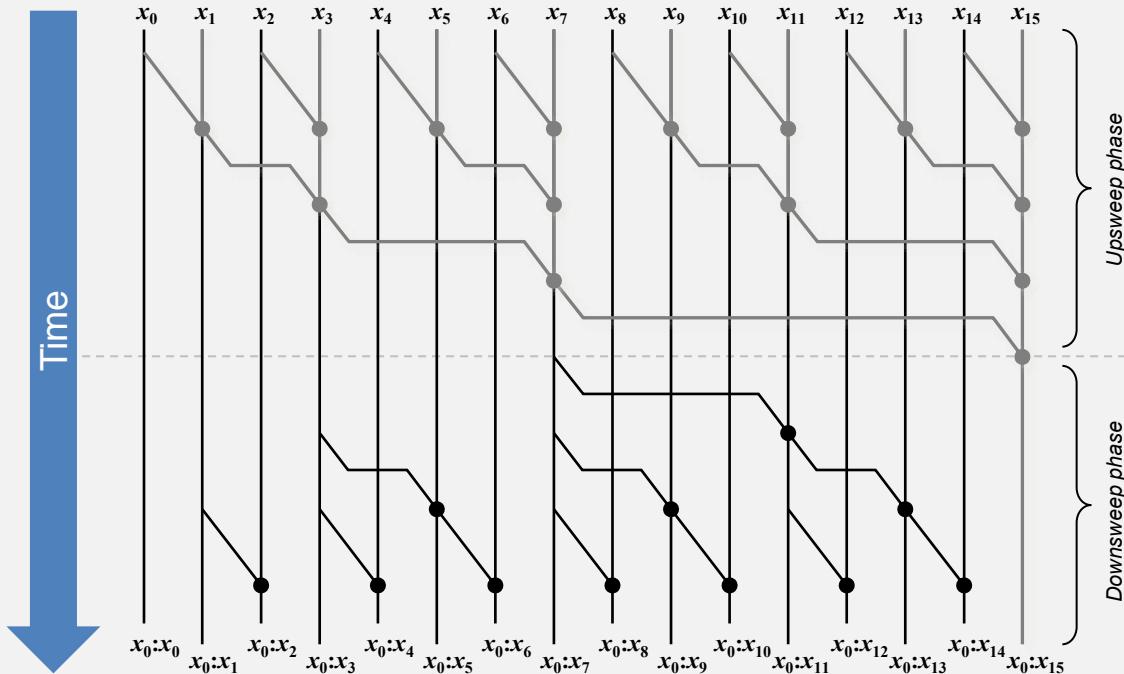


$O(n)$ Scan [Blelloch]

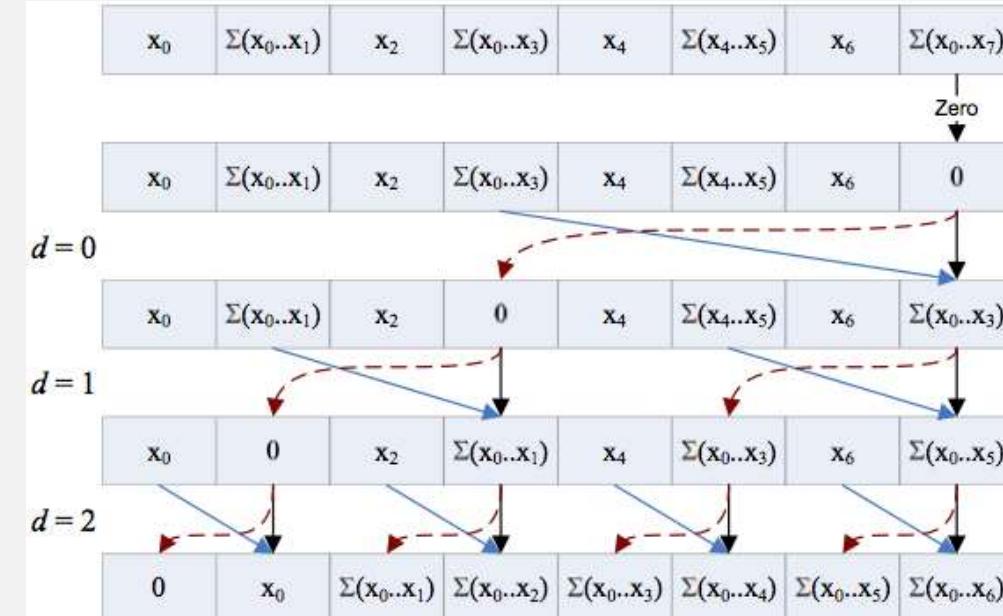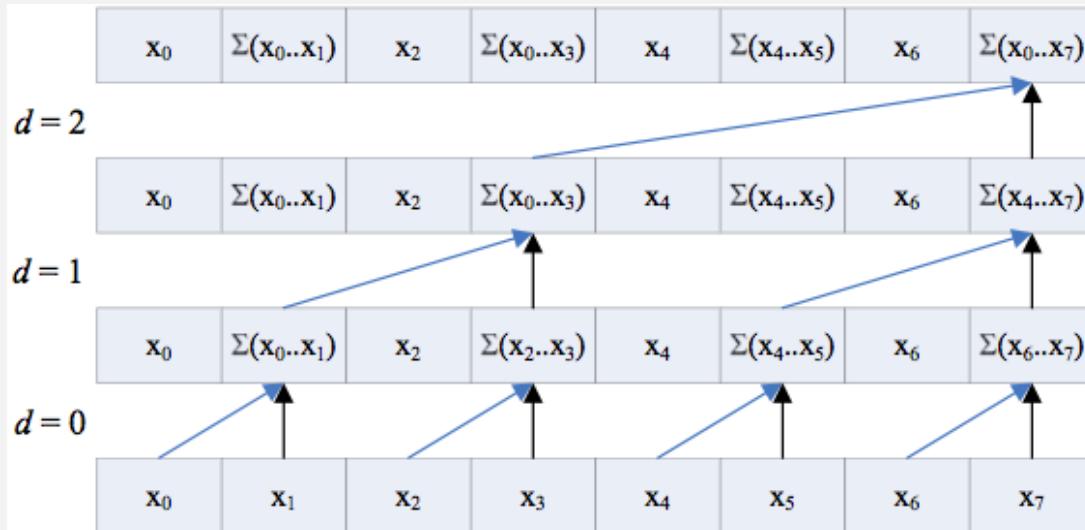

- Not step efficient ($2 \log n$ steps)
- Work efficient ($O(n)$ work)
- Bank conflicts, and lots of 'em

Hybrid methods

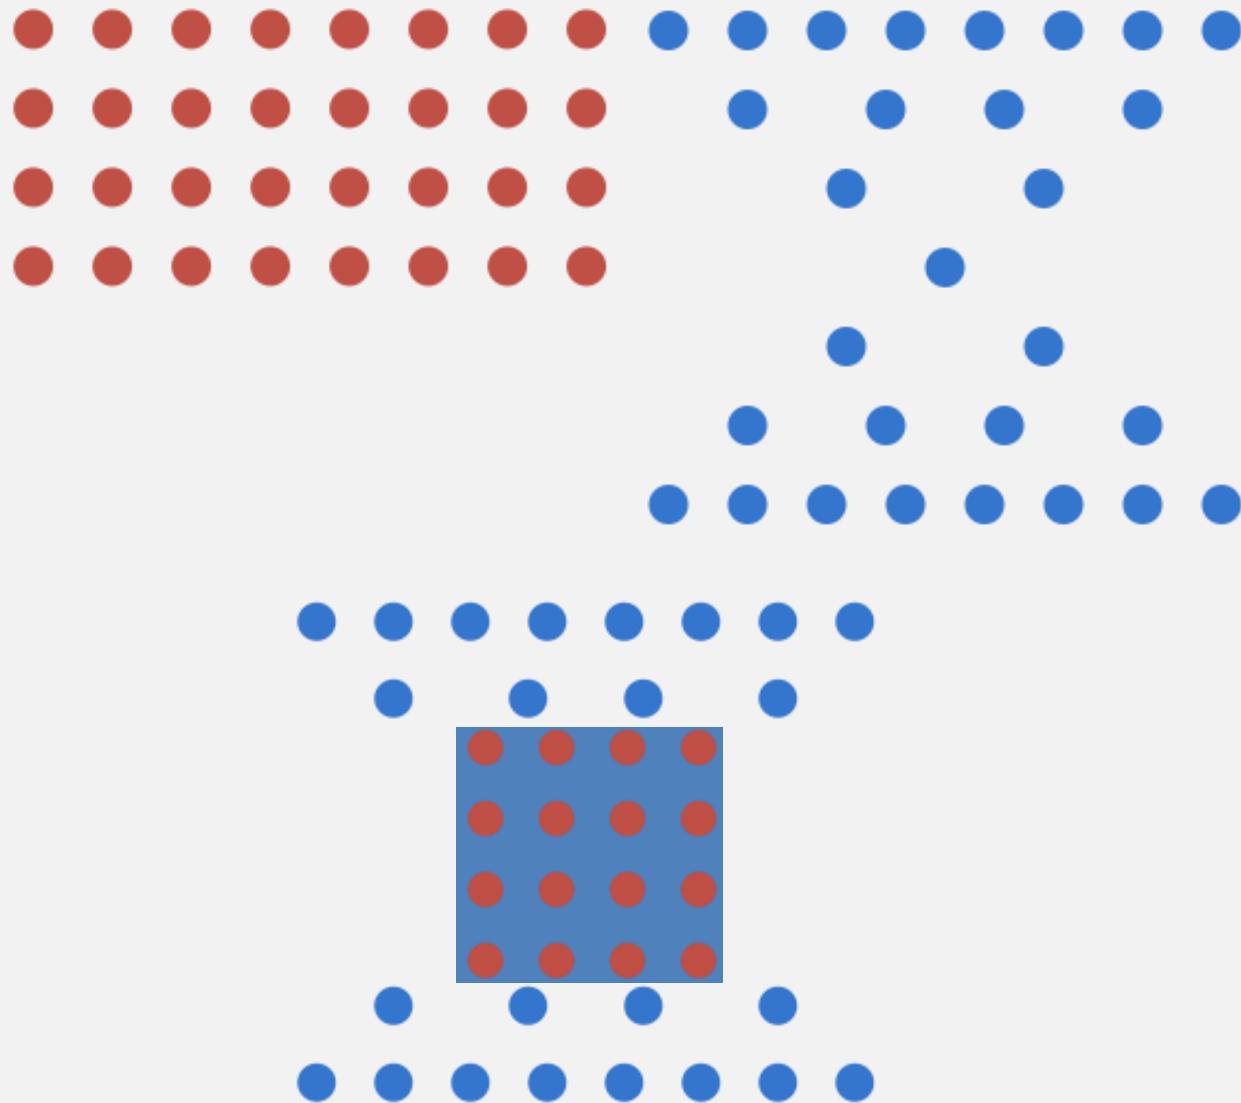


Scan papers

- Daniel Horn, Stream Reduction Operations for GPGPU Applications, GPU Gems 2, Chapter 36, pp. 573–589, March 2005.
- Shubhabrata Sengupta, Aaron E. Lefohn, and John D. Owens. A Work-Efficient Step-Efficient Prefix Sum Algorithm. In Proceedings of the 2006 Workshop on Edge Computing Using New Commodity Architectures, pages D–26–27, May 2006
- Mark Harris, Shubhabrata Sengupta, and John D. Owens. Parallel Prefix Sum (Scan) with CUDA. In Hubert Nguyen, editor, GPU Gems 3, chapter 39, pages 851–876. Addison Wesley, August 2007.
- Shubhabrata Sengupta, Mark Harris, Yao Zhang, and John D. Owens. Scan Primitives for GPU Computing. In Graphics Hardware 2007, pages 97–106, August 2007.
- Y. Dotsenko, N. K. Govindaraju, P. Sloan, C. Boyd, and J. Manferdelli, “Fast scan algorithms on graphics processors,” in ICS ’08: Proceedings of the 22nd Annual International Conference on Supercomputing, 2008, pp. 205–213.
- Shubhabrata Sengupta, Mark Harris, Michael Garland, and John D. Owens. Efficient Parallel Scan Algorithms for many-core GPUs. In Jakub Kurzak, David A. Bader, and Jack Dongarra, editors, Scientific Computing with Multicore and Accelerators, Chapman & Hall/CRC Computational Science, chapter 19, pages 413–442. Taylor & Francis, January 2011.
- D. Merrill and A. Grimshaw, Parallel Scan for Stream Architectures. Technical Report CS2009-14, Department of Computer Science, University of Virginia, 2009, 54pp.


Scan (across blocks)

Scan-then-propagate (4x)

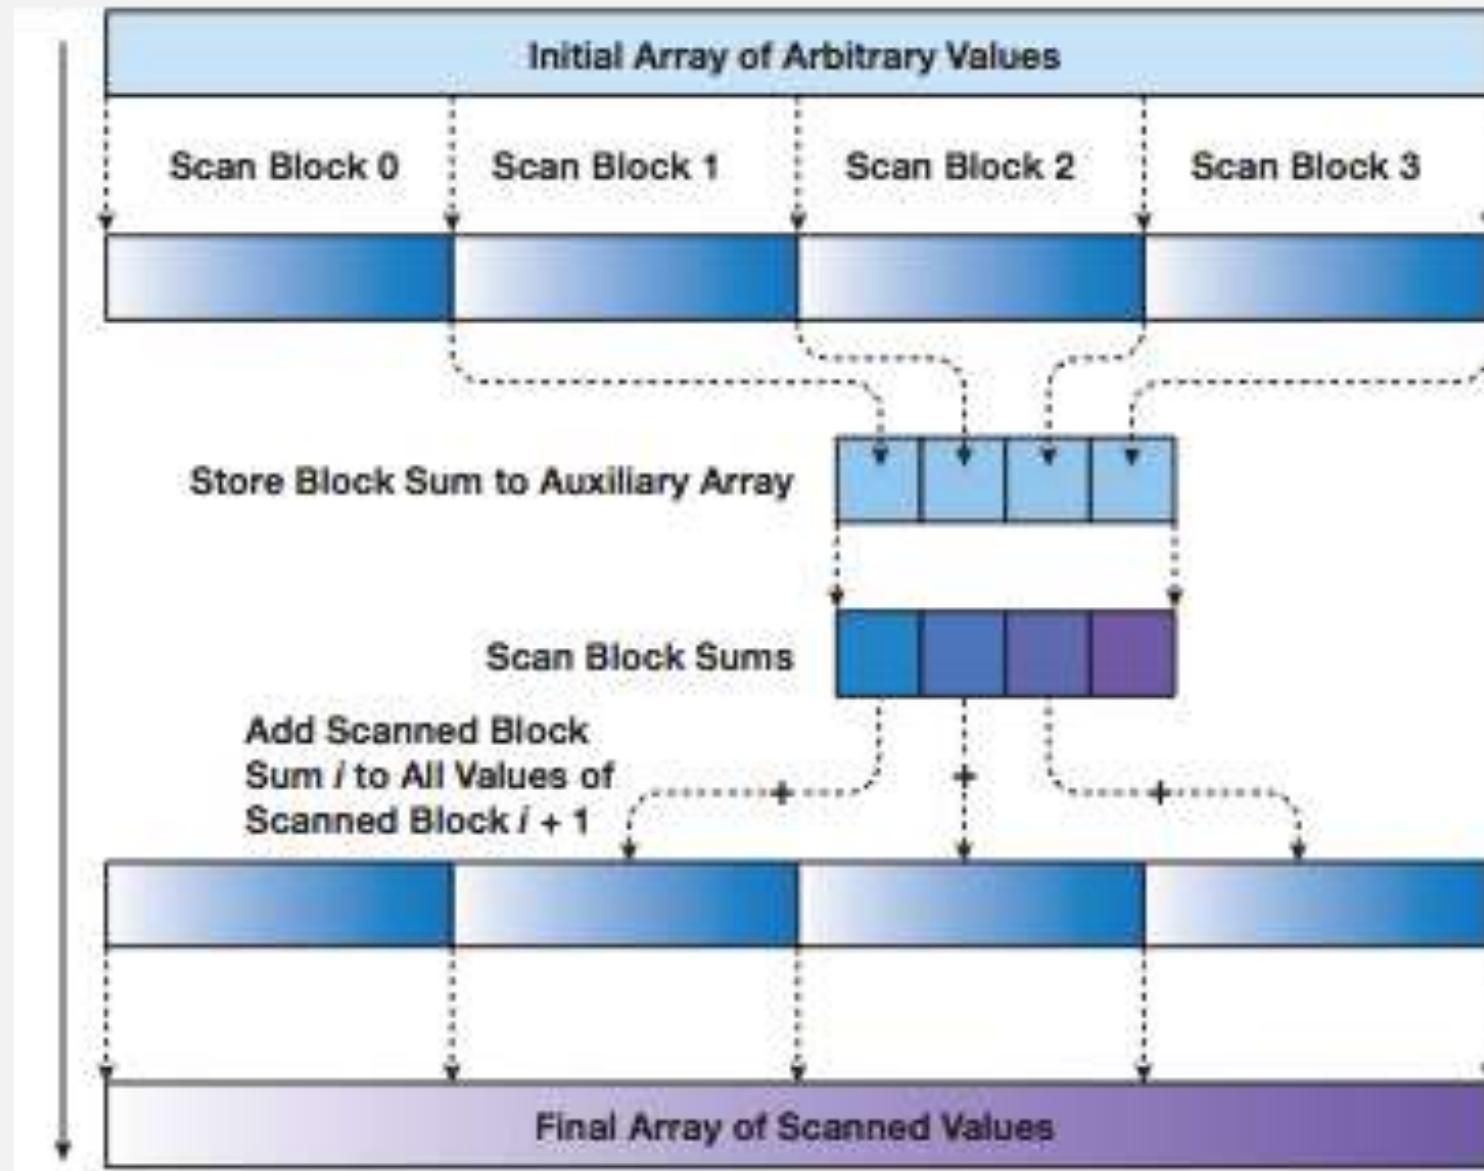

Scan-then-propagate (4x)


$\log_b(N)$ –level upsweep/downsweep
(scan-and-add strategy: CudPP)

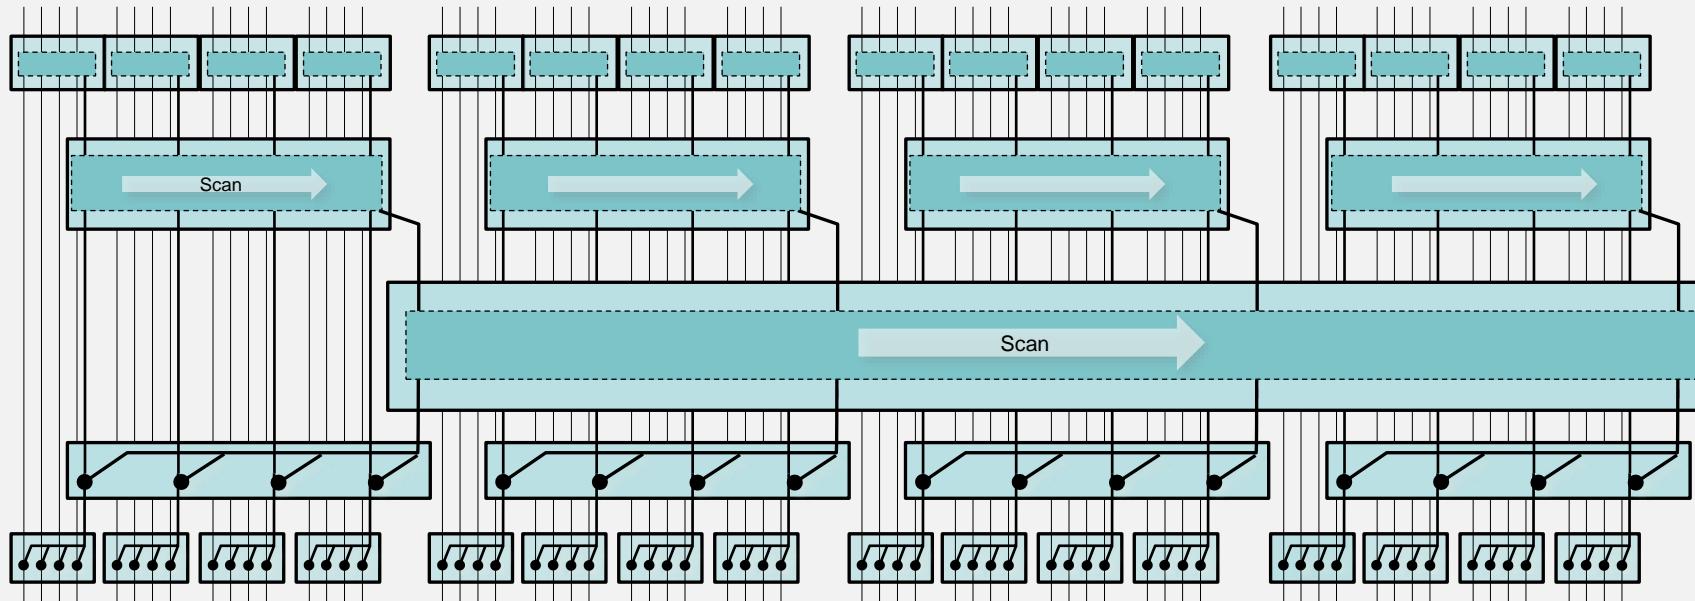

Reduce-then-scan (3x)


$\log_b(N)$ –level upsweep/downsweep

(reduce-then-scan strategy: Matrix-scan)

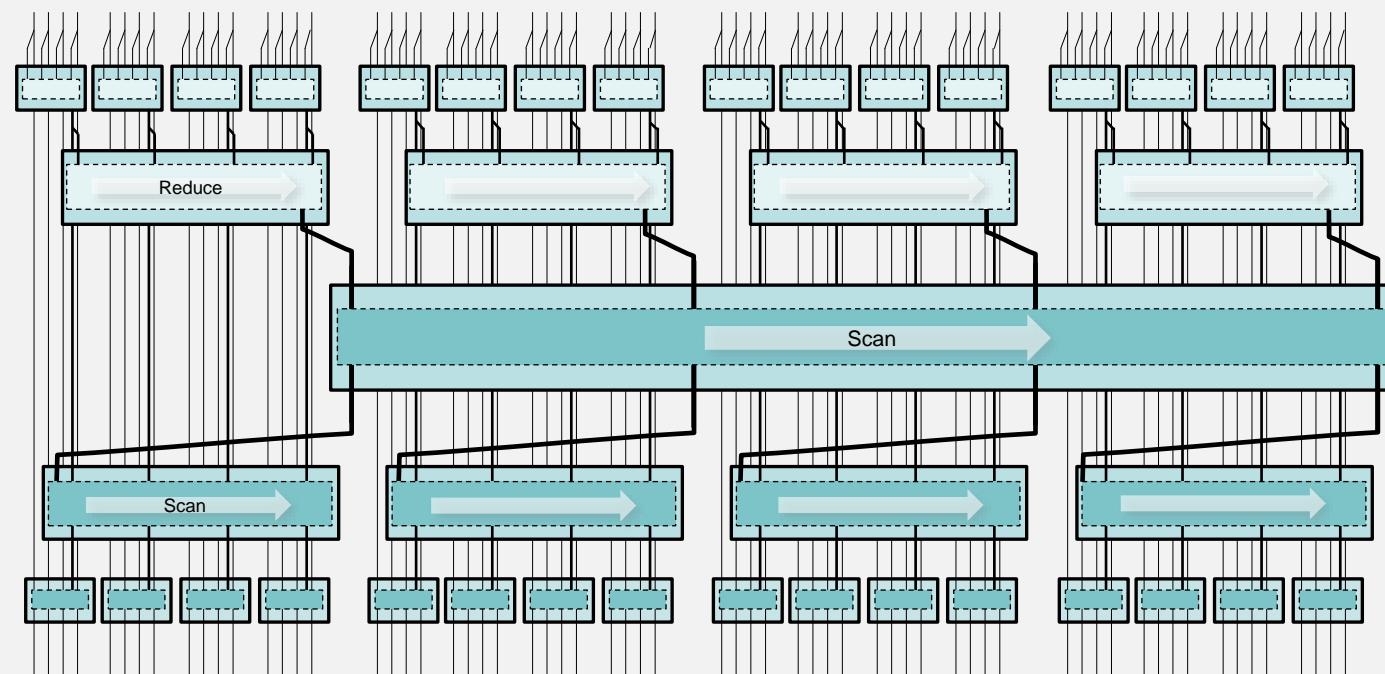

Merrill's 2-level upsweep/downsweep

(reduce-then-scan)

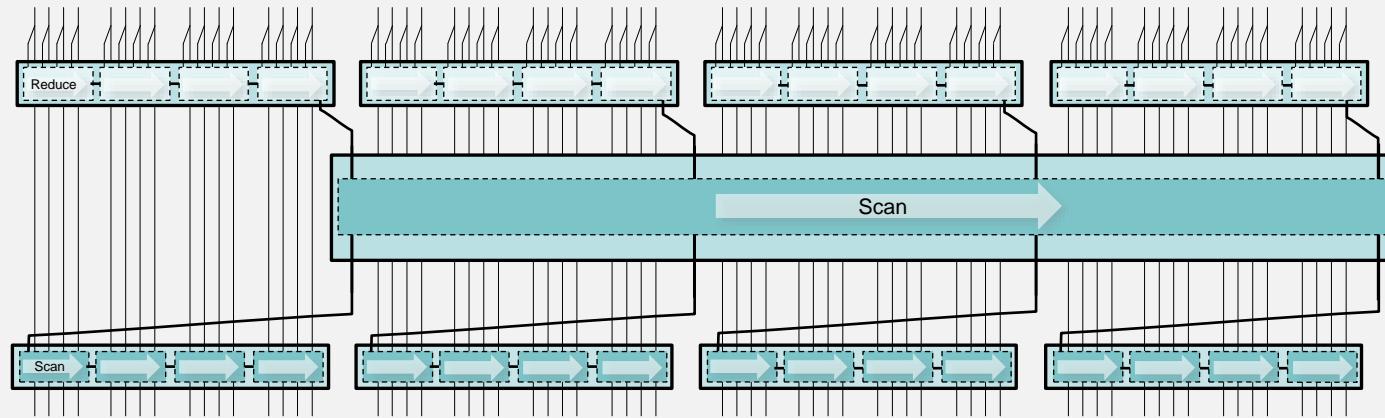


- Persistent threads
- Requires only 3 kernel launches vs. $\log n$
- Fewer global memory reads in intermediate step
(constant vs. $O(n)$)

Sort papers


- Mark Harris, Shubhabrata Sengupta, and John D. Owens. Parallel Prefix Sum (Scan) with CUDA. In Hubert Nguyen, editor, GPU Gems 3, chapter 39, pages 851–876. Addison Wesley, August 2007.
- N. Satish, M. Harris, and M. Garland, “Designing efficient sorting algorithms for manycore GPUs,” IPDPS 2009: IEEE International Symposium on Parallel & Distributed Processing, May 2009.
- D. Merrill and A. Grimshaw, Revisiting Sorting for GPGPU Stream Architectures. Technical Report CS2010-03, Department of Computer Science, University of Virginia, 2010, 17pp.

Radix Sort

Radix Sort Fundamentals

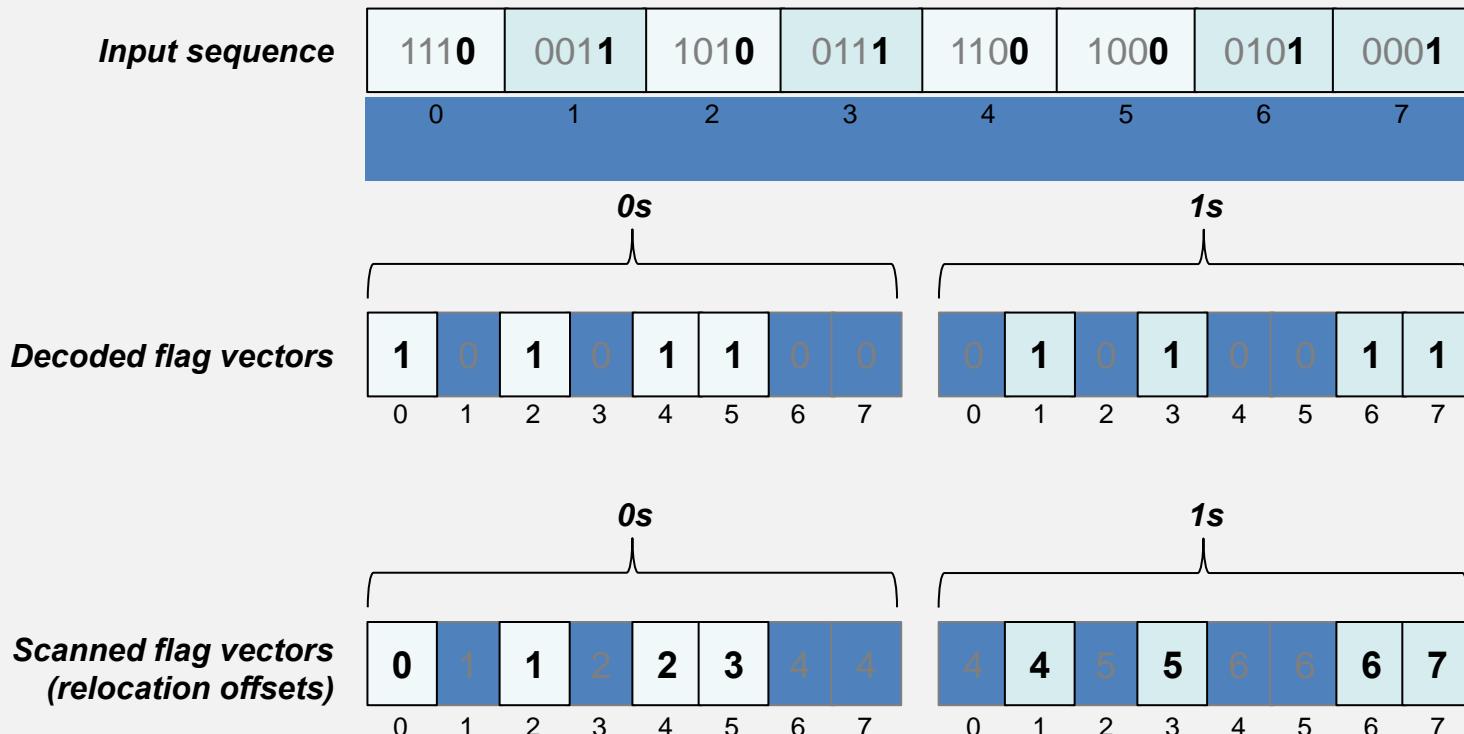

scatter—not efficient!

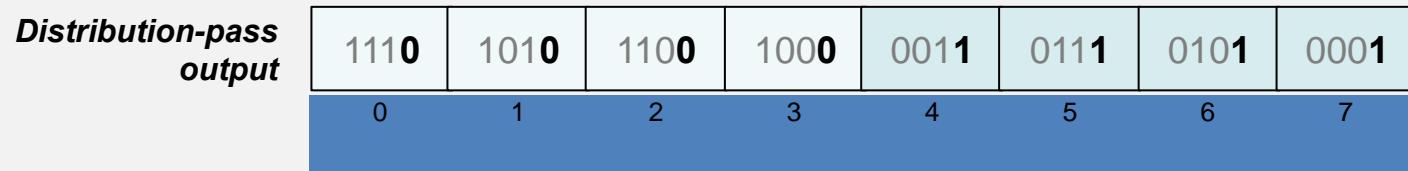

Goals: (1) minimize number of scatters; (2)
maximize coherence of scatters

Radix Sort Memory Cost

Step	Kernel	Purpose	Read Workload	Write Workload
1	<i>binning</i>	Create flags	n keys	nr flags
2	<i>bottom-level reduce</i>	Compact flags (scan primitive)	nr flags	<i>(insignificant constant)</i>
3	<i>top-level scan</i>		<i>(insignificant constant)</i>	<i>(insignificant constant)</i>
4	<i>bottom-level scan</i>		nr flags + <i>(insignificant constant)</i>	nr offsets
5	<i>scatter</i>	Distribute keys	n offsets + n keys (+ n values)	n keys (+ n values)

Total Memory Workload: $(k/d)(n)(r + 4)$ keys only
 $(k/d)(n)(r + 6)$ with values

- d-bit radix digits
- radix $r = 2^d$
- n-element input sequence of k-bit keys

Radix Sort

- Apply counting sort to successive digits of keys
- Performs d scatter steps for d -digit keys
- Scattering in memory is fundamentally costly

Parallel Radix Sort


- Assign tile of data to each block (1024 elements)
Satisf uses 256-thread blocks and 4 elements per thread
- Build per-block histograms of current digit (4 bit)
this is a reduction
- Combine per-block histograms (P x 16)
this is a scan
- Scatter

Per-Block Histograms

- Perform b parallel splits for b -bit digit
- Each split is just a prefix sum of bits
 - each thread counts 1 bits to its left
- Write bucket counts & partially sorted tile
 - sorting tile improves scatter coherence later

Combining Histograms

- Write per-block counts in column major order & scan

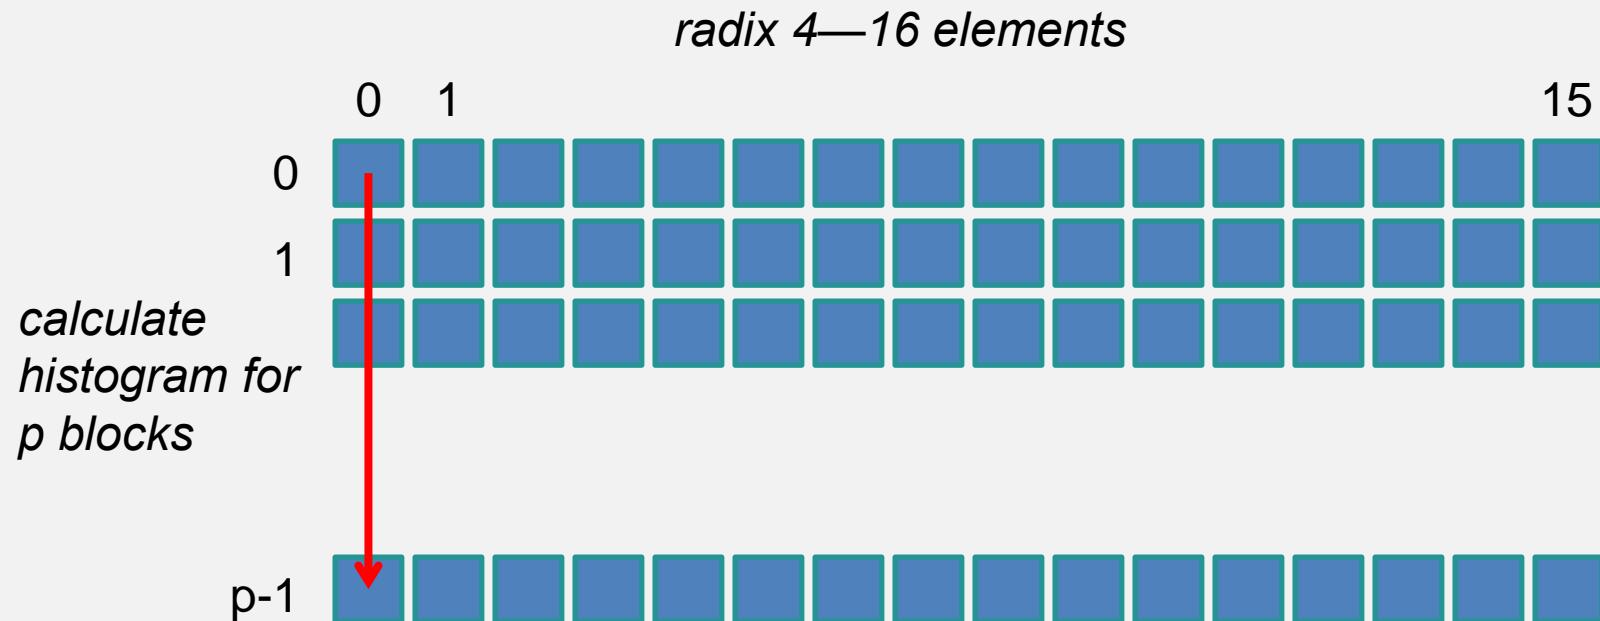


Satish's Radix Sort Memory Cost

Step	Kernel	Purpose	Read Workload	Write Workload
1	<i>local digit-sort</i>	Maximize coherence	n keys (+ n values)	n keys (+ n values)
2	<i>histogram</i>	Create histograms	n keys	nr/b counts
3	<i>bottom-level reduce</i>	Scan histograms (scan primitive)	nr/b counts	<i>(insignificant constant)</i>
4	<i>top-level scan</i>		<i>(insignificant constant)</i>	<i>(insignificant constant)</i>
5	<i>bottom-level scan</i>		nr/b counts + <i>(insignificant constant)</i>	nr/b offsets
6	<i>scatter</i>	Distribute keys	nr/b offsets + n keys (+ n values)	n keys (+ n values)

Total Memory Workload: $(k/d)(n)(5r/b + 7)$ keys only
 $(k/d)(n)(5r/b + 9)$ with values

- d-bit radix digits
- radix $r = 2^d$
- n-element input sequence of k-bit keys
- b bits per step

Merrill's 3-step sort

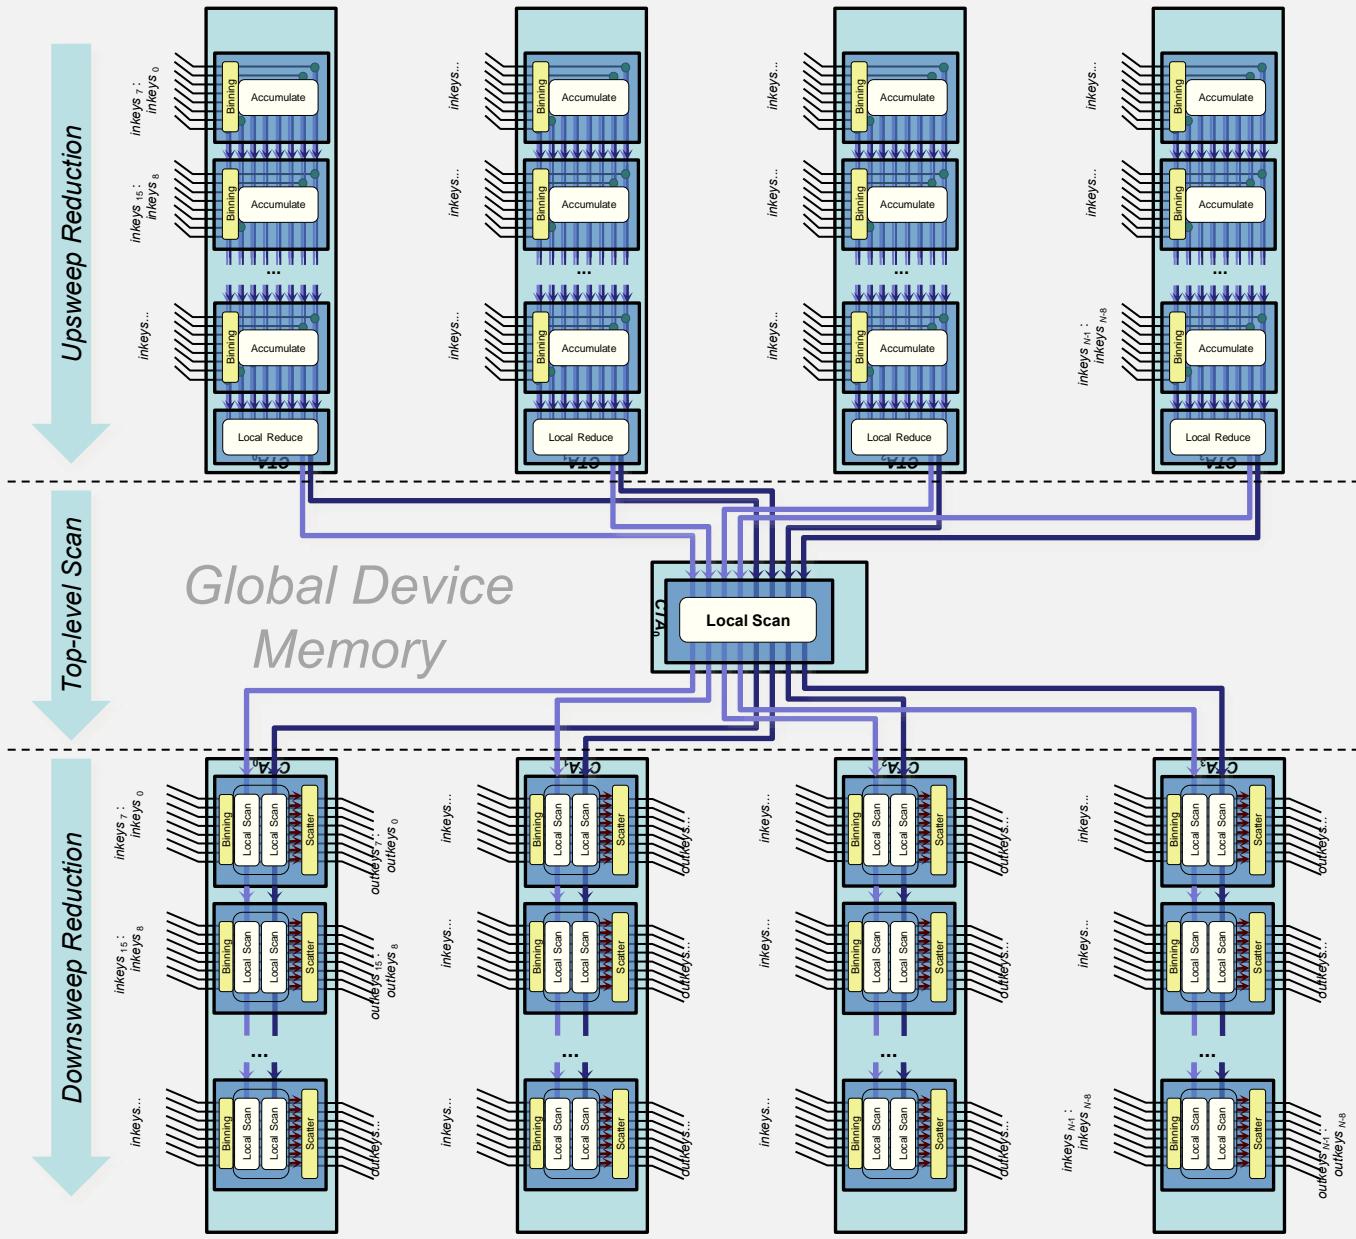

Merrill's sort, costs

Step	Kernel	Purpose	Read Workload	Write Workload
1	<i>bottom-level reduce</i>	Create flags, compact flags, scatter keys	n keys <i>(insignificant constant)</i>	<i>(insignificant constant)</i>
2	<i>top-level scan</i>		<i>(insignificant constant)</i>	<i>(insignificant constant)</i>
3	<i>bottom-level scan</i>		n keys (+ n values) + <i>(insignificant constant)</i>	n keys (+ n values)

Total Memory Workload: $(k/d)(3n)$ keys only
 $(k/d)(5n)$ with values

- d-bit radix digits
- radix $r = 2^d$
- n-element input sequence of k-bit keys
- Current GPUs use $d=4$ (higher values exhaust local storage)


Merge Sort

Merge Sort

- Divide input array into 256-element tiles
- Sort each tile independently




- Produce sorted output with tree of merges

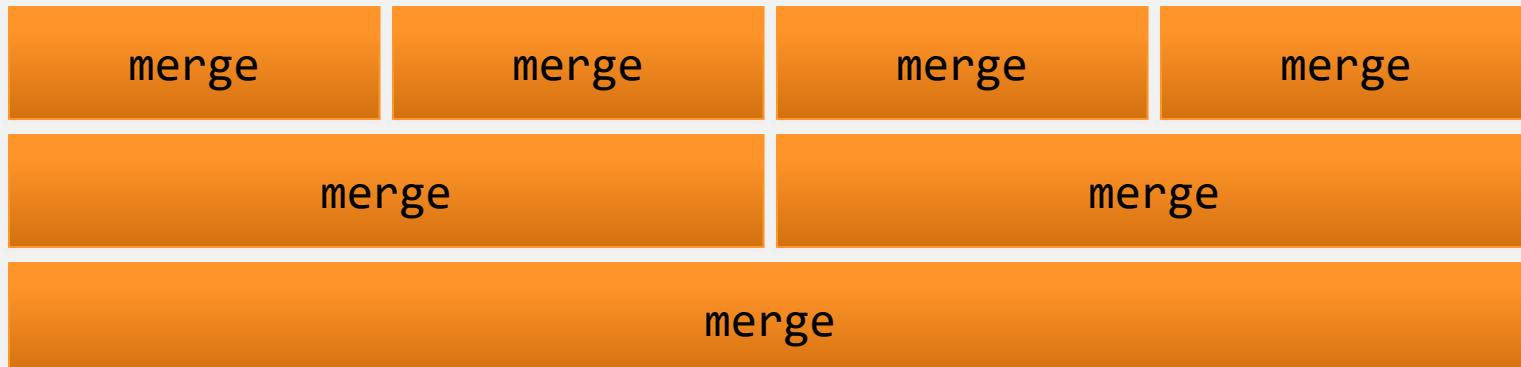


Sorting a Tile

- Tiles are sized so that:
 - a single thread block can sort them efficiently
 - they fit comfortably in on-chip memory
- Sorting networks are most efficient in this regime
 - we use **odd-even merge sort**
 - about 5-10% faster than comparable bitonic sort
- Caveat: sorting networks may reorder equal keys

Merging Pairs of Sorted Tiles

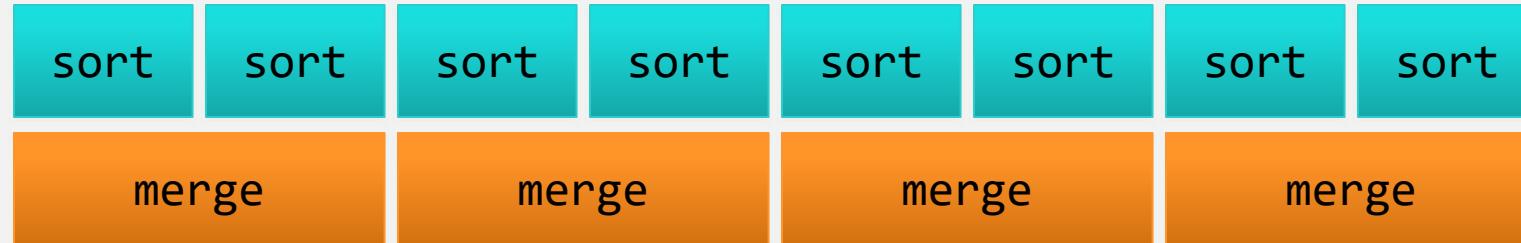

- Launch 1 thread block to process each pair of tiles
- Load tiles into on-chip memory
- Perform **counting merge**
- Store merged result to global memory

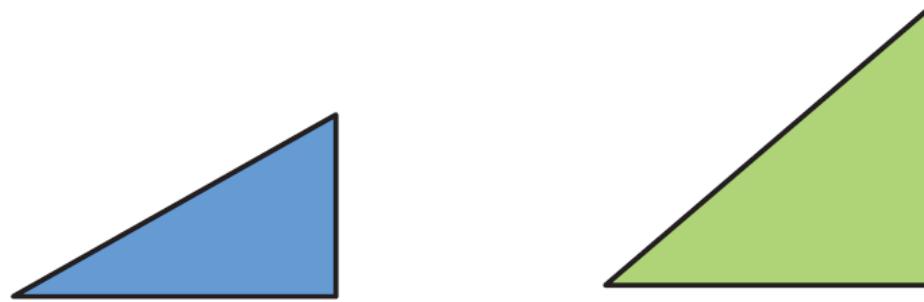

Sorted
Input A

Sorted
Input B




Flip B, pairwise compare to A



Smallest element in each comparison
yields smallest p elements overall in a
bitonic sequence

Counting Merge

`upper_bound(A[i], B) = count(j where A[i] ≤ B[j])`

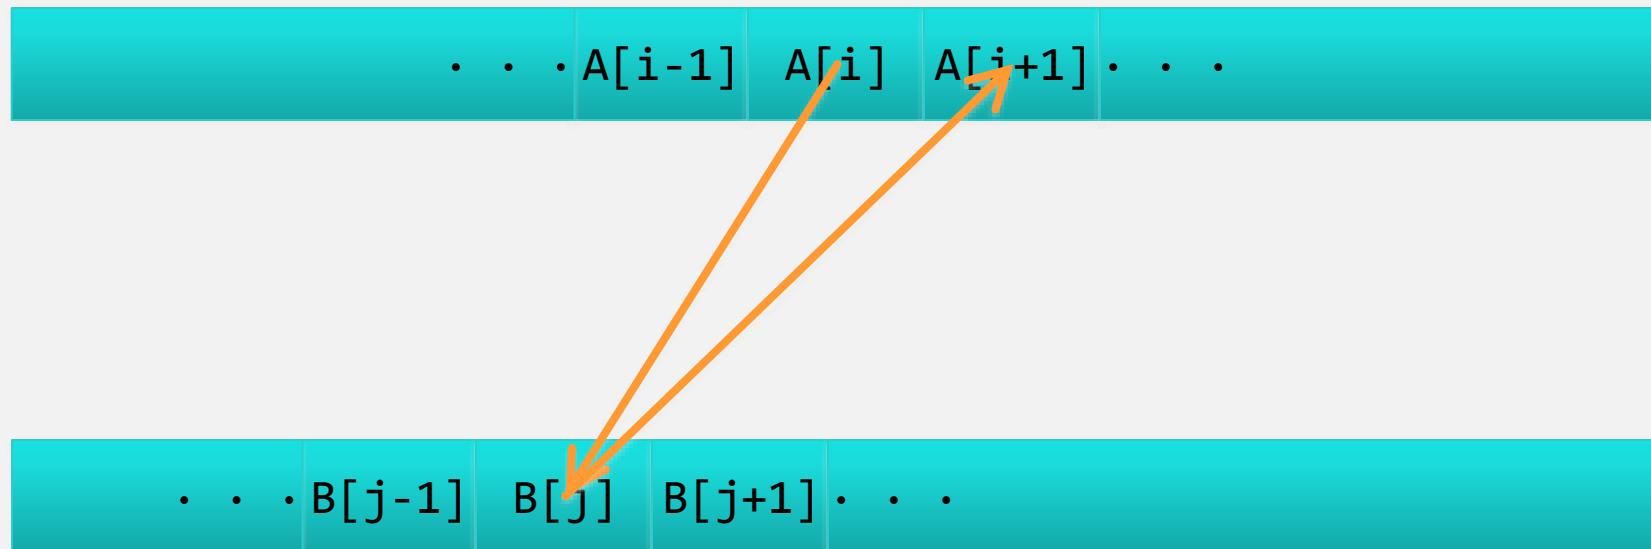

`lower_bound(B[j], A) = count(i where B[j] < A[i])`

Use binary search since A & B are sorted

Counting Merge


`upper_bound(A[i], B) = count(j where A[i] ≤ B[j])`



`lower_bound(B[j], A) = count(i where B[j] < A[i])`

```
scatter( A[i] -> C[i + upper_bound(A[i], B)] )
scatter( B[j] -> C[lower_bound(B[j], A) + j] )
```

Merging Larger Subsequences

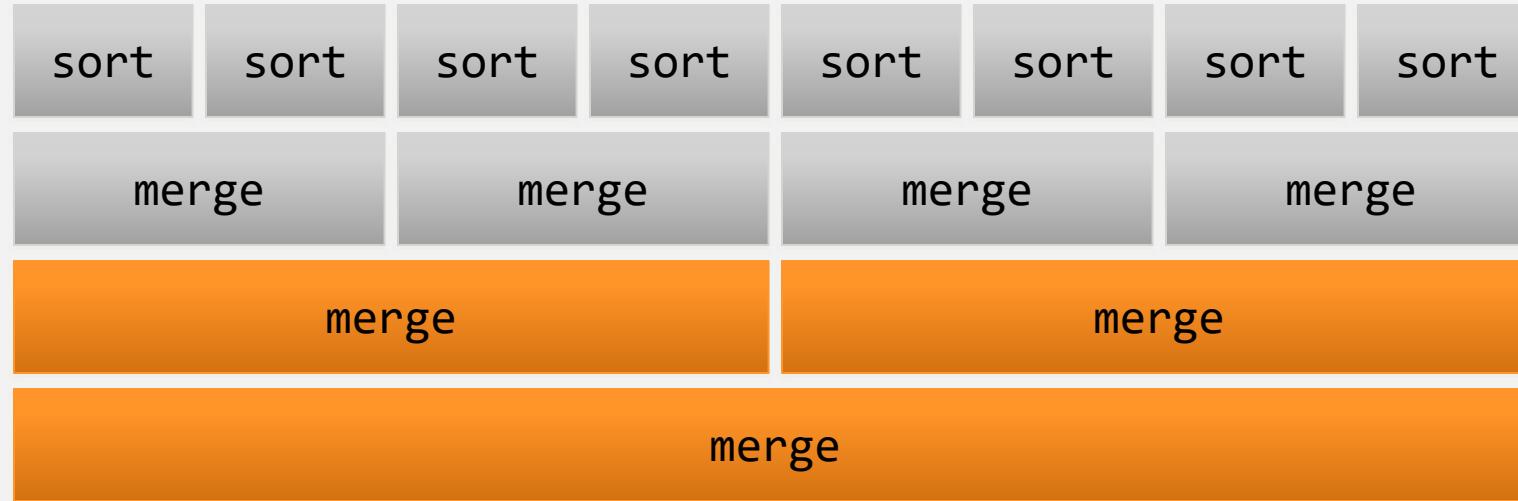

- Partition larger sequences into collections of tiles
- Apply counting merge to each pair of tiles

Two-way Partitioning Merge

- Pick a splitting element from either A or B

... A[i] ...

- Divide A and B into elements below/above splitter

A[j] ≤ A[i] A[i] A[j] > A[i]

B[j] ≤ A[i] B[j] > A[i]



found by binary search

merge : A[j] ≤ A[i] A[i]
B[j] ≤ A[i]

merge : A[j] > A[i]
B[j] > A[i]

Multi-way Partitioning Merge

- Pick every 256th element of A & B as splitter




- Apply merge recursively to merge splitter sets
 - recursively apply merge procedure

- Split A & B with merged splitters



- Merge resulting pairs of tiles (at most 256 elements)


- See CUDA Samples \ Advanced:
 - scan
 - reduction
 - mergeSort
 - radixSort

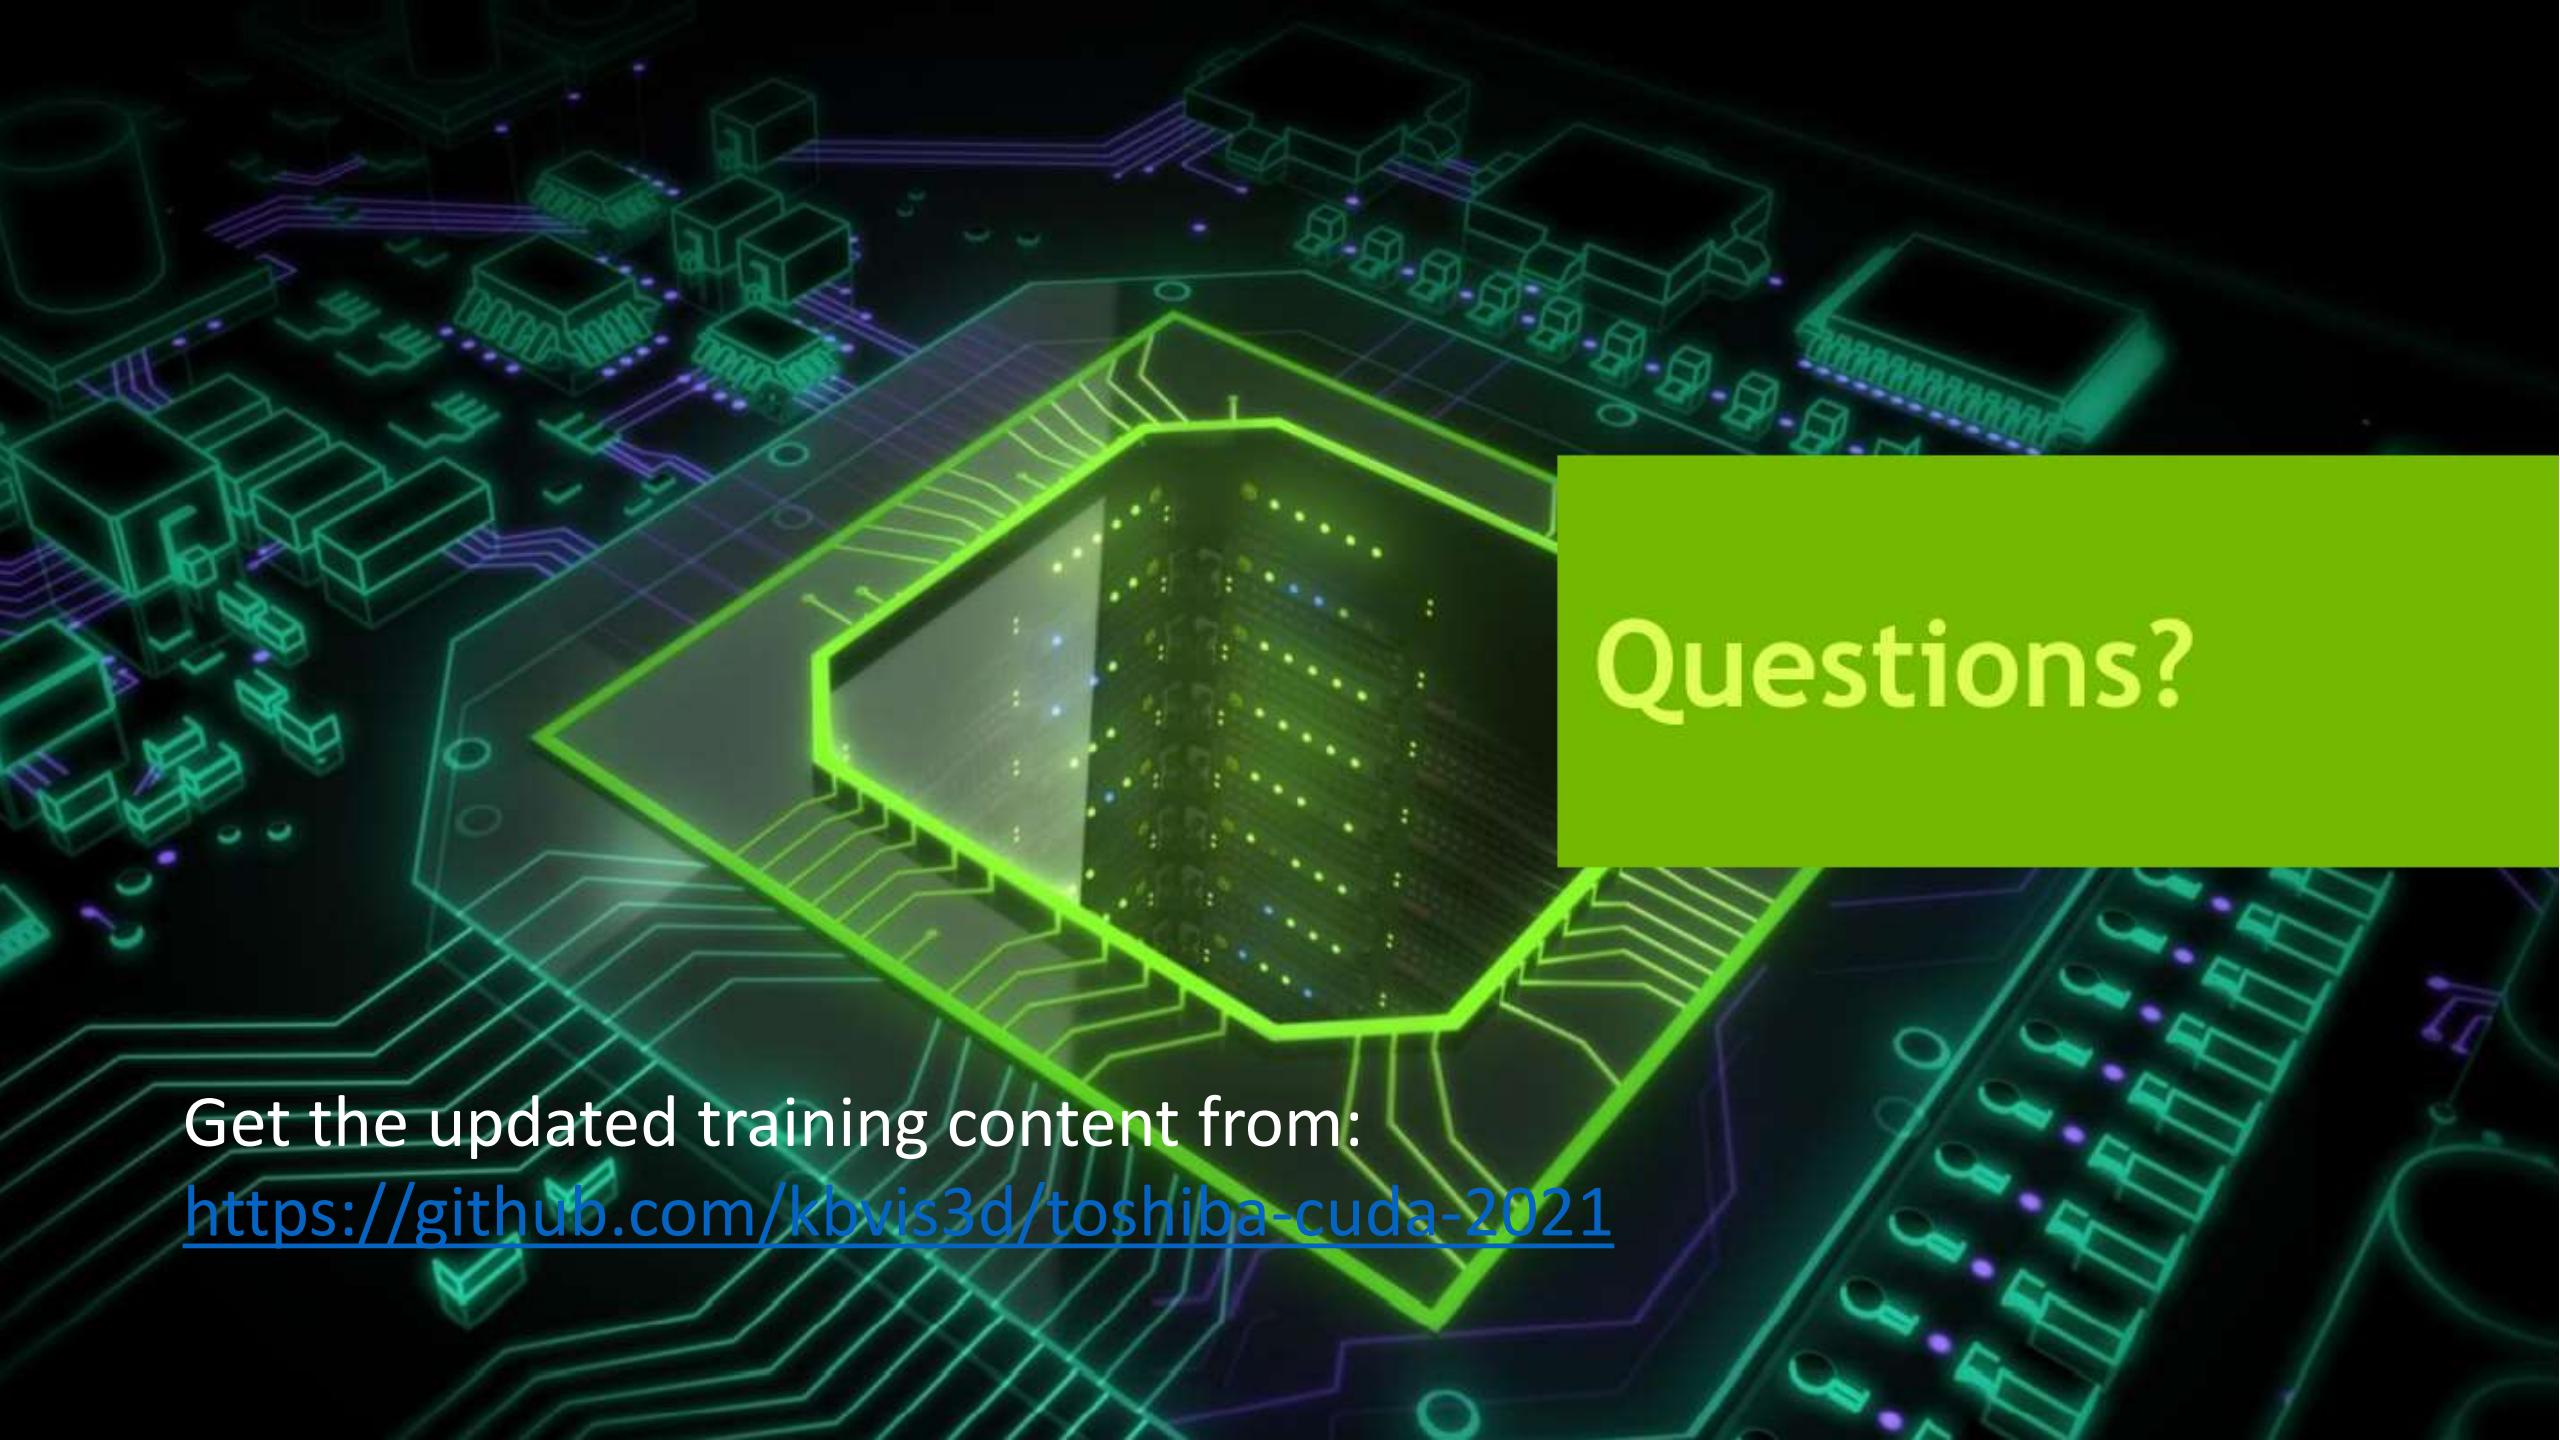

Questions?

Get the updated training content from:

<https://github.com/kbvis3d/toshiba-cuda-2021>

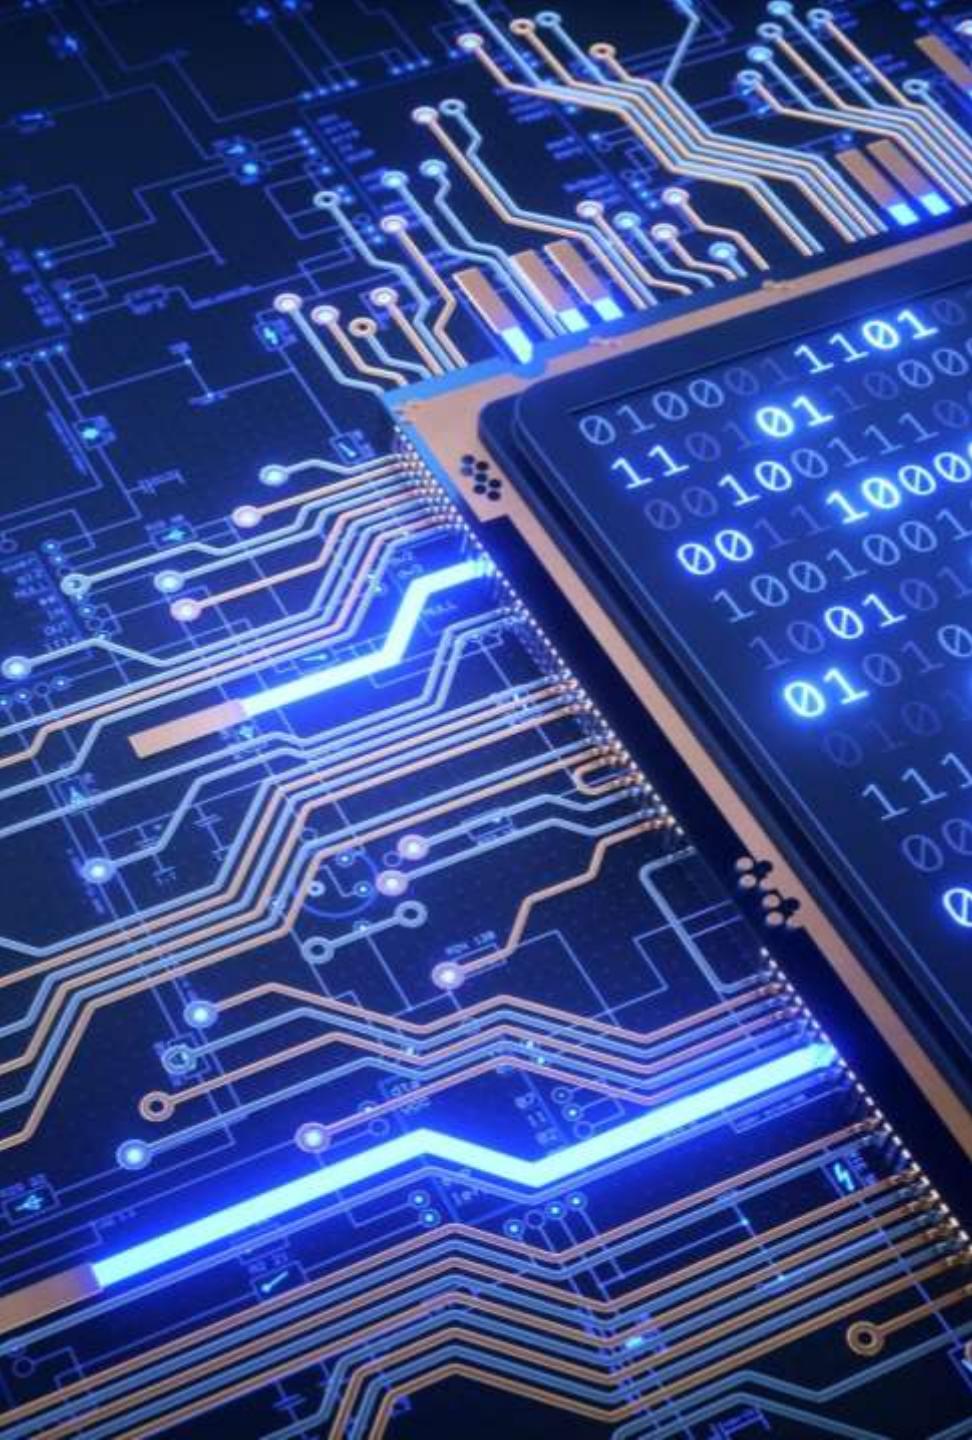

DAY 5

- Image Processing (continued)
 - Textures
 - Sobel Filter
 - Box Filter
 - Simple Convolution
 - Separable Convolution
 - Histogram
 - Transpose

Get the updated training content from:
<https://github.com/kbvis3d/toshiba-cuda-2021>

Image Processing Kernels



introduction

- Image processing is a natural fit for data parallel processing
 - Pixels can be mapped directly to threads
 - Lots of data is shared between pixels
- Advantages of CUDA vs. pixel shader-based image processing
- CUDA supports sharing image data with OpenGL and Direct3D applications



advantages of CUDA

- Shared memory (high speed on-chip cache)
- More flexible programming model
 - C with extensions vs HLSL/GLSL
- Arbitrary scatter writes
- Each thread can write more than one pixel
- Thread Synchronization



applications

- Convolutions
- Median filter
- FFT
- Image & Video compression
- DCT
- Wavelet
- Motion Estimation
- Histograms
- Noise reduction
- Image correlation
- Demosaic of CCD images (RAW conversion)



shared memory


- Shared memory is fast
 - Same speed as registers
 - Like a user managed data cache
- Limitations
 - 64KB per multiprocessor
 - Can store 128 x 128 pixels with 4 bytes per pixel
- Typical operation for each thread block:
 - Load image tile from global memory to shared
 - Synchronize threads
 - Threads operate on pixels in shared memory in parallel
 - Write tile back from shared to global memory
- Global memory vs Shared
 - Big potential for significant speed up depending on how many times data in shared memory can be reused

© 2008 NVIDIA Corporation.

image tiling

- Filter coefficients can be stored in constant memory
- Image tile can be cached to shared memory
- Each output pixel must have access to neighboring pixels within certain radius R
- This means tiles in shared memory must be expanded with an apron that contains neighboring pixels
- Only pixels interior to the apron write results
 - The remaining threads do nothing

tile apron

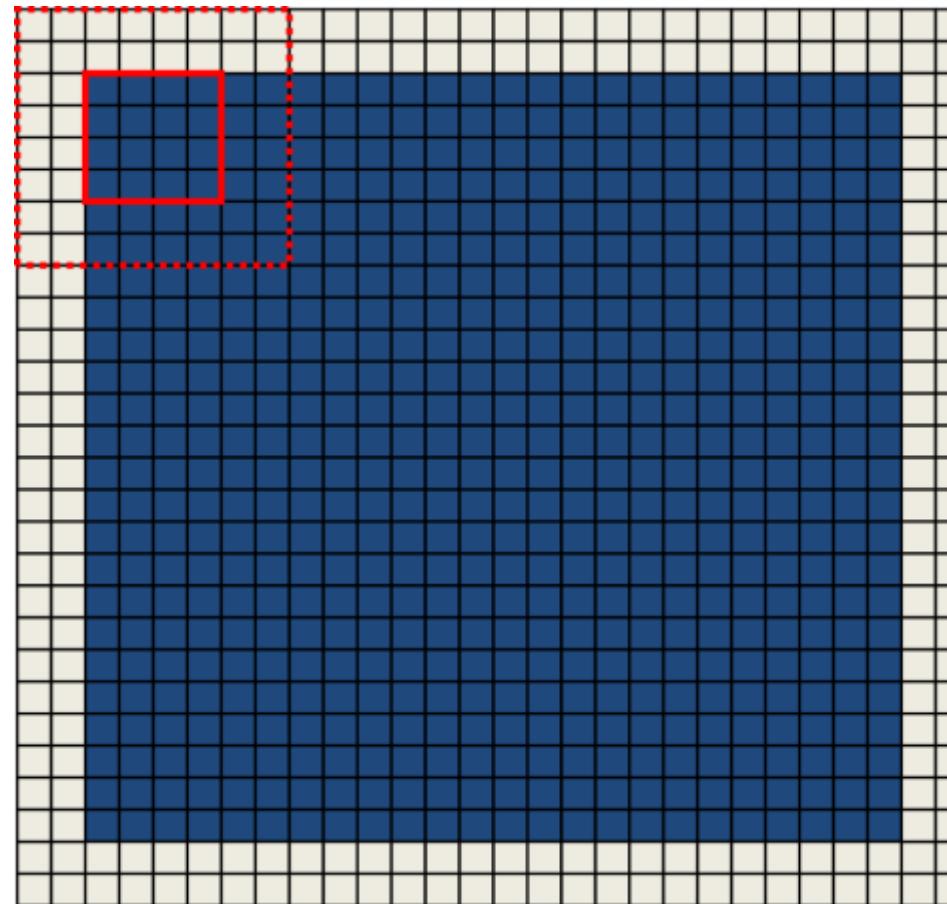

- Image
- Image Apron
- Tile
- Tile with Apron

© 2008 NVIDIA Corporation.

Image in Device Memory

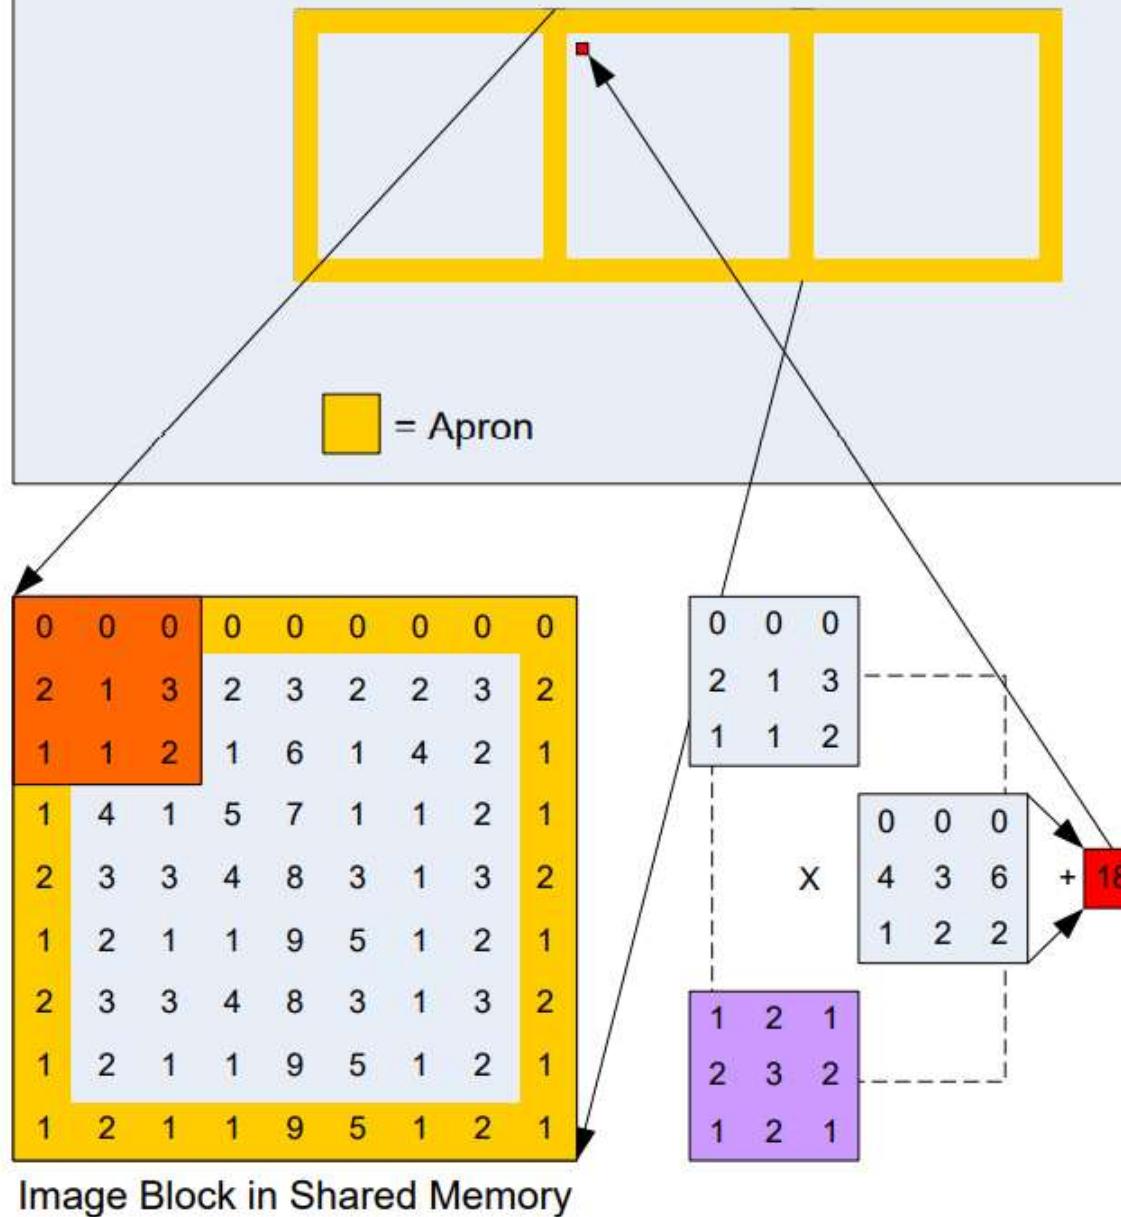




image processing with CUDA

- How does image processing map to the GPU?
 - Image Tiles ↔ Grid/Thread Blocks
 - Large Data ↔ Lots of Memory BW
 - 2D Region ↔ Shared Memory (cached)

define tile sizes

```
#define TILE_W    16
#define TILE_H    16
#define R          2      // filter radius
#define D          (R*2+1) // filter diameter
#define S          (D*D)  // filter size
#define BLOCK_W   (TILE_W+(2*R))
#define BLOCK_H   (TILE_H+(2*R))
```

simple filter example

```
__global__ void d_filter(int *g_idata, int *g_odata,
                        unsigned int width, unsigned int height)
{
    __shared__ int smem[BLOCK_W*BLOCK_H];
    int x = blockIdx.x*TILE_W + threadIdx.x - R;
    int y = blockIdx.y*TILE_H + threadIdx.y - R;

    // clamp to edge of image
    x = max(0, x);
    x = min(x, width-1);
    y = max(y, 0);
    y = min(y, height-1);

    unsigned int index = y*width + x;
    unsigned int bindex = threadIdx.y*blockDim.y+threadIdx.x;

    // each thread copies its pixel of the block to shared memory
    smem[bindex] = g_idata[index];
    __syncthreads();
}
```

© 2008 NVIDIA Corporation.

simple filter example (cont.)

```
// only threads inside the apron will write results
if ((threadIdx.x >= R) && (threadIdx.x < (BLOCK_W-R)) &&
    (threadIdx.y >= R) && (threadIdx.y < (BLOCK_H-R)))
{
    float sum = 0;
    for(int dy=-R; dy<=R; dy++) {
        for(int dx=-R; dx<=R; dx++) {
            float i = smem[bindex + (dy*blockDim.x) + dx];
            sum += i;
        }
    }
    g_odata[index] = sum / s;
}
```

sobel edge detect filter

- Two filters to detect horizontal and vertical change in the image
- Computes the magnitude and direction of edges
- We can calculate both directions with one single CUDA kernel



$$C_{horizontal} = \begin{pmatrix} -1 & -2 & -1 \\ 0 & 0 & 0 \\ 1 & 2 & 1 \end{pmatrix}$$


$$C_{vertical} = \begin{pmatrix} -1 & 0 & 1 \\ -2 & 0 & 2 \\ -1 & 0 & 1 \end{pmatrix}$$

$$Magnitude_{Sobel} = norm \cdot \sqrt{G_{horizontal}^2 + G_{vertical}^2}$$

$$Direction_{Sobel} = \arctan\left(\frac{G_{vertical}}{G_{horizontal}}\right)$$

sobel edge detect filter

- 3x3 window of pixels for each thread

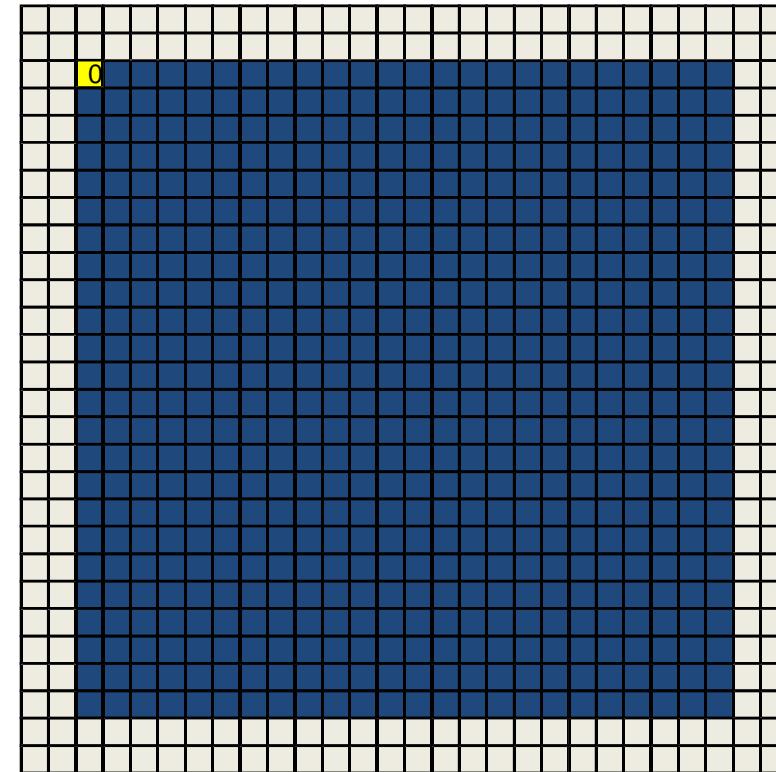

$$\bullet \quad C_{vertical} \begin{pmatrix} -1 & 0 & 1 \\ -2 & 0 & 2 \\ -1 & 0 & 1 \end{pmatrix} = G_{vertical}$$


$$\bullet \quad C_{horizontal} \begin{pmatrix} -1 & -2 & -1 \\ 0 & 0 & 0 \\ 1 & 2 & 1 \end{pmatrix} = G_{horizontal}$$

$$Magnitude_{Sobel} = norm \cdot \sqrt{G_{horizontal}^2 + G_{vertical}^2}$$

© 2008 NVIDIA Corporation.

sobel edge detect filter

- 3x3 window of pixels for each thread

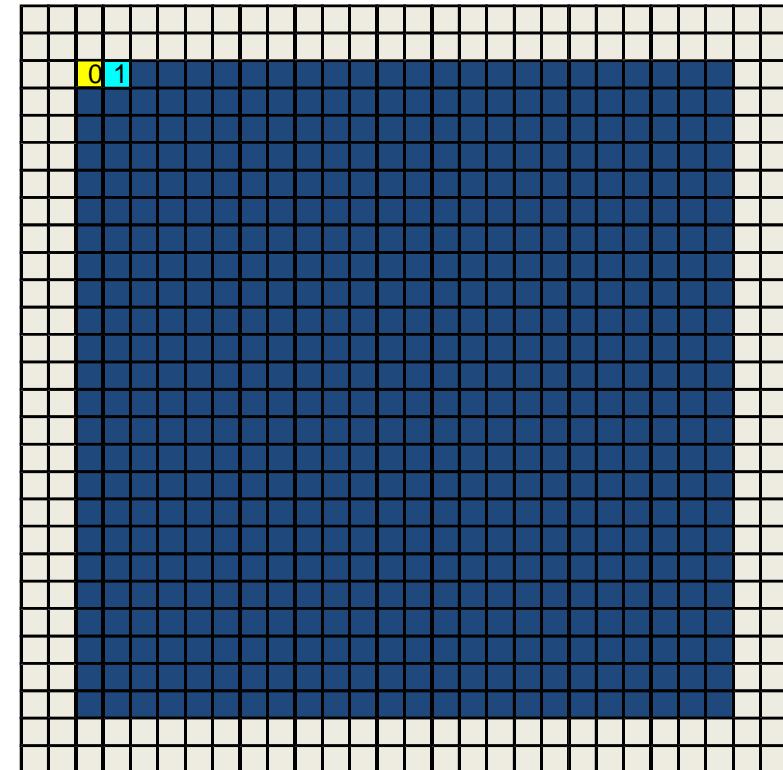

$$\bullet \quad C_{vertical} \begin{pmatrix} -1 & 0 & 1 \\ -2 & 0 & 2 \\ -1 & 0 & 1 \end{pmatrix} = G_{vertical}$$


$$\bullet \quad C_{horizontal} \begin{pmatrix} -1 & -2 & -1 \\ 0 & 0 & 0 \\ 1 & 2 & 1 \end{pmatrix} = G_{horizontal}$$

$$Magnitude_{Sobel} = norm \cdot \sqrt{G_{horizontal}^2 + G_{vertical}^2}$$

© 2008 NVIDIA Corporation.

sobel edge detect filter

- 3x3 window of pixels for each thread

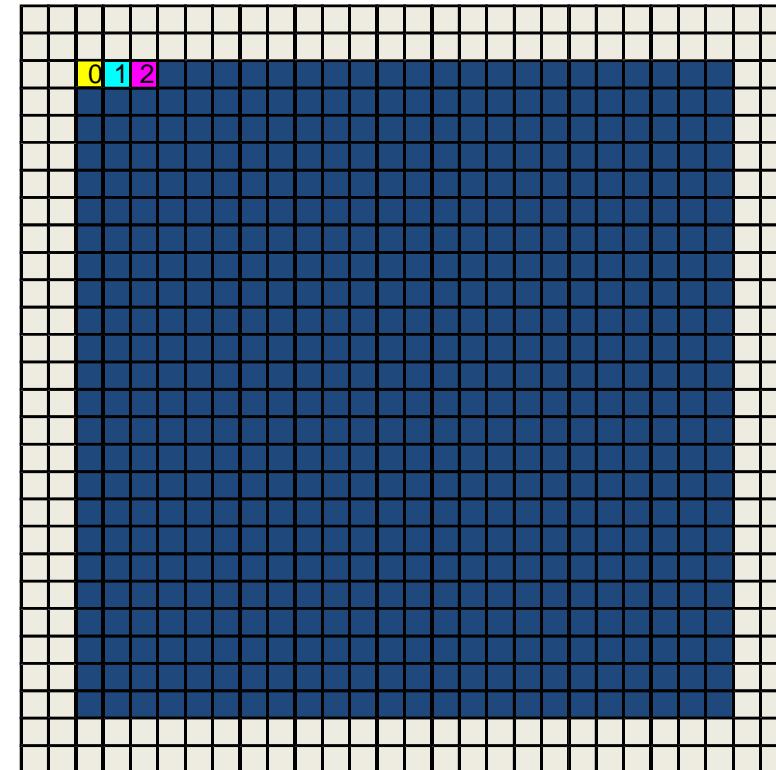

$$\bullet \quad C_{vertical} \begin{pmatrix} -1 & 0 & 1 \\ -2 & 0 & 2 \\ -1 & 0 & 1 \end{pmatrix} = G_{vertical}$$


$$\bullet \quad C_{horizontal} \begin{pmatrix} -1 & -2 & -1 \\ 0 & 0 & 0 \\ 1 & 2 & 1 \end{pmatrix} = G_{horizontal}$$

$$Magnitude_{Sobel} = norm \cdot \sqrt{G_{horizontal}^2 + G_{vertical}^2}$$

© 2008 NVIDIA Corporation.

sobel edge detect filter

- 3x3 window of pixels for each thread

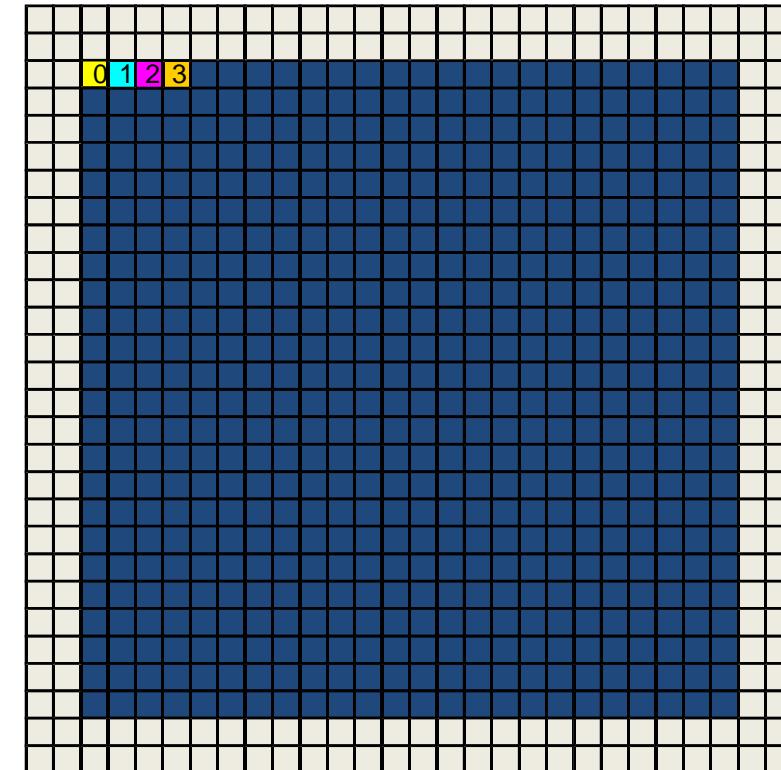

$$\bullet \quad C_{vertical} \begin{pmatrix} -1 & 0 & 1 \\ -2 & 0 & 2 \\ -1 & 0 & 1 \end{pmatrix} = G_{vertical}$$


$$\bullet \quad C_{horizontal} \begin{pmatrix} -1 & -2 & -1 \\ 0 & 0 & 0 \\ 1 & 2 & 1 \end{pmatrix} = G_{horizontal}$$

$$Magnitude_{Sobel} = norm \cdot \sqrt{G_{horizontal}^2 + G_{vertical}^2}$$

© 2008 NVIDIA Corporation.

sobel edge detect filter

- 3x3 window of pixels for each thread

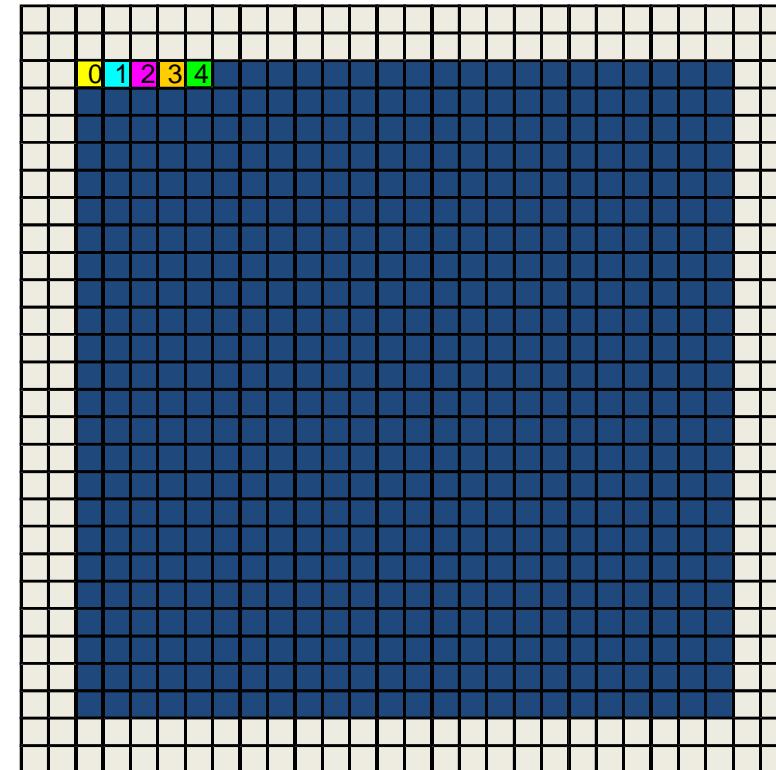

$$\bullet \quad C_{vertical} \begin{pmatrix} -1 & 0 & 1 \\ -2 & 0 & 2 \\ -1 & 0 & 1 \end{pmatrix} = G_{vertical}$$


$$\bullet \quad C_{horizontal} \begin{pmatrix} -1 & -2 & -1 \\ 0 & 0 & 0 \\ 1 & 2 & 1 \end{pmatrix} = G_{horizontal}$$

$$Magnitude_{Sobel} = norm \cdot \sqrt{G_{horizontal}^2 + G_{vertical}^2}$$

© 2008 NVIDIA Corporation.

sobel edge detect filter

- 3x3 window of pixels for each thread

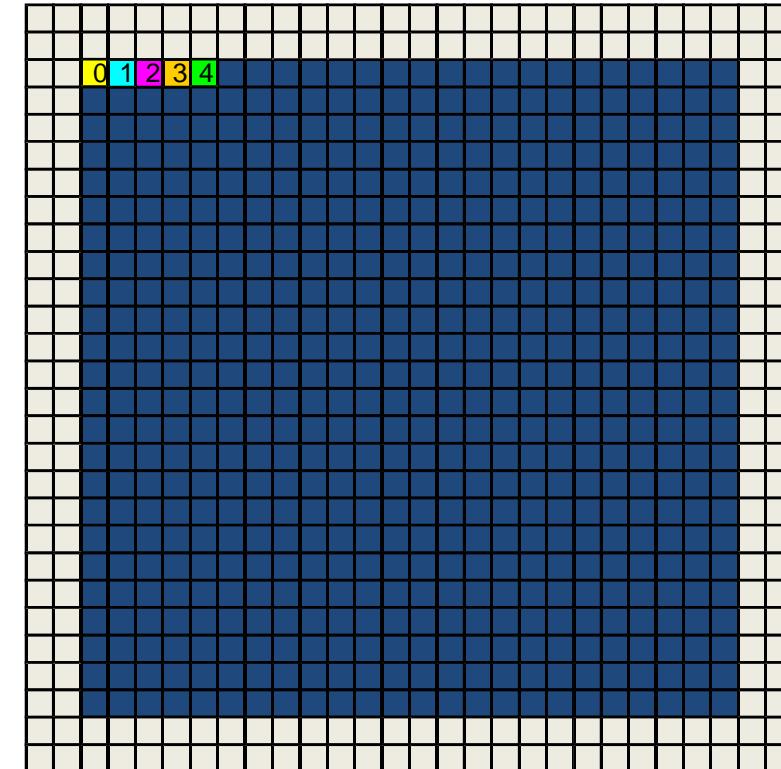

$$\begin{bmatrix} 4 & 4 & 4 \\ 4 & 4 & 4 \\ 4 & 4 & 4 \end{bmatrix}$$

$$\bullet \quad C_{vertical} \begin{pmatrix} -1 & 0 & 1 \\ -2 & 0 & 2 \\ -1 & 0 & 1 \end{pmatrix} = G_{vertical}$$

$$\bullet \quad C_{horizontal} \begin{pmatrix} -1 & -2 & -1 \\ 0 & 0 & 0 \\ 1 & 2 & 1 \end{pmatrix} = G_{horizontal}$$


$$Magnitude_{Sobel} = norm \bullet \sqrt{G_{horizontal}^2 + G_{vertical}^2}$$



© 2008 NVIDIA Corporation.

sobel edge detect filter

- 3x3 window of pixels for each thread

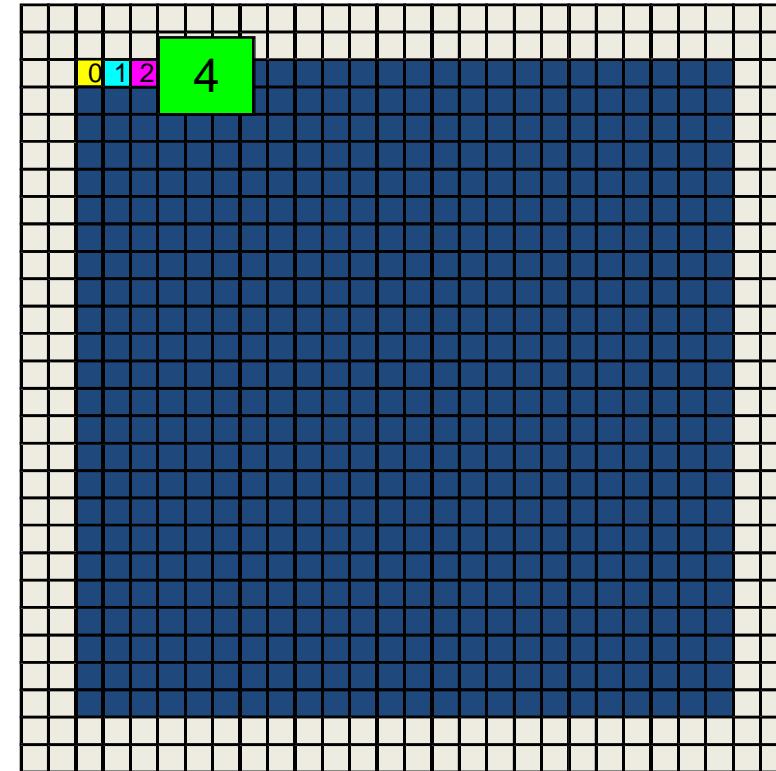

$$\bullet \quad C_{vertical} \begin{pmatrix} -1 & 0 & 1 \\ -2 & 0 & 2 \\ -1 & 0 & 1 \end{pmatrix} = G_{vertical}$$


$$\bullet \quad C_{horizontal} \begin{pmatrix} -1 & -2 & -1 \\ 0 & 0 & 0 \\ 1 & 2 & 1 \end{pmatrix} = G_{horizontal}$$

$$Magnitude_{Sobel} = norm \cdot \sqrt{G_{horizontal}^2 + G_{vertical}^2}$$

© 2008 NVIDIA Corporation.

sobel edge detect filter

- 3x3 window of pixels for each thread

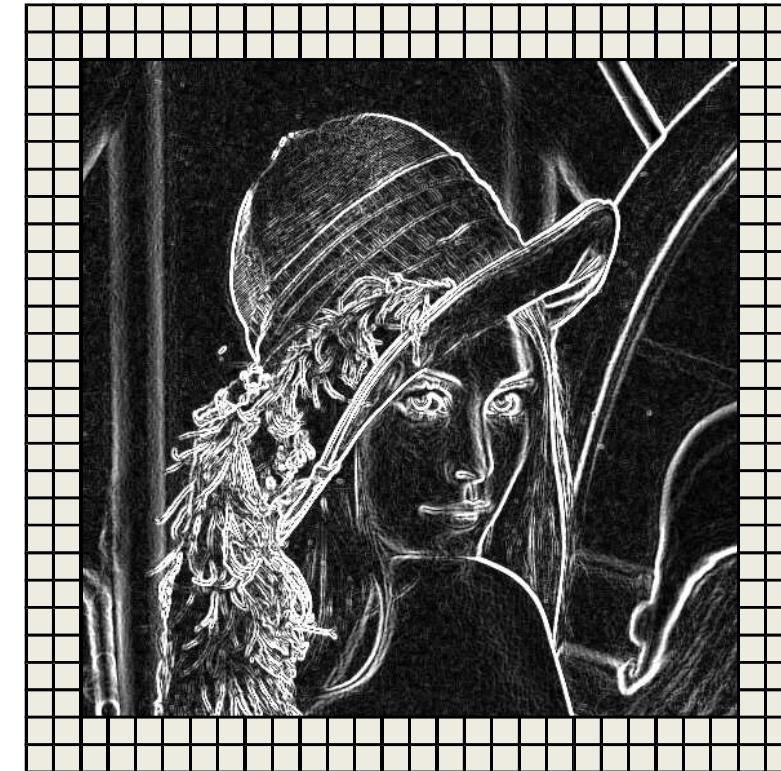

$$\bullet \quad C_{vertical} \begin{pmatrix} -1 & 0 & 1 \\ -2 & 0 & 2 \\ -1 & 0 & 1 \end{pmatrix} = G_{vertical}$$

$$\bullet \quad C_{horizontal} \begin{pmatrix} -1 & -2 & -1 \\ 0 & 0 & 0 \\ 1 & 2 & 1 \end{pmatrix} = G_{horizontal}$$

$$Magnitude_{Sobel} = norm \cdot \sqrt{G_{horizontal}^2 + G_{vertical}^2}$$

© 2008 NVIDIA Corporation.

samples / SobelFilter

```
_device_ unsigned char
ComputeSobel(unsigned char ul, // upper left
            unsigned char um, // upper middle
            unsigned char ur, // upper right
            unsigned char ml, // middle left
            unsigned char mm, // middle (unused)
            unsigned char mr, // middle right
            unsigned char ll, // lower left
            unsigned char lm, // lower middle
            unsigned char lr, // lower right
            float fScale)
{
    short Horz = ur + 2*mr + lr - ul - 2*ml - ll;
    short Vert = ul + 2*um + ur - ll - 2*lm - lr;
    short Sum = (short)(fScale*(abs((int)Horz)+abs((int)Vert)));

    if (Sum < 0)
    {
        return 0;
    }
    else if (Sum > 0xff)
    {
        return 0xff;
    }

    return (unsigned char) Sum;
}
```

samples / SobelFilter

```
_global_ void
SobelTex(Pixel *pSobelOriginal, unsigned int Pitch,
          int w, int h, float fScale, cudaTextureObject_t tex)
{
    unsigned char *pSobel =
        (unsigned char *)(((char *) pSobelOriginal)+blockIdx.x*Pitch);

    for (int i = threadIdx.x; i < w; i += blockDim.x)
    {
        unsigned char pix00 = tex2D<unsigned char>(tex, (float) i-1, (float) blockIdx.x-1);
        unsigned char pix01 = tex2D<unsigned char>(tex, (float) i+0, (float) blockIdx.x-1);
        unsigned char pix02 = tex2D<unsigned char>(tex, (float) i+1, (float) blockIdx.x-1);
        unsigned char pix10 = tex2D<unsigned char>(tex, (float) i-1, (float) blockIdx.x+0);
        unsigned char pix11 = tex2D<unsigned char>(tex, (float) i+0, (float) blockIdx.x+0);
        unsigned char pix12 = tex2D<unsigned char>(tex, (float) i+1, (float) blockIdx.x+0);
        unsigned char pix20 = tex2D<unsigned char>(tex, (float) i-1, (float) blockIdx.x+1);
        unsigned char pix21 = tex2D<unsigned char>(tex, (float) i+0, (float) blockIdx.x+1);
        unsigned char pix22 = tex2D<unsigned char>(tex, (float) i+1, (float) blockIdx.x+1);
        pSobel[i] = ComputeSobel(pix00, pix01, pix02,
                                pix10, pix11, pix12,
                                pix20, pix21, pix22, fScale);
    }
}
```

Image Sampling

$$F(\quad) =$$



$$F(\quad) =$$

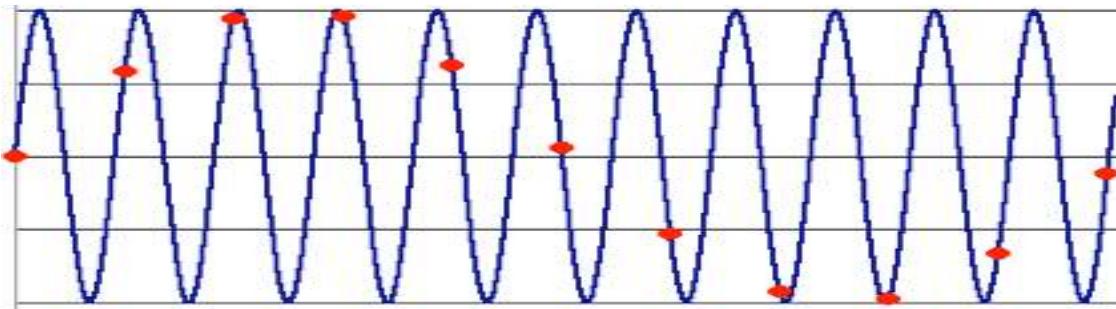


Image sub-sampling




Why does this look so crulty?

Down-sampling





- **Aliasing** can arise when you sample a continuous signal or image
 - occurs when your sampling rate is not high enough to capture the amount of detail in your image
 - Can give you the wrong signal/image—an *alias*
 - formally, the image contains structure at different scales
 - called “frequencies” in the Fourier domain
 - the sampling rate must be high enough to capture the highest frequency in the image

Sampling and the Nyquist rate


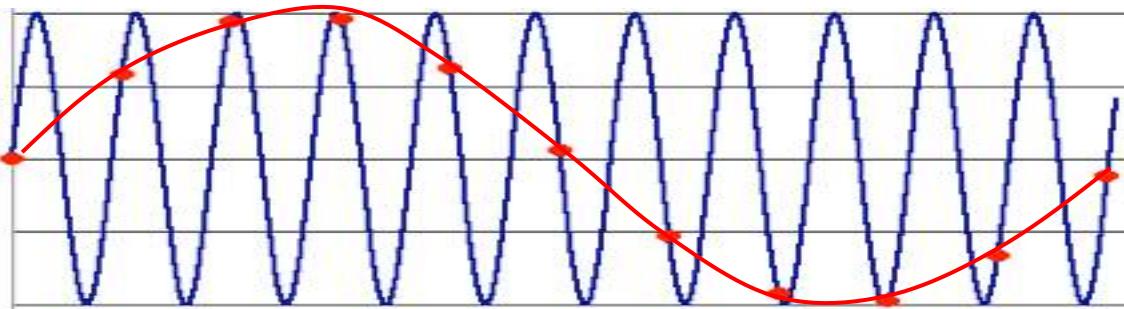


- **Aliasing** can arise when you sample a continuous signal or image
 - occurs when your sampling rate is not high enough to capture the amount of detail in your image
 - Can give you the wrong signal/image—an *alias*
 - formally, the image contains structure at different scales
 - called “frequencies” in the Fourier domain
 - the sampling rate must be high enough to capture the highest frequency in the image
- To avoid aliasing:
 - sampling rate $\geq 2 * \text{max frequency in the image}$
 - said another way: \geq two samples per cycle
 - This minimum sampling rate is called the **Nyquist rate**

2D example

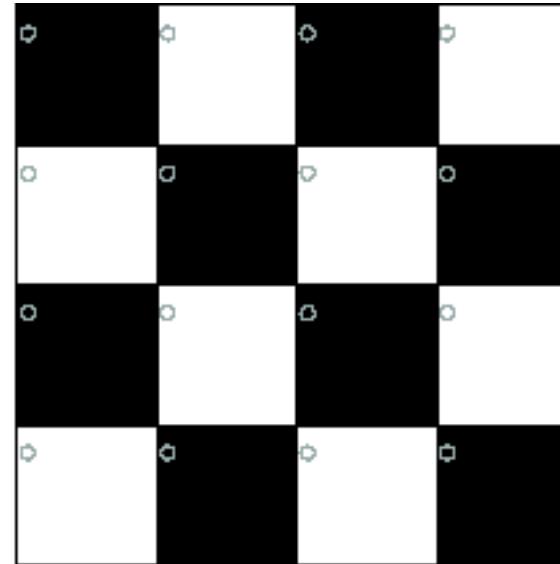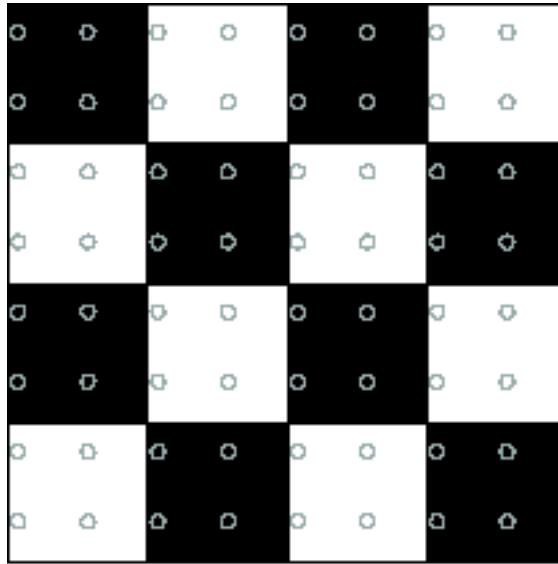


Good sampling

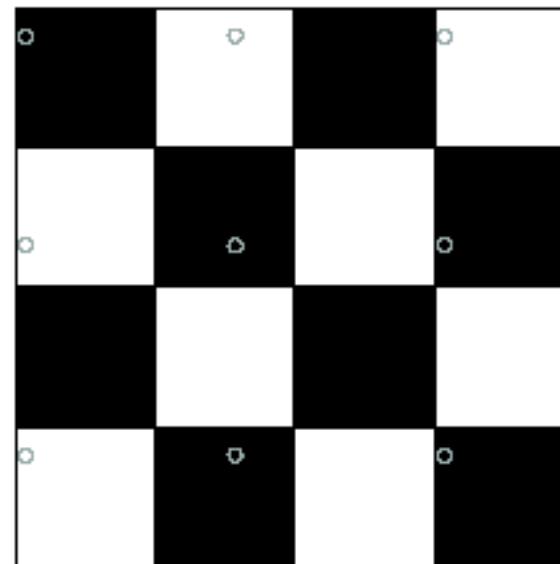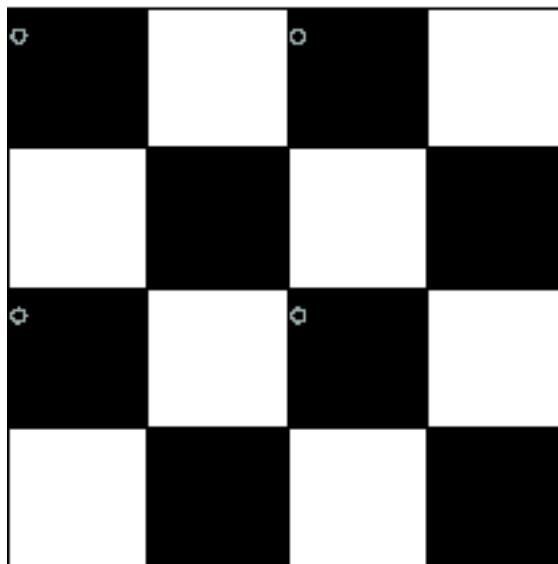


Bad sampling

Subsampling with Gaussian pre-filtering

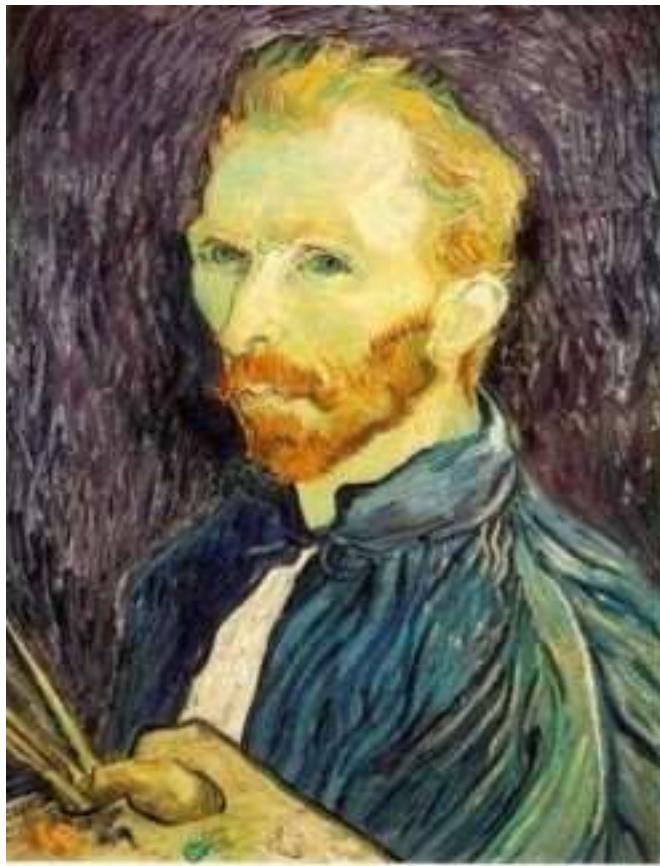

Gaussian 1/2

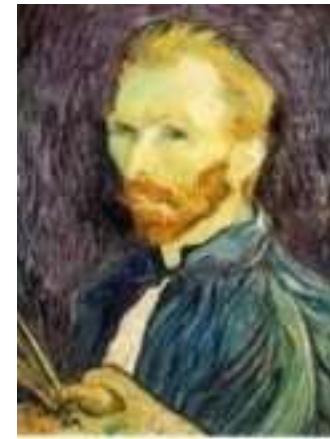

G 1/4




G 1/8

Solution: filter the image, *then* subsample

- Filter size should double for each $\frac{1}{2}$ size reduction. Why?

Subsampling with Gaussian pre-filtering

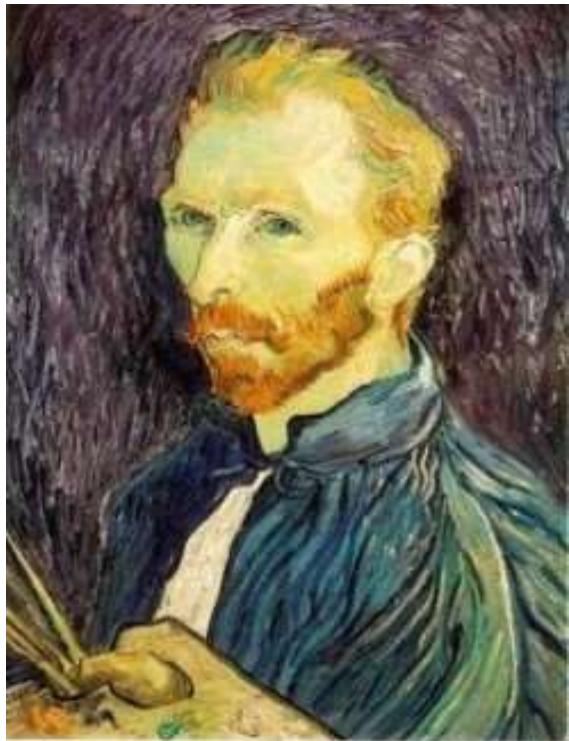

Gaussian 1/2



G 1/4




G 1/8

Solution: filter the image, *then* subsample

- Filter size should double for each $\frac{1}{2}$ size reduction. Why?
- How can we speed this up?

Compare with...

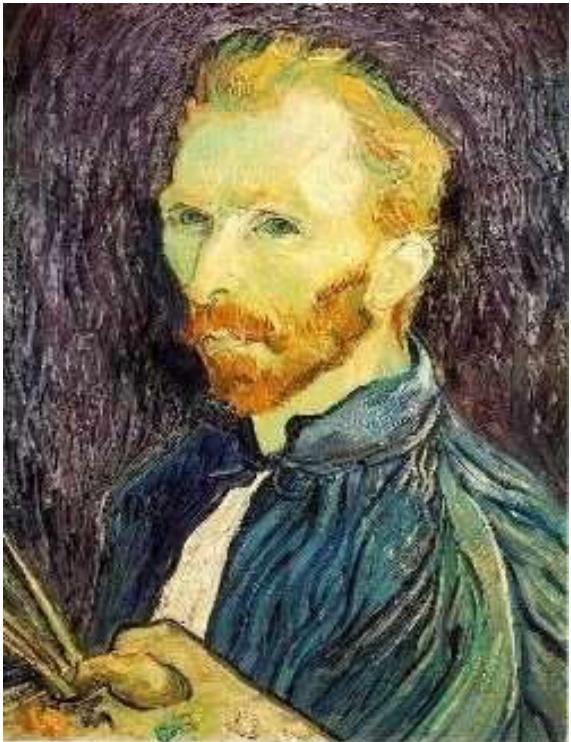

1/2




1/4 (2x zoom)



1/8 (4x zoom)


Up-sampling

How do we compute the values of pixels at fractional positions?

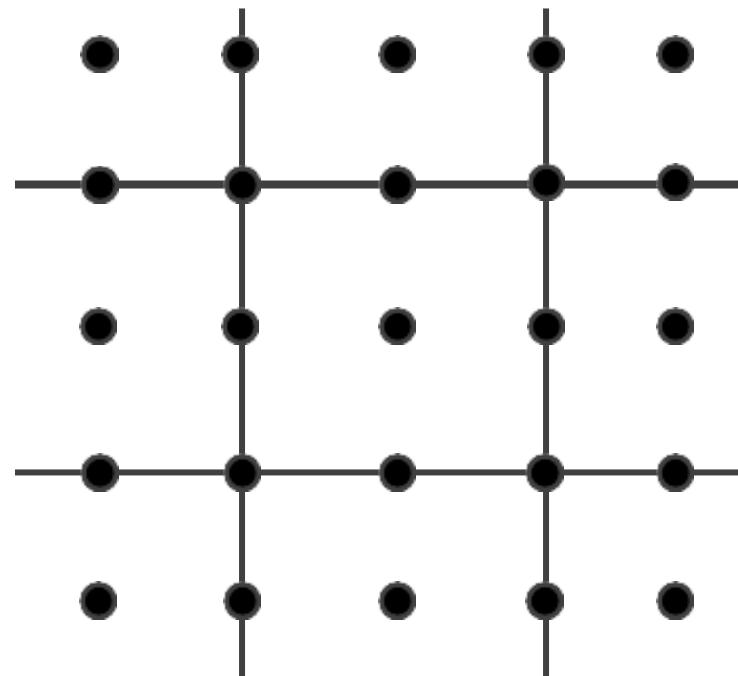

Up-sampling

How do we compute the values of pixels at fractional positions?

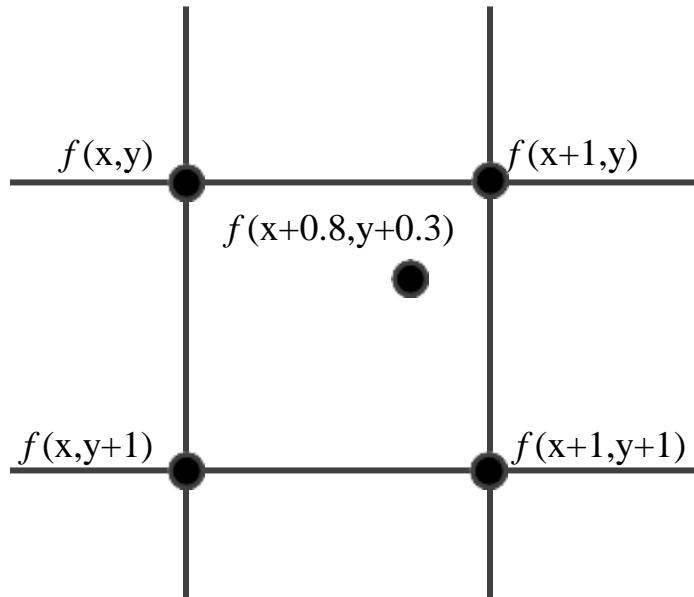


Bilinear sampling:


$$f(x + a, y + b) = (1 - a)(1 - b)f(x, y) + a(1 - b)f(x + 1, y) + (1 - a)b f(x, y + 1) + ab f(x + 1, y + 1)$$

Bicubic sampling fits a higher order function using a larger area of support.

Up-sampling Methods

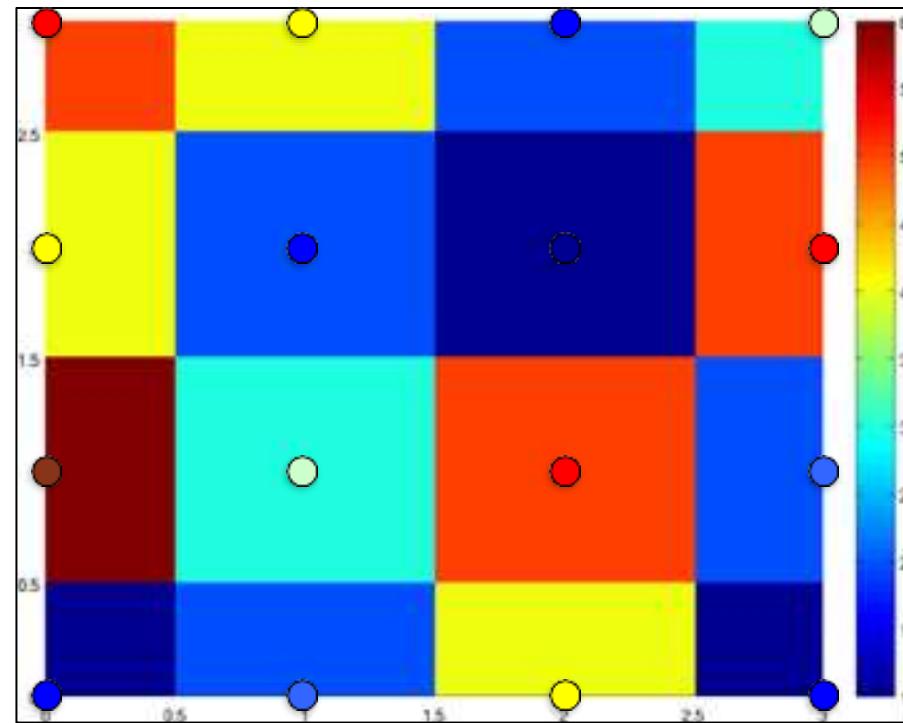

Up-sampling

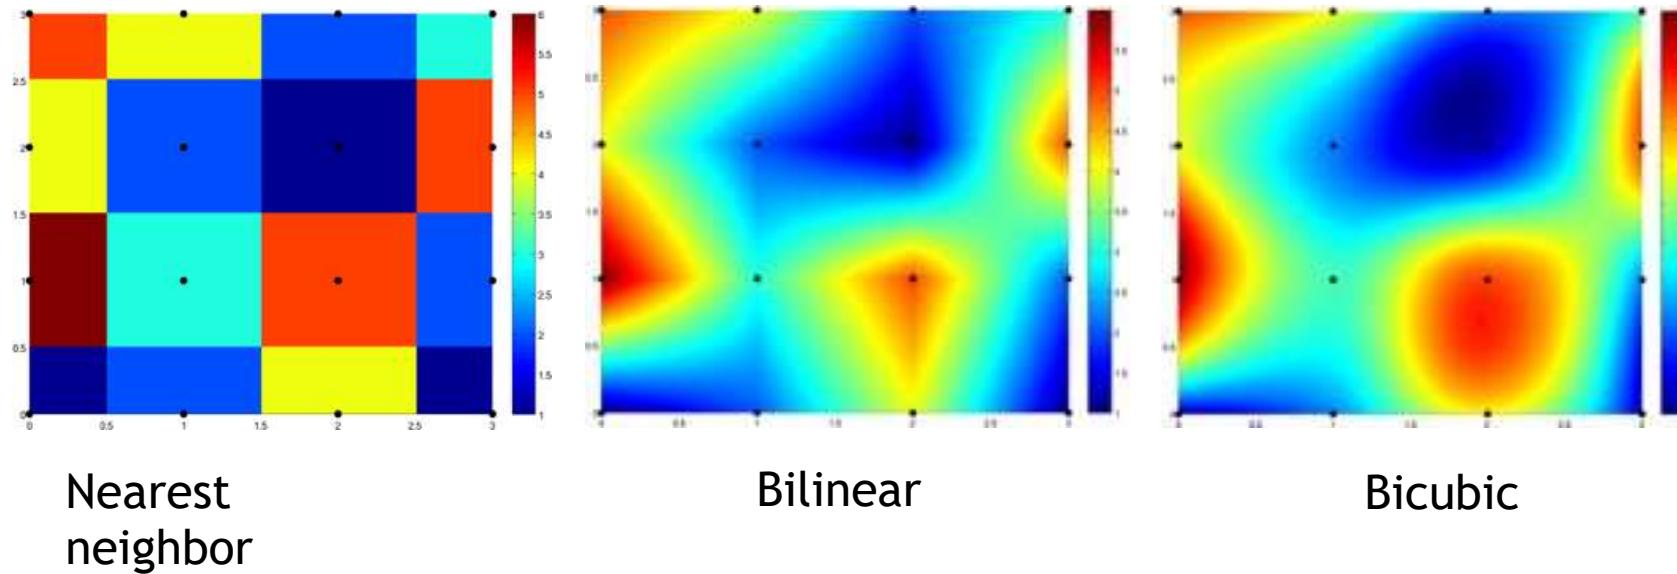

Up-sampling



Nearest
neighbor



Bilinear



Bicubic

Textures and Surfaces




- **Intro to Texturing and Texture Unit**
- **CUDA Array Storage**
- **Textures in CUDA C (Setup, Binding Modes, Coordinates)**
- **Texture Data Processing**
- **Texture Interpolation**
- **Surfaces**
- **Layered Textures (CUDA 4.0 Features)**
- **Usage Advice**

Texturing



- **Original purpose:**

- Provide surface coloring for 3D meshes (a "wrapping")
- 3D mesh has "texture coordinates", hardware looks up 2D color array

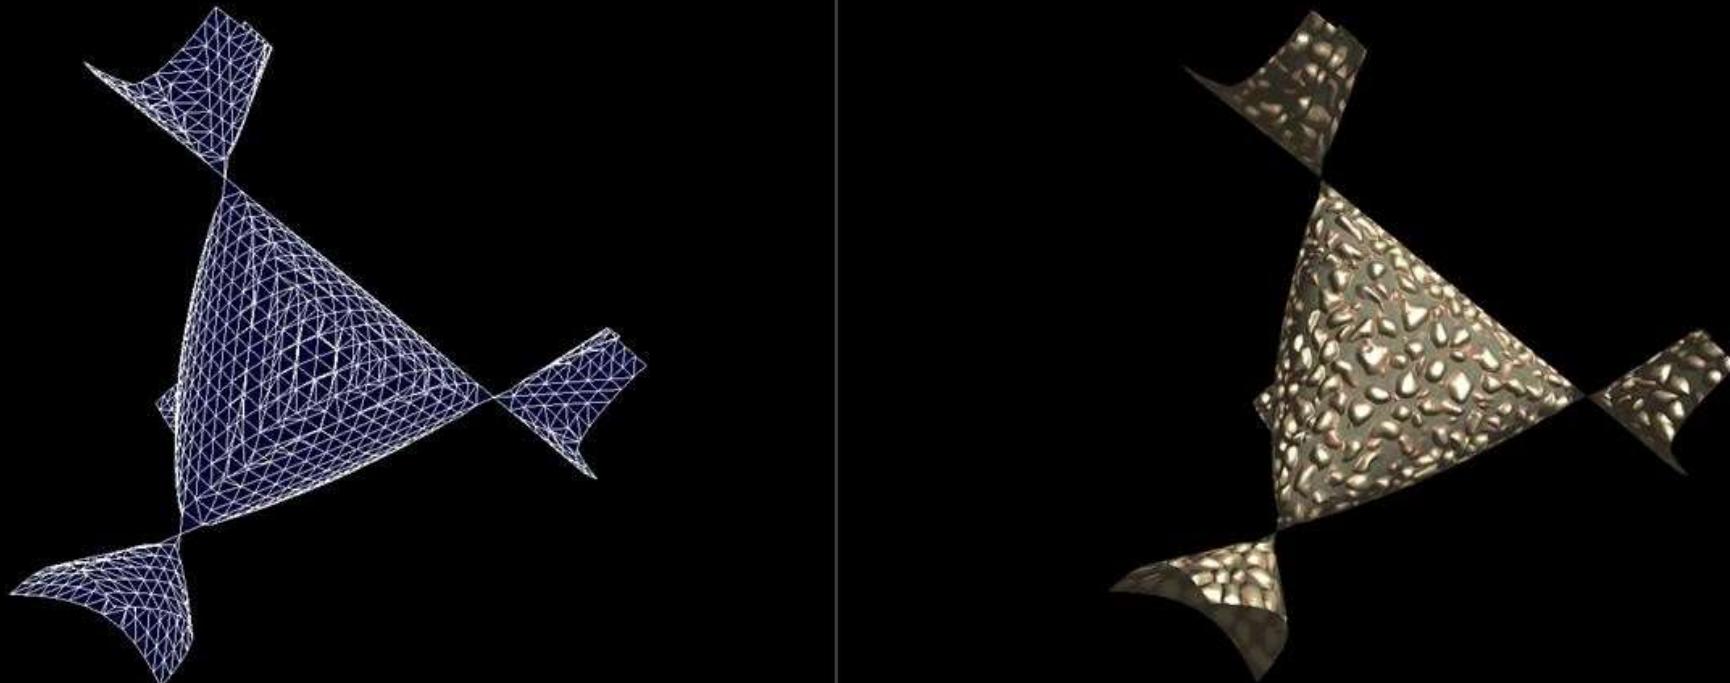


Texturing



- **Drawing Images:**



- Draw a quad comprising two triangles
- Texture it using the image pixels.

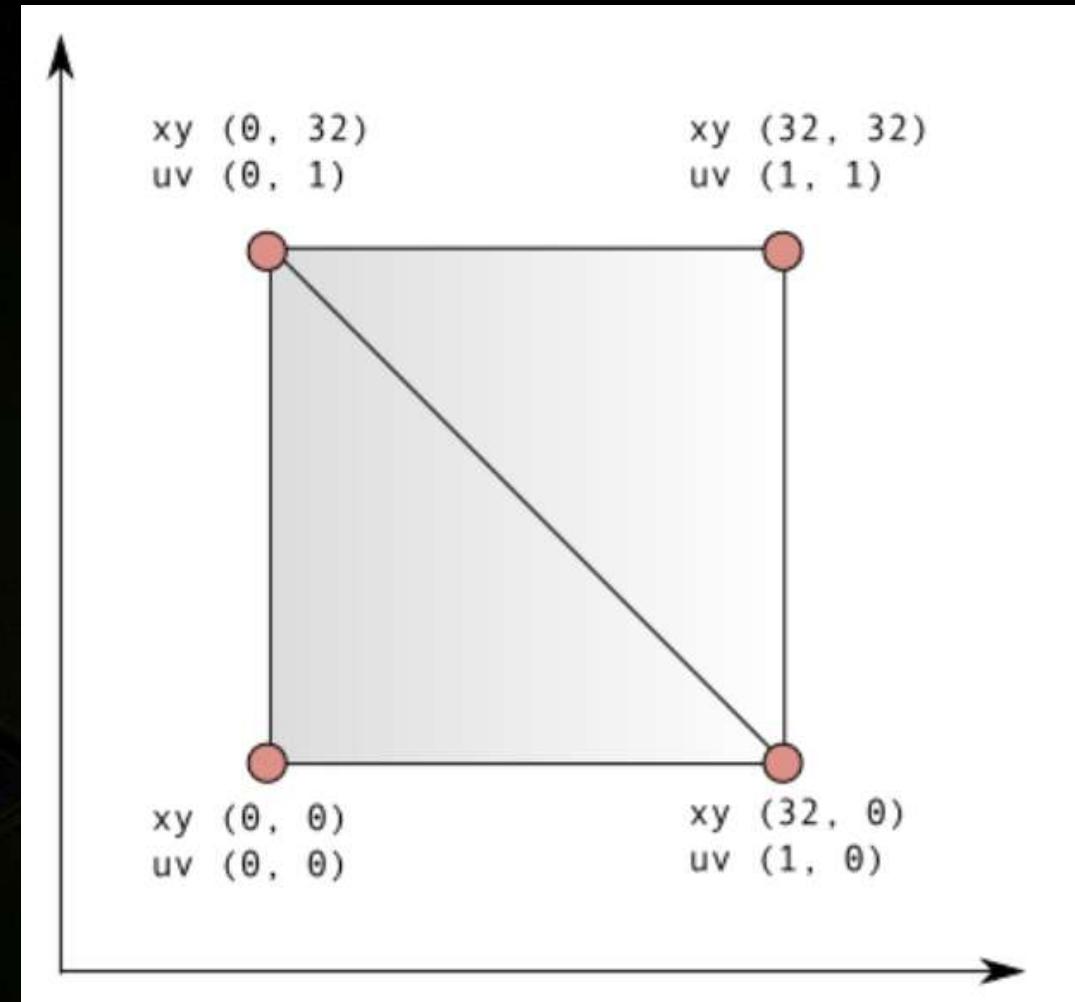


Texture Unit



- **Texture Read:**
Global memory read via texture hardware path
- **Data reads are cached**
 - Texture Cache (separate from L1)
 - Specialized for 2D/3D spatial locality

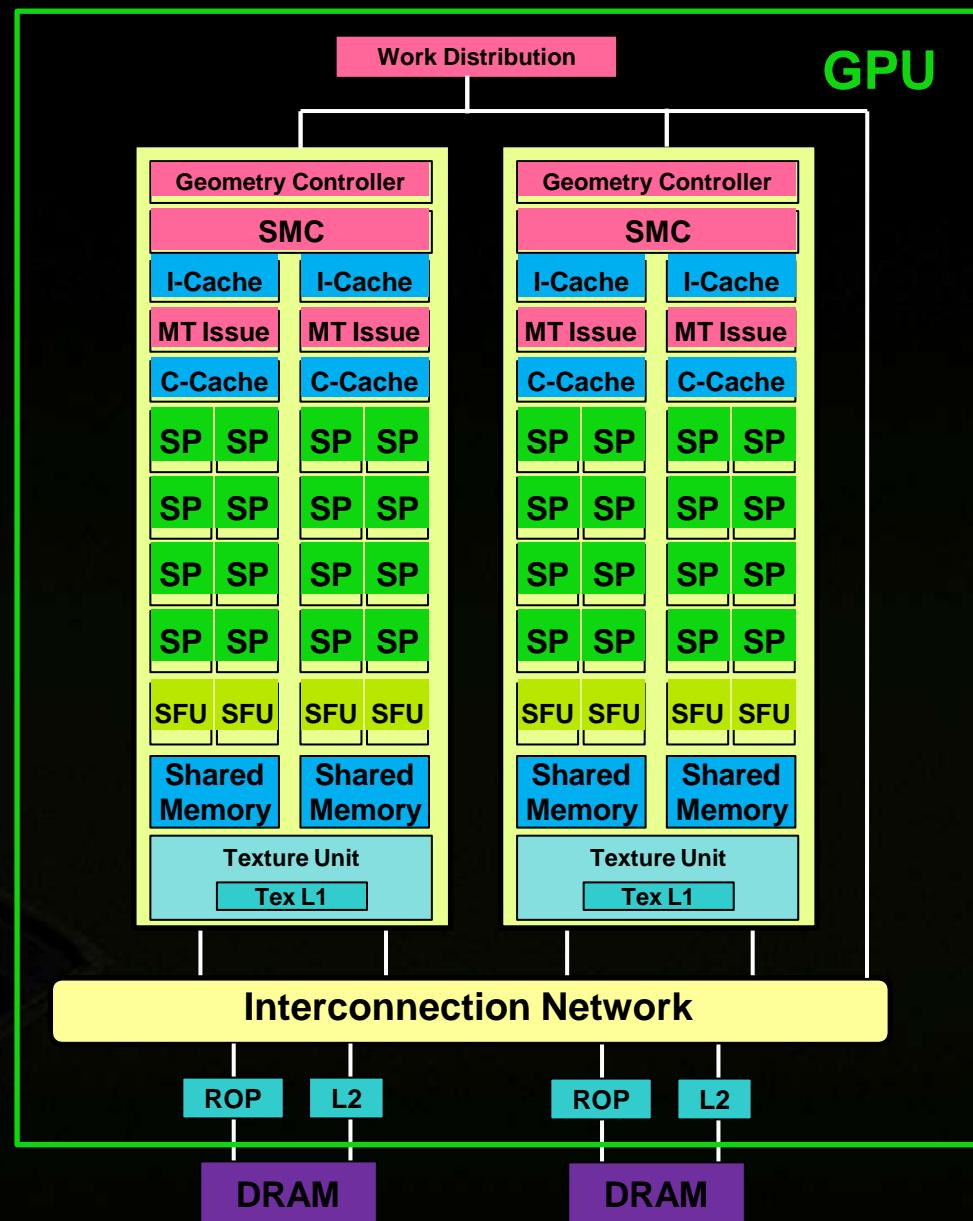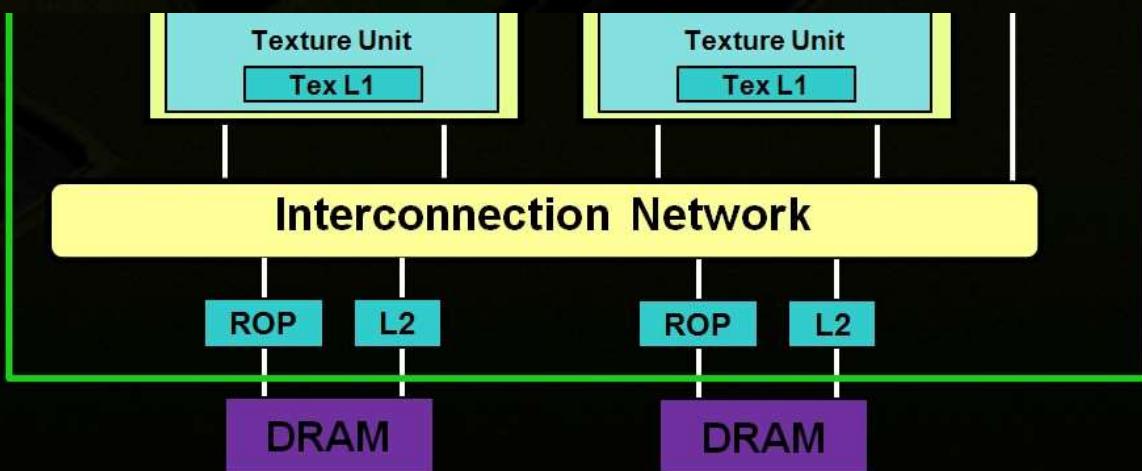

Texture Unit

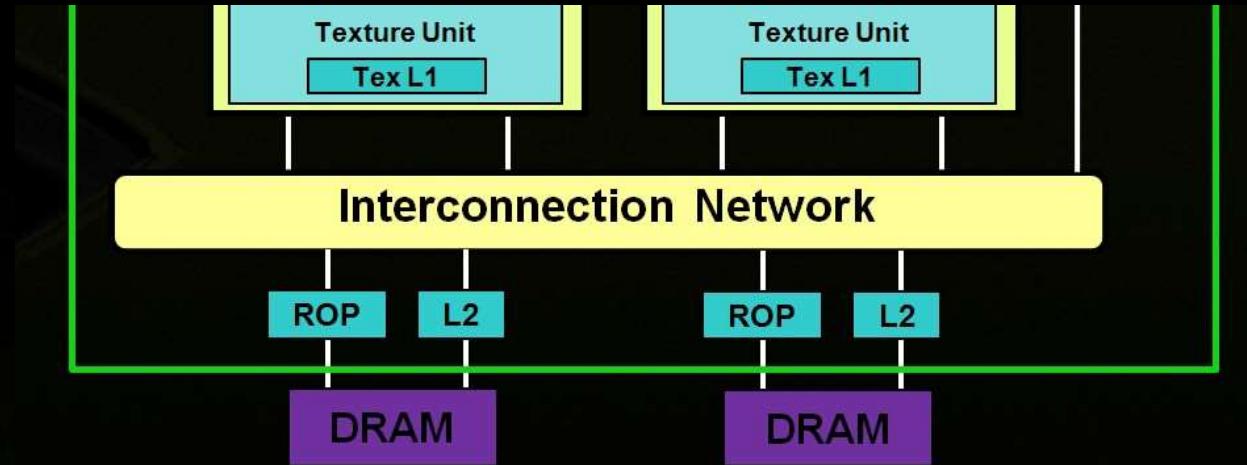

- **Data conversion (integer to float, 16 bit float to 32 bit float)**
- **Data Interpolation (aka Filtering)**
 - Linear / bilinear / trilinear data interpolation in hardware
- **Boundary modes (for “out-of-bounds” addresses)**
 - Addressable in 1D, 2D, or 3D.
 - Coordinate normalization mode (access becomes resolution-independent)
 - Clamp to edge / Clamp to Border color / Repeat / Mirror
- **Works best with CUDA Array as Data Storage**

CUDA Array



- **Opaque object for 1D/2D/3D data storage in global memory**
- **Purpose**
 - Optimal caching for 2D/3D spatial locality
(for 2D/3D threadblocks accessing in "cloud" pattern)
 - Standard exchange format for OpenGL/DirectX texture exchange
- **Data resides in Global Memory**
 - Host access through special cudaMemcpy operations
 - Device access through texture reads or surface read/write (explained later)

Setup of Textures



▪ Host Code

- Create Channel Description
 - Used for allocation of CUDA arrays and texture binding
 - Defines number of channels, type and bitness of data stored
 - E.g. 1 x float32, 4 x uchar
- Declare a texture object
- Allocate texture data storage (global memory as linear/pitch linear, or CUDA array)
- Bind texture to its data storage (device pointer / CUDA array)

▪ Device Code

- Fetch data using texture object
 - Textures bound to linear memory: `tex1Dfetch(tex, int coord)`
 - Textures bound to pitch linear memory: `tex2D(tex, float2 coord)`
 - Textures bound to CUDA arrays: `tex1D()` `tex2D()` `tex3D()`
 - Layered textures bound to CUDA arrays: `tex1DLayered()` `tex2DLayered()`



Texture binding modes

- **Texture objects are bound to device pointer or CUDA Array**
 - Sets the data source for all reads from this texture object
- **Bind to linear memory (device pointer)**
 - Texture is bound directly to global memory address
 - Large 1D extents (2^{27} elements), but integer indexing only
 - Simple, but: No data interpolation, no clamp/repeat addressing modes
- **Bind to pitch linear (device pointer)**
 - Texture is bound directly to global memory address of pitchlinear data
 - 2D indexing (but cache locality still sees pitchlinear mem)
 - Provides data interpolation and clamp/repeat addressing modes
 - SDK: "simplePitchLinearTexture"
- **Bind to CUDA array (handle)**
 - Texture is bound to CUDA array (1D, 2D, or 3D)
 - Float addressing (within array bounds, or normalized bounds)
 - Provides data interpolation and clamp/repeat addressing modes
 - Addressing modes (clamping, repeat)
 - SDK: "simpleTexture", "simpleTexture3D", "simpleTextureDrv"



Linear memory example (1D texture, simple caching access)

- Host Code

```
// global reference (visible for host and device code)
texture<float, cudaTextureType1D, cudaReadModeElementType> linmemTexture;
...
// host code: bind texture reference to linear memory
// (use implicitly created channel description)
cudaBindTexture(NULL, linmemTexture, d_linmemory_ptr,
                cudaCreateChannelDesc<float>(), linmemory_size);
// start kernel that uses texture reference!
```

- Device Code

```
float A = tex1Dfetch(linmemTexture, position);
```

CUDA Array example (2D texture interpolation)



Host Code

```
// global declaration of 2D float texture (visible for host and device code)
texture<float, cudaTextureType2D, cudaReadModeElementType> tex;

...
// Create explicit channel description (could use an implicit as well)
cudaChannelFormatDesc channelDesc = cudaCreateChannelDesc(32, 0, 0, 0, cudaChannelFormatKindFloat);

// Allocate CUDA array in device memory
cudaArray* cuArray;
cudaMallocArray(&cuArray, &channelDesc, width, height);

// Copy some data located at address h_data in host memory into CUDA array
cudaMemcpyToArray(cuArray, 0, 0, h_data, size, cudaMemcpyHostToDevice);

// Set the texture parameters (more sophisticated than a simple linear memory texture)
// boundary handling in x and y-direction!
tex.addressMode[0] = cudaAddressModeWrap; tex.addressMode[1] = cudaAddressModeWrap;
tex.filterMode = cudaFilterModeLinear; // linear interpolation
tex.normalized = true; // normalized coordinate bounds [0.0 .. 1.0]

// Bind the array to the texture reference
cudaBindTextureToArray(tex, cuArray, channelDesc);
```

Device Code


```
float value = tex2D(tex, xpos, ypos);
```

Texture Coordinates

- Texture fetch in device code takes floating point **texture coordinates**
- **Lookup mode** and coordinates determine data element fetch from global memory:
"Nearest neighbour" mode uses less data than "linear interpolation" mode
- Coordinate bounds can reflect input data dimensions, or be **normalized** (0.0 .. 1.0)
- Boundary handling in different ways:


Wrap

- Out-of-bounds coordinate is wrapped (modulo arithmetic)

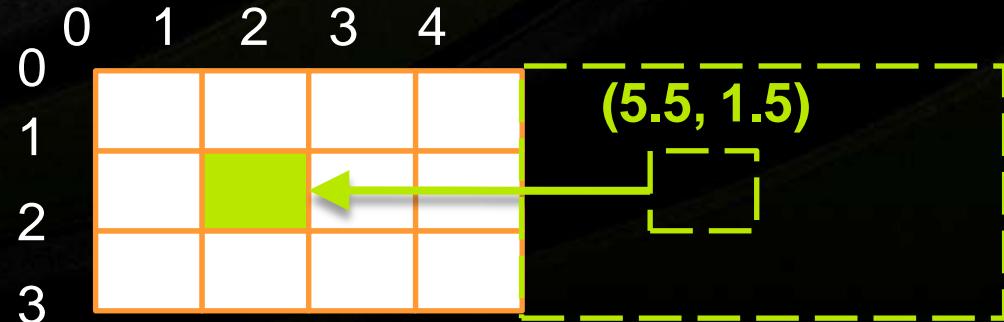

Clamp


- Out-of-bounds coordinate is clamped to closest boundary

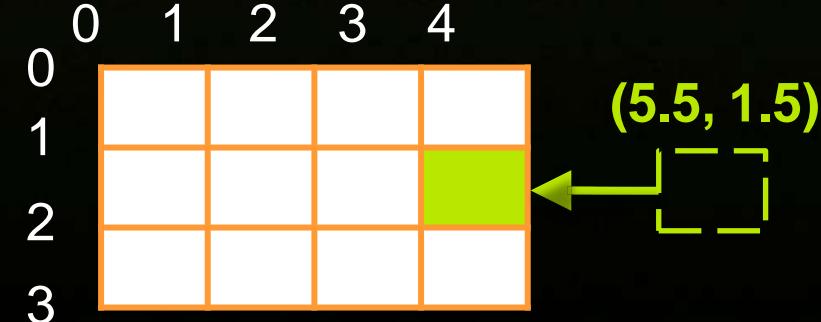

Texture Data Processing




- **Texture unit can convert integer input to floating point output**
 - E.g. 8bit input: uchar4(255, 128, 0, 0) becomes float4(1.0, 0.5, 0.0, 0.0)
- **Coordinate to Data mapping for "Nearest neighbour" mode:**
 - Example: Input data T, four values:

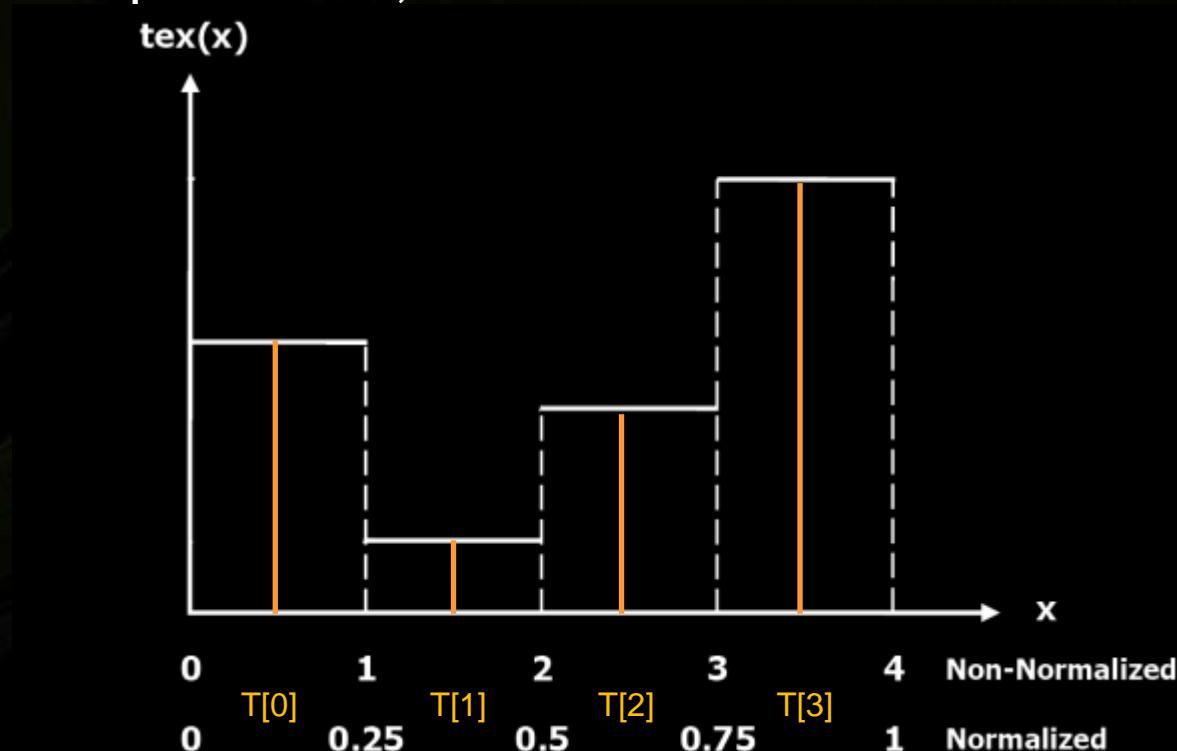

- All input data elements cover output ranges

Texture Interpolation

- Texture unit can interpolate between adjacent data elements
 - Fractional part of texture coordinate becomes interpolation weight
(Note: Interpolation weight is 8 bit quantized!)
 - Only in float conversion mode, bind to CUDA array or pitchlinear memory

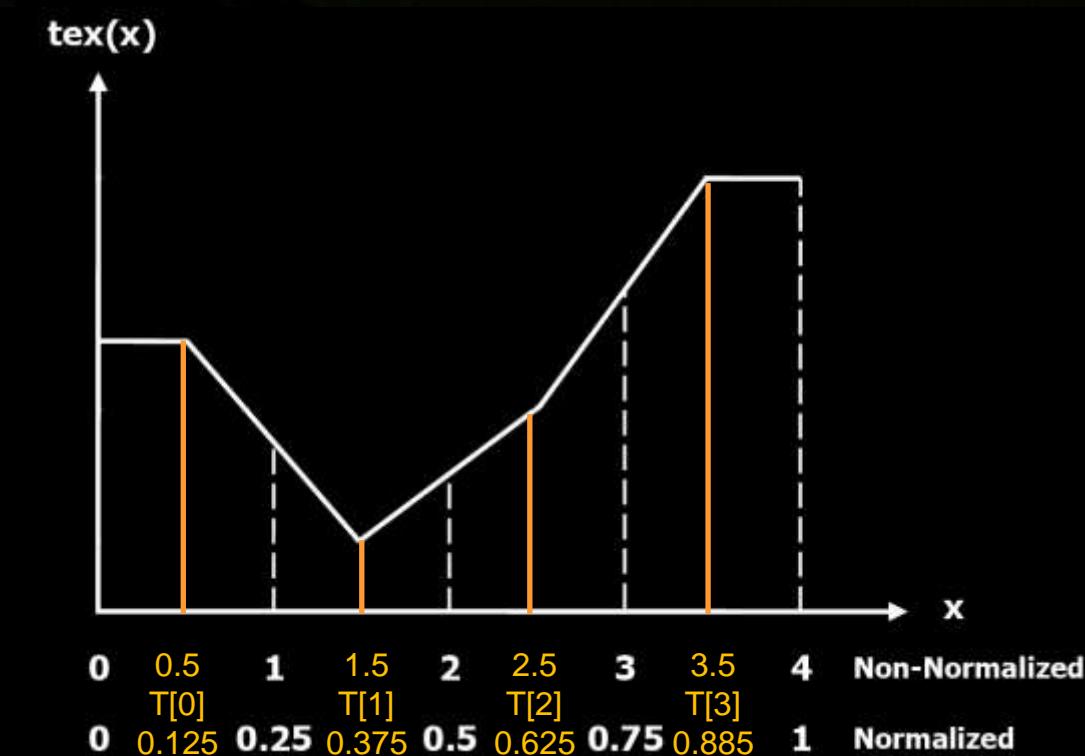

Surfaces

- Device code can read and write CUDA arrays via Surfaces
(Programming Guide, Appendix B.9 and SDK "simpleSurfaceWrite")
- Requires Compute Capability 2.0 or higher
- Currently available for 1D and 2D CUDA arrays
 - Use flag `cudaArraySurfaceLoadStore` during CUDA array creation
- Can also bind surface and texture to same CUDA array handle (write-to-texture)
- Surface operations have
 - no interpolation or data conversion
 - but some boundary handling
- Texture cache is not notified of CUDA array modifications!
 - Start new kernel to pick up modifications
- Note: Surface writes take x coordinate in byte size!



Layered Textures

- **Requires Compute Capability 2.0 or higher and CUDA 4.0**
- **3D coordinate, but z dimension is only integer (only xy-interpolation)**
- **Ideal for processing multiple textures with same size/format**
 - Reduced CPU overhead: single binding for entire texture array
 - Large sizes supported on Fermi GPUs with CC ≥ 2.0 (up to 16k x 16k x 2k)
 - e.g. Medical Imaging, Terrain Rendering (flight simulators), etc.
- **Faster Performance**
 - Faster than 3D Textures: better texture cache performance, since Linear/Bilinear interpolation only within a layer, not across layers
 - Fast interop with OpenGL / Direct3D for each layer
 - No need to create/manage a texture atlas
- **Can be bound to specially created CUDA Arrays**
 - Use `cudaMalloc3DArray()` with `cudaArrayLayered` flag
- **Details: Programming Guide 4.0, 3.2.10.1.5 Layered Textures**

Usage Advice

- **Texture bound to linear memory (device pointer)**
 - No interpolation!
 - Integer addressing, large extents (2^{27} elements)
 - Use if texture cache shall assist L1 cache
- **Texture bound to CUDA arrays (handle)**
 - Use if texture content changes rarely
(Can still modify content via surface writes or `cudaMemcpy`)
- **Texture bound to pitch linear memory (device pointer)**
 - Has float/integer addressing, filtering, and clamp/repeat addressing modes
 - Use if conversion to CUDA arrays too tedious (performance / code)
 - Performance caveat: 2D Threadblocks/Warps should only access rows!

Texture exchange with OpenGL/DirectX



- Interoperability API can bind OpenGL / DirectX context to CUDA C context
- Textures/Surfaces from graphics APIs are exported as CUDA Arrays
 - Direction flags tell which way data exchange goes from graphics API towards CUDA C (read-only, write-discard, read/write)
 - Host code can then modify textures with cudaMemcpy
 - Device code can modify textures with surface read/write:
E.g. while registering an OpenGL texture, use cudaGraphicsGLRegisterImage()
with flag cudaGraphicsRegisterFlagsSurfaceLoadStore
- SDK: "postProcessGL", "simpleD3D11Texture" and similar

Summary



- **Texturing provides additional performance**
 - Extra cache capacity
 - Linear interpolation of adjacent data in hardware
 - Array boundary handling
 - Integer-to-float conversion, data unpacking
- **Algorithmic design considerations**
 - Texture binding modes (linear memory, pitchlinear memory, CUDAArray)
 - Texture coordinate offsets for correct linear interpolation
 - 8bit weight quantization during linear interpolation
 - Can't flush texture cache during kernel execution
 - 3D: xy-interpolation (layered textures) vs. Trilinear xyz-interpolation (3D textures)



fast box filter

- Allows box filter of any width with a constant cost
 - Rolling box filter
- Uses a sliding window
 - Two adds and a multiply per output pixel
 - Adds new pixel entering window, subtracts pixel leaving
- Iterative Box Filter \approx Gaussian blur
- Using pixel shaders, it is impossible to implement a rolling box filter
 - Each thread requires writing more than one pixel
- CUDA allows executing rows/columns in parallel
 - Uses tex2D to improve read performance and simplify addressing


fast box filter

- Separable, two pass filter. First row pass, then column pass

Source Image (input)




Output Result

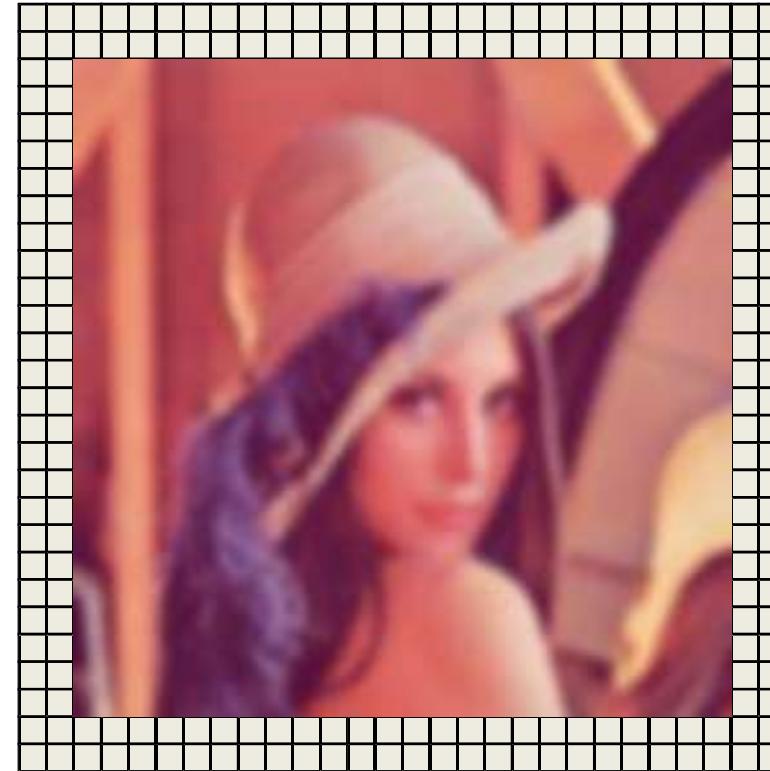

© 2008 NVIDIA Corporation.

fast box filter (row pass pixel 0)

- Assume $r = 2$, each thread works pixels along the row and sums $(2r+1)$ pixels
- Then average $(2r+1)$ pixels and writes to destination (i, j)

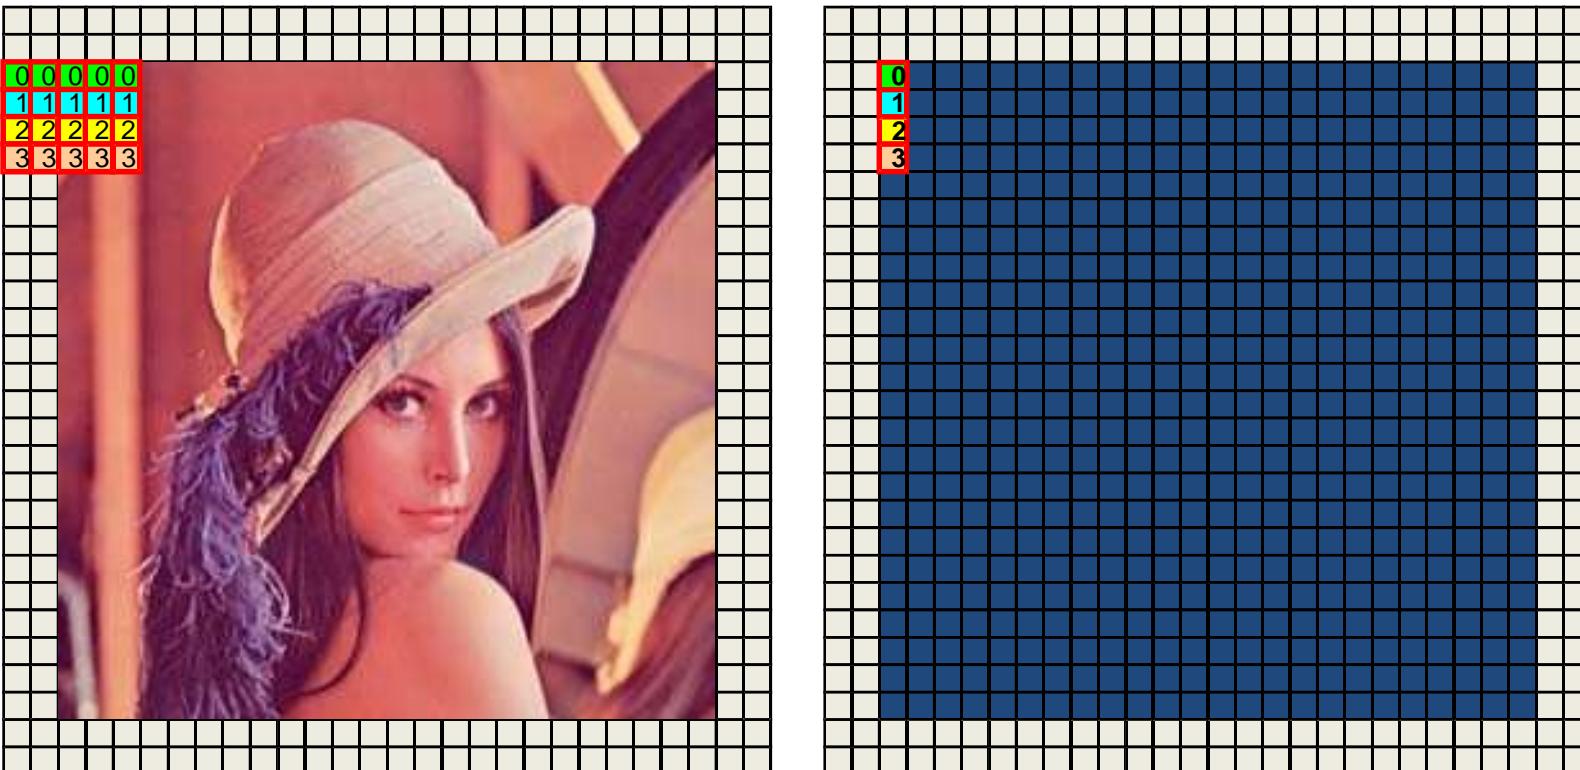


$$\frac{3 + 3 + 3 + 3 + 3}{(2r + 1)} = 3$$

© 2008 NVIDIA Corporation.


fast box filter (row pass pixel 11)

- Take previous sum from pixel 10, -1 pixel ($i - (r+1), j$), +1 pixel ($i + (r+1), j$)
- Average $(2r+1)$ pixels and Output to (i, j)

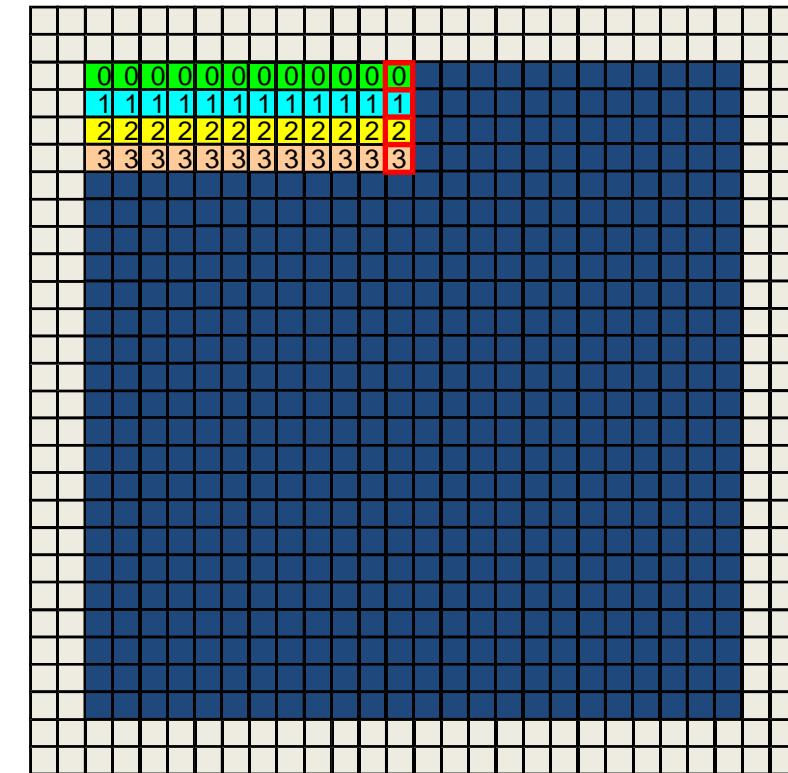

fast box filter (finish row pass)

- Each thread continues to iterate until the entire row of pixels is done
- Average then Write to (i, j) in destination image
- A single thread writes the entire row of pixels

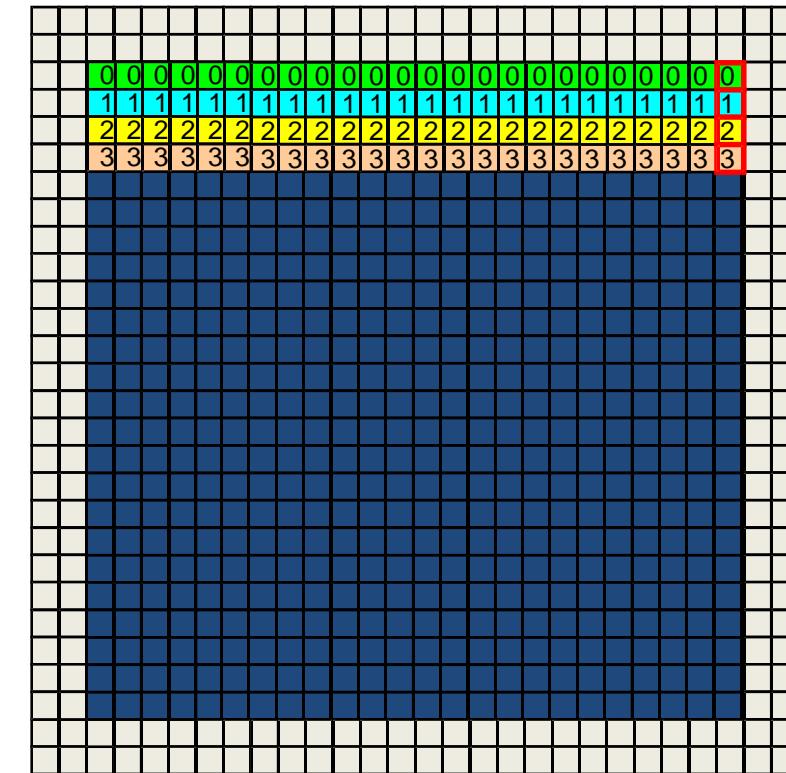


- Note: Writes are not coalesced
- Solution: Use shared memory to cache results per warp,
`call __syncthreads()`, then copy to global mem to achieve Coalescing

© 2008 NVIDIA Corporation.

Column Filter Pass (final)

- Threads (i, j) read from global memory and sum along the column from row pass image, we get Coalesced Reads
 - Compute pixel sums from previous pixel, -1 pixel, +1 pixel
 - Average result and Output to (i, j) . We get Coalesced Writes

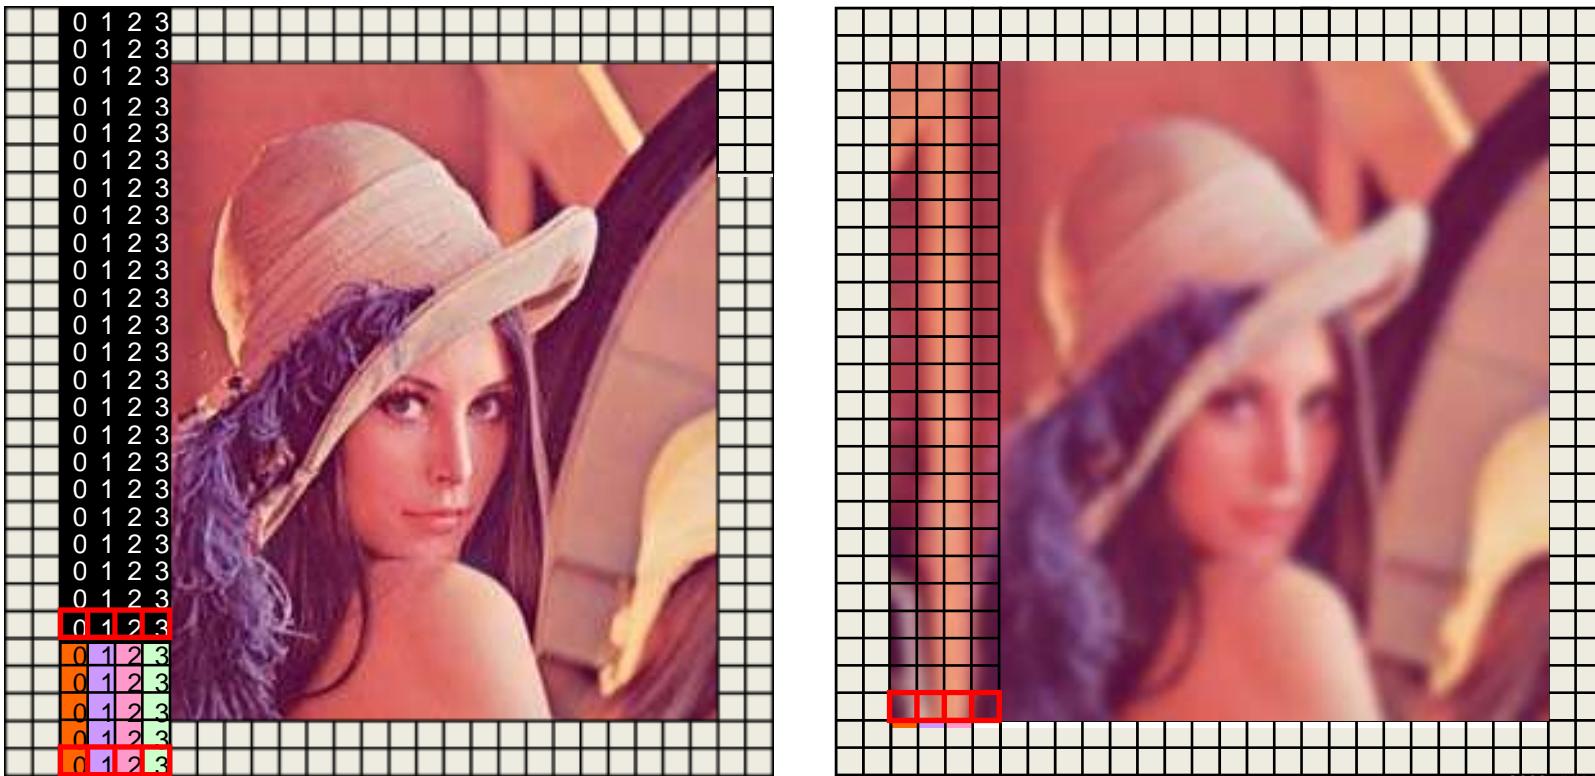

© 2008 NVIDIA Corporation.

samples / boxFilter

```
// process row
__device__ void
d_boxfilter_x(float *id, float *od, int w, int h, int r)    // main loop
{
    float scale = 1.0f / (float)((r << 1) + 1);

    float t;
    // do left edge
    t = id[0] * r;

    for (int x = 0; x < (r + 1); x++)
    {
        t += id[x];
    }

    od[0] = t * scale;

    for (int x = 1; x < (r + 1); x++)                         }
    {
        t += id[x + r];
        t -= id[0];
        od[x] = t * scale;
    }

    // do right edge
    for (int x = w - r; x < w; x++)
    {
        t += id[w - 1];
        t -= id[x - r - 1];
        od[x] = t * scale;
    }
}
```

```
// process column
__device__ void
d_boxfilter_y(float *id, float *od, int w, int      // main loop
h, int r)
{
    float scale = 1.0f / (float)((r << 1) + 1);

    float t;
    // do left edge
    t = id[0] * r;

    for (int y = 0; y < (r + 1); y++)
    {
        t += id[y * w];
    }
    od[0] = t * scale;

    for (int y = 1; y < (r + 1); y++)
    {
        t += id[(y + r) * w];
        t -= id[0];
        od[y * w] = t * scale;
    }


    // main loop
    for (int y = (r + 1); y < (h - r); y++)
    {
        t += id[(y + r) * w];
        t -= id[((y - r) * w) - w];
        od[y * w] = t * scale;
    }

    // do right edge
    for (int y = h - r; y < h; y++)
    {
        t += id[(h-1) * w];
        t -= id[((y - r) * w) - w];
        od[y * w] = t * scale;
    }
}
```


```
__global__ void
d_boxfilter_x_global(float *id, float *od, int w, int h, int r)
{
    unsigned int y = blockIdx.x*blockDim.x + threadIdx.x;
    d_boxfilter_x(&id[y * w], &od[y * w], w, h, r);
}
```

```
__global__ void
d_boxfilter_y_global(float *id, float *od, int w, int h, int r)
{
    unsigned int x = blockIdx.x*blockDim.x + threadIdx.x;
    d_boxfilter_y(&id[x], &od[x], w, h, r);
}
```

samples \ convolutionTexture

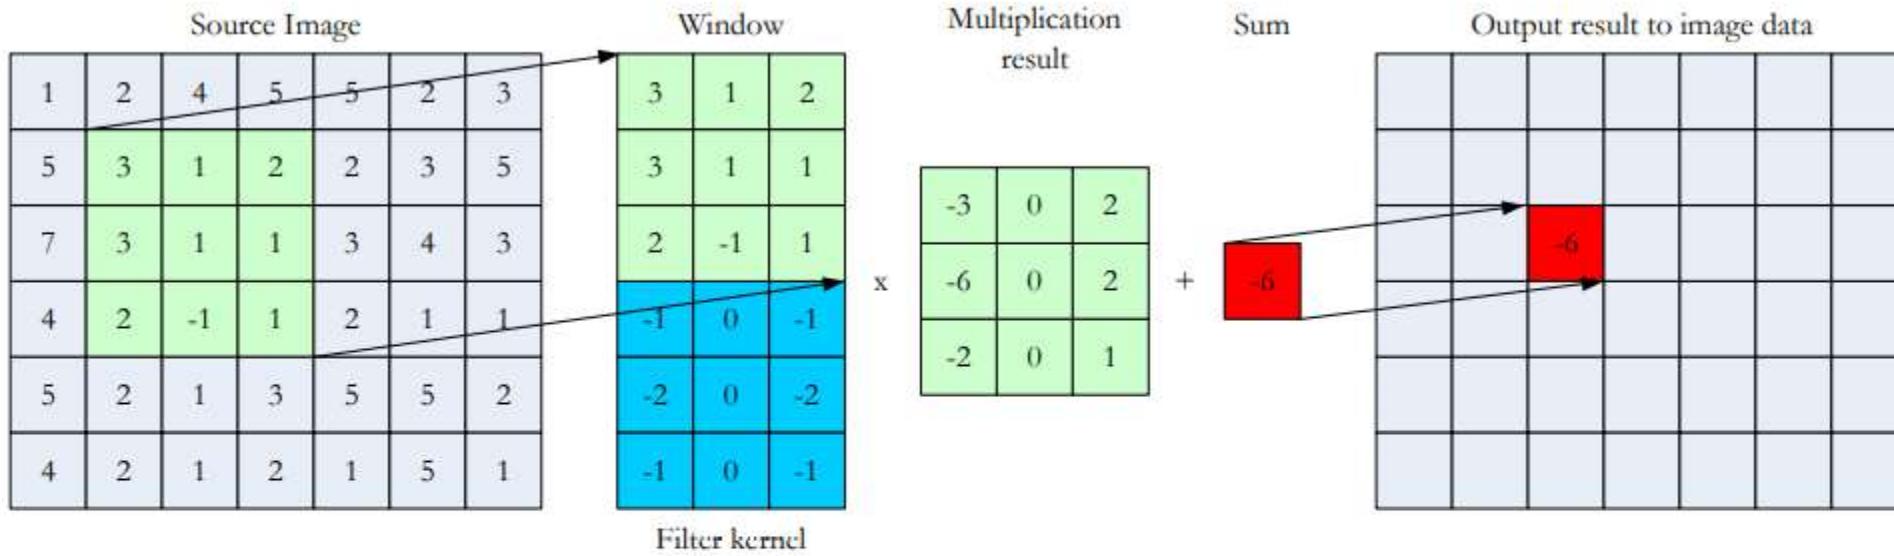

The basic convolution method.

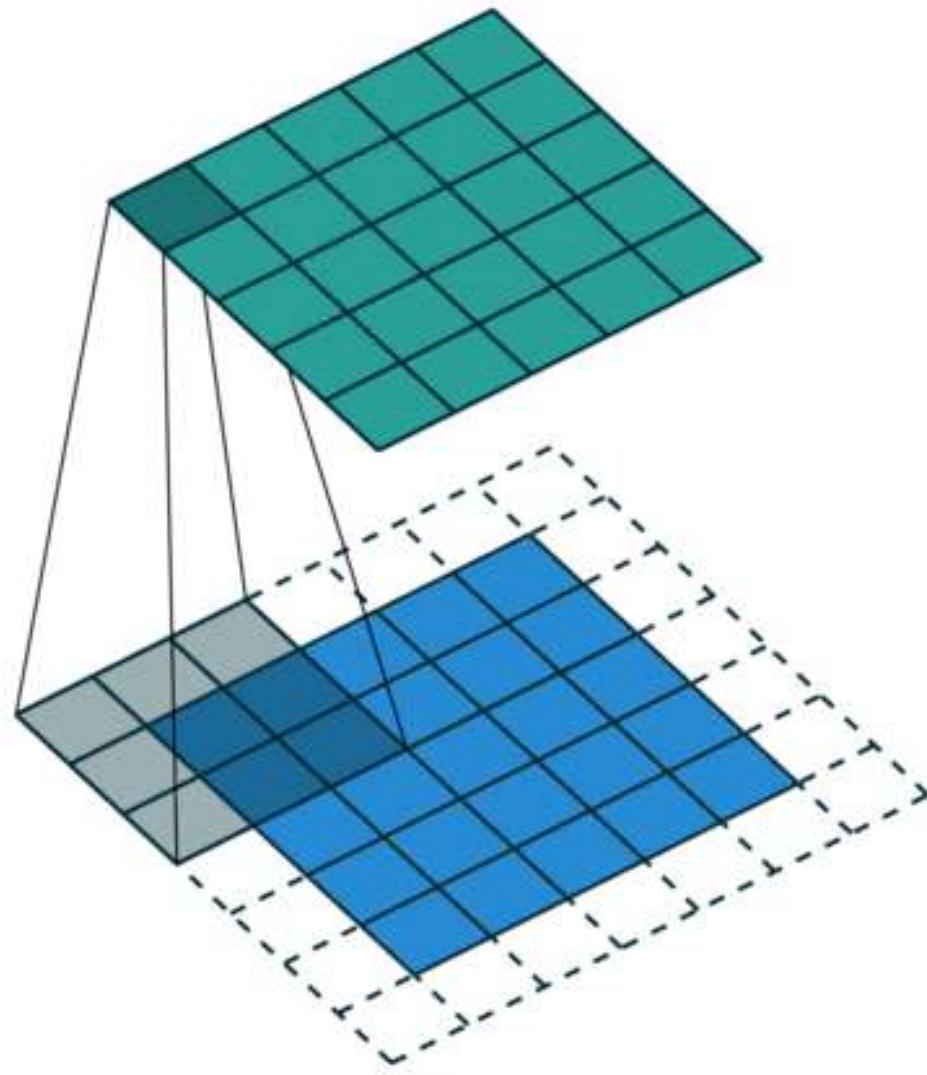

```
//////////  
// Convolution kernel and input array storage  
//////////  
__constant__ float c_Kernel[KERNEL_LENGTH];  
  
extern "C" void setConvolutionKernel(float *h_Kernel)  
{  
    cudaMemcpyToSymbol(c_Kernel, h_Kernel, KERNEL_LENGTH * sizeof(float));  
}
```

Constant Memory

Variables that are declared with the **__constant__** attribute are declared in constant memory (which is part of global memory).

There is only a limited amount of constant memory (64KB per kernel), but it is much faster than regular global memory, because it is always cached.

Constant memory can be written to by the host process using the **cudaMemcpyToSymbol** function and read-from using the **cudaMemcpyFromSymbol** function.

Lifetime of program, but can only be changed by the CPU.

```
__global__ void convolutionRowsKernel(
    float *d_Dst,
    int imageW,
    int imageH,
    cudaTextureObject_t texSrc
)
{
    const int ix = IMAD(blockDim.x, blockIdx.x, threadIdx.x);
    const int iy = IMAD(blockDim.y, blockIdx.y, threadIdx.y);
    const float x = (float)ix + 0.5f;
    const float y = (float)iy + 0.5f;


    if (ix >= imageW || iy >= imageH)
    {
        return;
    }

    float sum = 0;

    for (int k = -KERNEL_RADIUS; k <= KERNEL_RADIUS; k++)
    {
        sum += tex2D<float>(texSrc, x + (float)k, y) * c_Kernel[KERNEL_RADIUS - k];
    }

    d_Dst[IMAD(iy, imageW, ix)] = sum;
}
```

samples \ convolutionSeparable

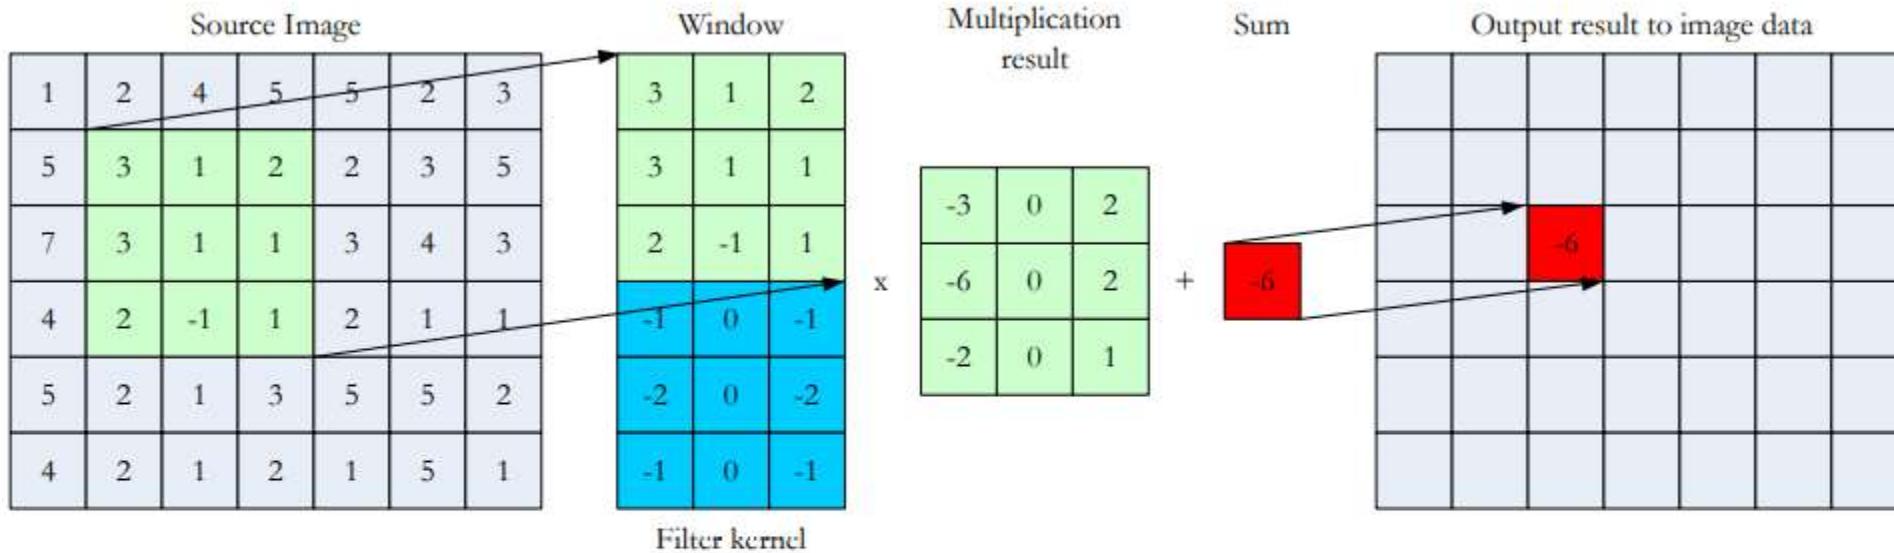

The basic convolution method.


Separability Filters

- A separable 2D Filter can be expressed as the composition of two 1D filters
- Example – Sobel Filter

$$\begin{bmatrix} 1 \\ 2 \\ 1 \end{bmatrix} * [1 \ 0 \ -1] = \begin{bmatrix} 1 & 0 & -1 \\ 2 & 0 & -2 \\ 1 & 0 & -1 \end{bmatrix}$$

samples \
convolutionSeparable

Image in Device Memory

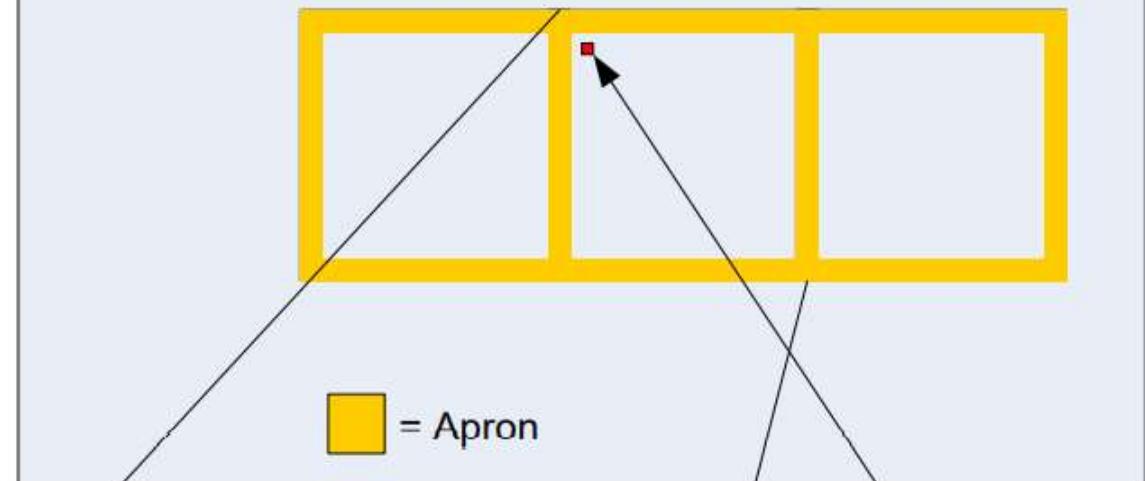

0 0 0	0 0 0 0 0 0
2 1 3	2 3 2 2 3 2
1 1 2	1 6 1 4 2 1
1 4 1	5 7 1 1 2 1
2 3 3	4 8 3 1 3 2
1 2 1	1 9 5 1 2 1
2 3 3	4 8 3 1 3 2
1 2 1	1 9 5 1 2 1
1 2 1	1 9 5 1 2 1

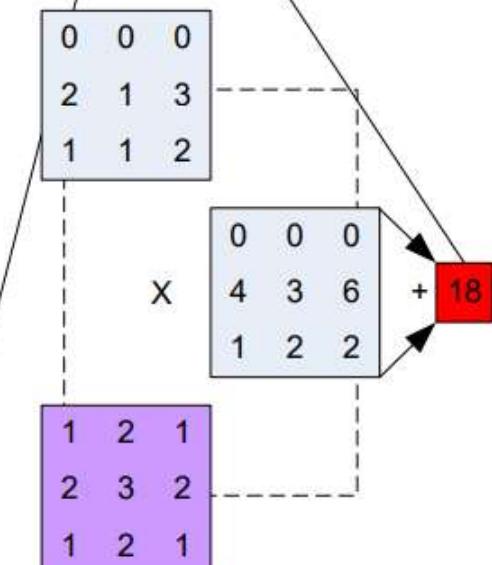


Image Block in Shared Memory

Avoiding Idle Threads

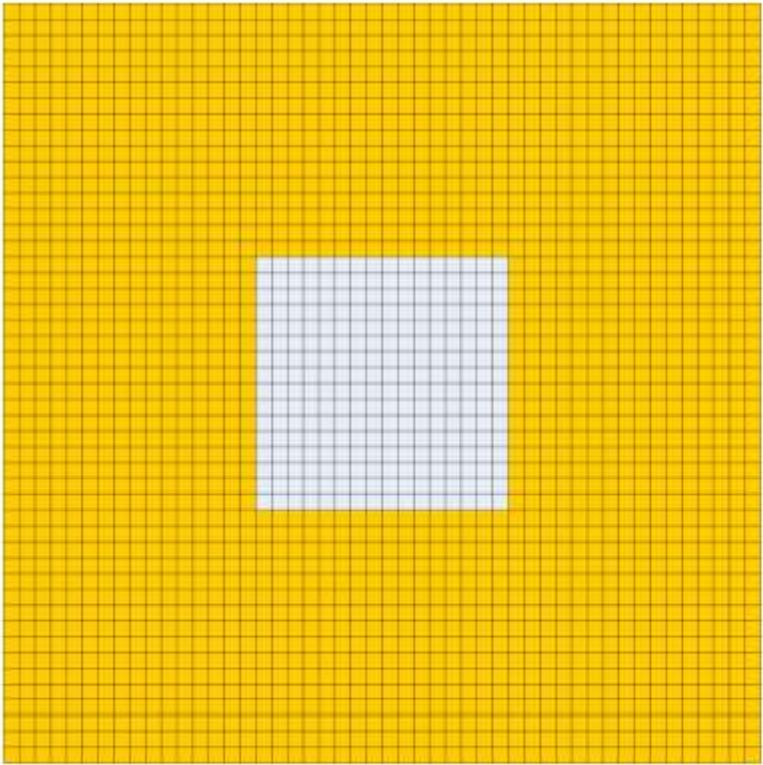


Figure 5: If the radius of the filter kernel is large relative to the image block size, there will be many idle threads during filter computation.

Avoiding Idle Threads

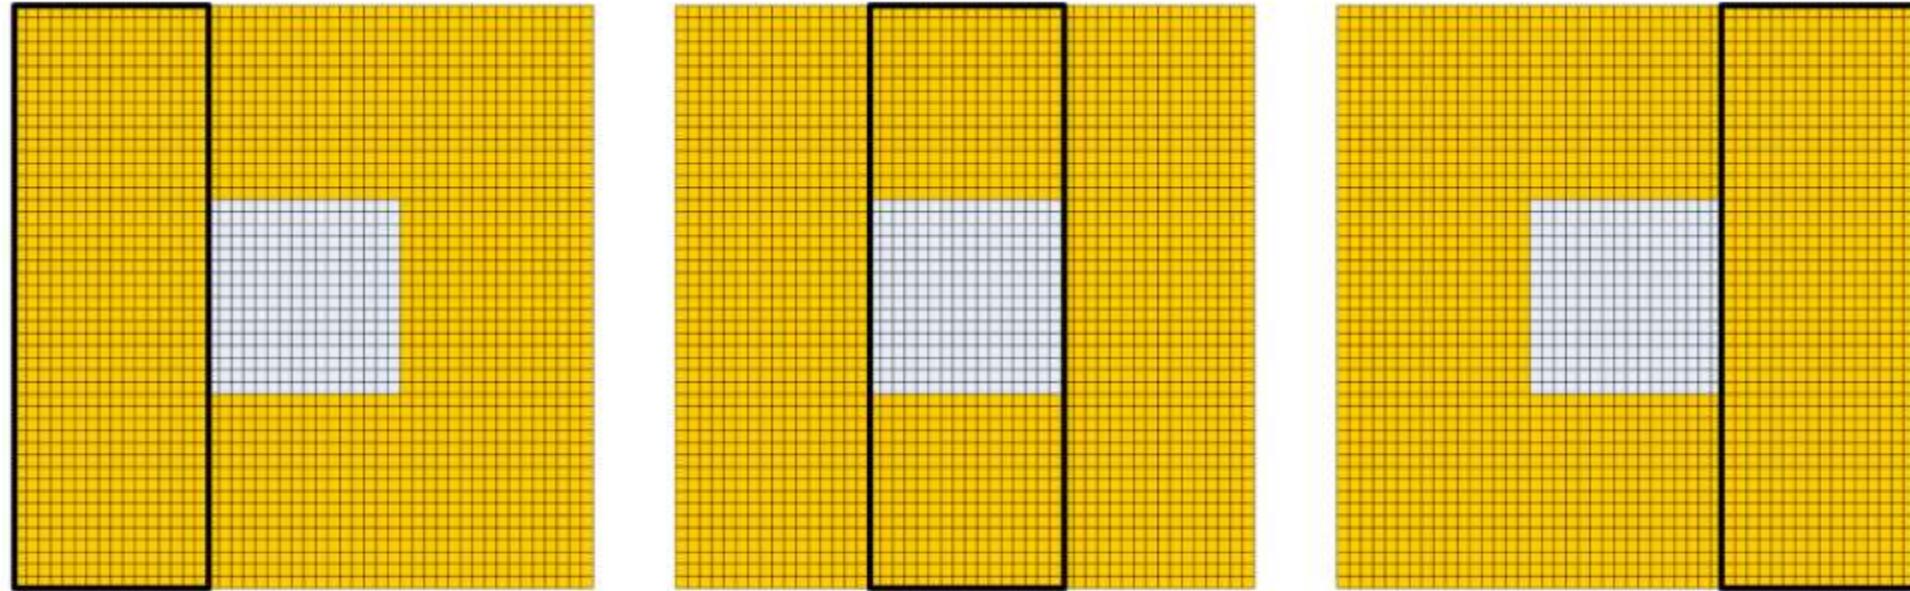


Figure 6: Reduce idle threads by loading multiple pixels per thread.

Avoiding Idle Threads

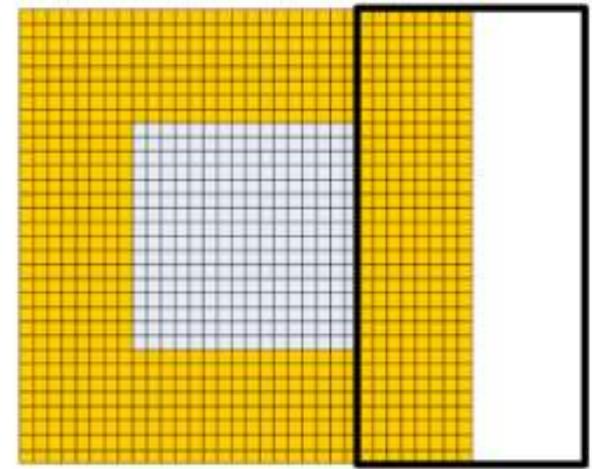
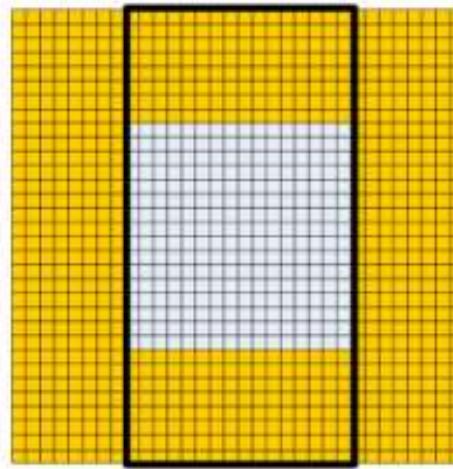
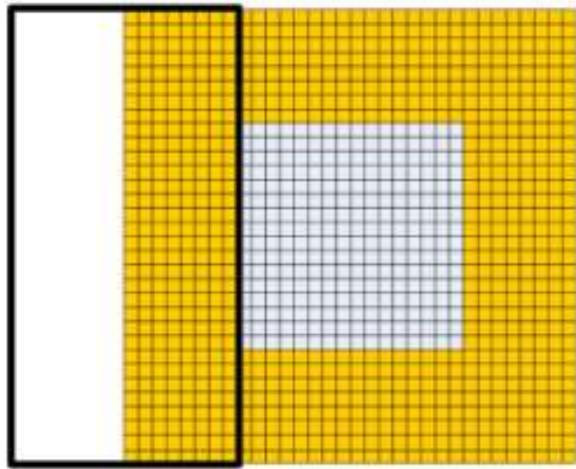


Figure 7: When the apron is narrower than the thread block, some threads are inactive during loading.

Separable Implementation

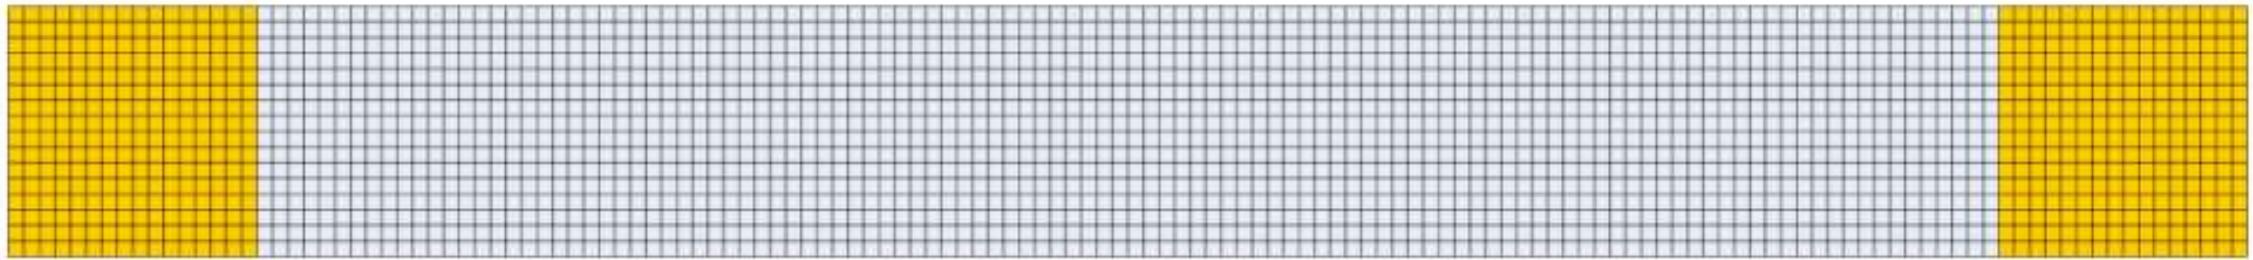


Figure 8: A separable filter allows multiple pixels to be processed for each thread, achieving higher efficiency.

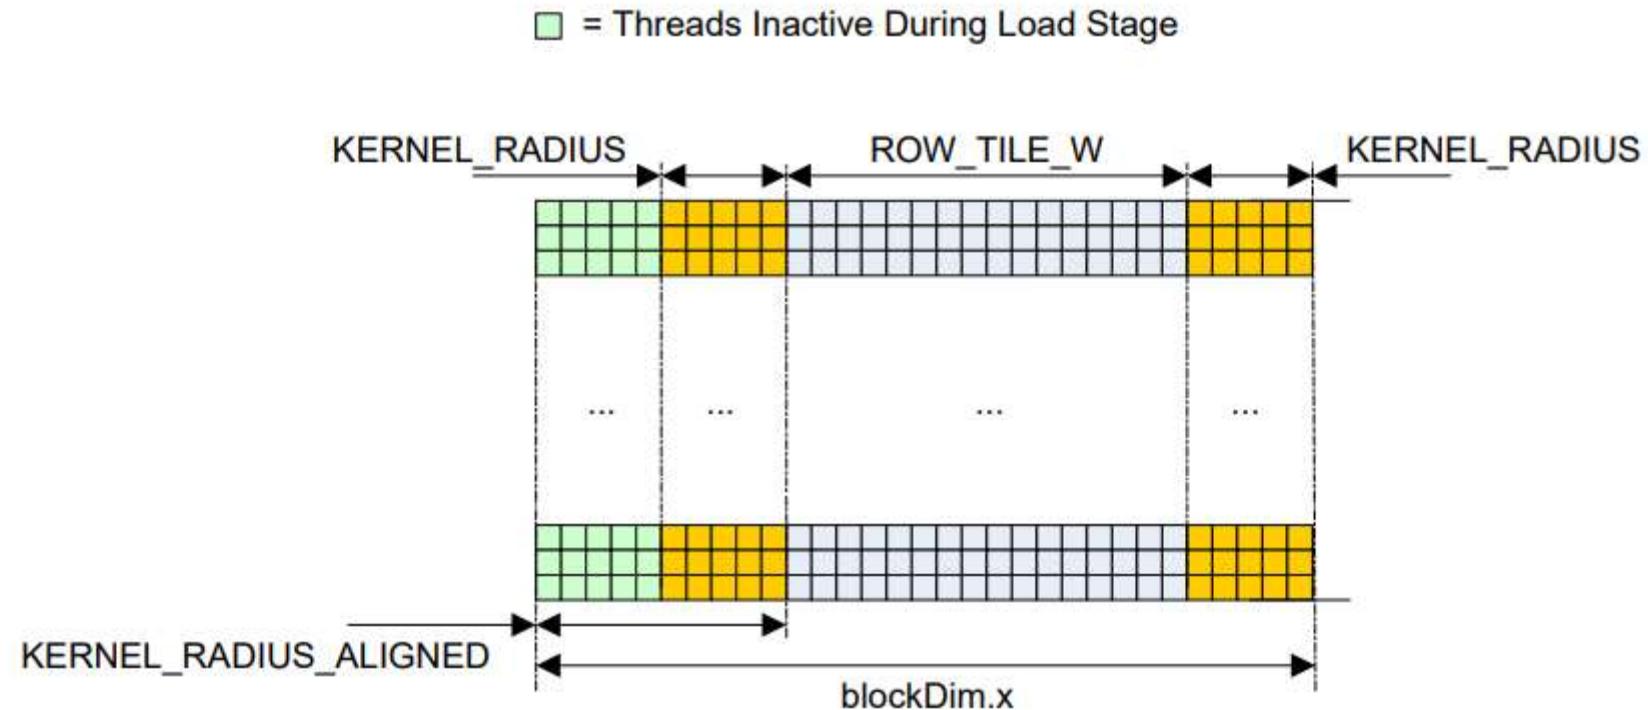


Figure 9: Padding thread block with inactive threads to achieve the alignment required for coalesced loads in the row filtering pass.

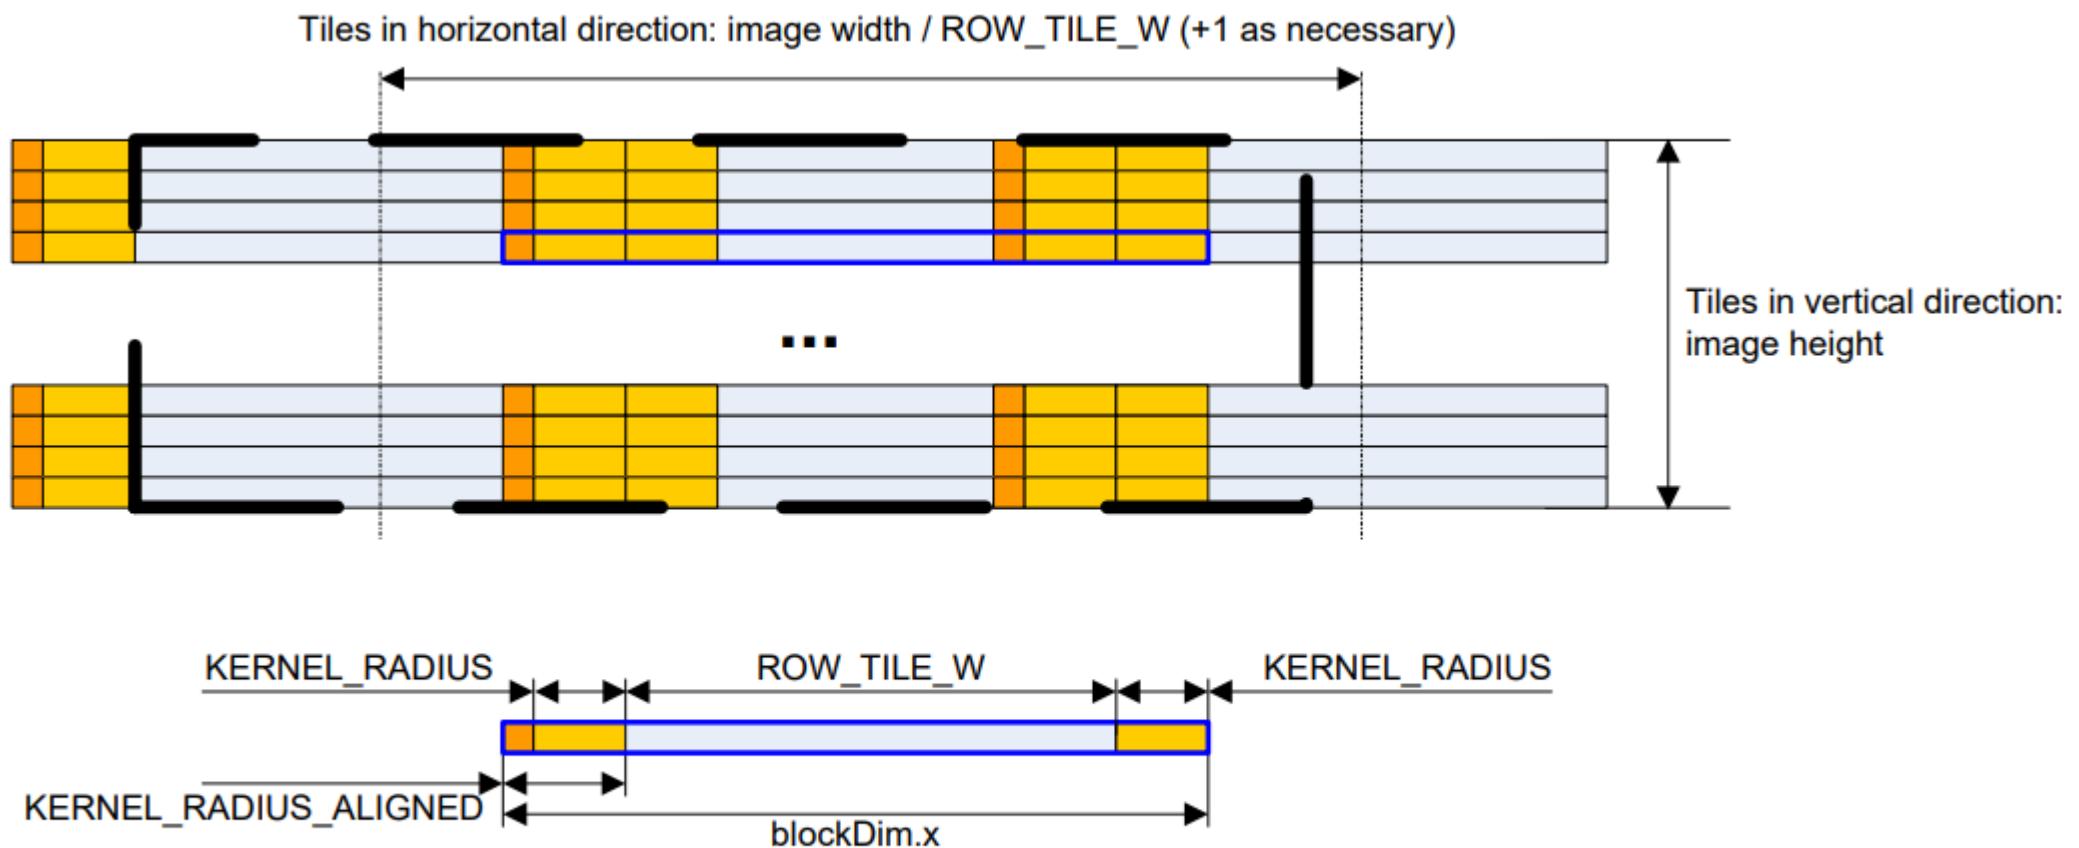


Figure 10: Layout of the thread block grid for the row filtering pass.

Tiles in horizontal direction: image width / COLUMN_TILE_W

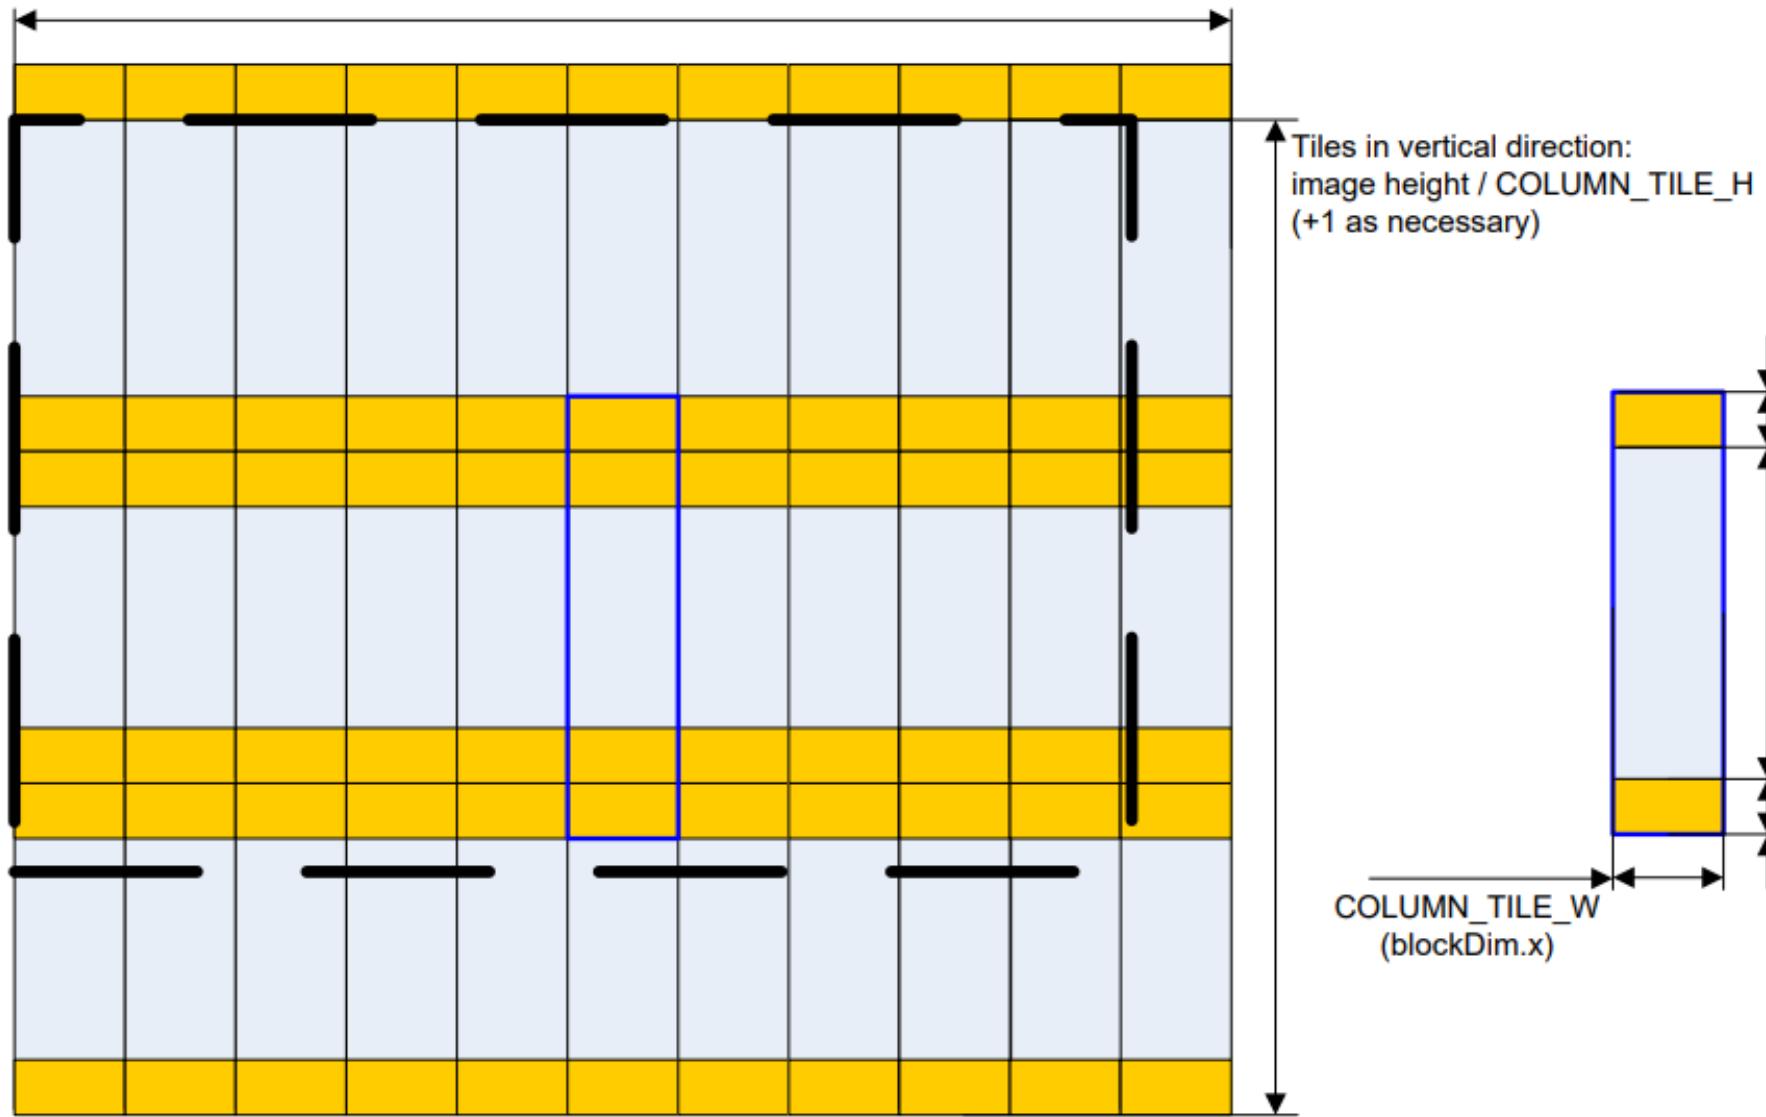


Figure 12: Layout of the thread block grid for the column filtering pass.

```
for (int i = -1; i < iterations; i++)  
{  
  
    convolutionRowsGPU(  
        d_Buffer,  
        d_Input,  
        imageW,  
        imageH  
    );  
  
    convolutionColumnsGPU(  
        d_Output,  
        d_Buffer,  
        imageW,  
        imageH  
    );  
}  
  
} // Main loop
```

→

Output of Rows

→

Becomes input of columns

```
__global__ void convolutionRowsKernel(  
    float *d_Dst,  
    float *d_Src,  
    int imageW,  
    int imageH,  
    int pitch  
)  
  
__global__ void convolutionColumnsKernel(  
    float *d_Dst,  
    float *d_Src,  
    int imageW,  
    int imageH,  
    int pitch  
)
```

convolutionSeparable.cu

```
//////////  
// Column convolution filter  
//////////  


```
#define COLUMNS_BLOCKDIM_X 16
#define COLUMNS_BLOCKDIM_Y 8
#define COLUMNS_RESULT_STEPS 8
#define COLUMNS_HALO_STEPS 1
```


```
__global__ void convolutionColumnsKernel(
 float *d_Dst,
 float *d_Src,
 int imageW,
 int imageH,
 int pitch
)
{
 // Handle to thread block group
 cg::thread_block cta = cg::this_thread_block();
 __shared__ float s_Data[COLUMNS_BLOCKDIM_X][(COLUMNS_RESULT_STEPS + 2 *
COLUMNS_HALO_STEPS) * COLUMNS_BLOCKDIM_Y + 1];
```


```

Pop Quiz: Why do we need the Magic "+1" ???


Histogram



- Extremely Important Algorithm
 - Histogram Data used in large number of “compound” algorithms:
 - Color and contrast improvements
 - Tone Mapping
 - Color re-quantization/posterize
 - Device Calibration

Histogram Algorithm

- Distribution of intensities/colors in an image
- Standard algorithm:

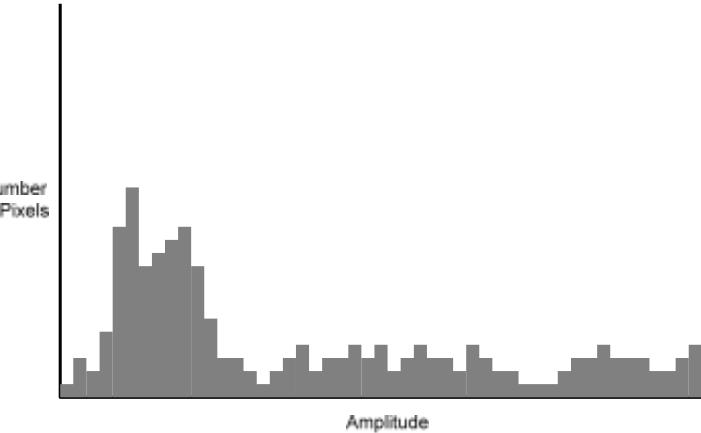

```
for all i in [0, max_luminance]:  
    h[i] = 0;  
    for all pixel in image:  
        ++h[luminance(pixel)]
```

- How to parallelize?

samples / transpose

Histogram Parallelization


- Subdivide “for-all-pixel” loop
 - Thread works on block of pixels (in extreme, one thread per pixel)
 - Need `++h[luminance(pixel)]` to be atomic (global atomics >= compute1_1)
- Breaking up Image I into sub-images
 $I = \text{UNION}(A, B)$:
 - $H(\text{UNION}(A, B)) = H(A) + H(B)$
 - Histogram of concatenation is sum of histograms

Better Parallel Histogram

- Have one histogram per thread
 - Memory consumption!
 - Consolidate sub-histograms in parallel (parallel-reduction).
- CUDA:
 - Histograms in shared memory
 - $64 \text{ bins} * 256 \text{ threads} = 16 \text{kByte}$ (8bit bins)
 - $256 \text{ bins} * 256 \text{ threads} = 64 \text{kByte}$ (8bit bins)

samples / transpose

Better Parallel Histogram

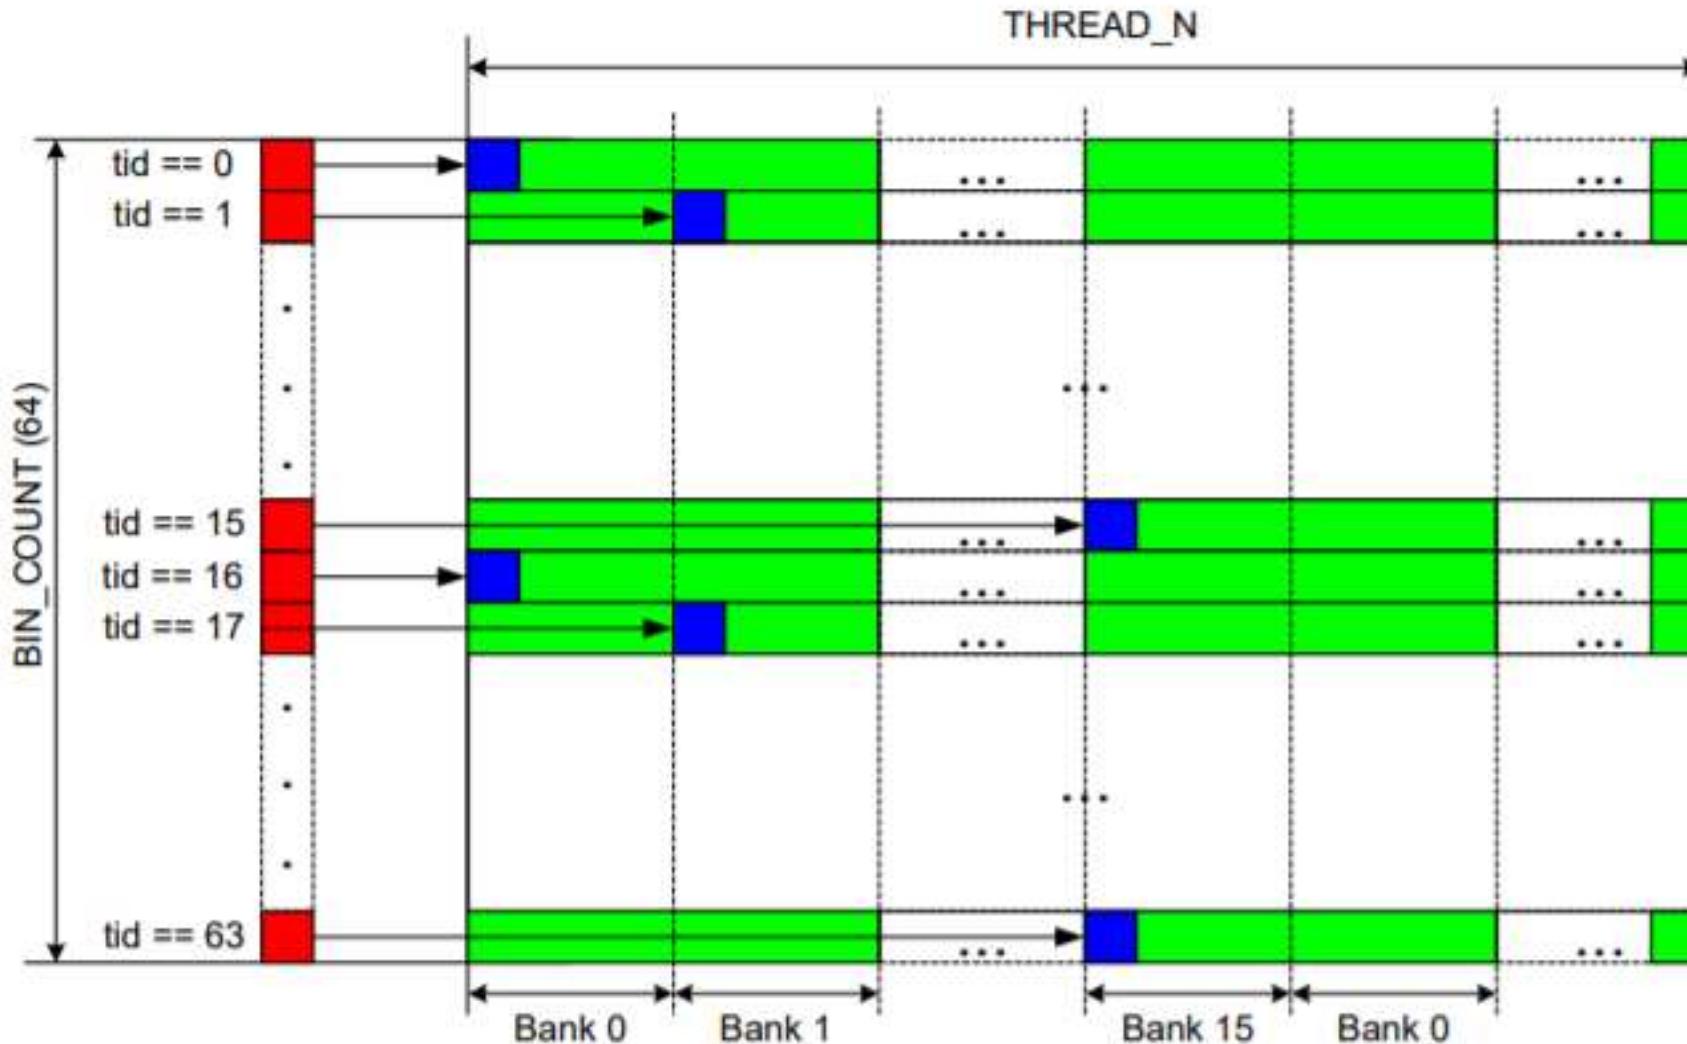

samples / transpose

Image Transpose

- Naïve implementation:

```
kernel(char * pi, int si, char * po, int so,
       int w, int h)
{
    int x = blockIdx.x * blockDim.x + threadIdx.x;
    int y = blockIdx.y * blockDim.y + threadIdx.y;

    if (y < w && x < h)
        OUTPUT_PIXEL(y, x) = INPUT_PIXEL(x, y);
}
```


samples / transpose

Problems with Naïve Code


- Memory reads AND writes not coalesced because reading/writing bytes, not words.
- Idea:
 - Need to read (at least) 16 words in subsequent threads.

Coalesced Transpose


idata

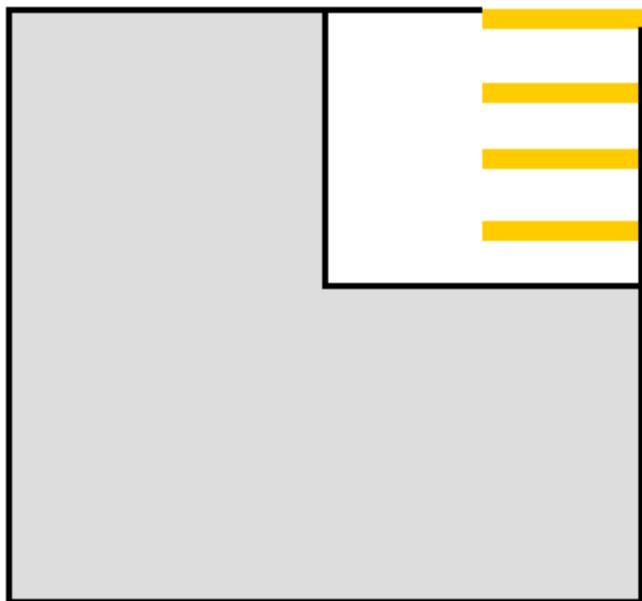

tile

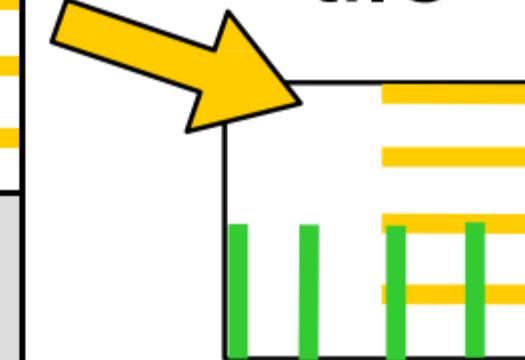

odata

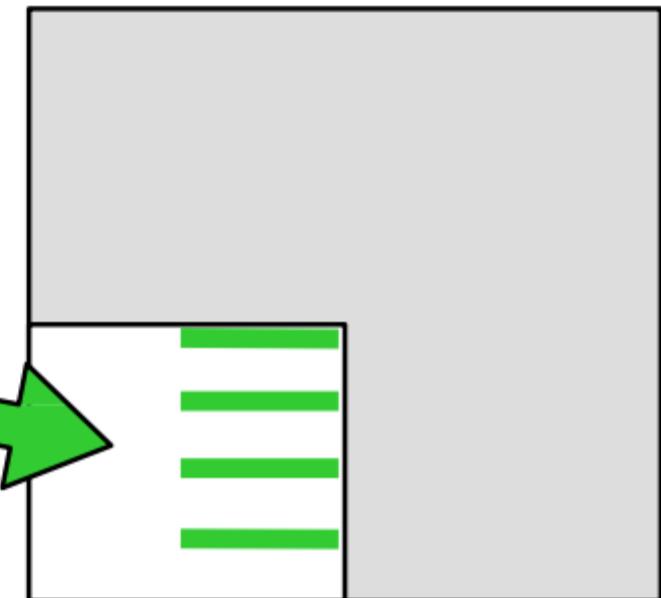

samples / transpose

Improved Transpose Idea


- Subdivide image into “micro-blocks” of 4x4 pixels (16Byte).
- Thread blocks of 16x16 threads.
- Each thread operates on a micro-block.
- Shared memory for micro-blocks:
 $16 \times 16 \times 4 \times 4 = 4\text{kByte}$.

Basic Algorithm

- Each thread reads its micro-block into shared memory.
- Each thread transposes its micro-block.
- Each thread writes its micro-block back into global memory.


Reading and Writing MicroBlocks

- Reading one row of MicroBlock via **uchar4** rather than 4x **unsigned char**

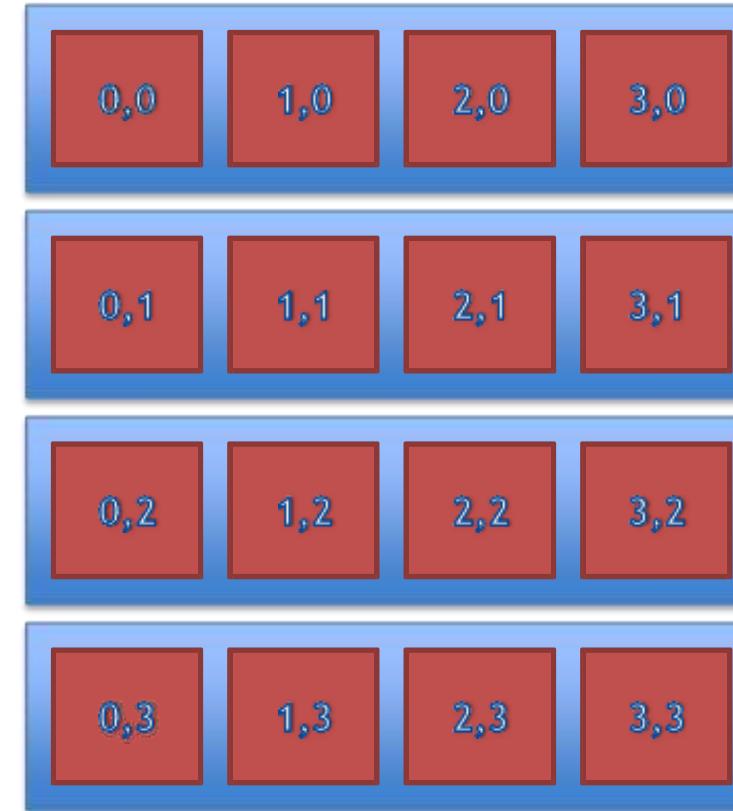

16x16 Thread Blocks

- One (16-thread) warp reads one row of MicroBlocks.
- One 16x16 block of threads deals with a 64x64 pixel region (8-bit luminance pixels).

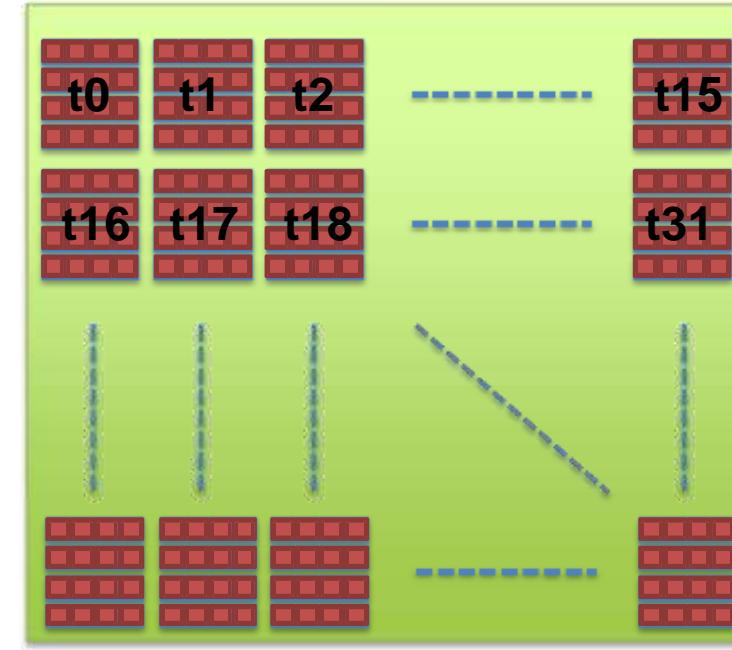

Pseudo Code

- Assume single 64x64 image.


```
kernel(...)  
{  
    int i = threadIdx.x;  
    int j = threadIdx.y;  
  
    readMicroBlock(image, i, j, shared, i, j);  
    transposeMicroBlock(shared, i, j);  
    writeMicroBlock(shared, i, j, image, j, i);  
}
```

- Problem: Non-coalesced writes!



Write Coalescing for Transpose

- `readMicroBlock(image, i, j, shared, i, j);`
- `writeMicroBlock(shared, i, j, image, j, i);`

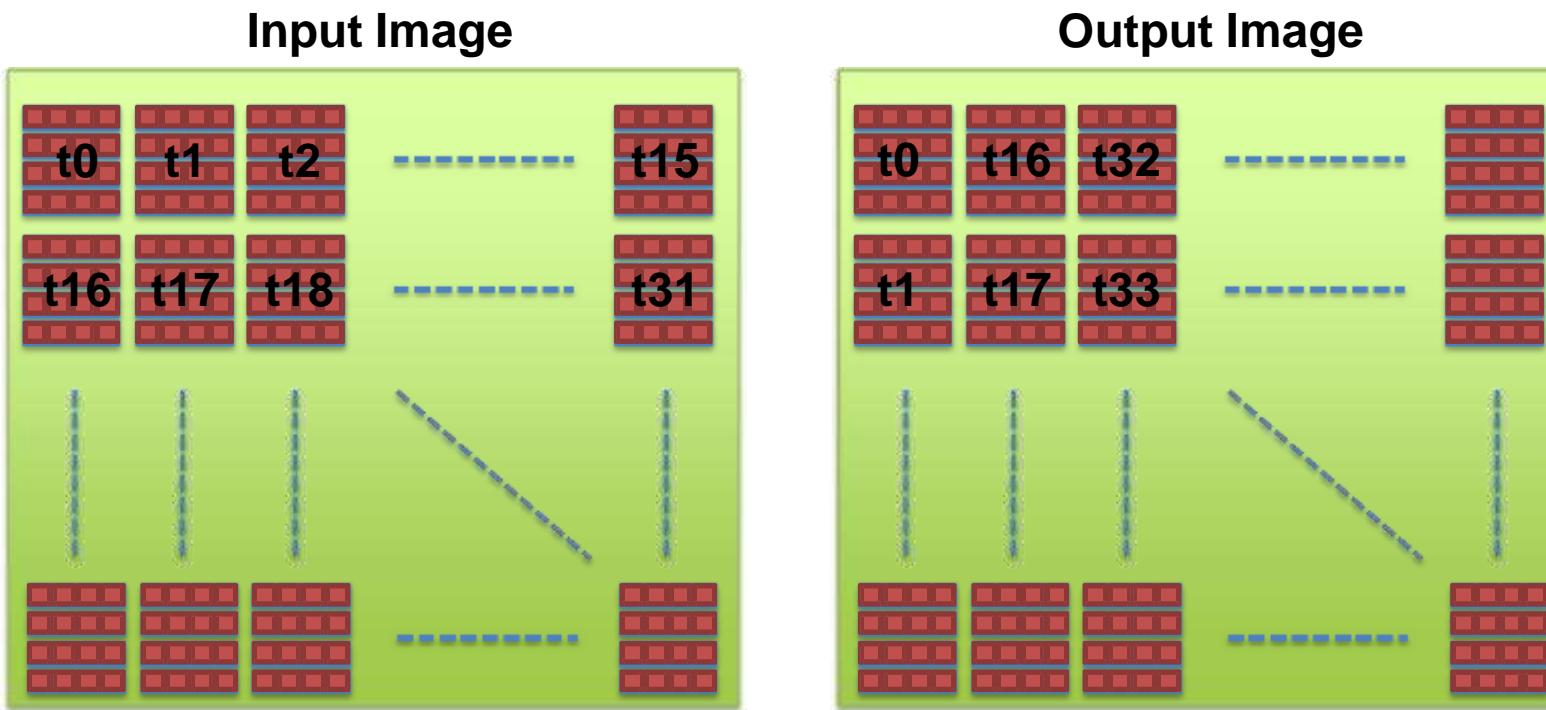

Coalesced Writes


- Simple fix:

```
kernel(...)  
{  
    int i = threadIdx.x;  
    int j = threadIdx.y;  
  
    readMicroBlock(image, i, j, shared, i, j);  
    transposeMicroBlock(shared, i, j);  
    __syncthreads();  
    writeMicroBlock(shared, j, i, image, i, j);  
}
```

- Must `__syncthreads()` because $T_{i,j}$ now writes data produced by $T_{j,i}$.
- better, use threadgroups and `sync()`


Putting Graphics & Compute together

- Compute and Visualize the same data

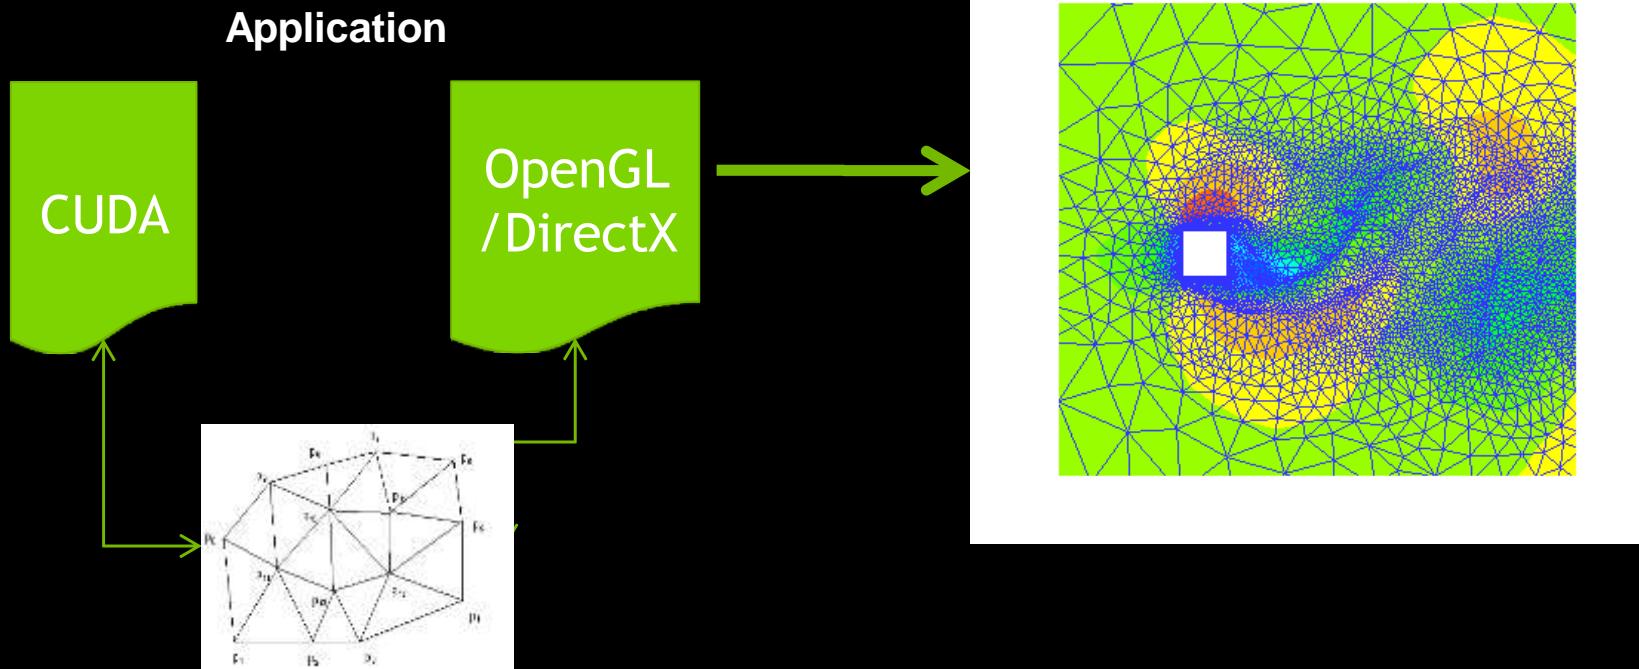

Compute/Graphics interoperability

- Set of compute API functions
 - Graphics sets up the objects
 - Register/Unregister the objects with compute context
 - Mapping/Unmapping of the objects to/from the compute context every frame

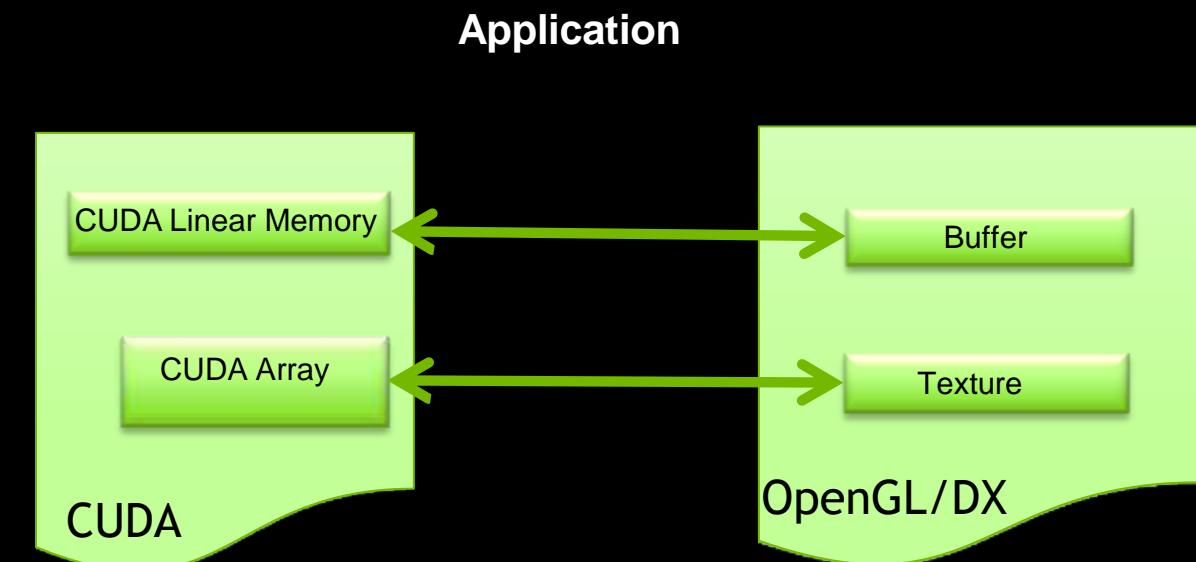

Simple OpenGL-CUDA interop sample: Setup and Register of Buffer Objects

```
GLuint imagePBO;  
  
cudaGraphicsResource_t cudaResourceBuf;  
  
//OpenGL buffer creation  
  
glGenBuffers(1, &imagePBO);  
glBindBuffer(GL_PIXEL_UNPACK_BUFFER_ARB, imagePBO);  
glBufferData(GL_PIXEL_UNPACK_BUFFER_ARB, size, NULL, GL_DYNAMIC_DRAW);  
glBindBuffer(GL_PIXEL_UNPACK_BUFFER_ARB,0);  
  
//Registration with CUDA  
  
cudaGraphicsGLRegisterBuffer(&cudaResourceBuf, imagePBO,  
    cudaGraphicsRegisterFlagsNone);
```

Simple OpenGL-CUDA interop sample: Setup and Register of Texture Objects


```
GLuint imageTex;  
  
cudaGraphicsResource_t cudaResourceTex;  
//OpenGL texture creation  
glGenTextures(1, &imageTex);  
glBindTexture(GL_TEXTURE_2D, imageTex);  
//set texture parameters here  
glTexImage2D(GL_TEXTURE_2D, 0, GL_RGBA8UI_EXT, width, height, 0,  
GL_RGBA_INTEGER_EXT, GL_UNSIGNED_BYTE, NULL);  
glBindTexture(GL_TEXTURE_2D, 0);  
//Registration with CUDA  
cudaGraphicsGLRegisterImage (&cudaResourceTex, imageTex, GL_TEXTURE_2D,  
cudaGraphicsRegisterFlagsNone);
```

Simple OpenGL-CUDA interop sample

```
unsigned char *memPtr;  
cudaArray *arrayPtr;  
  
while (!done) {  
    cudaGraphicsMapResources(1, &cudaResourceTex, cudaStream);  
    cudaGraphicsMapResources(1, &cudaResourceBuf, cudaStream);  
    cudaGraphicsSubResourceGetMappedArray(&cudaArray, cudaResourceTex, 0, 0);  
    cudaGraphicsResourceGetMappedPointer((void **) &memPtr, &size, cudaResourceBuf);  
    doWorkInCUDA(cudaArray, memPtr, cudaStream); // asynchronous  
    cudaGraphicsUnmapResources(1, &cudaResourceTex, cudaStream);  
    cudaGraphicsUnmapResources(1, &cudaResourceBuf, cudaStream);  
    doWorkInGL(imagePBO, imageTex); // asynchronous  
}
```


Interoperability behavior:single GPU

- The resource is shared
- Tasks are serialized

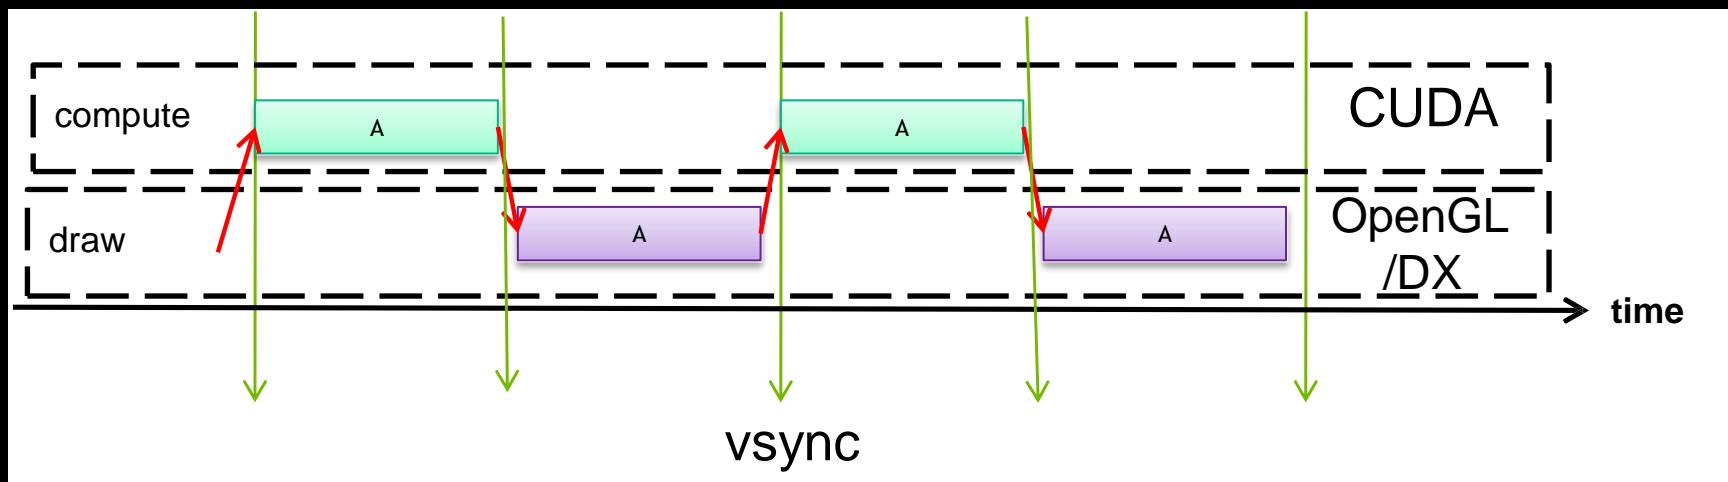

Interoperability behavior: multiple GPUs


- Each context owns a copy of the resource
- Tasks are serialized
- map/unmap might do a host side synchronization

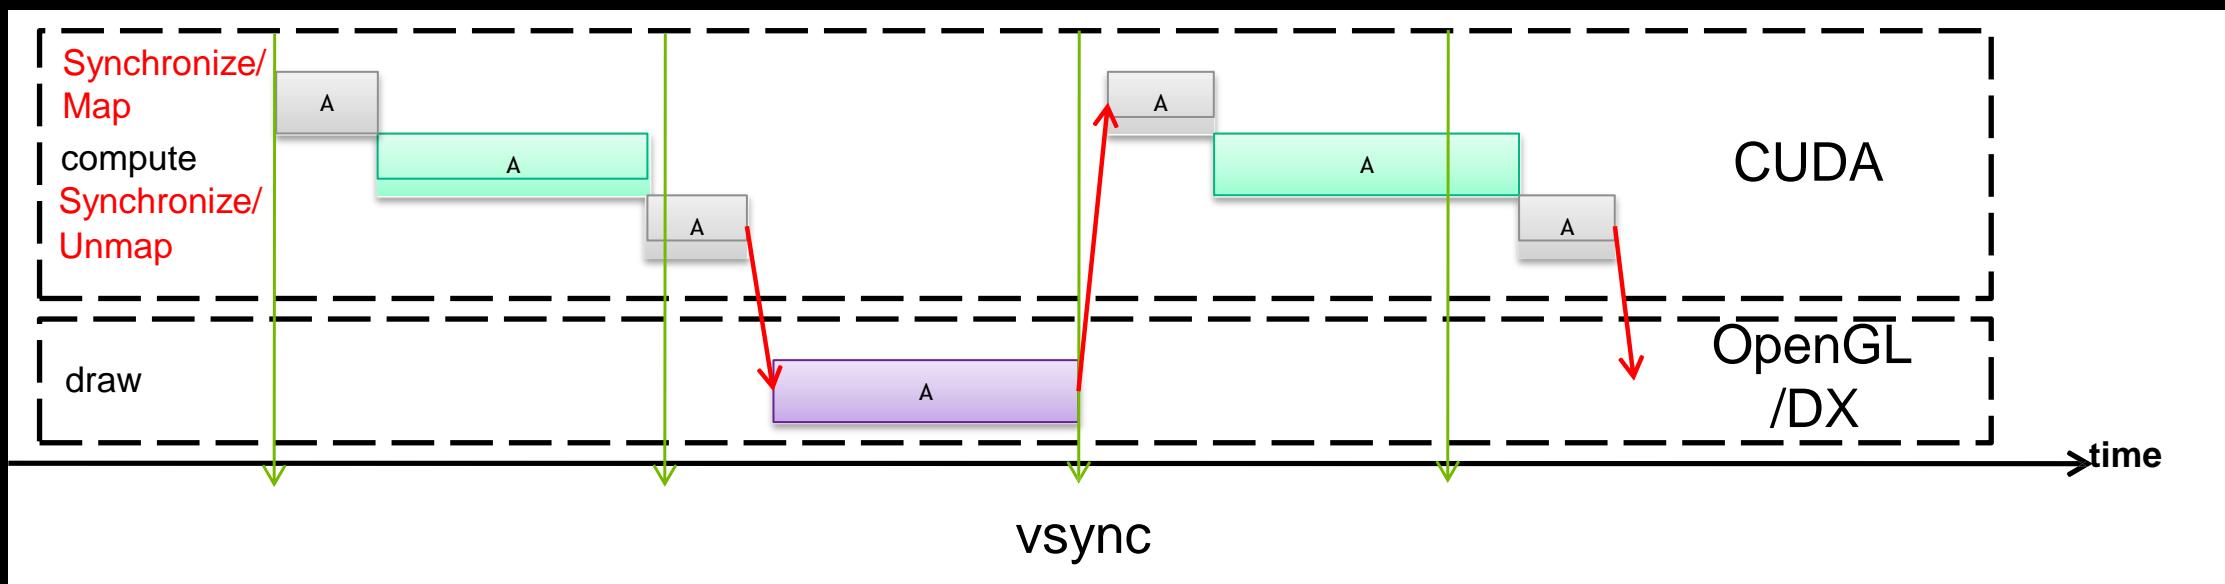

Interoperability behavior: multiple GPUs Improvements

- If one of the APIs is a producer and another is a consumer then the tasks can overlap.

CUDA as a producer example:

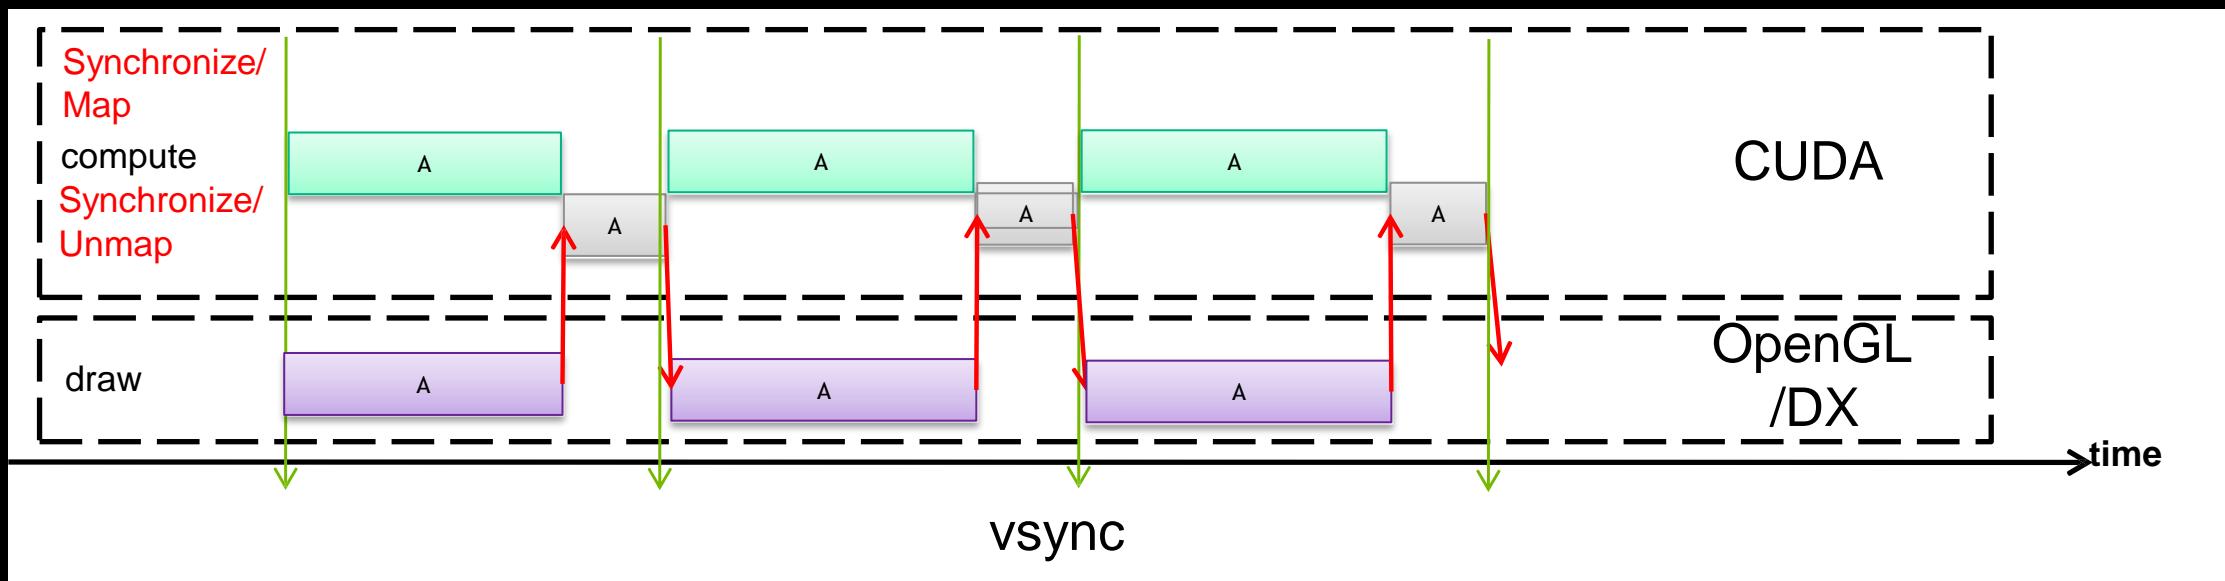


Simple OpenGL-CUDA interop sample

- Use mapping hint with `cudaGraphicsResourceSetMapFlags()`
`cudaGraphicsMapFlagsReadOnly/cudaGraphicsMapFlagsWriteDiscard:`

```
unsigned char *memPtr;  
cudaGraphicsResourceSetMapFlags(cudaResourceBuf, cudaGraphicsMapFlagsWriteDiscard)  
while (!done) {  
    cudaGraphicsMapResources(1, &cudaResourceBuf, cudaStream);  
    cudaGraphicsResourceGetMappedPointer((void **) &memPtr, &size, cudaResourceBuf);  
    doWorkInCUDA(memPtr, cudaStream); // asynchronous  
    cudaGraphicsUnmapResources(1, &cudaResourceBuf, cudaStream);  
    doWorkInGL(imagePBO); // asynchronous  
}
```

Interoperability behavior: multiple GPUs Improvements

- If the graphics and compute are interdependant use ping-pong buffers for task overlap

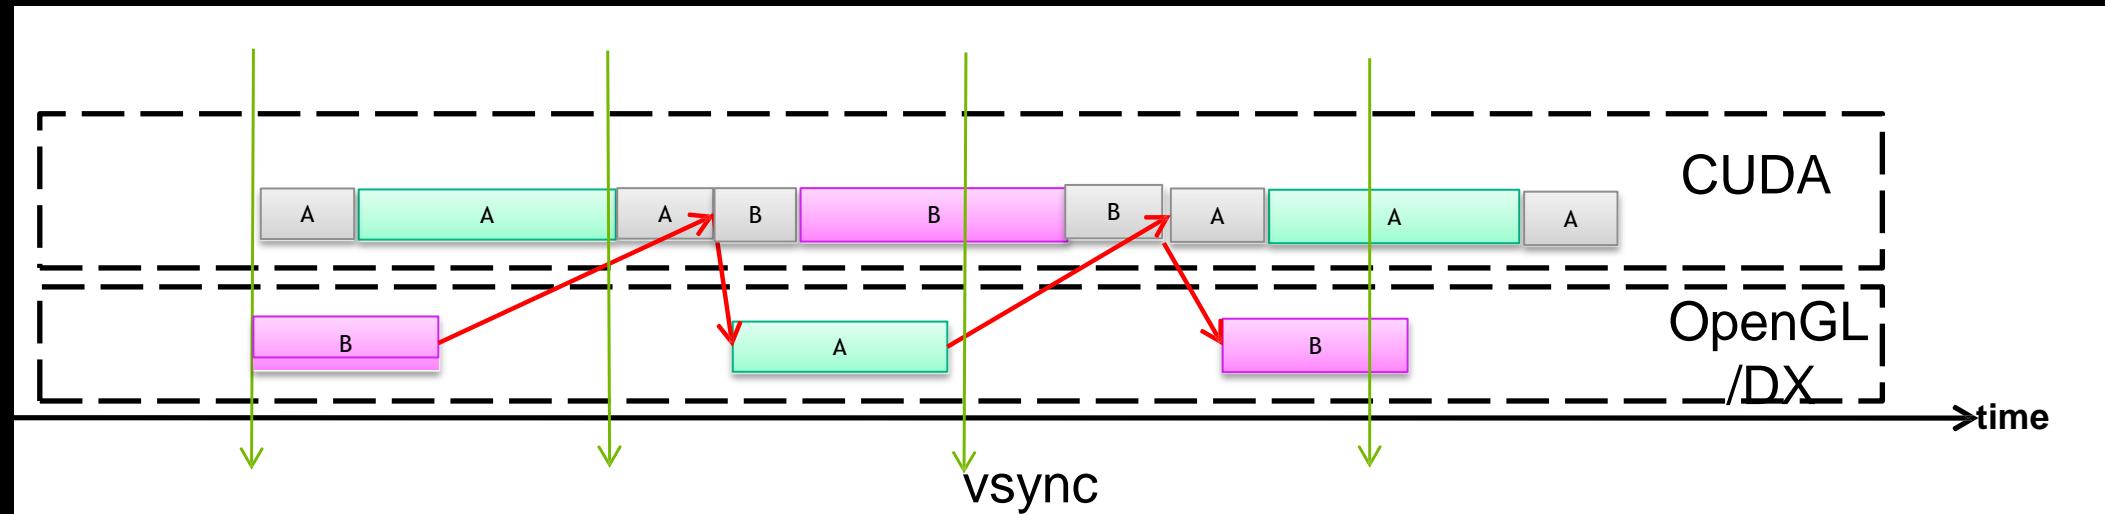


Simple OpenGL-CUDA interop sample

- ping-pong buffers:

```
unsigned char *memPtr;  
  
int count = 0;  
  
while (!done) {  
    cudaResourceBuf = (count%2) ? cudaResourceBuf1 : cudaResourceBuf2;  
    imagePBO = (count%2) ? imagePBO1 : imagePBO2;  
    cudaGraphicsMapResources(1, &cudaResourceBuf, cudaStream);  
    cudaGraphicsResourceGetMappedPointer((void **) &memPtr, &size, cudaResourceBuf);  
    doWorkInCUDA(memPtr, cudaStream); // asynchronous  
    cudaGraphicsUnmapResources(1, & cudaResourceBuf, cudaStream);  
    doWorkInGL(imagePBO); // asynchronous  
    count++;  
}
```

Interoperability behavior: multiple GPUs Improvements

- Utilize the copy engines to hide the data transfer latency cost.

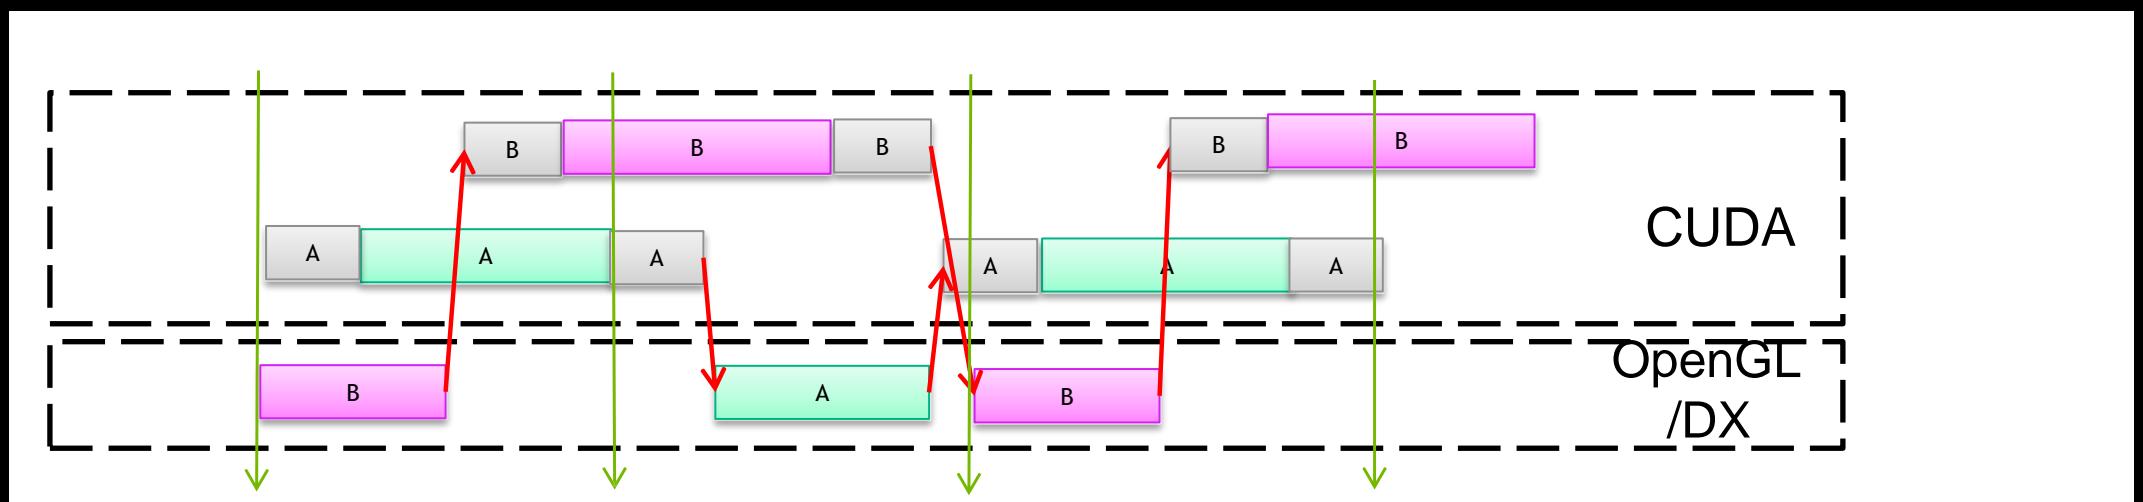

Simple OpenGL-CUDA interop sample



- Use streams

```
unsigned char *memPtr;  
  
int count = 0;  
  
while (!done){  
    cudaResourceBuf = (count%2) ? cudaResourceBuf1 : cudaResourceBuf2;  
    imagePBO = (count%2) ? imagePBO1 : imagePBO2;  
    cudaStream= (count%2) ? cudaStream1 : cudaStream2;  
    cudaGraphicsMapResources(1, &cudaResourceBuf, cudaStream);  
    cudaGraphicsResourceGetMappedPointer((void **) &memPtr, &size, cudaResourceBuf);  
    doWorkInCUDA(memPtr, cudaStream); // asynchronous  
    cudaGraphicsUnmapResources(1, & cudaResourceBuf, cudaStream);  
    doWorkInGL(imagePBO); // asynchronous  
    count++;  
}
```

Simple OpenGL-CUDA interop sample: Quick Summary of Techniques


- Mapping hints
- Ping-pong buffers
- Streams
- This is enough if:
 - You can use the map/unmap hints
 - map/unmap is CPU asynchronous
 - You are afraid of multiple threads
 - You developed the whole application

API Interop hides all the complexity

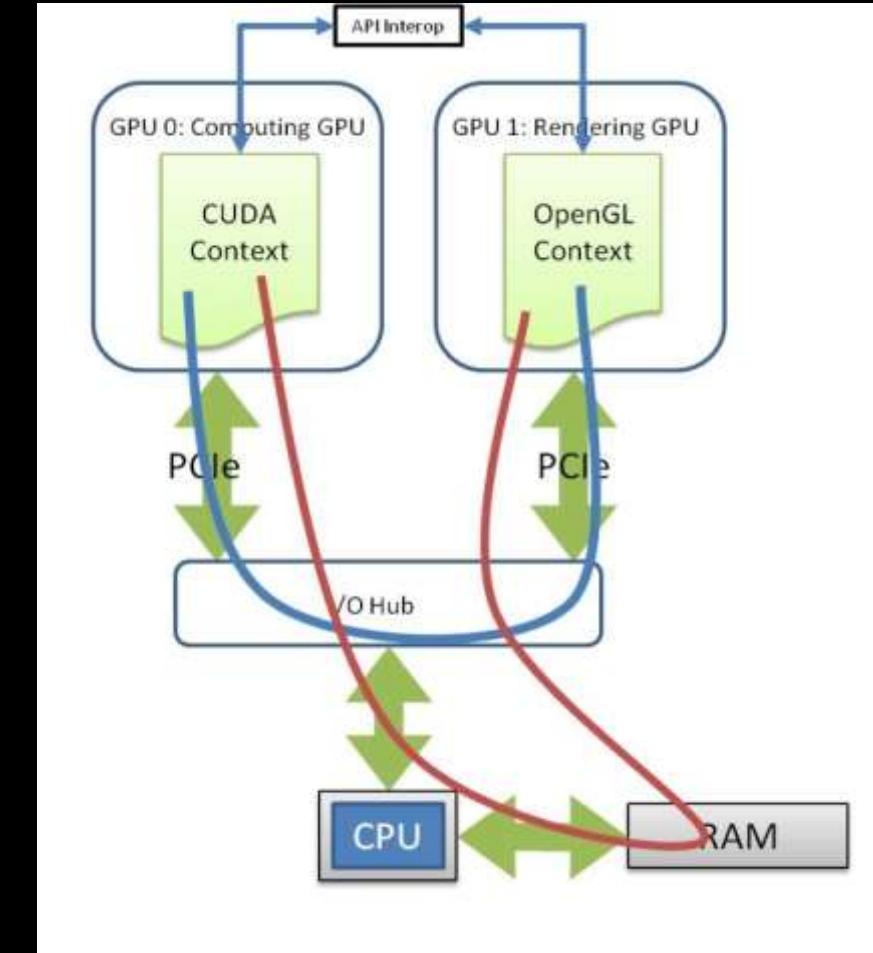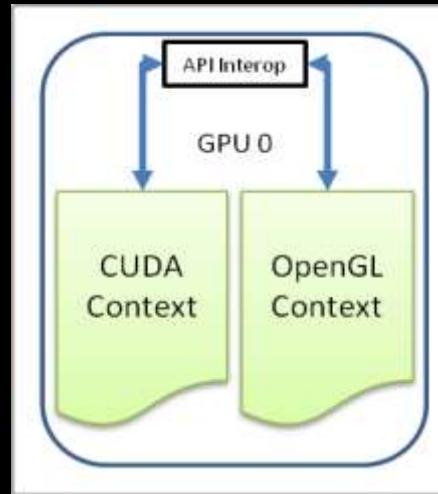


If not cross-GPU API interop then what?

A)

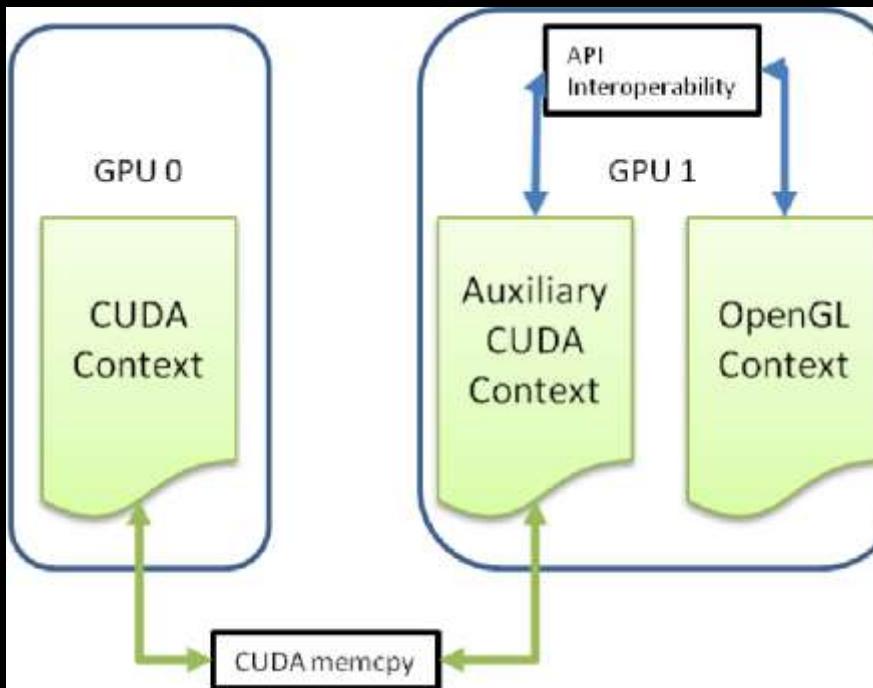

B)

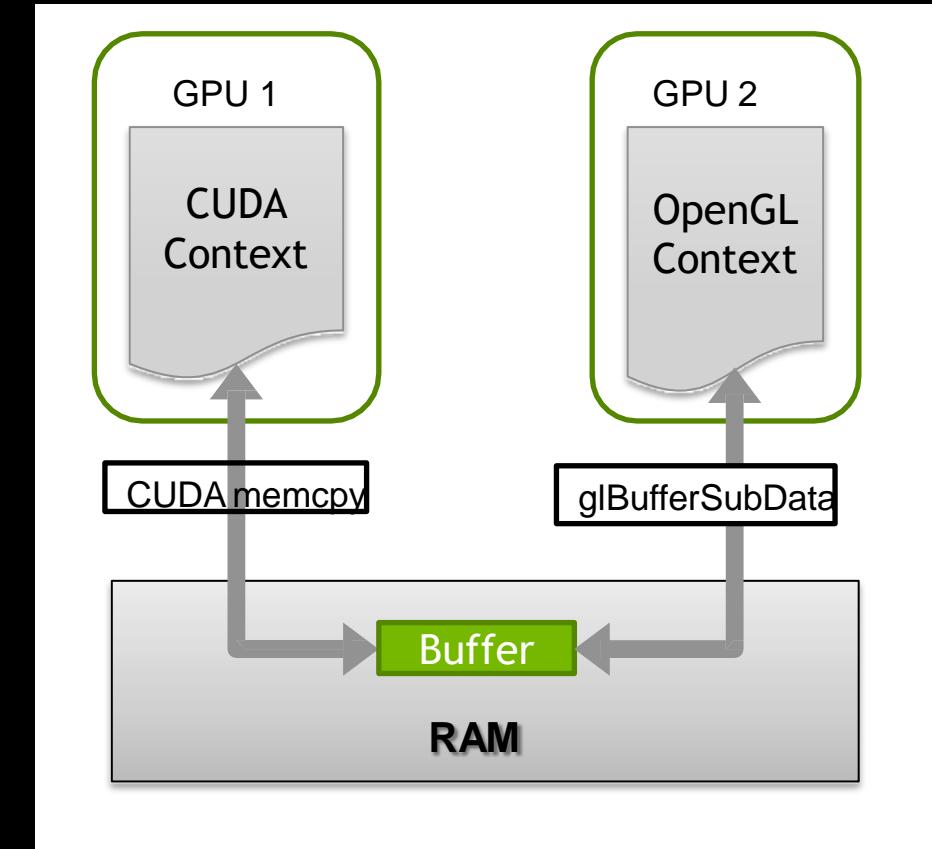

Conclusions/Resources

- The driver will do all the heavy lifting but..
- Scalability and final performance is up to the developer and..
- For fine grained control you might want to move data yourself.
- CUDA samples/documentation:

<http://developer.nvidia.com/cuda-downloads>

samples \ recursiveGaussian

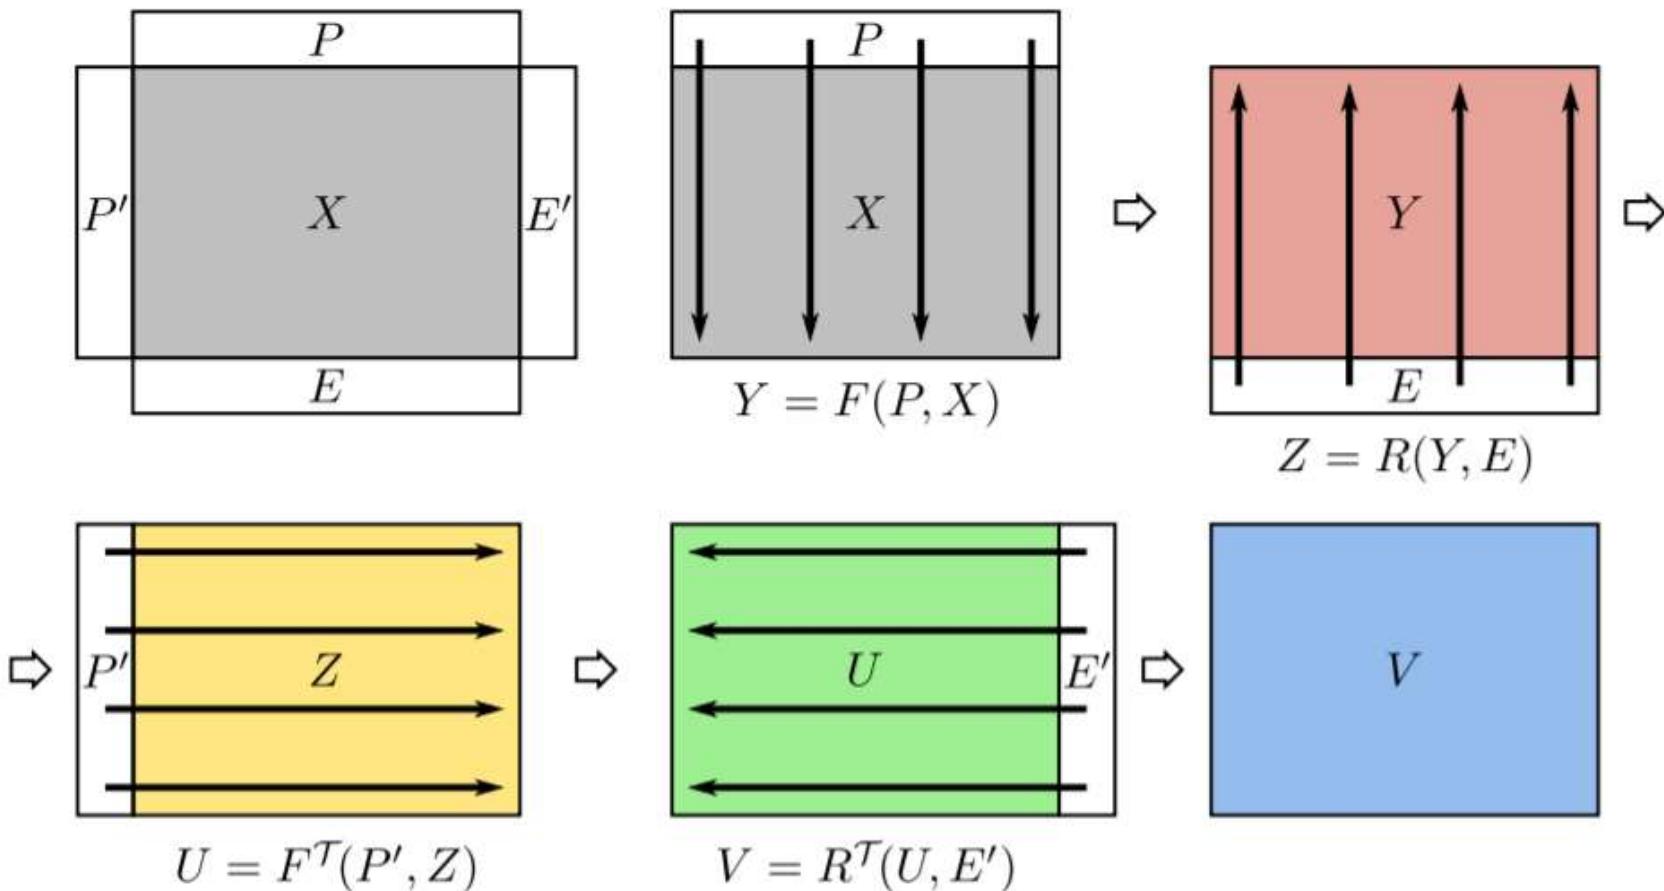


Figure 1: The problem is to compute for an image X a sequence of four 1D recursive filters (down, up, right, left), with boundary conditions given by prologue P, P' and epilogue E, E' matrices.

Summed Area Table

- Summed *Area Table (SAT)*: 2D table where each element stores the sum of all elements in an input image between the lower left corner and the entry location.

Summed Area Table

■ Example:

Input image

2	1	0	0
0	1	2	0
1	2	1	0
1	1	0	2

SAT

4	9	12	14
2	6	9	11
2	5	6	8
1	2	2	4

$$(1 + 1 + 0) + (1 + 2 + 1) + (0 + 1 + 2) = 9$$

Summed Area Table

■ Benefit

- Used to perform different width filters at every pixel in the image in constant time per pixel
- Just sample four pixels in SAT:

$$s_{filter} = \frac{s_{ur} - s_{ul} - s_{lr} + s_{ll}}{w \times h},$$

Summed Area Table

- Uses

- Glossy environment reflections and refractions
 - Approximate depth of field



Image from http://http.developer.nvidia.com/GPUGems3/gpugems3_ch39.html

Summed Area Table

Input image

2	1	0	0
0	1	2	0
1	2	1	0
1	1	0	2

SAT

Summed Area Table

Input image

2	1	0	0
0	1	2	0
1	2	1	0
1	1	0	2

SAT

1			

Summed Area Table

Input image

2	1	0	0
0	1	2	0
1	2	1	0
1	1	0	2

SAT

1	2		

Summed Area Table

Input image

2	1	0	0
0	1	2	0
1	2	1	0
1	1	0	2

SAT

1	2	2	
1	2	2	
1	2	2	
1	2	2	

Summed Area Table

Input image

2	1	0	0
0	1	2	0
1	2	1	0
1	1	0	2

SAT

1	2	2	4
1	2	2	4
1	2	2	4
1	2	2	4

Summed Area Table

Input image

2	1	0	0
0	1	2	0
1	2	1	0
1	1	0	2

SAT

2			
1	2	2	4

Summed Area Table

Input image

2	1	0	0
0	1	2	0
1	2	1	0
1	1	0	2

SAT

1	2	5	4
1	2	2	4
2	5	1	3
1	3	2	6

Summed Area Table

■ ■ ■

Summed Area Table

Input image

2	1	0	0
0	1	2	0
1	2	1	0
1	1	0	2

SAT

4	9		
2	6	9	11
2	5	6	8
1	2	2	4

Summed Area Table

Input image

2	1	0	0
0	1	2	0
1	2	1	0
1	1	0	2

SAT

4	9	12	
2	6	9	11
2	5	6	8
1	2	2	4

Summed Area Table

Input image

2	1	0	0
0	1	2	0
1	2	1	0
1	1	0	2

SAT

4	9	12	14
2	6	9	11
2	5	6	8
1	2	2	4

Summed Area Table

How would implement
this on the GPU?

Summed Area Table

- Recall *Inclusive Scan*:

0	1	2	3	4	5	6	7
0	1	3	6	10	15	21	28

Summed Area Table

How would compute a
SAT on the GPU using
inclusive scan?

Summed Area Table

■ Step 1 of 2:

Input image

2	1	0	0
0	1	2	0
1	2	1	0
1	1	0	2

Partial SAT

2	3	3	3
0	1	3	3
1	3	4	4
1	2	2	4

→

One inclusive scan for each row

Summed Area Table

■ Step 2 of 2:

Partial SAT

2	3	3	3
0	1	3	3
1	3	4	4
1	2	2	4


Final SAT

4	9	12	14
2	6	9	11
2	5	6	8
1	2	2	4



One inclusive scan for each
Column, bottom to top



OpenGL PBO (Pixel Buffer Object)

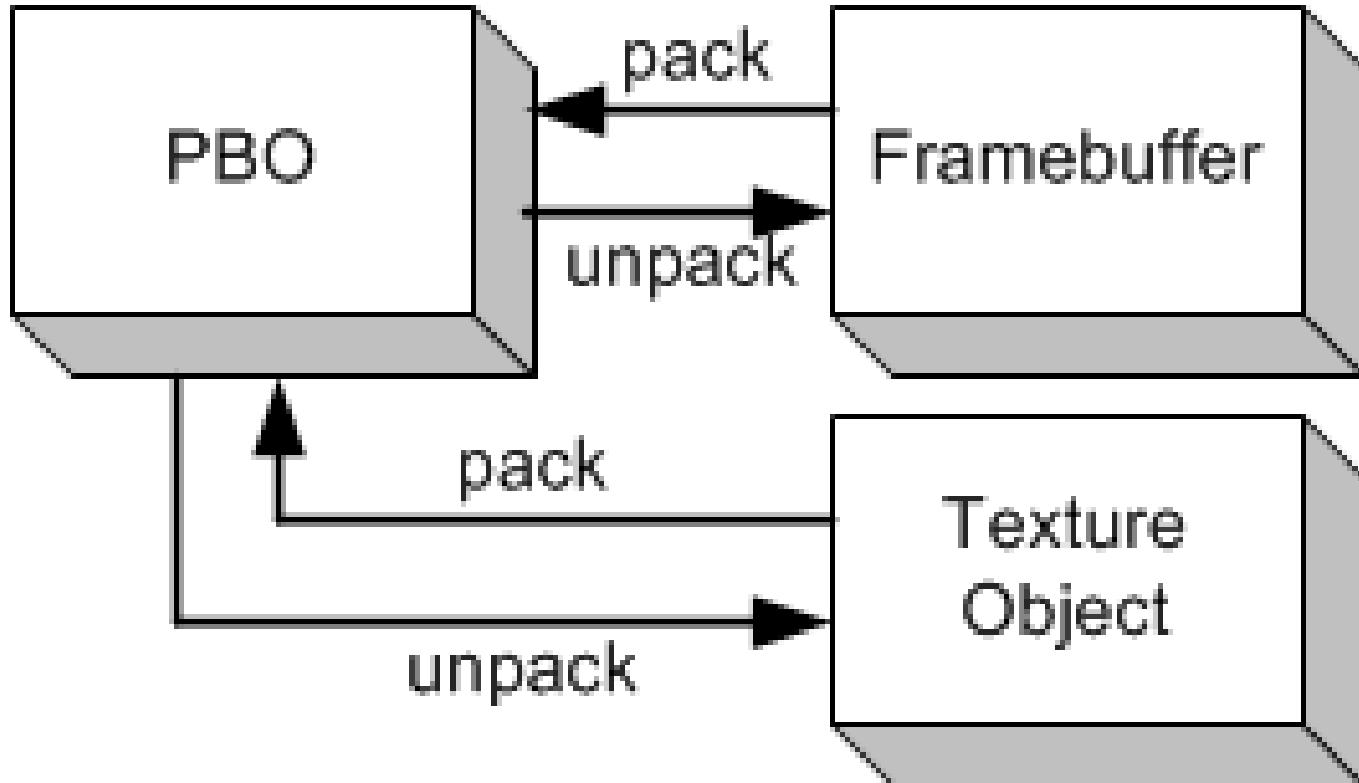


OpenGL PBO (Pixel Buffer Object)


Not to be confused with:

- Framebuffer Object (FBO)
- Similar to Vertex Buffer Object (VBO)
- Support faster asynchronous data transfer
- Used with texture objects

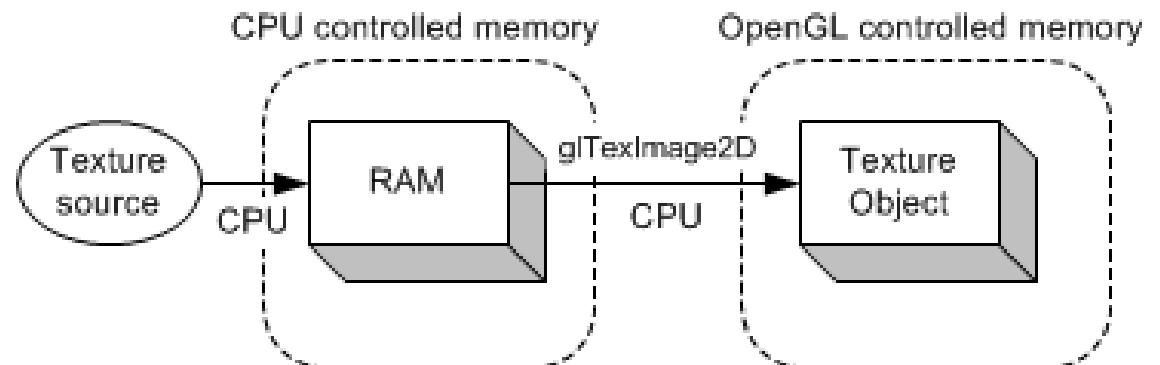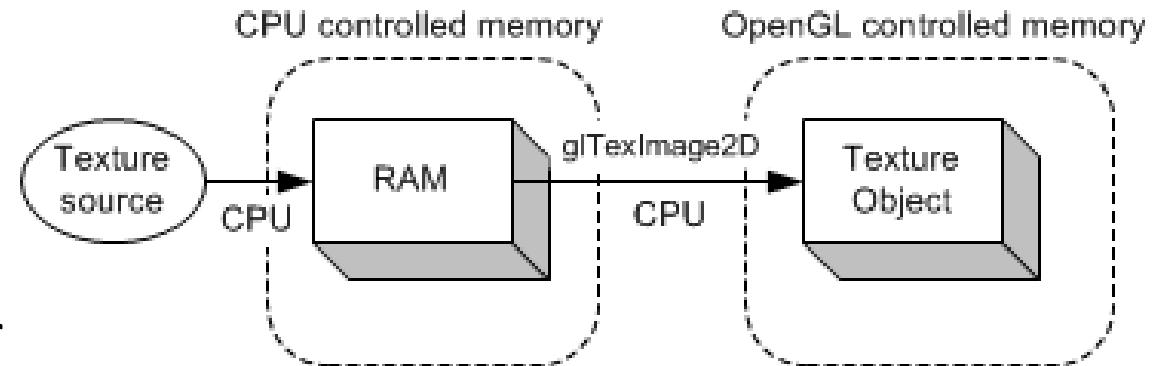


3D Textures and Volume Data

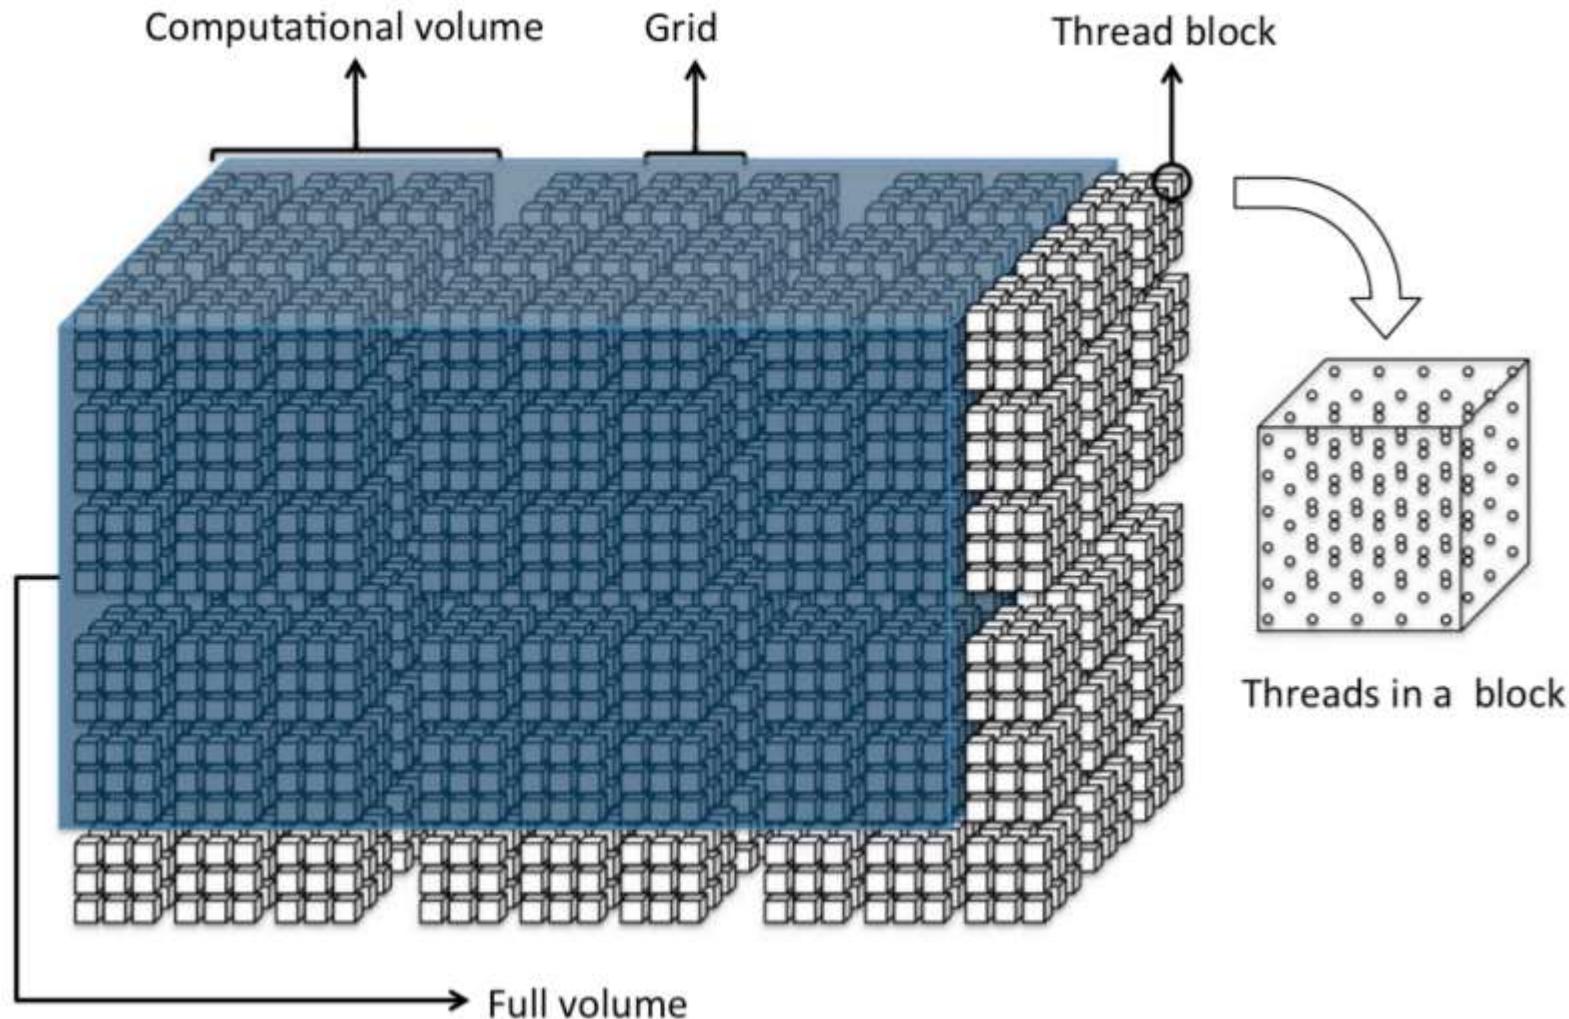

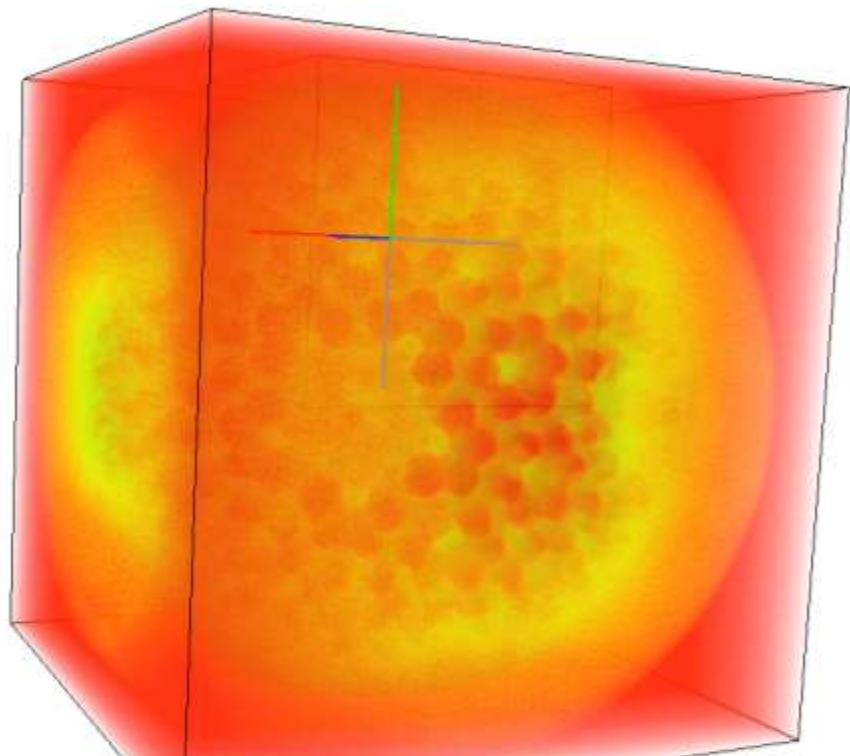


(a) Volume visualization of the virus

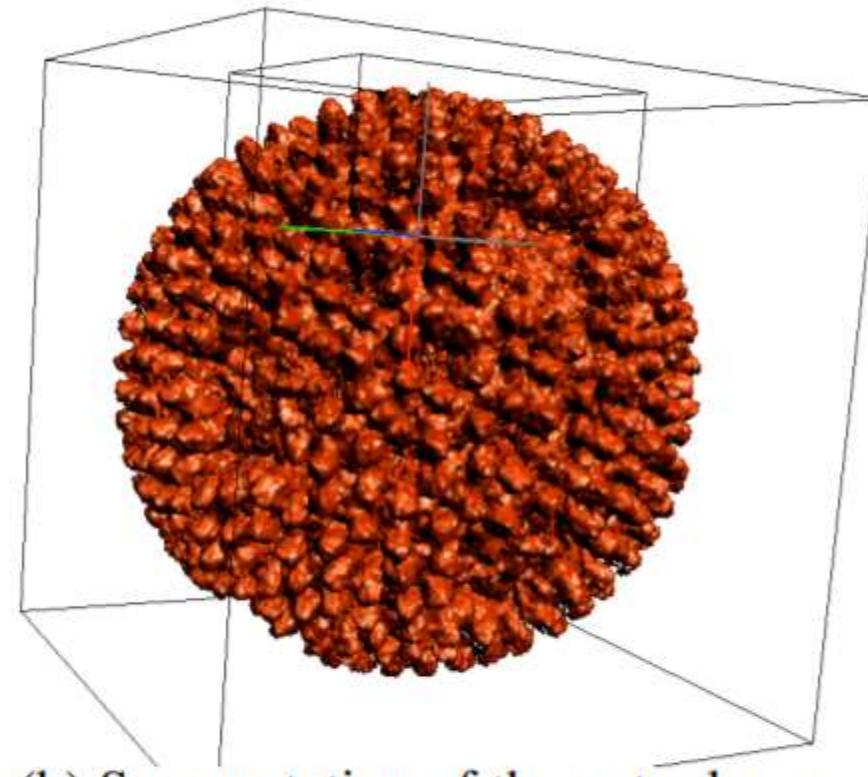


(b) Segmentation of the outer layer

The Reovirus Cryo-EM image, $403 \times 403 \times 403$ volume

CUDA Samples \ Graphics \ volumeRender

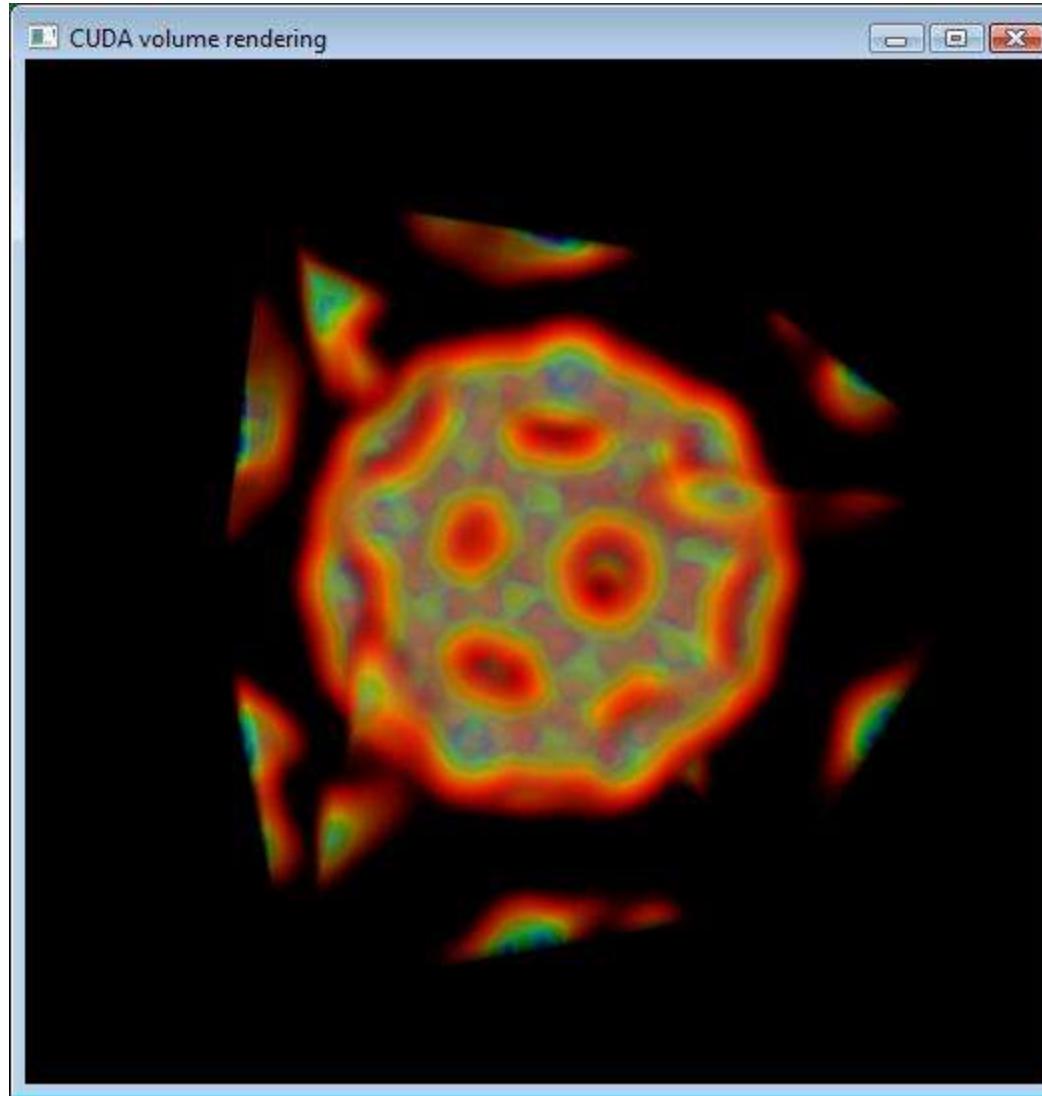


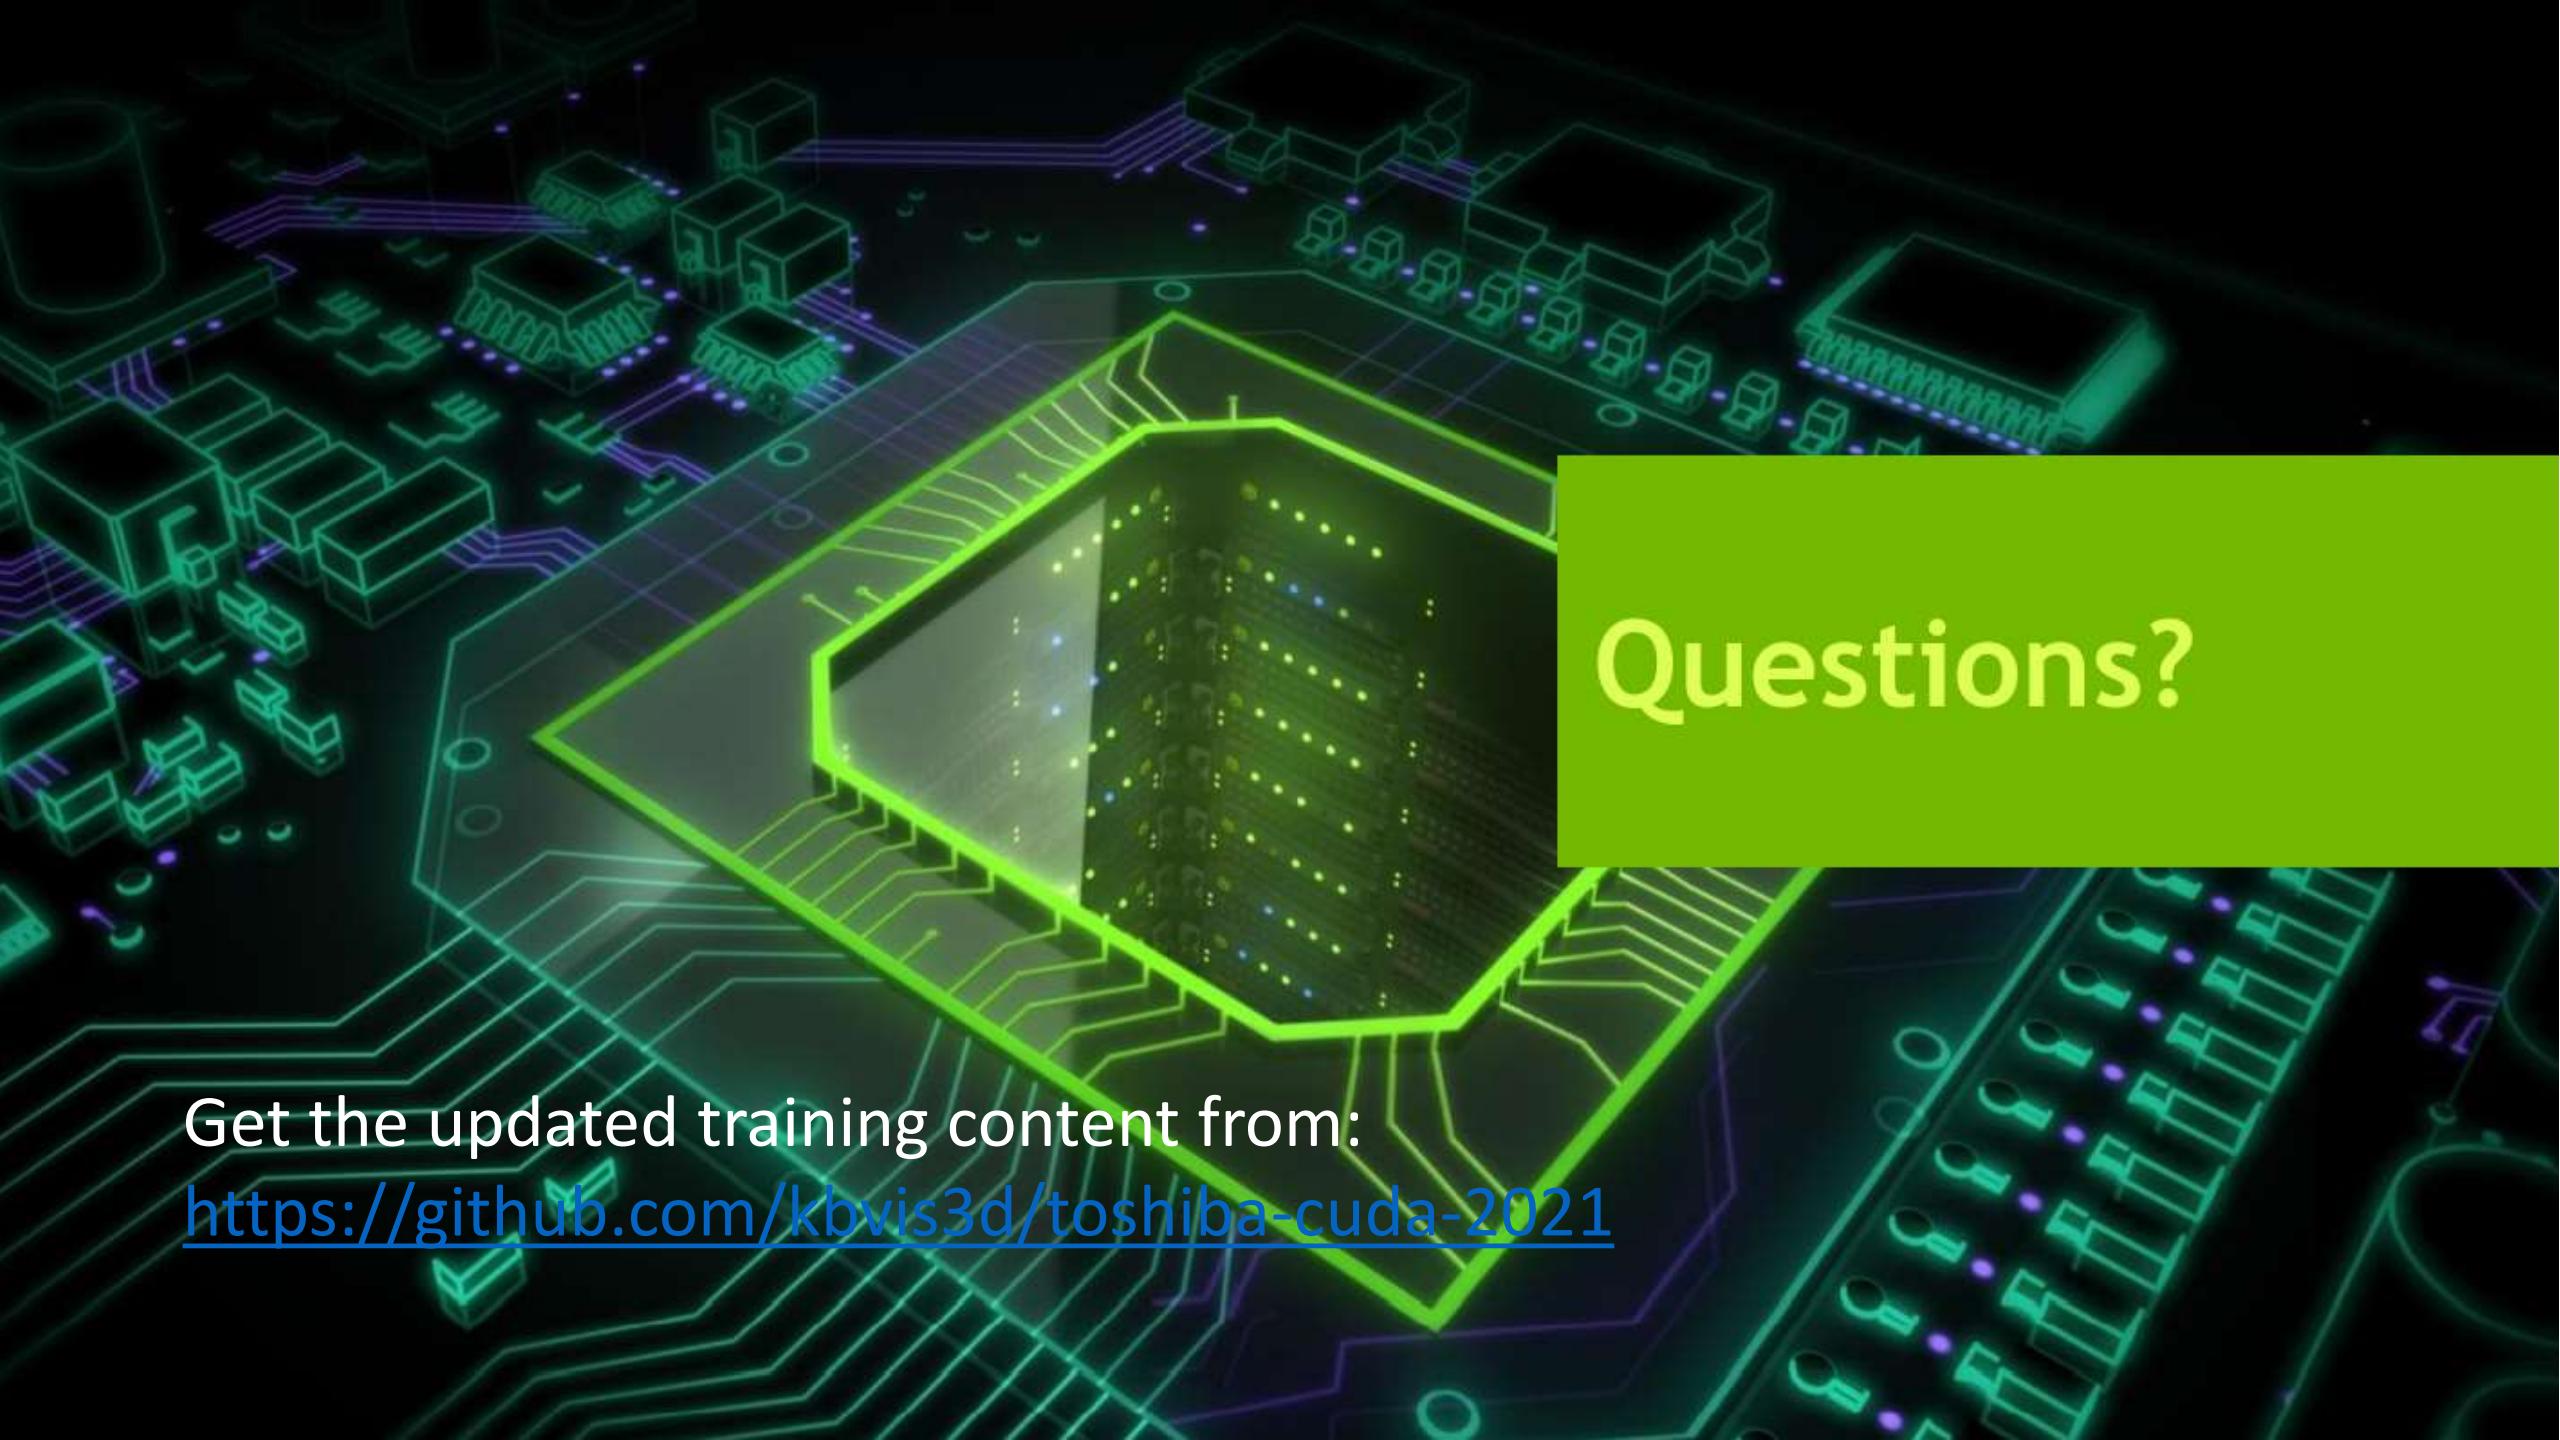

Questions?

Get the updated training content from:

<https://github.com/kbvis3d/toshiba-cuda-2021>

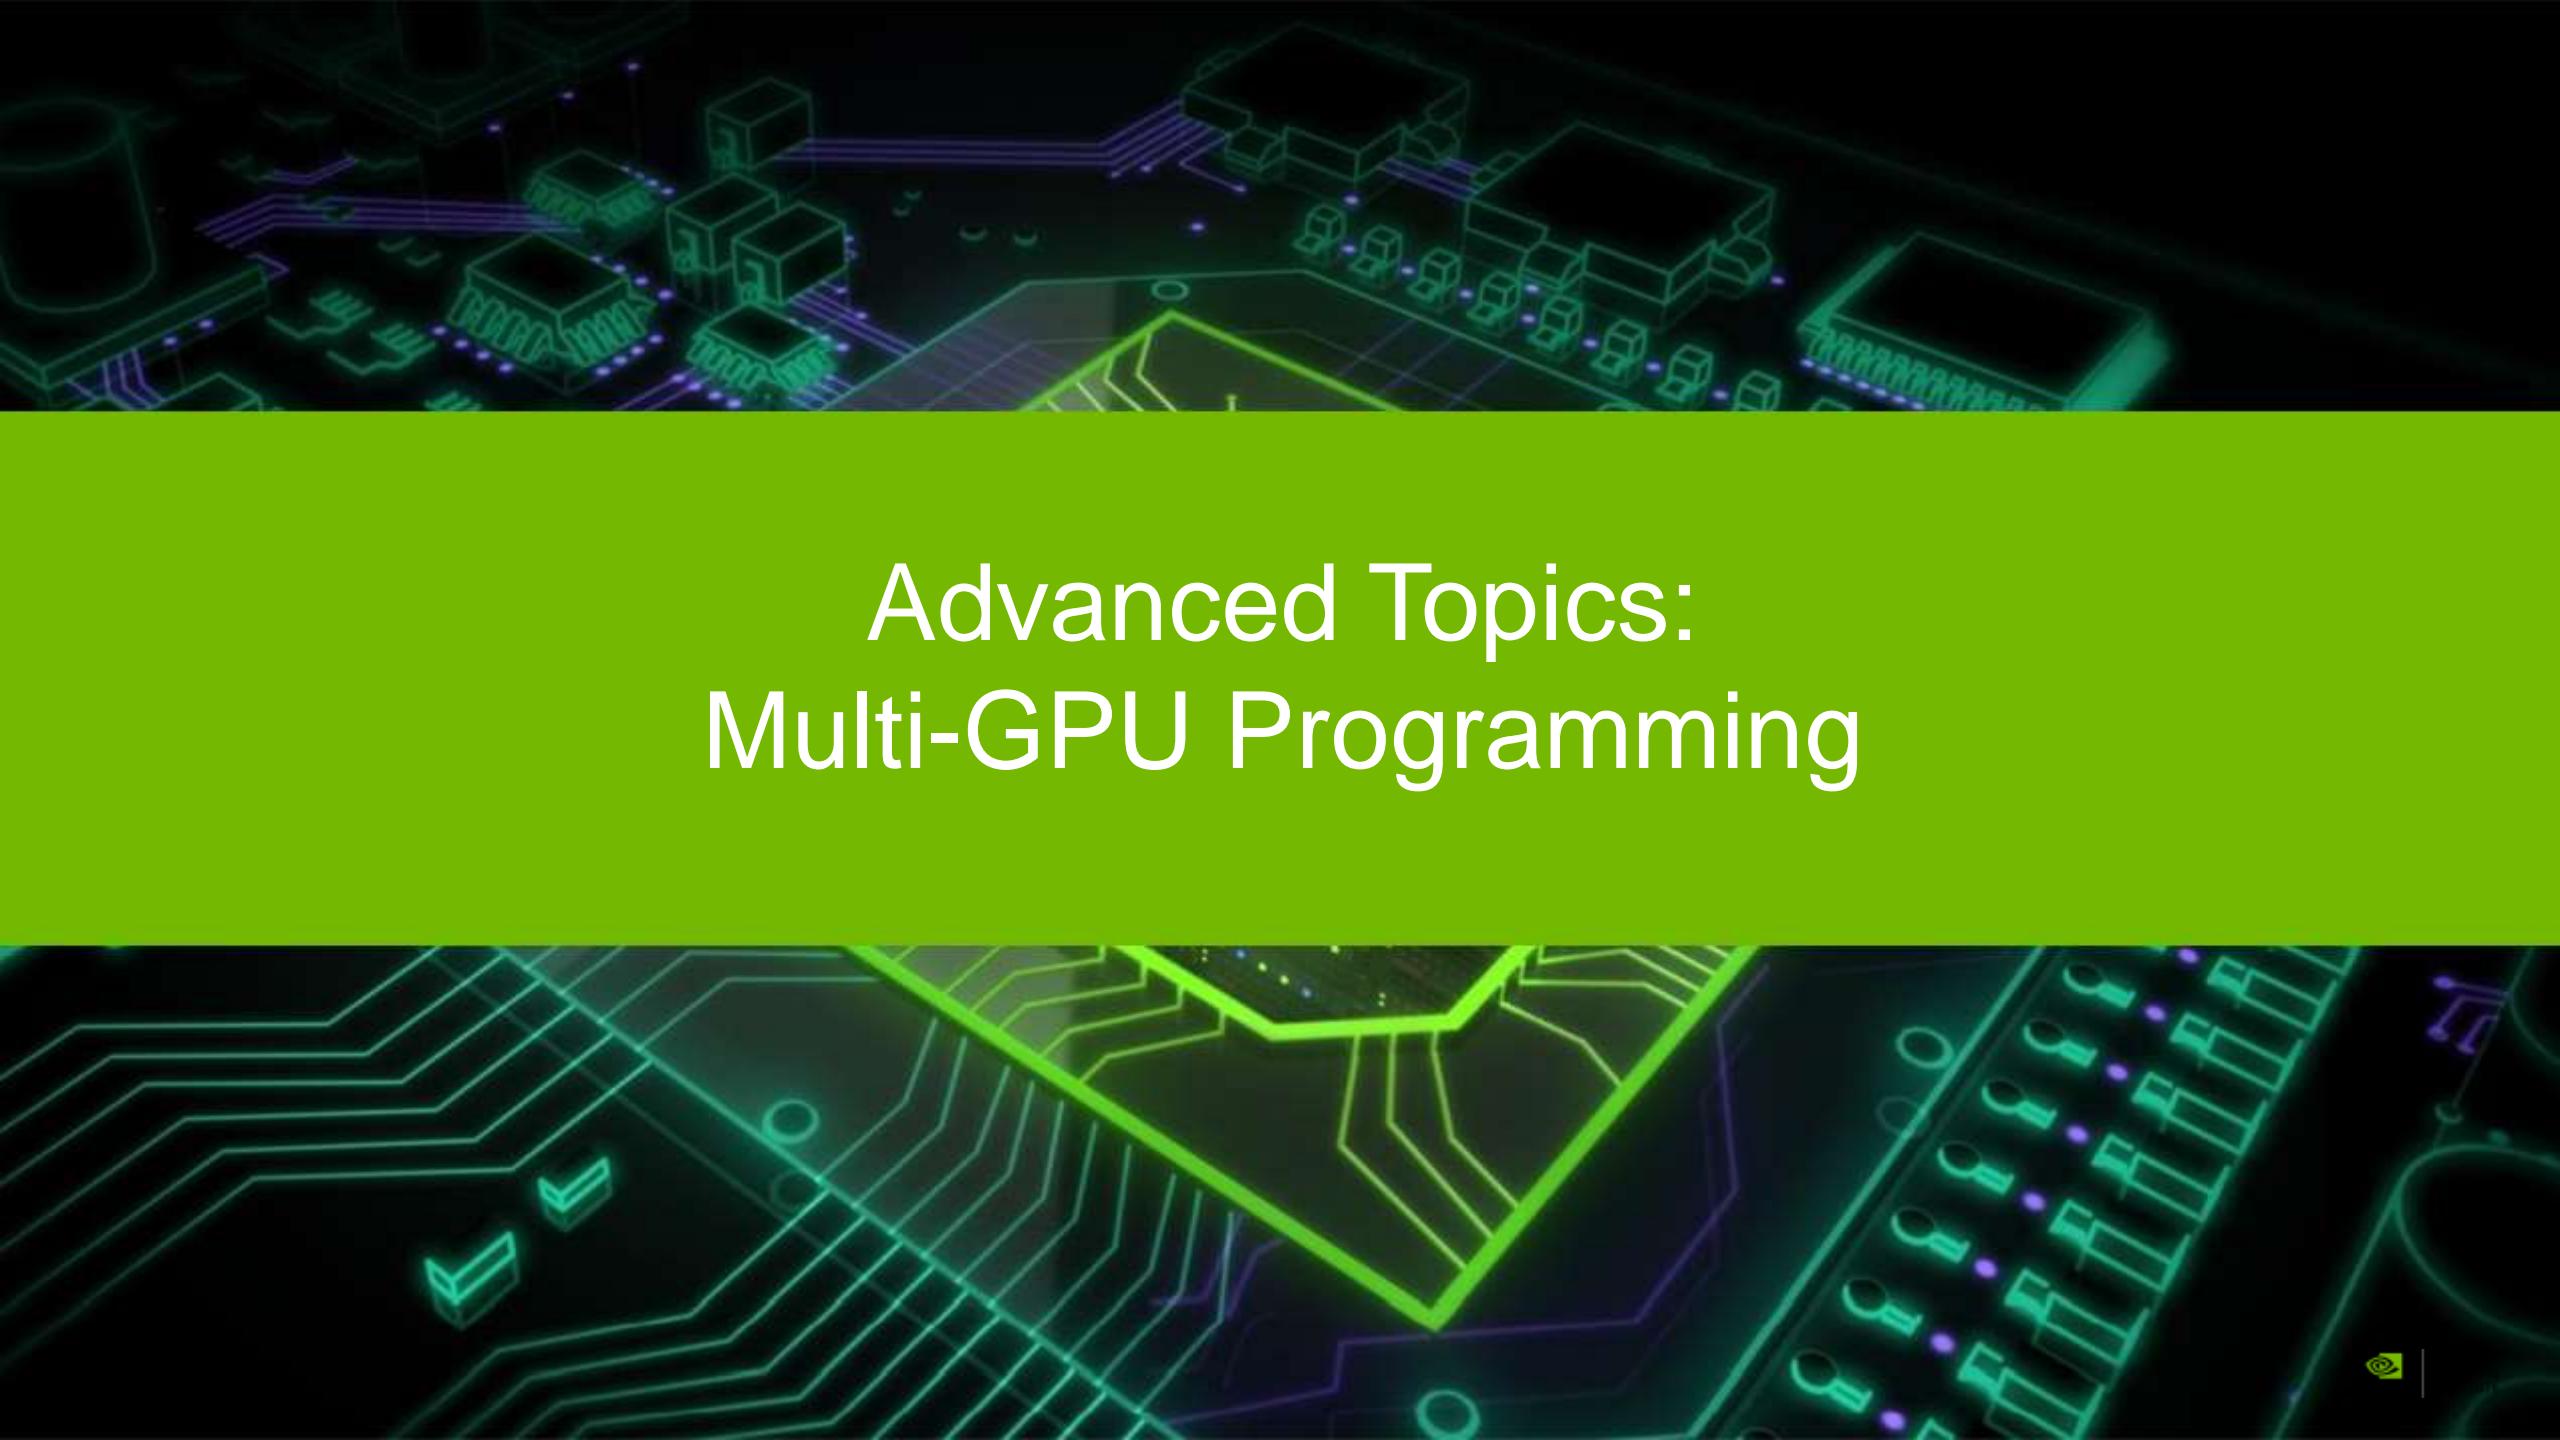

Advanced Topics: Multi-GPU Programming

MOTIVATION

Why use multiple GPUs?

Need to compute larger, e.g. bigger networks, car models, ...

Need to compute faster, e.g. weather prediction

Better energy efficiency with dense nodes with multiple GPUs

DGX-1

Two fully connected quads,
connected at corners


160GB/s per GPU bidirectional to
Peers

Load/store access to Peer Memory

Full atomics to Peer GPUs

High speed copy engines for bulk
data copy

PCIe to/from CPU

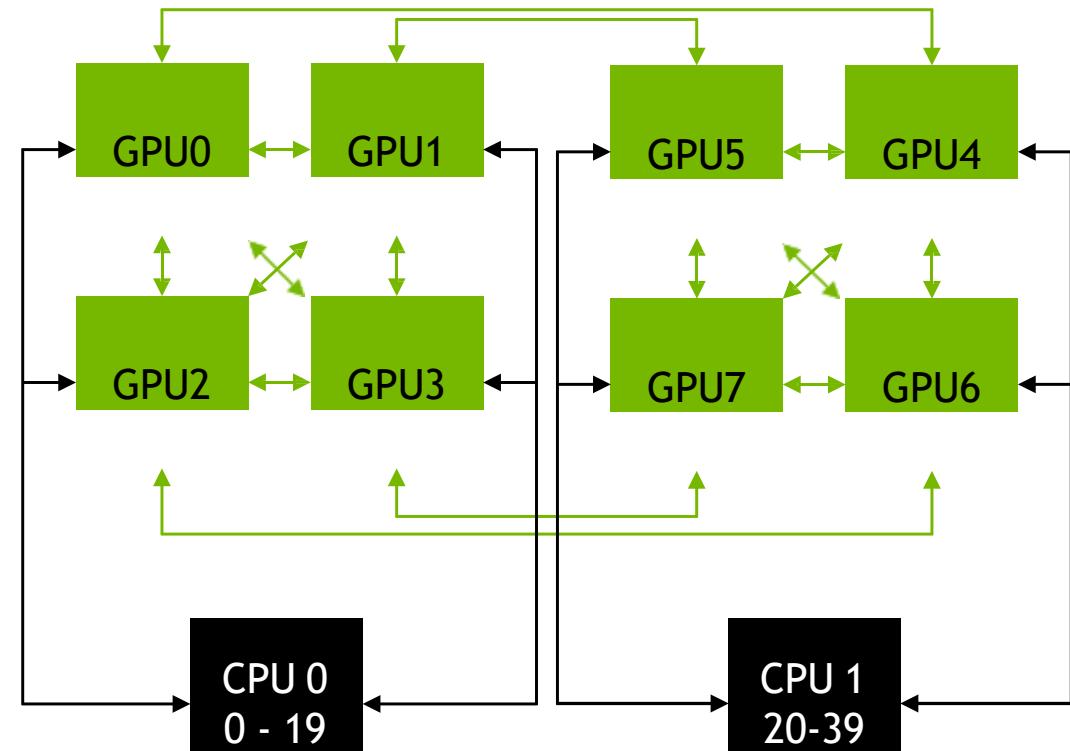

EXAMPLE: JACOBI SOLVER

Solves the 2D-Laplace Equation on a rectangle

$$\Delta u(x, y) = \mathbf{0} \quad \forall (x, y) \in \Omega \setminus \delta\Omega$$

Dirichlet boundary conditions (constant values on boundaries) on left and right boundary

Periodic boundary conditions on top and bottom boundary


EXAMPLE: JACOBI SOLVER

Single GPU

While not converged

Do Jacobi step:

```
for( int iy = 1; < ny-1; iy++ )  
    iy  
    for( int ix = 1; < ny-1; ix++ )  
        ix  
        a_new[iy*nx+ix] = -0.25 * *nx+ix-1]  
            -( a[ iy *nx+(ix+1)] + a[ (iy+1)*nx+ix ] );  
            iy
```

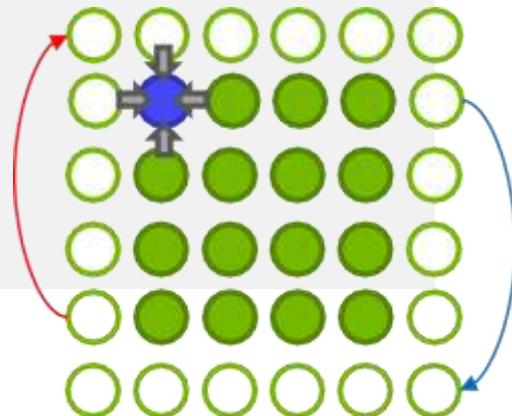

Apply periodic boundary conditions

Swap `a_new` and `a`

Next iteration

DOMAIN DECOMPOSITION

Different Ways to split the work between processes:

Minimize number of neighbors:




Communicate to less neighbors

Optimal for latency bound communication

Minimize surface area/volume ratio:

Communicate less data

Optimal for bandwidth bound communication

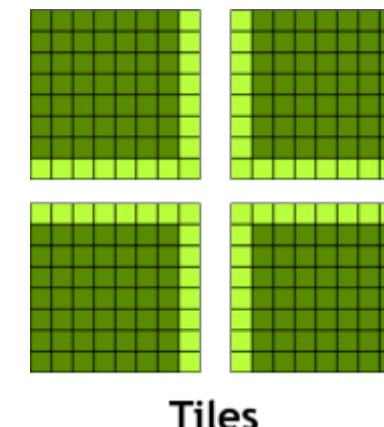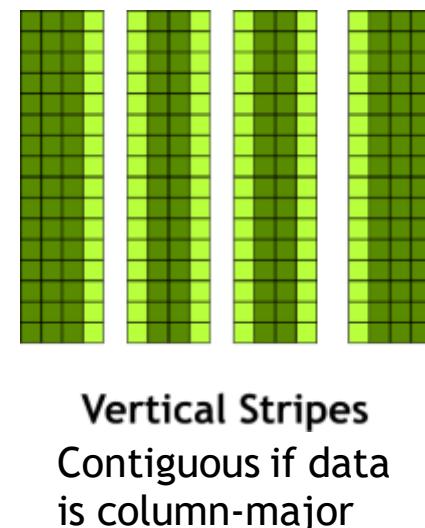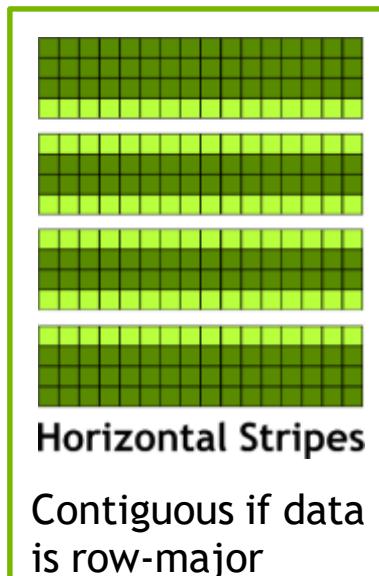

EXAMPLE: JACOBI SOLVER

Multi GPU

While not converged

Do Jacobi step:

```
for (int iy = iy_start; iy < iy_end; iy++ )  
for( int ix = 1; ix < ny-1; ix++ )  
    a_new[iy*nx+ix] = -0.25 *  
        -( a[ iy    *nx+(ix+1) ] + a[ iy    *nx+ix-1]  
        + a[(iy-1)*nx+ ix    ] + a[(iy+1)*nx+ix    ] );
```


Apply periodic boundary conditions

Exchange halo with 2 neighbors

Swap `a_new` and `a`

Next iteration

One-step with
ring exchange

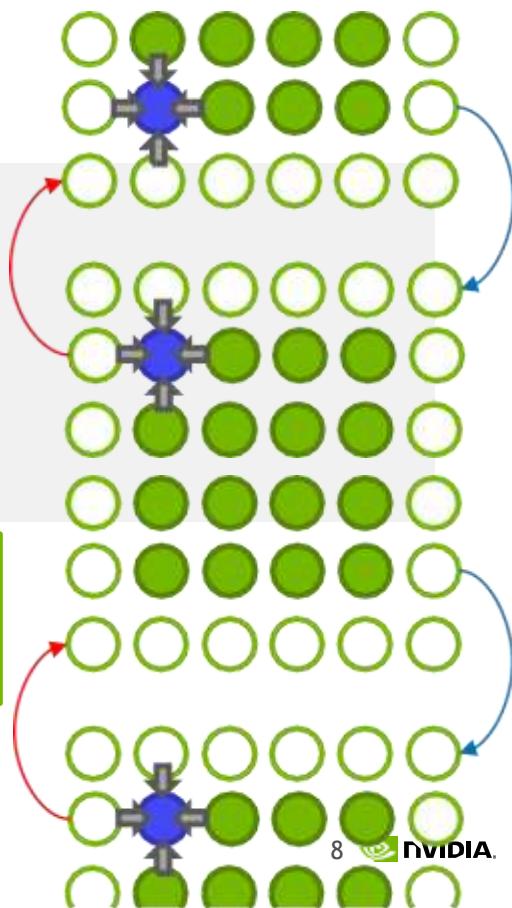


SINGLE THREADED MULTI GPU PROGRAMMING

```
while ( l2_norm > tol && iter < iter_max ) {
    for ( int dev_id = 0; dev_id < num_devices; ++dev_id ) {
        const int top = dev_id > 0 ? dev_id - 1 : (num_devices-1); const int bottom = (dev_id+1)%num_devices;
        cudaSetDevice( dev_id );
        cudaMemsetAsync( l2_norm_d[dev_id], 0 , sizeof(real) );
        jacobi_kernel<<<dim_grid,dim_block>>>( a_new[dev_id], a[dev_id], l2_norm_d[dev_id],
                                                    iy_start[dev_id], iy_end[dev_id], nx );
        cudaMemcpyAsync( l2_norm_h[dev_id], l2_norm_d[dev_id], sizeof(real), cudaMemcpyDeviceToHost );
        cudaMemcpyAsync( a_new[top]+(iy_end[top]*nx), a_new[dev_id]+iy_start[dev_id]*nx, nx*sizeof(real), ... );
        cudaMemcpyAsync( a_new[bottom], a_new[dev_id]+(iy_end[dev_id]-1)*nx, nx*sizeof(real), ... );
    }
    l2_norm = 0.0;
    for ( int dev_id = 0; dev_id < num_devices; ++dev_id ) {
        cudaSetDevice( dev_id ); cudaDeviceSynchronize();
        l2_norm += *(l2_norm_h[dev_id]);
    }
    l2_norm = std::sqrt( l2_norm );
    for ( int dev_id = 0; dev_id < num_devices; ++dev_id ) std::swap(a_new[dev_id],a[dev_id]);
    iter++;
}
```

EXAMPLE JACOBI

Top/Bottom Halo


```
cudaMemcpyAsync(  
    a_new[top]+(iy_end[top]*nx) ,  
    a_new[dev_id]+iy_start[dev_id]*nx, nx*sizeof(real), ...);
```

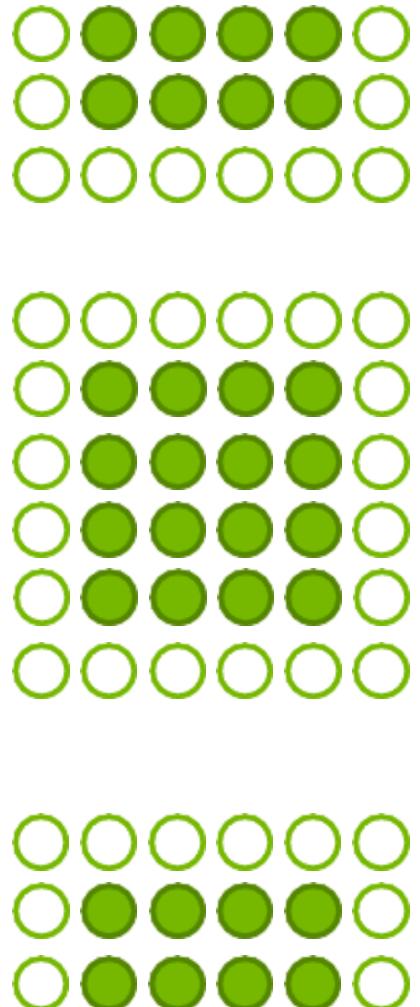

EXAMPLE JACOBI

Top/Bottom Halo

```
cudaMemcpyAsync(  
    a_new[top]+(iy_end[top]*nx),  
    a_new[dev_id]+iy_start[dev_id]*nx, nx*sizeof(real), ...);
```

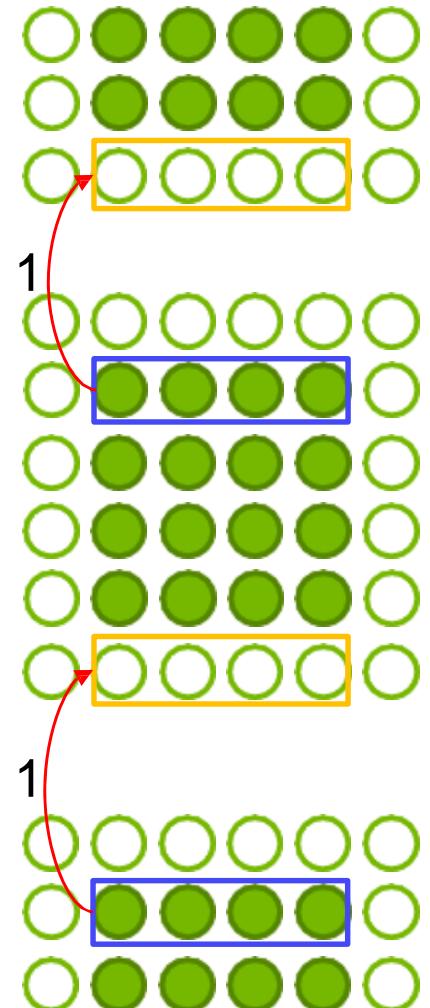

MULTI THREADED MULTI GPU PROGRAMMING

Using OpenMP

```
int num_devices = 0;

cudaGetDeviceCount( &num_devices );

#pragma omp parallel num_threads( num_devices )

{
    int dev_id = omp_get_thread_num();

    cudaSetDevice( dev_id );
}
```

MULTI THREADED MULTI GPU PROGRAMMING

Using OpenMP and P2P Mappings

```
while ( l2_norm > tol && iter < iter_max ) {  
    cudaMemsetAsync(l2_norm_d, 0 , sizeof(real), compute_stream );  
    #pragma omp barrier  
    cudaStreamWaitEvent( compute_stream, compute_done[iter%2][top], 0 );  
    cudaStreamWaitEvent( compute_stream, compute_done[iter%2][bottom], 0  
); jacobi_kernel<<<dim_grid,dim_block,0,compute_stream>>>(  
    a_new[dev_id], a, l2_norm_d, iy_start, iy_end[dev_id], nx,  
    a_new[top], iy_end[top], a_new[bottom], 0 );  
    cudaEventRecord( compute_done[(iter+1)%2][dev_id], compute_stream );  
    cudaMemcpyAsync(l2_norm,l2_norm_d,sizeof(real),cudaMemcpyDeviceToHost,compute_stream);  
    // l2_norm reduction btw threads skipped ...  
    #pragma omp barrier  
    std::swap(a_new[dev_id],a); iter++;  
}
```

MULTI THREADED MULTI GPU PROGRAMMING

Using OpenMP and P2P Mappings

```
__global__ void jacobi_kernel( ... ) {
    for (int iy = bIdx.y*bDim.y+tIdx.y + iy_start; iy < iy_end; iy += bDim.y*gDim.y) {
        for (int ix = bIdx.x*bDim.x+tIdx.x + 1; ix < (nx-1); ix += bDim.x*gDim.x)
            const real new_val = 0.25 * ( a[ iy * nx + ix + 1 ] + a[ iy * nx + ix - 1 ]
                + a[ (iy+1)*nx + ix ] + a[ (iy-1)*nx + ix ] );
        if ( iy_start == iy ) { a_new_top[ top_iy*nx + ix ] = new_val; }
        if ( (iy_end - 1) == iy ) { a_new_bottom[ bottom_iy*nx + ix ] = new_val; }
        atomicAdd( &residue_l2_norm, residue * residue );
    }
}
```

MESSAGE PASSING INTERFACE - MPI

Standard to exchange data between processes via messages

Defines API to exchanges messages

Point to Point: e.g. `MPI_Send`, `MPI_Recv`

Collectives: e.g. `MPI_Reduce`

Multiple implementations (open source and commercial)

Bindings for C/C++, Fortran, Python, ...

E.g. MPICH, OpenMPI, MVAPICH, IBM Platform MPI, Cray MPT, ...


MPI - SKELETON

```
#include <mpi.h>
int main(int argc, char *argv[]) {
    int rank, size;
    /* Initialize the MPI library */
    MPI_Init(&argc, &argv);
    /* Determine the calling process rank and total number of ranks */
    MPI_Comm_rank(MPI_COMM_WORLD, &rank);
    MPI_Comm_size(MPI_COMM_WORLD, &size);
    /* Call MPI routines like MPI_Send, MPI_Recv, ... */
    ...
    /* Shutdown MPI library */
    MPI_Finalize();
    return 0;
}
```

MP

Compiling and Launching


```
$ mpicc -o myapp myapp.c  
$ mpirun -np 4 ./myapp <args>
```

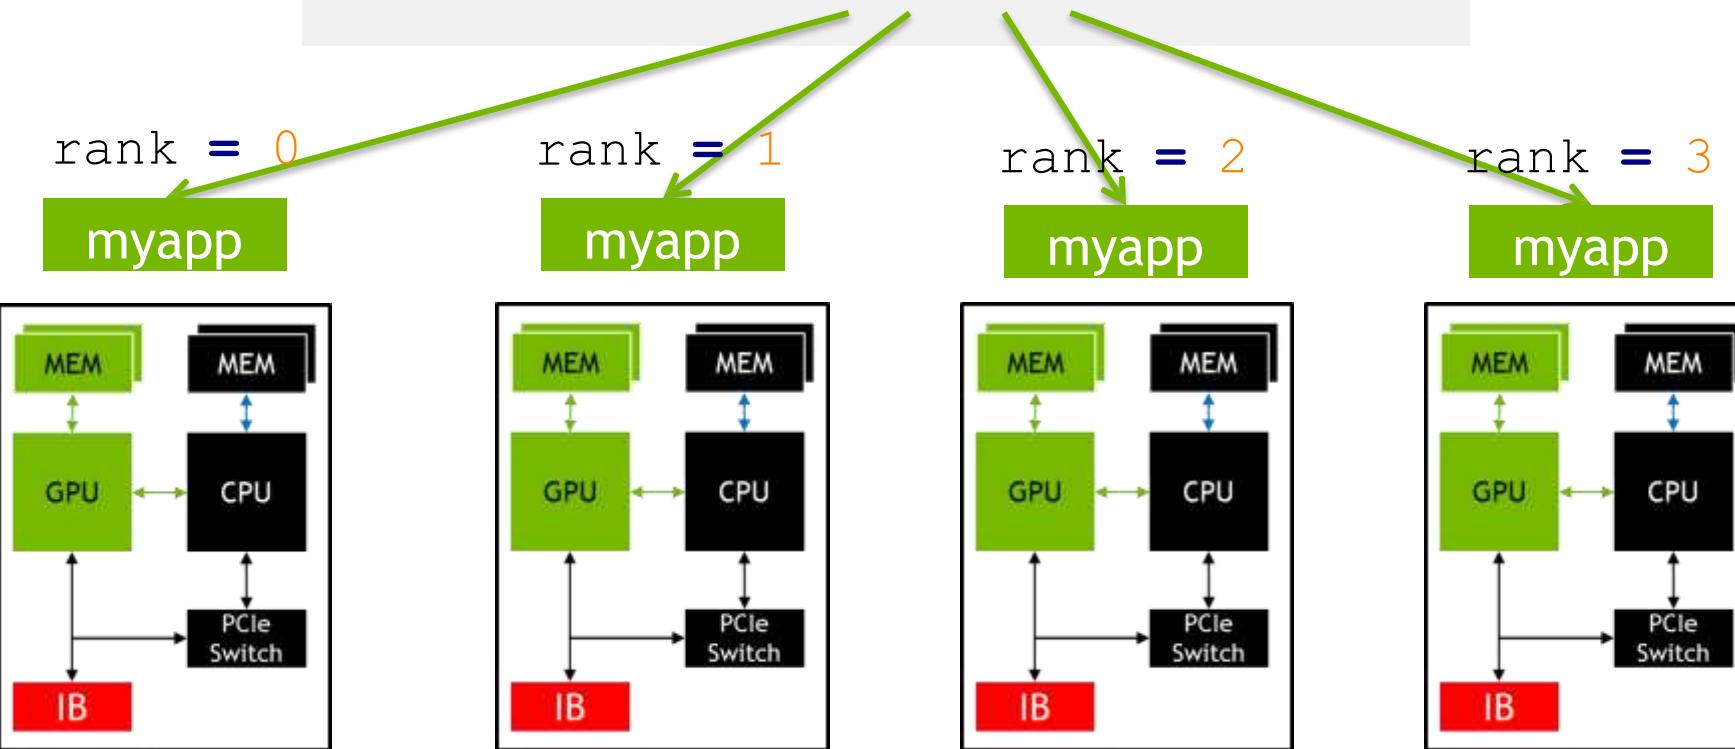

EXAMPLE JACOBI

Top/Bottom Halo


```
MPI_Sendrecv(a_new+iy_start*nx, nx, MPI_FLOAT, top , 0,  
             a_new+(iy_end*nx), nx, MPI_FLOAT, bottom, 0,  
             MPI_COMM_WORLD, MPI_STATUS_IGNORE);
```

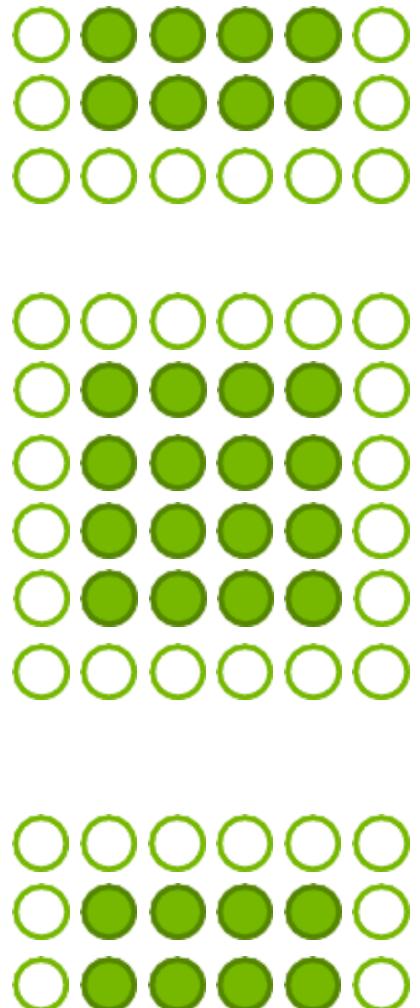

EXAMPLE JACOBI

Top/Bottom Halo

```
MPI_Sendrecv(a new+iy start*nx, nx, MPI_FLOAT, top , 0,  
             a new+(iy end*nx), nx, MPI_FLOAT, bottom, 0,  
             MPI_COMM_WORLD, MPI_STATUS_IGNORE);
```

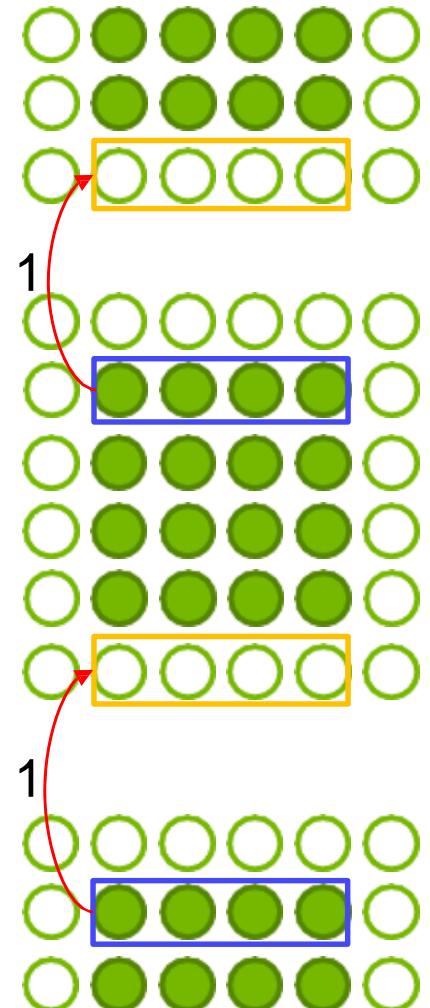


EXAMPLE JACOBI


Top/Bottom Halo

```
MPI_Sendrecv(a_new+iy_start*nx, nx, MPI_FLOAT, top , 0,
              a_new+(iy_end*nx), nx, MPI_FLOAT, bottom, 0,
              MPI_COMM_WORLD, MPI_STATUS_IGNORE);

MPI_Sendrecv(a_new+(iy_end-1)*nx, nx, MPI_FLOAT, bottom, 0,
              a_new, nx, MPI_FLOAT, top, 0, MPI_COMM_WORLD,
              MPI_STATUS_IGNORE);
```

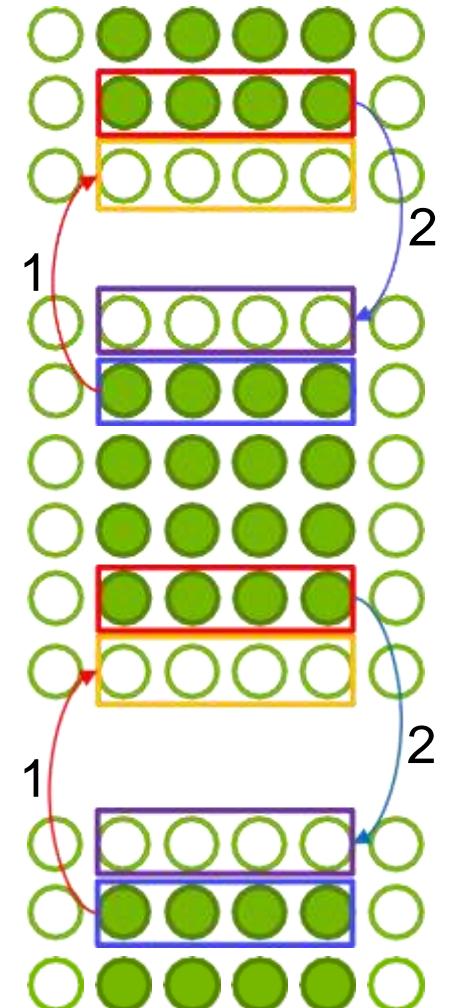

HANDLING MULTIPLE MULTI GPU NODES

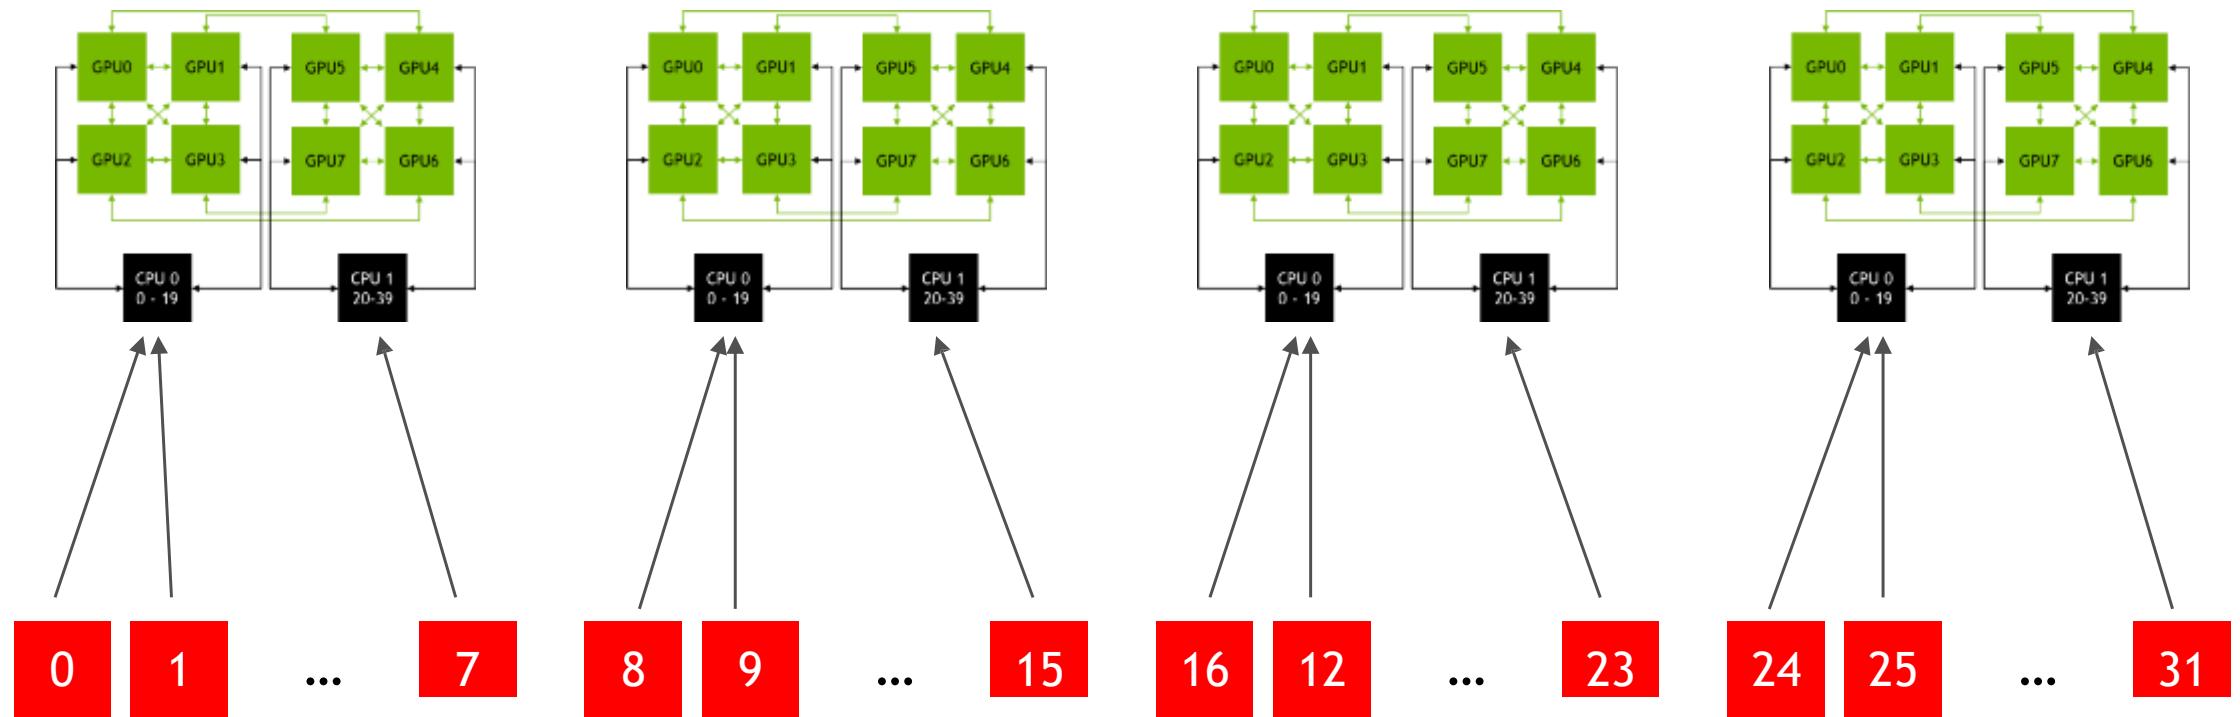


HANDLING MULTIPLE MULTI GPU NODES

How to determine the local rank? - MPI-3

```
MPI_Comm local_comm;  
  
MPI_Info info;  
  
MPI_Info_create(&info);  
  
MPI_Comm_split_type(MPI_COMM_WORLD, MPI_COMM_TYPE_SHARED, rank, info, &local_comm);  
int local_rank = -1;  
  
MPI_Comm_rank(local_comm, &local_rank);  
  
MPI_Comm_free(&local_comm);  
  
MPI_Info_free(&info);
```

HANDLING MULTIPLE MULTI GPU NODES

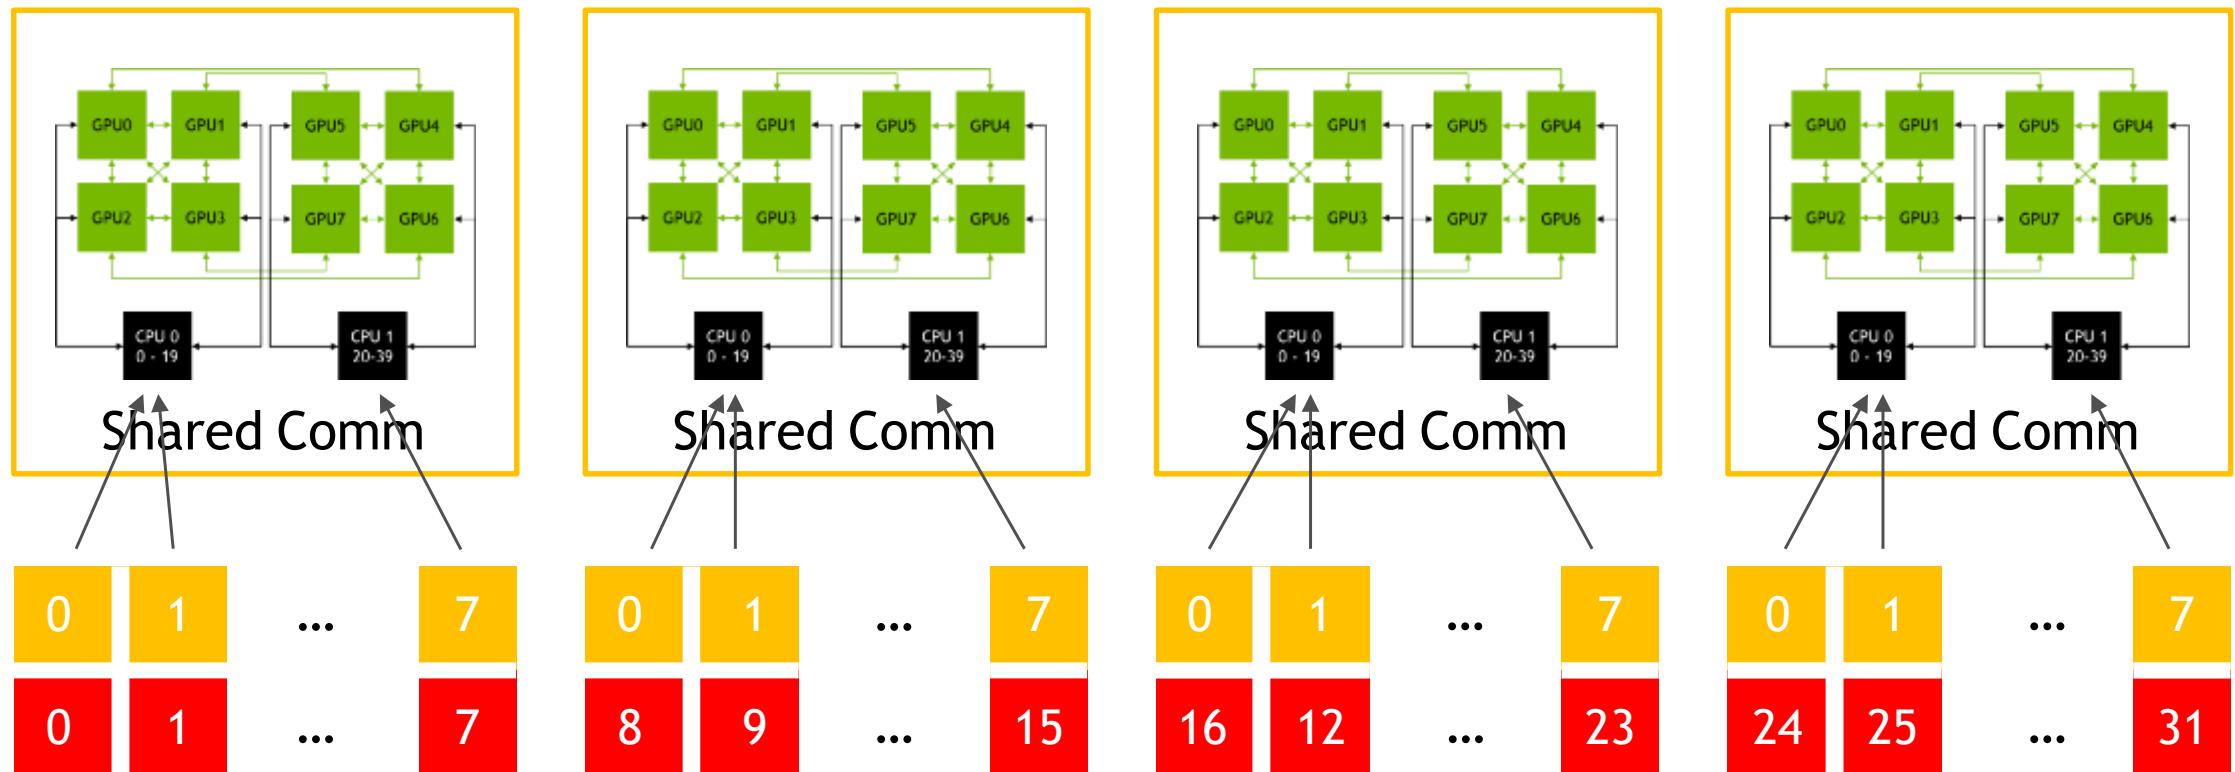

HANDLING MULTIPLE MULTI GPU NODES


GPU-affinity

Use local rank:

```
int local_rank = -1;  
MPI_Comm_rank(local_comm,&local_rank);  
  
int num_devices = 0;  
cudaGetDeviceCount (&num_devices);  
  
cudaSetDevice (local_rank % num_devices);
```

COMMUNICATION + COMPUTATION OVERLAP

```
launch_jacobi_kernel( a_new, a, l2_norm_d, iy_start, (iy_start+1), nx, push_top_stream );
launch_jacobi_kernel( a_new, a, l2_norm_d, (iy_end-1), iy_end, nx, push_bottom_stream );
launch_jacobi_kernel( a_new, a, l2_norm_d, (iy_start+1), (iy_end-1), nx, compute_stream
const int top = rank > 0 ? rank - 1 : (size+1);
const int bottom = (rank+1)%size;
cudaStreamSynchronize( push_top_stream );
MPI_Sendrecv( a_new+iy_start*nx, nx, MPI_REAL_TYPE, top, 0,
              a_new+(iy_end*nx), nx, MPI_REAL_TYPE, bottom, 0,
              MPI_COMM_WORLD, MPI_STATUS_IGNORE );
cudaStreamSynchronize( push_bottom_stream );
MPI_Sendrecv( a_new+(iy_end-1)*nx, nx, MPI_REAL_TYPE, bottom, 0,
              a_new, nx, MPI_REAL_TYPE, top, 0, MPI_COMM_WORLD,
              MPI_STATUS_IGNORE );
```

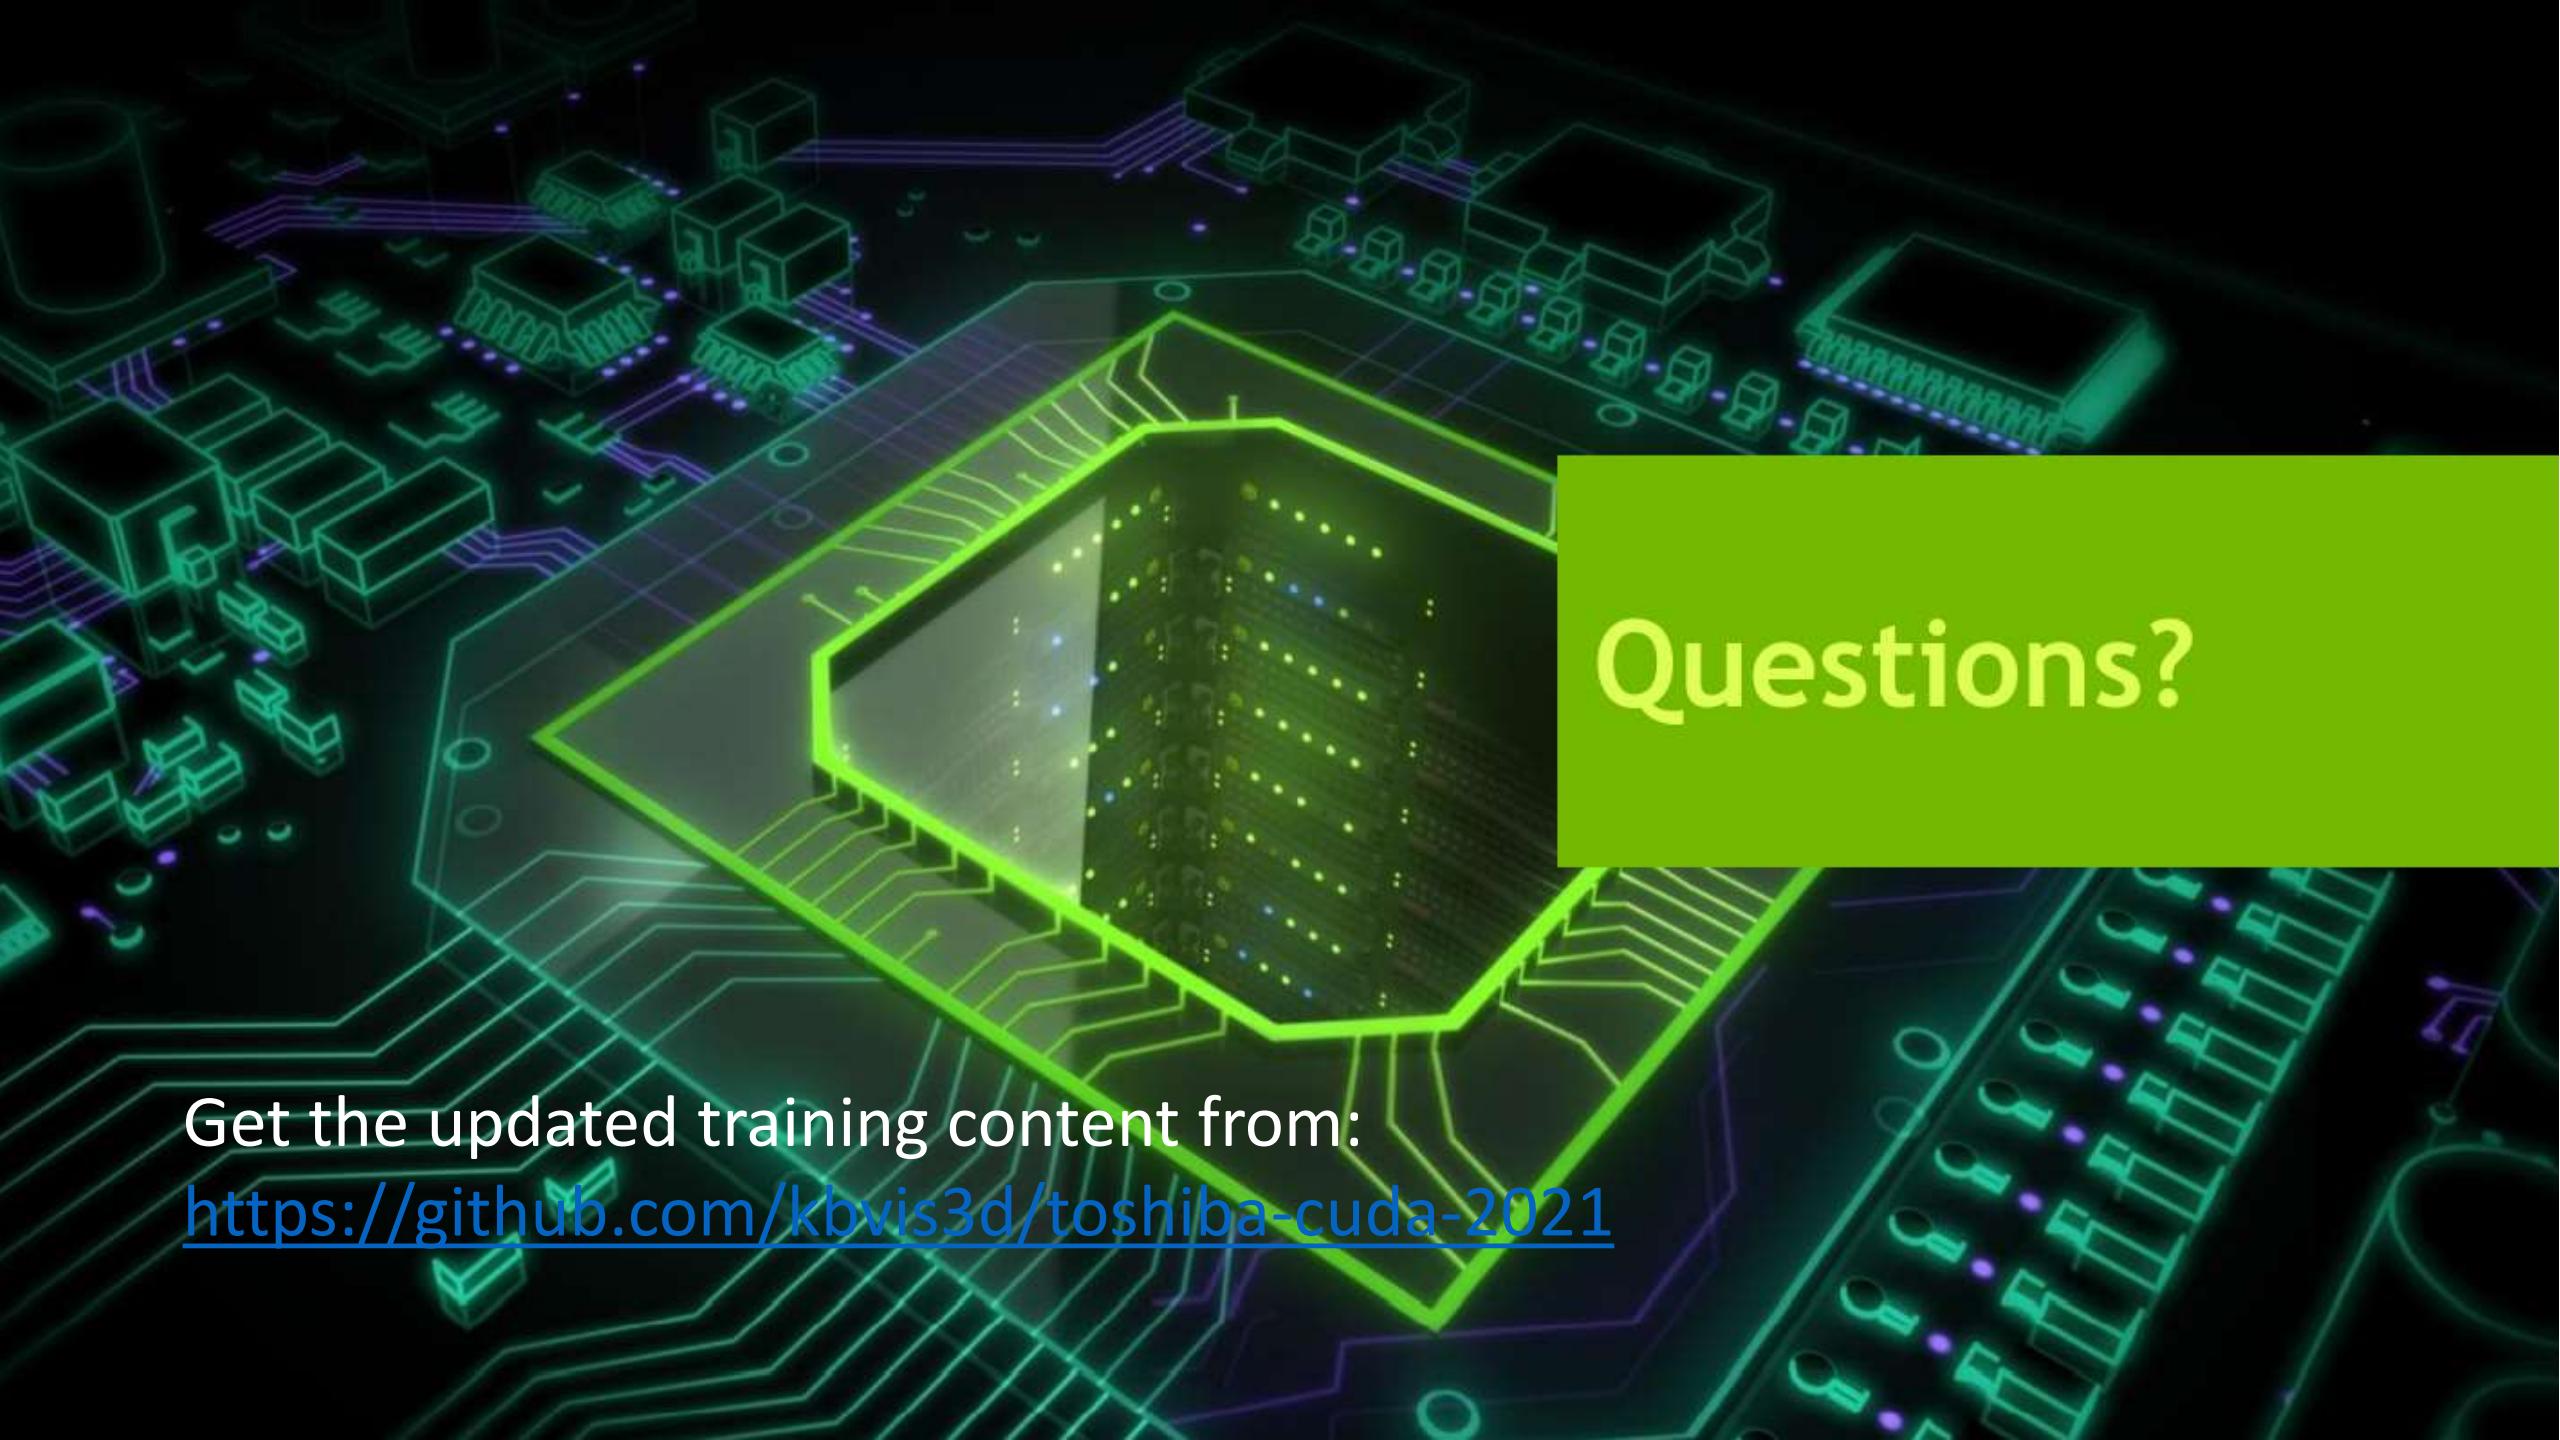

Questions?

Get the updated training content from:

<https://github.com/kbvis3d/toshiba-cuda-2021>