



Create and view global-route guides

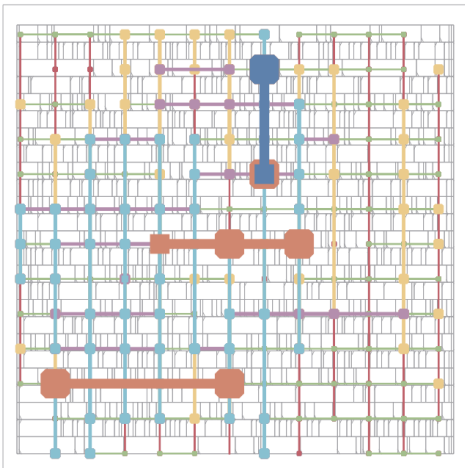


```
# Build legal pin access.
pin_access
# Routing access is already set earlier.
# Write the global-route guide file.
global_route \
  -guide_file /path/to/route.guide \
  -congestion_iterations 100 -verbose
# Read the saved global-route guide file.
read_guides /path/to/route.guide
# Draw all global-route guides.
draw_route_segments {*}
```

View one global-route guide

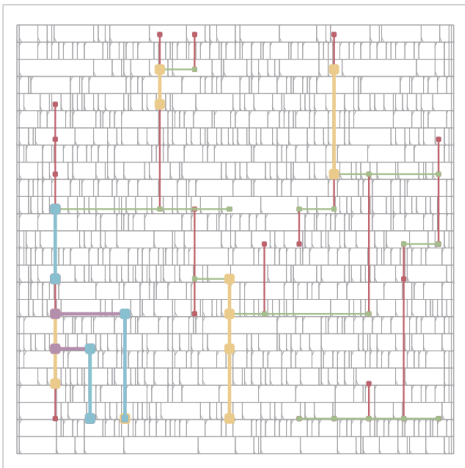


```
# Read the saved global-route guide file.  
read_guides /path/to/route.guide  
# Draw one global-route guide.  
draw_route_segments {_188_}
```

Global-route congestion and RC

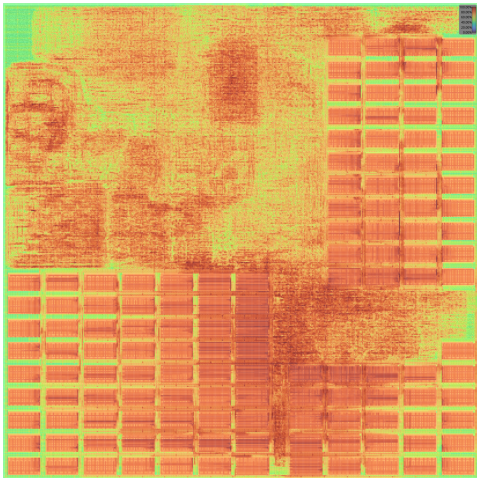

```
# Preserve the congestion report and replace  
placement-only  
# wire estimates with the topology selected  
by global routing.  
global_route \  
  -guide_file results/ariane/route.guide \  
  -congestion_iterations 100 \  
  -congestion_report_file results/ariane/  
congestion.rpt \  
  -verbose  
estimate_parasitics -global_routing
```

Detailed routing and checks

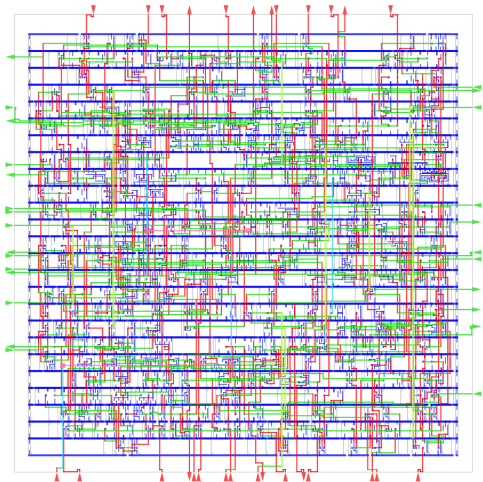

```
repair_antennas -iterations 5
detailed_route \
  -output_drc \
  results/gcd/7_detailed_route_drc.rpt \
  -output_maze \
  results/gcd/7_detailed_route_maze.log \
  -no_pin_access -verbose 0
check_antennas -verbose
report_wire_length \
  -summary -global_route
```