

Project 1: Concurrent Web Server using BSD Sockets

Computer Network 소프트웨어학부 2015037974 강치훈 testGIF.gif

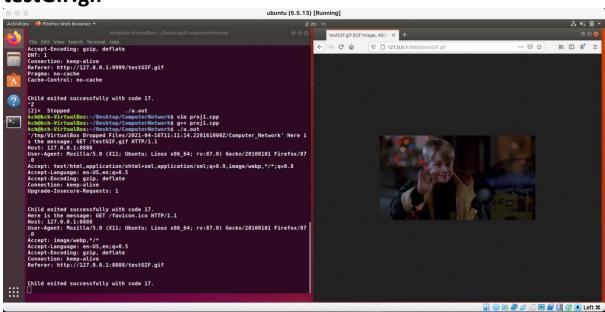

testHTML.html

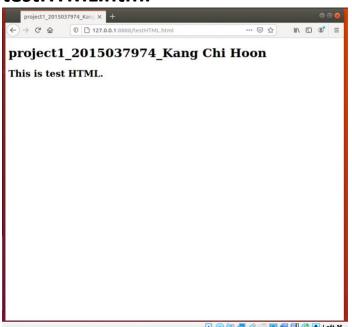

```
Here is the message: GET /testHTML.html HTTP/1.1

Host: 127.0.0.1:8888

User-Agent: Mozilla/5.0 (X11; Ubuntu; Linux x86_64; rv:87.0) Gecko/20100101 Firefox/87
.0

Accept: text/html,application/xhtml+xml,application/xml;q=0.9,image/webp,*/*;q=0.8


Accept-Language: en-US,en;q=0.5

Accept-Encoding: gzip, deflate


Connection: keep-alive
Upgrade-Insecure-Requests: 1

Child exited successfully with code 17.
```

testJPEG.jpeg

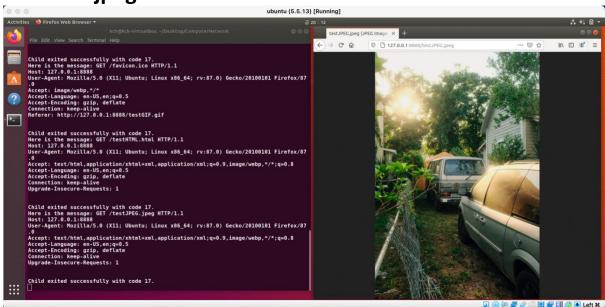

testJPG.jpg

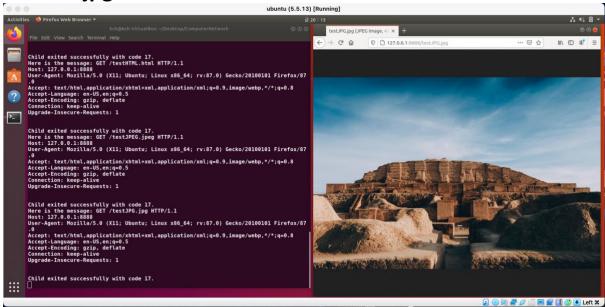

testMP4.mp4

```
Child exited successfully with code 17.

Here is the message: GET /testMP4.mp4 HTTP/1.1

Host: 127.0.0.1:8888

User-Agent: Mozilla/5.0 (X11; Ubuntu; Linux x86_64; rv:87.0) Gecko/20100101 Firefox/87.0

Accept: text/html,application/xhtml+xml,application/xml;q=0.9,image/webp,*/*;q=0.8

Accept-Language: en-US,en;q=0.5

Accept-Encoding: gzip, deflate

Connection: keep-alive

Upgrade-Insecure-Requests: 1

Child exited successfully with code 17.
```

Mp4 확장자 파일은 리눅스의 동영상 재생 프로그램이 없어서 열리지 않고 다운로드 받도록 떴습니다.