

CPPDescent

63dd51f (with uncommitted changes)

Generated by Doxygen 1.9.7



# Chapter 1

## CPP-Descent

Part of the “Software Development for Computing Systems” course of the Department of Informatics and Telecommunications, UoA for the first semester of the academic year 2023-2024.

A library that implements the KNN-Graph creation and search algorithms described in [1], [2].

### 1.1 Dependencies

For local development, you will need Make and CMake. To install them on an apt-based linux distro, run the following commands:

```
$ sudo apt update && sudo apt upgrade
$ sudo apt install make
$ sudo apt install cmake
```

#### 1.1.1 Minor dependencies

- The project uses [Google Test](#) for its testing needs. Gtest is used as a git submodule of this repo, that is downloaded by CMake the first time you clone. That means that nothing extra needs to be installed to run the tests.
- If you would like to generate the documentation, you will need [doxygen](#) installed.

### 1.2 Code Structure

In the [wiki](#), you can find documentation generated by [Doxygen](#). It is also available in [pdf form](#).

#### 1.2.1 Code Coverage

This project uses [LCOV](#) for its code coverage needs. The results are uploaded upon commit [here](#).

## 1.3 Contributors

- [Konstantinos Chousos](#) (1115202000215)
- [Anastasios-Fedon Seitanidis](#) (1115202000179)

## 1.4 Bibliography

[1] W. Dong, C. Moses, and K. Li, “Efficient k-nearest neighbor graph construction for generic similarity measures,” in *Proceedings of the 20th international conference on World wide web*, in WWW '11. New York, NY, USA: Association for Computing Machinery, Mar. 2011, pp. 577–586. doi: [10.1145/1963405.1963487](#).

[2] “How PyNNDescent works — pynndescent 0.5.0 documentation.” Accessed: Oct. 10, 2023. [Online]. Available: [https://pynndescent.readthedocs.io/en/latest/how\\_pynndescent\\_works.html](https://pynndescent.readthedocs.io/en/latest/how_pynndescent_works.html)

## Chapter 2

# Namespace Index

### 2.1 Namespace List

Here is a list of all documented namespaces with brief descriptions:

|                            |                                                      |    |
|----------------------------|------------------------------------------------------|----|
| <a href="#">cppdescent</a> | Functions for the creation of a K-NN graph . . . . . | ?? |
|----------------------------|------------------------------------------------------|----|



## Chapter 3

# Class Index

### 3.1 Class List

Here are the classes, structs, unions and interfaces with brief descriptions:

|                                 |                                        |    |
|---------------------------------|----------------------------------------|----|
| <a href="#">Graph</a>           | .....                                  | ?? |
| <a href="#">GraphVertexPair</a> | .....                                  | ?? |
| <a href="#">List</a>            |                                        |    |
|                                 | ADT <a href="#">List</a> .....         | ?? |
| <a href="#">ListNode</a>        |                                        |    |
|                                 | Node of a list .....                   | ?? |
| <a href="#">Map</a>             | .....                                  | ?? |
| <a href="#">MapNode</a>         | .....                                  | ?? |
| <a href="#">PQueue</a>          |                                        |    |
|                                 | ADT Priority Queue .....               | ?? |
| <a href="#">Vector</a>          |                                        |    |
|                                 | ADT <a href="#">Vector</a> .....       | ?? |
| <a href="#">vectorNode</a>      |                                        |    |
|                                 | Class for the vector Node object ..... | ?? |



## Chapter 4

# File Index

### 4.1 File List

Here is a list of all documented files with brief descriptions:

|                                                   |     |    |
|---------------------------------------------------|-----|----|
| <a href="#">ADTGraph.hpp</a>                      |     |    |
| Abstract undirected graph with weighted edges     | ... | ?? |
| <a href="#">ADTList.hpp</a>                       | ... | ?? |
| <a href="#">ADTMap.hpp</a>                        | ... | ?? |
| <a href="#">ADTPQueue.hpp</a>                     | ... | ?? |
| <a href="#">ADTVector.hpp</a>                     |     |    |
| ADTVector implementation using a dynamic array    | ... | ?? |
| <a href="#">common.hpp</a>                        | ... | ?? |
| <a href="#">cppdescent.hpp</a>                    | ... | ?? |
| <a href="#">ADTGraph.cpp</a>                      | ... | ?? |
| <a href="#">ADTList.cpp</a>                       |     |    |
| Implementation of an ADT linked list              | ... | ?? |
| <a href="#">ADTMap.cpp</a>                        |     |    |
| Implementation of ADTMap                          | ... | ?? |
| <a href="#">ADTPQueue.cpp</a>                     |     |    |
| An ADT Priority Queue implemented using a heap    | ... | ?? |
| <a href="#">ADTVector.cpp</a>                     |     |    |
| Implementation of ADTVector using a dynamic array | ... | ?? |
| <a href="#">cppdescent.cpp</a>                    |     |    |
| Implementation of the cppdescent library          | ... | ?? |



## Chapter 5

# Namespace Documentation

### 5.1 cppdescent Namespace Reference

Functions for the creation of a K-NN graph.

#### Functions

- void **deleteFloat** (Pointer value)
- float \* **createFloat** (float value)
- float **compareFloats** (Pointer a, Pointer b)
- int **deleteDatapointVectors** ([Vector](#) \*vec)
- int **compareVertices** (Pointer first, Pointer second)
- [Vector](#) \* **readBinData** (char \*fp, int dimensions)  
*Reads the data from a binary file.*
- [Graph](#) \* **KNNBruteForceGraph** ([Vector](#) \*data, int K, CompareFunc compare, DistanceFunc distance)  
*Computes the K-NN graph using brute force.*

#### 5.1.1 Detailed Description

Functions for the creation of a K-NN graph.

#### 5.1.2 Function Documentation

##### 5.1.2.1 KNNBruteForceGraph()

```
Graph * cppdescent::KNNBruteForceGraph (  
    Vector * data,  
    int K,  
    CompareFunc compare,  
    DistanceFunc distance )
```

Computes the K-NN graph using brute force.

Useful for testing the recall and the performance of our NN-Descent algorithm.

The user is responsible deletion of the allocated memory of the graph.

**Parameters**

|                 |                                                                       |
|-----------------|-----------------------------------------------------------------------|
| <i>data</i>     | A pointer to the parent N-sized vector.                               |
| <i>K</i>        | The number of Nearest Neighbors to find.                              |
| <i>compare</i>  | The function to use to compare the distances.                         |
| <i>distance</i> | The function that computes the distance between two points (vectors). |

**Returns**

Graph\* A pointer to the optimal K-NN graph.

**5.1.2.2 readBinData()**

```
Vector * cppdescent::readBinData (
    char * fp,
    int dimensions )
```

Reads the data from a binary file.

The data read are stored in a N-sized [Vector](#), where N is the <uint32\_t> at the start of the file. Each node of this vector is a pointer to another 100-sized vector, of which the values are pointers to floats.

All of the vectors (the parent N-sized and each of the 100-sized) must be freed by the user.

**Parameters**

|                   |                                                          |
|-------------------|----------------------------------------------------------|
| <i>fp</i>         | A string (char *) of the filepath to the binary dataset. |
| <i>dimensions</i> | The dimension of each point.                             |

**Returns**

Vector\* An N-sized vector with vectors for each element.

# Chapter 6

## Class Documentation

### 6.1 Graph Class Reference

#### Public Member Functions

- **Graph** (CompareFunc compare, DestroyFunc destroy)
- int **getSize** ()
- void **insertVertex** (Pointer vertex)  
*Insert a vertex to the graph (if it doesn't already exist).*
- **List** \* **getVertices** ()  
*The returned list needs to be deleted, but the list's elements are pointers the the vector's elements, so the list shouldn't have a `destroyValue`.*
- void **removeVertex** (Pointer vertex)
- void **insertEdge** (Pointer vertex1, Pointer vertex2, float weight)
- void **removeEdge** (Pointer vertex1, Pointer vertex2)
- float **getWeight** (Pointer vertex1, Pointer vertex2)
- **List** \* **getAdjacent** (Pointer vertex)
- void **setHashFunction** (HashFunc hash)
- CompareFunc **getCompare** ()
- DestroyFunc **getDestroy** ()
- HashFunc **getHash** ()

#### 6.1.1 Member Function Documentation

##### 6.1.1.1 getVertices()

```
List * Graph::getVertices ( )
```

The returned list needs to be deleted, but the list's elements are pointers the the vector's elements, so the list shouldn't have a `destroyValue`.

#### Returns

List\*

##### 6.1.1.2 insertVertex()

```
void Graph::insertVertex (
    Pointer vertex )
```

Insert a vertex to the graph (if it doesn't already exist).

## Parameters

|               |                                         |
|---------------|-----------------------------------------|
| <i>vertex</i> | A Pointer to the vertex to be unsorted. |
|---------------|-----------------------------------------|

The documentation for this class was generated from the following files:

- [ADTGraph.hpp](#)
- [ADTGraph.cpp](#)

## 6.2 GraphVertexPair Class Reference

### Public Member Functions

- **GraphVertexPair** ([Graph](#) \*owner, Pointer vertex1, Pointer vertex2)
- Pointer **getVertex1** ()
- Pointer **getVertex2** ()
- [Graph](#) \* **getOwner** ()

The documentation for this class was generated from the following file:

- [ADTGraph.hpp](#)

## 6.3 List Class Reference

ADT [List](#).

```
#include <ADTList.hpp>
```

### Public Member Functions

- [List](#) (DestroyFunc value=nullptr)  
*Construct a new [List](#) object.*
- [~List](#) ()  
*Destroy the [List](#) object.*
- void [insertNext](#) ([ListNode](#) \*node, Pointer value)  
*Adds a node after the given node.*
- void [removeNext](#) ([ListNode](#) \*node)  
*Removes the node after the given node.*
- Pointer [find](#) (Pointer value, CompareFunc compare)  
*Finds the first value equal to the value parameter.*
- DestroyFunc [setDestroyValue](#) (DestroyFunc value)  
*Set the Destroy Value object to a new value.*
- int [getSize](#) ()  
*Get the size of the [List](#).*
- int [increaseSize](#) ()  
*Increase the list size.*

- `int decreaseSize ()`  
*Decrease the list size.*
- `ListNode * getHead ()`  
*Getter for the head of the [List](#).*
- `ListNode * getTail ()`  
*Getter for the tail of the [List](#).*
- `ListNode * next (ListNode *node)`  
*Returns the node after the given one.*
- `Pointer nodeValue (ListNode *node)`  
*Returns the value of the node.*
- `ListNode * findNode (Pointer value, CompareFunc compare)`  
*Finds the first node that has value equal to the value parameter.*

### 6.3.1 Detailed Description

ADT [List](#).

An Abstract Data Type [List](#) with linear access to data, and addition and removal to/from arbitrary positions.

### 6.3.2 Constructor & Destructor Documentation

#### 6.3.2.1 List()

```
List::List (
    DestroyFunc value = nullptr )
```

Construct a new [List](#) object.

##### Parameters

|                           |                                                                                                   |
|---------------------------|---------------------------------------------------------------------------------------------------|
| <code>destroyValue</code> | If destroyValue != nullptr, the destroyValue function will be called each time a node is removed. |
|---------------------------|---------------------------------------------------------------------------------------------------|

head is a virtual node that is always present in the list.

##### Parameters

|                           |                                                                       |
|---------------------------|-----------------------------------------------------------------------|
| <code>destroyValue</code> | The destroy function for the values of the list. Defaults to nullptr. |
|---------------------------|-----------------------------------------------------------------------|

#### 6.3.2.2 ~List()

```
List::~~List ( )
```

Destroy the [List](#) object.

If the destroyValue function is not nullptr, it is called for every value.

### 6.3.3 Member Function Documentation

#### 6.3.3.1 decreaseSize()

```
int List::decreaseSize ( )
```

Decrease the list size.

##### Returns

int The updated size.

#### 6.3.3.2 find()

```
Pointer List::find (
    Pointer value,
    CompareFunc compare )
```

Finds the first value equal to the value parameter.

Find the first value equal to the value parameter.

##### Parameters

|                |                                                              |
|----------------|--------------------------------------------------------------|
| <i>value</i>   | The value based on which the search is done.                 |
| <i>compare</i> | A pointer to the function that will compare the node values. |

##### Returns

Pointer A pointer to the resulting node.

##### Parameters

|                |                                    |
|----------------|------------------------------------|
| <i>value</i>   | The value to search for.           |
| <i>compare</i> | A pointer to the compare function. |

##### Returns

Pointer A pointer to found value.

#### 6.3.3.3 findNode()

```
ListNode * List::findNode (
    Pointer value,
    CompareFunc compare )
```

Finds the first node that has value equal to the value parameter.

Find the first node with value equal to the value parameter.

**Parameters**

|                |                              |
|----------------|------------------------------|
| <i>value</i>   | The value to search.         |
| <i>compare</i> | The compare function to use. |

**Returns**

ListNode\* A pointer to the resulting node.

**Parameters**

|                |                                    |
|----------------|------------------------------------|
| <i>value</i>   | The value to search for.           |
| <i>compare</i> | A pointer to the compare function. |

**Returns**

ListNode\* A pointer to the found node.

**6.3.3.4 getHead()**

```
ListNode * List::getHead ( )
```

Getter for the head of the [List](#).

Get the first element of the [List](#).

**Returns**

ListNode\* The head.

**Returns**

ListNode\* Pointer to the first element.

**6.3.3.5 getSize()**

```
int List::getSize ( )
```

Get the size of the [List](#).

Get the size of the list.

The size is updated upon entry/removal of nodes, so the retrieval of the size is O(1).

**Returns**

int

**Returns**

int The size.

### 6.3.3.6 getTail()

```
ListNode * List::getTail ( )
```

Getter for the tail of the [List](#).

Get the last element of the list.

#### Returns

ListNode\* The tail.

If the list is empty, the virtual head is the tail, so we return nullptr.

#### Returns

ListNode\* Pointer to the last element.

### 6.3.3.7 increaseSize()

```
int List::increaseSize ( )
```

Increase the list size.

#### Returns

int The updated size.

### 6.3.3.8 insertNext()

```
void List::insertNext (
    ListNode * node,
    Pointer value )
```

Adds a node *after* the given node.

Insert a new element after the node.

#### Parameters

|              |                                                  |
|--------------|--------------------------------------------------|
| <i>node</i>  | The node that the new node will be placed after. |
| <i>value</i> | The value of the new node.                       |

#### Parameters

|              |                                               |
|--------------|-----------------------------------------------|
| <i>node</i>  | The node after which the element is inserted. |
| <i>value</i> | The value of the new element.                 |

### 6.3.3.9 next()

```
ListNode * List::next (
    ListNode * node )
```

Returns the node after the given one.

Get the next node.

#### Parameters

|             |  |
|-------------|--|
| <i>node</i> |  |
|-------------|--|

#### Returns

ListNode\* A pointer to the next node.

#### Parameters

|             |  |
|-------------|--|
| <i>node</i> |  |
|-------------|--|

#### Returns

ListNode\*

### 6.3.3.10 nodeValue()

```
Pointer List::nodeValue (
    ListNode * node )
```

Returns the value of the node.

Get the node's value.

#### Parameters

|             |  |
|-------------|--|
| <i>node</i> |  |
|-------------|--|

#### Returns

Pointer A generic pointer to the value.

#### Parameters

|             |  |
|-------------|--|
| <i>node</i> |  |
|-------------|--|

**Returns**

Pointer

**6.3.3.11 removeNext()**

```
void List::removeNext (
    ListNode * node )
```

Removes the node *after* the given node.

Removes the node after the given node.

**Parameters**

|             |                                         |
|-------------|-----------------------------------------|
| <i>node</i> | The node before the node to be removed. |
|-------------|-----------------------------------------|

**Parameters**

|             |                                              |
|-------------|----------------------------------------------|
| <i>node</i> | The node after which the element is removed. |
|-------------|----------------------------------------------|

**6.3.3.12 setDestroyValue()**

```
DestroyFunc List::setDestroyValue (
    DestroyFunc value )
```

Set the Destroy Value object to a new value.

Set the destroy value function.

**Parameters**

|              |                                        |
|--------------|----------------------------------------|
| <i>value</i> | A pointer to the new destroy function. |
|--------------|----------------------------------------|

**Returns**

DestroyFunc A pointer to the old destroy function.

**Parameters**

|              |                           |
|--------------|---------------------------|
| <i>value</i> | The new destroy function. |
|--------------|---------------------------|

**Returns**

DestroyFunc The old destroy function.

The documentation for this class was generated from the following files:

- ADTList.hpp
- [ADTList.cpp](#)

## 6.4 ListNode Class Reference

Node of a list.

```
#include <ADTList.hpp>
```

### Public Member Functions

- [ListNode](#) ()  
*Construct a new [List](#) Node object that is empty.*
- [ListNode](#) (Pointer value)  
*Construct a new [List](#) Node object with value 'value'.*
- void [setNext](#) ([ListNode](#) \*next)  
*Setter for the next node.*
- [ListNode](#) \* [getNext](#) ()  
*Getter for the next node.*
- Pointer [getValue](#) ()  
*Getter for the value of the node.*

### 6.4.1 Detailed Description

Node of a list.

A list node is represented by its value. It also holds a pointer to the next node in the list.

### 6.4.2 Constructor & Destructor Documentation

#### 6.4.2.1 [ListNode\(\)](#) [1/2]

```
ListNode::ListNode ( ) [inline]
```

Construct a new [List](#) Node object that is empty.

#### 6.4.2.2 [ListNode\(\)](#) [2/2]

```
ListNode::ListNode (
    Pointer value ) [inline]
```

Construct a new [List](#) Node object with value 'value'.

#### Parameters

|              |                                             |
|--------------|---------------------------------------------|
| <i>value</i> | a generic pointer to the value of the node. |
|--------------|---------------------------------------------|

## 6.4.3 Member Function Documentation

### 6.4.3.1 getNext()

```
ListNode * ListNode::getNext ( )
```

Getter for the next node.

Get the next node of the list.

#### Returns

ListNode\* The pointer to the next node.

#### Returns

ListNode\* The next node.

### 6.4.3.2 getValue()

```
Pointer ListNode::getValue ( )
```

Getter for the value of the node.

Get the value of the current node.

#### Returns

Pointer A generic pointer to the value.

#### Returns

Pointer The value of the current node.

### 6.4.3.3 setNext()

```
void ListNode::setNext (
    ListNode * next )
```

Setter for the next node.

Set the given node as the next one.

#### Parameters

|             |                               |
|-------------|-------------------------------|
| <i>next</i> | The pointer to the next node. |
|-------------|-------------------------------|

## Parameters

|             |                      |
|-------------|----------------------|
| <i>next</i> | The node to be next. |
|-------------|----------------------|

The documentation for this class was generated from the following files:

- ADTList.hpp
- [ADTList.cpp](#)

## 6.5 Map Class Reference

### Public Member Functions

- [Map](#) (CompareFunc compare, DestroyFunc destroyKey, DestroyFunc destroyValue)  
*Construct a new [Map::Map](#) object.*
- [~Map](#) ()  
*Destroy the [Map::Map](#) object.*
- void [insert](#) (Pointer key, Pointer value)  
*Add a new pair (key --> value) in the map.*
- bool [remove](#) (Pointer key)  
*Remove from the map the pair (key --> value) that corresponds to the given key.*
- Pointer [find](#) (Pointer key)
- void [rehash](#) ()  
*Extend the hash table in case the load factor exceeds the predefined threshold.*
- void [setCapacity](#) (int capacity)
- void [setDestroyKey](#) (DestroyFunc destroyKey)
- void [setDestroyValue](#) (DestroyFunc destroyValue)
- void [setHashFunction](#) (HashFunc hash)
- [MapNode](#) \*\* [getArray](#) ()
- int [getCapacity](#) ()
- int [getSize](#) ()
- int [getDeleted](#) ()
- DestroyFunc [getDestroyKey](#) ()
- DestroyFunc [getDestroyValue](#) ()
- HashFunc [getHashFunction](#) ()
- [MapNode](#) \* [getFirst](#) ()
- [MapNode](#) \* [getNext](#) ([MapNode](#) \*node)
- [MapNode](#) \* [findNode](#) (Pointer key)

### 6.5.1 Constructor & Destructor Documentation

#### 6.5.1.1 Map()

```
Map::Map (
    CompareFunc compare,
    DestroyFunc destroyKey,
    DestroyFunc destroyValue )
```

Construct a new [Map::Map](#) object.

## Parameters

|                     |                                                |
|---------------------|------------------------------------------------|
| <i>compare</i>      | A compare function to keep the map sorted      |
| <i>destroyKey</i>   | A destroy function for the key of every node   |
| <i>destroyValue</i> | A destroy function fro the balue of every node |

**6.5.1.2 ~Map()**

```
Map::~~Map ( )
```

Destroy the [Map::Map](#) object.

**6.5.2 Member Function Documentation****6.5.2.1 findNode()**

```
MapNode * Map::findNode (
    Pointer key )
```

## Parameters

|            |  |
|------------|--|
| <i>key</i> |  |
|------------|--|

## Returns

MapNode\*

**6.5.2.2 getFirst()**

```
MapNode * Map::getFirst ( )
```

## Returns

MapNode\*

**6.5.2.3 getNext()**

```
MapNode * Map::getNext (
    MapNode * node )
```

## Parameters

|             |  |
|-------------|--|
| <i>node</i> |  |
|-------------|--|

**Returns**

MapNode\*

**6.5.2.4 insert()**

```
void Map::insert (
    Pointer key,
    Pointer value )
```

Add a new pair (key --> value) in the map.

**Parameters**

|              |  |
|--------------|--|
| <i>key</i>   |  |
| <i>value</i> |  |

**6.5.2.5 rehash()**

```
void Map::rehash ( )
```

Extend the hash table in case the load factor exceeds the predefined threshold.

**Parameters**

|            |                                               |
|------------|-----------------------------------------------|
| <i>map</i> | The map whose hash table needs to be rehashed |
|------------|-----------------------------------------------|

**6.5.2.6 remove()**

```
bool Map::remove (
    Pointer key )
```

Remove from the map the pair (key --> value) that corresponds to the given key.

**Returns**

true he node with the given key was removed successfully  
false he node with the given key was not removed

The documentation for this class was generated from the following files:

- [ADTMap.hpp](#)
- [ADTMap.cpp](#)

## 6.6 MapNode Class Reference

### Public Member Functions

- **MapNode** (Pointer key, Pointer value, State state)
- void **setKey** (Pointer key)
- void **setValue** (Pointer value)
- void **setState** (State state)
- Pointer **getKey** ()
- Pointer **getValue** ()
- State **getState** ()

The documentation for this class was generated from the following file:

- [ADTMap.hpp](#)

## 6.7 PQueue Class Reference

ADT Priority Queue.

```
#include <ADTPQueue.hpp>
```

### Public Member Functions

- [PQueue](#) (CompareFunc compare, DestroyFunc destroyValue, [Vector](#) \*values)  
*Construct a new [PQueue](#) object.*
- [~PQueue](#) ()  
*Destroy the [PQueue](#) object.*
- int [getSize](#) ()  
*Get the size of the priority queue.*
- Pointer [getMax](#) ()  
*Get the max element of the queue.*
- void [insert](#) (Pointer value)  
*Insert a new element to the queue.*
- void [removeMax](#) ()  
*Remove the max of the queue.*
- DestroyFunc [setDestroyValue](#) (DestroyFunc destroyValue)  
*Set the Destroy Value object.*
- Pointer **nodeValue** (int nodeId)
- void **nodeSwap** (int nodeId1, int nodeId2)
- void **bubbleUp** (int nodeId)
- void **bubbleDown** (int nodeId)
- void **naiveHeapify** ([Vector](#) \*values)

### 6.7.1 Detailed Description

ADT Priority Queue.

## 6.7.2 Constructor & Destructor Documentation

### 6.7.2.1 PQueue()

```
PQueue::PQueue (
    CompareFunc compare,
    DestroyFunc destroyValue,
    Vector * values )
```

Construct a new [PQueue](#) object.

Uses the `compare` function to compare its elements.

If `destroyValue != nullptr`, the `destroyValue` function is called upon removal of an element.

If `values != nullptr`, then the priority queue will be initialized with the values of the vector `values`.

#### Parameters

|                     |  |
|---------------------|--|
| <i>compare</i>      |  |
| <i>destroyValue</i> |  |
| <i>values</i>       |  |

### 6.7.2.2 ~PQueue()

```
PQueue::~~PQueue ( )
```

Destroy the [PQueue](#) object.

## 6.7.3 Member Function Documentation

### 6.7.3.1 getMax()

```
Pointer PQueue::getMax ( )
```

Get the max element of the queue.

#### Returns

Pointer A generic pointer to the max element.

### 6.7.3.2 getSize()

```
int PQueue::getSize ( )
```

Get the size of the priority queue.

#### Returns

int

### 6.7.3.3 insert()

```
void PQueue::insert (  
    Pointer value )
```

Insert a new element to the queue.

## Parameters

|                    |                                              |
|--------------------|----------------------------------------------|
| <code>value</code> | The value of the new element to be inserted. |
|--------------------|----------------------------------------------|

**6.7.3.4 removeMax()**

```
void PQueue::removeMax ( )
```

Remove the max of the queue.

**6.7.3.5 setDestroyValue()**

```
DestroyFunc PQueue::setDestroyValue (
    DestroyFunc destroyValue )
```

Set the Destroy Value object.

## Parameters

|                           |  |
|---------------------------|--|
| <code>destroyValue</code> |  |
|---------------------------|--|

## Returns

DestroyFunc

The documentation for this class was generated from the following files:

- [ADTPQueue.hpp](#)
- [ADTPQueue.cpp](#)

## 6.8 Vector Class Reference

ADT [Vector](#).

```
#include <ADTVector.hpp>
```

**Public Member Functions**

- [Vector](#) (int size, DestroyFunc destroyValue)  
*Construct a new [Vector](#) object.*
- [~Vector](#) ()  
*Destroy the [Vector](#) object.*
- int [getSize](#) ()  
*Get the current size of the [Vector](#).*
- void [insertLast](#) (Pointer value)

- Inserts a new element at the end of the vector.*
- `int removeLast ()`  
*Removes the last element of the vector.*
- `Pointer getAt (int pos)`  
*Get the value at the specified position of the vector.*
- `int setAt (int pos, Pointer value)`  
*Set the value at the specified position of the vector.*
- `Pointer find (Pointer value, CompareFunc compare)`  
*Find the first element with value equal to value.*
- `DestroyFunc setDestroyValue (DestroyFunc destroyValue)`  
*Set the Destroy Value.*
- `vectorNode * first ()`  
*Get the first node of the vector.*
- `vectorNode * last ()`  
*Get the last node of the vector.*
- `vectorNode * next (vectorNode *node)`  
*Get the next node of the vector, after the one given.*
- `vectorNode * previous (vectorNode *node)`  
*Get the previous node of the vector, before the one given.*
- `Pointer nodeValue (vectorNode *node)`  
*Get the value of the node.*
- `vectorNode * findNode (Pointer value, CompareFunc compare)`  
*Find the first node with value equal to value.*

## 6.8.1 Detailed Description

ADT [Vector](#).

An ADT [Vector](#) using a dynamic array for smart resizing.

## 6.8.2 Constructor & Destructor Documentation

### 6.8.2.1 Vector()

```
Vector::Vector (
    int size,
    DestroyFunc destroyValue )
```

Construct a new [Vector](#) object.

The newly created [Vector](#) will be of size `size` and its elements will be initialized as `nullptr`.

If `destroyValue` is not `nullptr`, it will be called on each element when it is removed from the [Vector](#).

#### Parameters

|                           |                                                                                                |
|---------------------------|------------------------------------------------------------------------------------------------|
| <code>size</code>         | The initial size of the <a href="#">Vector</a> .                                               |
| <code>destroyValue</code> | The function to be called on each element when it is removed from the <a href="#">Vector</a> . |

### 6.8.2.2 ~Vector()

```
Vector::~~Vector ( )
```

Destroy the [Vector](#) object.

Deletes all allocated memory of the [Vector](#).

## 6.8.3 Member Function Documentation

### 6.8.3.1 find()

```
Pointer Vector::find (
    Pointer value,
    CompareFunc compare )
```

Find the first element with value equal to value.

#### Parameters

|                |                                         |
|----------------|-----------------------------------------|
| <i>value</i>   | The value to look for.                  |
| <i>compare</i> | The function to be used for comparison. |

#### Returns

Pointer A pointer to the found value.

### 6.8.3.2 findNode()

```
vectorNode * Vector::findNode (
    Pointer value,
    CompareFunc compare )
```

Find the first node with value equal to value.

#### Parameters

|                |                                         |
|----------------|-----------------------------------------|
| <i>value</i>   | The value to look for.                  |
| <i>compare</i> | The function to be used for comparison. |

#### Returns

[vectorNode](#) The resulting node.

### 6.8.3.3 first()

```
vectorNode * Vector::first ( )
```

Get the first node of the vector.

**Returns**

[vectorNode](#)

**6.8.3.4 getAt()**

```
Pointer Vector::getAt (
    int pos )
```

Get the value at the specified position of the vector.

**Parameters**

|            |                           |
|------------|---------------------------|
| <i>pos</i> | The position to look for. |
|------------|---------------------------|

**Returns**

Pointer A pointer to the value at the specified position.

**6.8.3.5 getSize()**

```
int Vector::getSize ( )
```

Get the current size of the [Vector](#).

**Returns**

int The size of the [Vector](#).

**6.8.3.6 insertLast()**

```
void Vector::insertLast (
    Pointer value )
```

Inserts a new element at the end of the vector.

**Parameters**

|              |                               |
|--------------|-------------------------------|
| <i>value</i> | The value of the new element. |
|--------------|-------------------------------|

If we are at the last element, we create a new array double the size.

**6.8.3.7 last()**

```
vectorNode * Vector::last ( )
```

Get the last node of the vector.

Returns

[vectorNode](#)

### 6.8.3.8 next()

```
vectorNode * Vector::next (
    vectorNode * node )
```

Get the next node of the vector, after the one given.

Parameters

|             |                              |
|-------------|------------------------------|
| <i>node</i> | The node to get the next of. |
|-------------|------------------------------|

Returns

[vectorNode](#)

### 6.8.3.9 nodeValue()

```
Pointer Vector::nodeValue (
    vectorNode * node )
```

Get the value of the node.

Parameters

|             |  |
|-------------|--|
| <i>node</i> |  |
|-------------|--|

Returns

Pointer

### 6.8.3.10 previous()

```
vectorNode * Vector::previous (
    vectorNode * node )
```

Get the previous node of the vector, before the one given.

Parameters

|             |                                  |
|-------------|----------------------------------|
| <i>node</i> | The node to get the previous of. |
|-------------|----------------------------------|

**Returns**

[vectorNode](#)

**6.8.3.11 removeLast()**

```
int Vector::removeLast ( )
```

Removes the last element of the vector.

**Returns**

int -1 if the function fails, else 0.

**6.8.3.12 setAt()**

```
int Vector::setAt (
    int pos,
    Pointer value )
```

Set the value at the specified position of the vector.

**Parameters**

|              |                       |
|--------------|-----------------------|
| <i>pos</i>   | The position to edit. |
| <i>value</i> | The new value.        |

**Returns**

int -1 if the function fails, else 0.

**6.8.3.13 setDestroyValue()**

```
DestroyFunc Vector::setDestroyValue (
    DestroyFunc destroyValue )
```

Set the Destroy Value.

**Parameters**

|                     |                                 |
|---------------------|---------------------------------|
| <i>destroyValue</i> | The new destroy value function. |
|---------------------|---------------------------------|

**Returns**

DestroyFunc The old destroy value function.

The documentation for this class was generated from the following files:

- [ADTVector.hpp](#)
- [ADTVector.cpp](#)

## 6.9 vectorNode Class Reference

Class for the vector Node object.

```
#include <ADTVector.hpp>
```

### Public Member Functions

- [vectorNode](#) ()  
*Construct a new vector Node object.*
- **vectorNode** (Pointer value)
- Pointer [getValue](#) () const  
*Get the Value object.*
- void [setValue](#) (Pointer value)  
*Set the Value object.*

### 6.9.1 Detailed Description

Class for the vector Node object.

A vector node is described only its value.

### 6.9.2 Constructor & Destructor Documentation

#### 6.9.2.1 vectorNode()

```
vectorNode::vectorNode ( ) [inline]
```

Construct a new vector Node object.

#### Parameters

|              |                         |
|--------------|-------------------------|
| <i>value</i> | A Pointer to the value. |
|--------------|-------------------------|

### 6.9.3 Member Function Documentation

#### 6.9.3.1 getValue()

```
Pointer vectorNode::getValue ( ) const [inline]
```

Get the Value object.

**Returns**

Pointer

**6.9.3.2 setValue()**

```
void vectorNode::setValue (  
    Pointer value ) [inline]
```

Set the Value object.

**Parameters**

|              |  |
|--------------|--|
| <i>value</i> |  |
|--------------|--|

The documentation for this class was generated from the following file:

- [ADTVector.hpp](#)

## Chapter 7


# File Documentation

### 7.1 ADTGraph.hpp File Reference


Abstract undirected graph with weighted edges.

```
#include "ADTList.hpp"  
#include "ADTMap.hpp"  
#include "ADTVector.hpp"
```

Include dependency graph for ADTGraph.hpp:

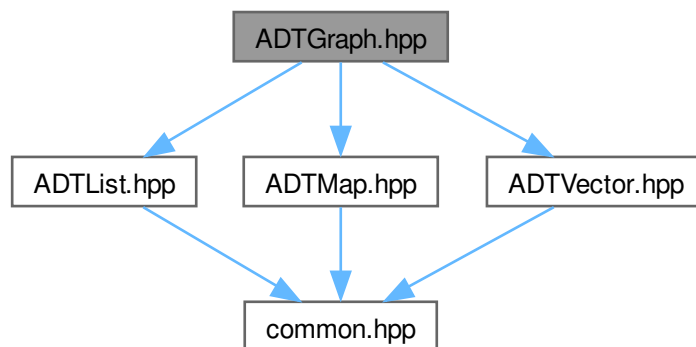

This graph shows which files directly or indirectly include this file:

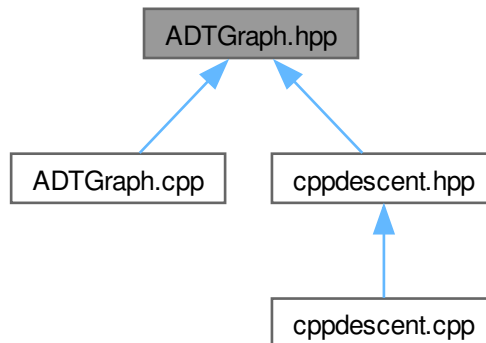

## Classes

- class [Graph](#)
- class [GraphVertexPair](#)

### 7.1.1 Detailed Description

Abstract undirected graph with weighted edges.

#### Author

Phaedon Seitanidis

#### Version

0.1

#### Date

2023-11-01

#### Copyright

Copyright (c) 2023

## 7.2 ADTGraph.hpp

[Go to the documentation of this file.](#)

```

00001
00012 #pragma once
00013
00014 #include "ADTList.hpp"
00015 #include "ADTMap.hpp"
00016 #include "ADTVector.hpp"
00017
00018 class Graph {
00019 private:
00020     Vector* vec;
00021     Map* map;
00022     int size;
00023     CompareFunc compare;
00024     DestroyFunc destroy;
00025     HashFunc hash;
00026
00027 public:
00028     Graph(CompareFunc compare, DestroyFunc destroy);
00029     ~Graph();
00030     int getSize();
00031     void insertVertex(Pointer vertex);
00032     List* getVertices();
00033     void removeVertex(Pointer vertex);
00034     void insertEdge(Pointer vertex1, Pointer vertex2, float weight);
00035     void removeEdge(Pointer vertex1, Pointer vertex2);
00036     float getWeight(Pointer vertex1, Pointer vertex2);
00037     List* getAdjacent(Pointer vertex);
00038     // Map* shortestPathLengths();
00039     void setHashFunction(HashFunc hash);
00040     CompareFunc getCompare() { return this->compare; };
00041     DestroyFunc getDestroy() { return this->destroy; };
00042     HashFunc getHash() { return this->hash; };
00043 };
00044
00045 class GraphVertexPair {
00046 public:
00047     GraphVertexPair(Graph* owner, Pointer vertex1, Pointer vertex2)
00048         : vertex1(vertex1), vertex2(vertex2), owner(owner){};
00049     Pointer getVertex1() { return this->vertex1; };
00050     Pointer getVertex2() { return this->vertex2; };
00051     Graph* getOwner() { return this->owner; };
00052
00053 private:
00054     Pointer vertex1;
00055     Pointer vertex2;
00056     Graph* owner;
00057 };

```

## 7.3 ADTList.hpp

```

00001
00011 #pragma once
00012 #include "common.hpp"
00013
00014 #define LIST_BOF (ListNode*)0
00015 #define LIST_EOF (ListNode*)0
00016
00024 class ListNode {
00025 public:
00030     ListNode() : next(nullptr), value(nullptr){};
00036     ListNode(Pointer value) : next(nullptr), value(value){};
00042     void setNext(ListNode* next);
00048     ListNode* getNext();
00054     Pointer getValue();
00055
00056 private:
00057     ListNode* next;
00058     Pointer value;
00059 };
00060
00068 class List {
00069 public:
00076     List(DestroyFunc value = nullptr);
00081     ~List();
00088     void insertNext(ListNode* node, Pointer value);
00094     void removeNext(ListNode* node);
00102     Pointer find(Pointer value, CompareFunc compare);
00109     DestroyFunc setDestroyValue(DestroyFunc value);

```

```


00118     int getSize();
00119     int increaseSize();
00120     int decreaseSize();
00126     ListNode* getHead();
00132     ListNode* getTail();
00139     ListNode* next(ListNode* node);
00146     Pointer nodeValue(ListNode* node);
00154     ListNode* findNode(Pointer value, CompareFunc compare);
00155
00156 private:
00157     DestroyFunc destroyValue;
00158     int size;
00159     ListNode* head;
00160     ListNode* tail;
00161 };

```


## 7.4 ADTMap.hpp File Reference

#include "common.hpp"

Include dependency graph for ADTMap.hpp:



This graph shows which files directly or indirectly include this file:

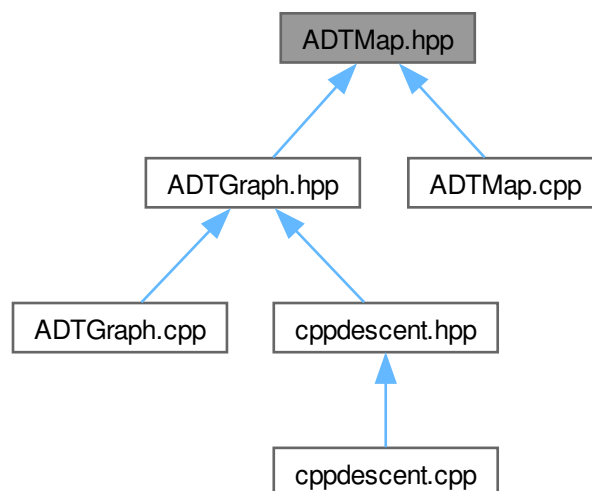

**Classes**

- class [MapNode](#)
- class [Map](#)

**Macros**

- #define **MAX\_LOAD\_FACTOR** 0.5
- #define **MAP\_EOF** ([MapNode\\*](#))0

**Enumerations**

- enum **State** { **EMPTY** , **OCCUPIED** , **DELETED** }

**7.4.1 Detailed Description****Author**

Phaedon Seitandis

**Version**

0.1

**Date**

2023-11-01

**Copyright**

Copyright (c) 2023

**7.5 ADTMap.hpp**

[Go to the documentation of this file.](#)

```

00001
00011 #pragma once
00012
00013 #include "common.hpp"
00014
00015 #define MAX_LOAD_FACTOR 0.5
00016 #define MAP_EOF (MapNode*)0
00017
00018 typedef enum { EMPTY, OCCUPIED, DELETED } State;
00019
00020 class MapNode {
00021 public:
00022     MapNode() : key(nullptr), value(nullptr), state(EMPTY){};
00023     MapNode(Pointer key, Pointer value, State state)
00024         : key(key), value(value), state(state){};
00025     ~MapNode(){};
00026     void setKey(Pointer key) { this->key = key; };
00027     void setValue(Pointer value) { this->value = value; };
00028     void setState(State state) { this->state = state; };
00029     Pointer getKey() { return this->key; };
00030     Pointer getValue() { return this->value; };
00031     State getState() { return this->state; };
00032

```

```


00033 private:
00034     Pointer key;
00035     Pointer value;
00036     State state;
00037 };
00038
00039 class Map {
00040 public:
00041     Map();
00042     Map(CompareFunc compare, DestroyFunc destroyKey, DestroyFunc destroyValue);
00043     ~Map();
00044     void insert(Pointer key, Pointer value);
00045     bool remove(Pointer key);
00046     Pointer find(Pointer key);
00047     void rehash();
00048     void setCapacity(int capacity) { this->capacity = capacity; };
00049     void setDestroyKey(DestroyFunc destroyKey) { this->destroyKey = destroyKey; };
00050     void setDestroyValue(DestroyFunc destroyValue) {
00051         this->destroyValue = destroyValue;
00052     };
00053     void setHashFunction(HashFunc hash) { this->hash = hash; };
00054     MapNode** getArray() { return this->array; };
00055     int getCapacity() { return this->capacity; };
00056     int getSize() { return this->size; };
00057     int getDeleted() { return this->deleted; };
00058     DestroyFunc getDestroyKey() { return this->destroyKey; };
00059     DestroyFunc getDestroyValue() { return this->destroyValue; };
00060     HashFunc getHashFunction() { return this->hash; };
00061     MapNode* getFirst();
00062     MapNode* getNext(MapNode* node);
00063     MapNode* findNode(Pointer key);
00064
00065 private:
00066     MapNode** array;
00067     CompareFunc compare;
00068     DestroyFunc destroyKey;
00069     DestroyFunc destroyValue;
00070     HashFunc hash;
00071     int capacity;
00072     int size;
00073     int deleted;
00074 };

```


## 7.6 ADTPQueue.hpp File Reference

#include "ADTVector.hpp"

Include dependency graph for ADTPQueue.hpp:



This graph shows which files directly or indirectly include this file:

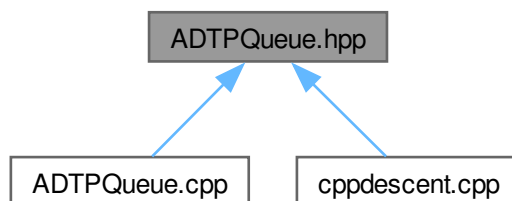

## Classes

- class [PQueue](#)  
*ADT Priority Queue.*

## 7.6.1 Detailed Description

### Author

Konstantinos Chousos

### Version

0.1

### Date

2023-10-30

### Copyright

Copyright (c) 2023

## 7.7 ADTPQueue.hpp

[Go to the documentation of this file.](#)

```
00001
00011 #pragma once
00012
00013 #include "ADTVector.hpp"
00014
00019 class PQueue {
00020 public:
00036 PQueue(CompareFunc compare, DestroyFunc destroyValue, Vector* values);
00041 ~PQueue();
00047 int getSize();
00053 Pointer getMax();
00059 void insert(Pointer value);
```

```

00064 void removeMax();
00071 DestroyFunc setDestroyValue(DestroyFunc destroyValue);
00072
00073 // Helper functions
00074 // These are used because the node IDs are 1-based, where as the
00075 // vector is 0-based.
00076 Pointer nodeValue(int nodeId);
00077 void nodeSwap(int nodeId1, int nodeId2);
00078 void bubbleUp(int nodeId);
00079 void bubbleDown(int nodeId);
00080 void naiveHeapify(Vector* values);
00081
00082 private:
00083 Vector* vector;
00084 CompareFunc compare;
00085 DestroyFunc destroyValue;
00086 };


```

## 7.8 ADTVector.hpp File Reference


ADTVector implementation using a dynamic array.

```
#include "common.hpp"
```

Include dependency graph for ADTVector.hpp:



This graph shows which files directly or indirectly include this file:

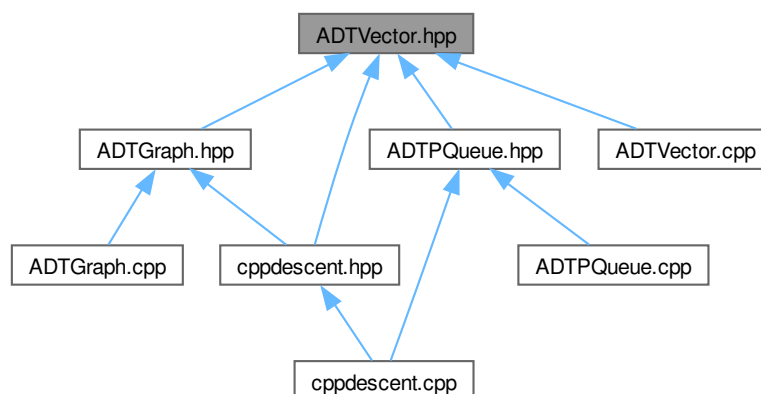

**Classes**

- class [vectorNode](#)  
*Class for the vector Node object.*
- class [Vector](#)  
*ADT [Vector](#).*

**Macros**

- `#define VECTOR_MIN_CAPACITY 10`
- `#define VECTOR_BOF (vectorNode\*)0`
- `#define VECTOR_EOF (vectorNode\*)0`

**7.8.1 Detailed Description**

ADTVector implementation using a dynamic array.

**Author**

Konstantinos Chousos

**Version**

0.1

**Date**

2023-10-29

**Copyright**

Copyright (c) 2023

**7.9 ADTVector.hpp**

[Go to the documentation of this file.](#)

```

00001
00011 #pragma once
00012
00013 #include "common.hpp"
00014
00015 #define VECTOR_MIN_CAPACITY 10
00016
00017 #define VECTOR_BOF (vectorNode\*)0
00018 #define VECTOR_EOF (vectorNode\*)0
00019
00026 class vectorNode {
00027     public:
00033     vectorNode(){};
00034     vectorNode(Pointer value) : value(value){};
00040     Pointer getValue() const { return value; };
00046     void setValue(Pointer value) { this->value = value; };
00047
00048     private:
00049     Pointer value;
00050 };
00051

```

```

00058 class Vector {
00059 public:
00073   Vector(int size, DestroyFunc destroyValue);
00080   ~Vector();
00086   int getSize();
00092   void insertLast(Pointer value);
00098   int removeLast();
00105   Pointer getAt(int pos);
00113   int setAt(int pos, Pointer value);
00121   Pointer find(Pointer value, CompareFunc compare);
00128   DestroyFunc setDestroyValue(DestroyFunc destroyValue);
00134   vectorNode* first();
00140   vectorNode* last();
00147   vectorNode* next(vectorNode* node);
00154   vectorNode* previous(vectorNode* node);
00161   Pointer nodeValue(vectorNode* node);
00169   vectorNode* findNode(Pointer value, CompareFunc compare);
00170
00171 private:
00172   vectorNode* array;
00173   int size;
00174   int capacity;
00175   DestroyFunc destroyValue;
00176 };

```

## 7.10 common.hpp

```

00001 #pragma once
00002
00003 typedef void* Pointer;
00004
00005 typedef int (*CompareFunc)(Pointer a, Pointer b);
00006
00007 typedef void (*DestroyFunc)(Pointer value);
00008
00009 typedef unsigned int (*HashFunc)(Pointer);

```

## 7.11 cppdescent.hpp

```

00001
00005 #include "ADTGraph.hpp"
00006 #include "ADTVector.hpp"
00007
00008 #define DEFAULT_POINTS_NUM 100
00009
00010 typedef float (*DistanceFunc)(Pointer a, Pointer b);
00011
00016 namespace cppdescent {
00017 void deleteFloat(Pointer value);
00018
00019 float* createFloat(float value);
00020
00021 float compareFloats(Pointer a, Pointer b);
00022
00023 int deleteDatapointVectors(Vector* vec);
00024
00025 int compareVertices(Pointer first, Pointer second);
00040 Vector* readBinData(char* fp, int dimensions);
00056 Graph* KNNBruteForceGraph(Vector* data,
00057                             int K,
00058                             CompareFunc compare,
00059                             DistanceFunc distance);
00060 }; // namespace cppdescent

```

## 7.12 ADTGraph.cpp File Reference


```

#include "cppdescent/ADTGraph.hpp"
#include <climits>

```

```
#include <iostream>
```

Include dependency graph for ADTGraph.cpp:

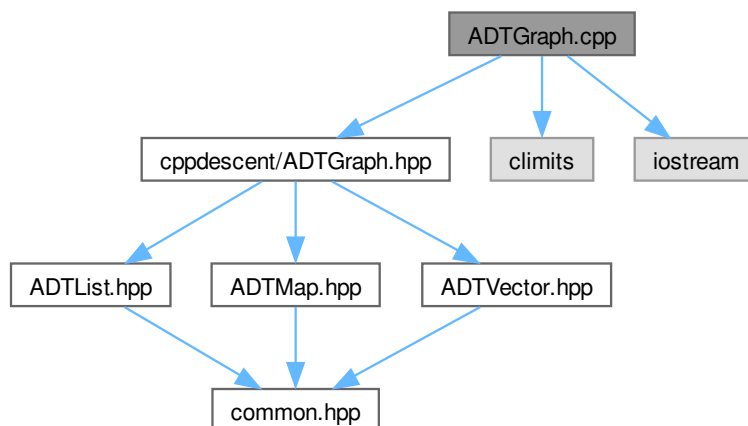

## Functions

- int \* **createInt** (int value)
- float \* **createFloat** (float value)
- int **compareVertexPair** ([GraphVertexPair](#) \*pair1, [GraphVertexPair](#) \*pair2)
- void **destroyVertexPair** ([GraphVertexPair](#) \*pair)
- void **destroyValue** (Pointer value)

### 7.12.1 Detailed Description

#### Author

Pheadon Seitanidis

#### Version

0.1

#### Date

2023-11-01

#### Copyright


Copyright (c) 2023

## 7.13 ADTList.cpp File Reference

Implementation of an ADT linked list.

```
#include "cppdescent/ADTList.hpp"
```

Include dependency graph for ADTList.cpp:



### 7.13.1 Detailed Description

Implementation of an ADT linked list.

#### Author

Konstantinos Chousos

#### Version

0.1

#### Date

2023-10-29

#### Copyright

Copyright (c) 2023


## 7.14 ADTMap.cpp File Reference

Implementation of ADTMap.

```
#include "cppdescent/ADTMap.hpp"
```

```
#include <iostream>
```

Include dependency graph for ADTMap.cpp:

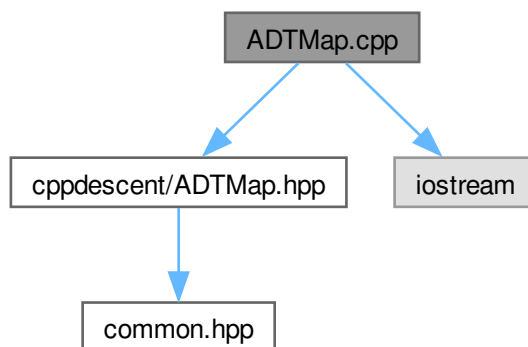

### Variables

- int `prime_sizes` []

### 7.14.1 Detailed Description

Implementation of ADTMap.

#### Author

Phaedon Seitanidis

#### Version

0.1

#### Date

2023-10-29

#### Copyright

Copyright (c) 2023

## 7.14.2 Variable Documentation

### 7.14.2.1 prime\_sizes

```
int prime_sizes[]
```

**Initial value:**

```
= {
    53,      97,      193,      389,      769,      1543,      3079,
    6151,    12289,    24593,    49157,    98317,    196613,    393241,
    786433,  1572869,  3145739,  6291469,  12582917,  25165843,  50331653,
    100663319, 201326611, 402653189, 805306457, 1610612741}
```

We want the capacity of the Hash Table to be a prime number, according to the theory. So the following list consists of prime numbers that are proven good capacity values for a Hash Table. When a rehash is needed, the capacity of the new table will be chosen from this table. If more than 1610612741 elements are needed, we double the capacity of the old table at rehash.


## 7.15 ADTPQueue.cpp File Reference

An ADT Priority Queue implemented using a heap.

```
#include "cppdescent/ADTPQueue.hpp"
```

```
#include <iostream>
```

Include dependency graph for ADTPQueue.cpp:

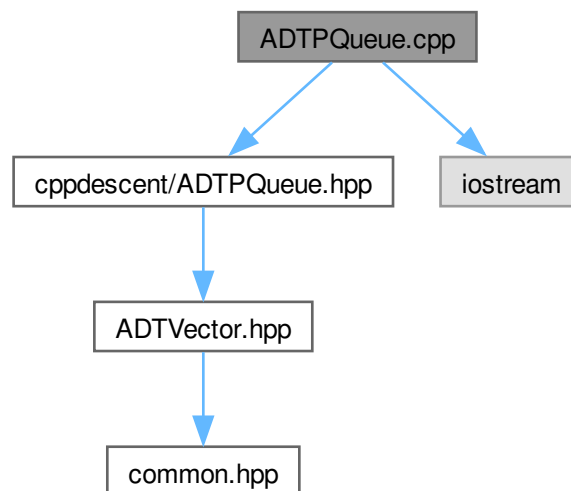

### 7.15.1 Detailed Description

An ADT Priority Queue implemented using a heap.

**Author**

Konstantinos Chousos

**Version**

0.1

**Date**

2023-10-30

**Copyright**

Copyright (c) 2023


## 7.16 ADTVector.cpp File Reference

Implementation of ADTVector using a dynamic array.

```
#include "cppdescent/ADTVector.hpp"
```

```
#include "stdlib.h"
```

Include dependency graph for ADTVector.cpp:

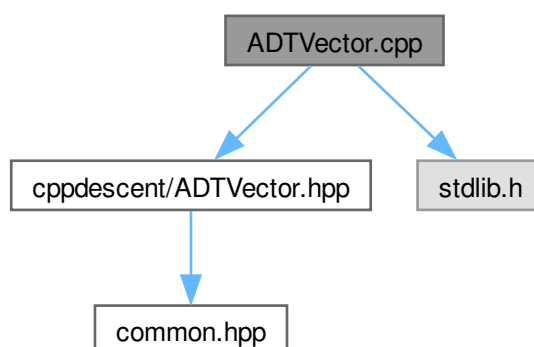

### 7.16.1 Detailed Description

Implementation of ADTVector using a dynamic array.

#### Author

Konstantinos Chousos

#### Version

0.1

#### Date

2023-10-30


#### Copyright

Copyright (c) 2023

## 7.17 cppdescent.cpp File Reference

Implementation of the cppdescent library.

```
#include "cppdescent/cppdescent.hpp"
#include <cstdlib>
#include <iostream>
#include "cppdescent/ADTPQueue.hpp"
Include dependency graph for cppdescent.cpp:
```

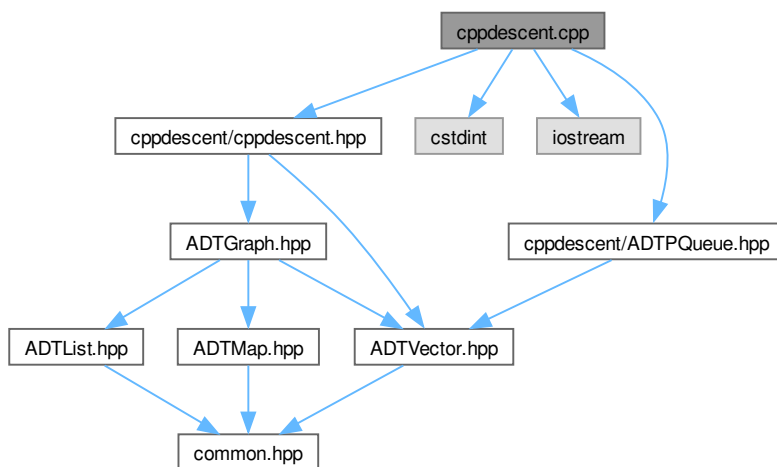

## Functions

- void **swapEdges** ([GraphVertexPair](#) \*first, [GraphVertexPair](#) \*second)
- void **EdgesBubbleSort** ([GraphVertexPair](#) \*\*edges, int size, CompareFunc compare)
- int **partition** ([GraphVertexPair](#) \*\*edges, int low, int high, CompareFunc compare)
- void **EdgesQuickSort** ([GraphVertexPair](#) \*\*edges, int low, int high, CompareFunc compare)
- bool **EdgesBinarySearch** ([GraphVertexPair](#) \*\*edges, [GraphVertexPair](#) \*edge, int low, int high, CompareFunc compare)
- void **destroyEdges** ([GraphVertexPair](#) \*pair)
- int **hashEdge** (Pointer edge)

### 7.17.1 Detailed Description

Implementation of the cppdescent library.

#### Author

Konstantinos Chousos

#### Version

0.1

#### Date

2023-10-27

#### Copyright

Copyright (c) 2023

